

Reverse Engineering for Beginners

Dennis Yurichev
<dennis@yurichev.com>



©2013-2014, Dennis Yurichev.

This work is licensed under the Creative Commons Attribution-NonCommercial-NoDerivs 3.0 Unported License. To view a copy of this license, visit

<http://creativecommons.org/licenses/by-nc-nd/3.0/>.

Text version (March 17, 2014).

There is probably a newer version of this text, and also Russian language version also accessible at

<http://yurichev.com/RE-book.html>

You may also subscribe to my twitter, to get information about updates of this text, etc: [@yurichev](#), or to subscribe to [mailing list](#).

Please donate!

I worked more than year on this book, here are more than 600 pages, and it's free.
Same level books has price tag from \$20 to \$50.

More about it: [0.1](#).

Contents

0.1	Preface	xiv
I	Code patterns	1
1	Short introduction to the CPU	3
2	Hello, world!	4
2.1	x86	4
2.1.1	MSVC—x86	4
2.1.2	GCC—x86	5
2.1.3	GCC: AT&T syntax	6
2.2	x86-64	7
2.2.1	MSVC—x86-64	7
2.2.2	GCC—x86-64	8
2.3	ARM	9
2.3.1	Non-optimizing Keil + ARM mode	9
2.3.2	Non-optimizing Keil: thumb mode	10
2.3.3	Optimizing Xcode (LLVM) + ARM mode	11
2.3.4	Optimizing Xcode (LLVM) + thumb-2 mode	11
3	Function prologue and epilogue	13
4	Stack	14
4.1	Why stack grows backward?	14
4.2	What is the stack used for?	15
4.2.1	Save the return address where a function must return control after execution	15
4.2.2	Passing function arguments	16
4.2.3	Local variable storage	17
4.2.4	x86: alloca() function	17
4.2.5	(Windows) SEH	19
4.2.6	Buffer overflow protection	19
4.3	Typical stack layout	19
5	printf() with several arguments	20
5.1	x86: 3 arguments	20
5.1.1	MSVC	20
5.1.2	MSVC and OllyDbg	21
5.1.3	GCC	23
5.1.4	GCC and GDB	24
5.2	x64: 8 arguments	26
5.2.1	MSVC	26
5.2.2	GCC	27
5.2.3	GCC + GDB	27
5.3	ARM: 3 arguments	29
5.3.1	Non-optimizing Keil + ARM mode	30
5.3.2	Optimizing Keil + ARM mode	30
5.3.3	Optimizing Keil + thumb mode	30
5.4	ARM: 8 arguments	30
5.4.1	Optimizing Keil: ARM mode	31
5.4.2	Optimizing Keil: thumb mode	32

5.4.3	Optimizing Xcode (LLVM): ARM mode	32
5.4.4	Optimizing Xcode (LLVM): thumb-2 mode	33
5.5	By the way	33
6	scanf()	34
6.1	About pointers	34
6.2	x86	34
6.2.1	MSVC	34
6.2.2	MSVC + OllyDbg	36
6.2.3	GCC	37
6.3	x64	38
6.3.1	MSVC	38
6.3.2	GCC	38
6.4	ARM	39
6.4.1	Optimizing Keil + thumb mode	39
6.5	Global variables	39
6.5.1	MSVC: x86	40
6.5.2	MSVC: x86 + OllyDbg	41
6.5.3	GCC: x86	42
6.5.4	MSVC: x64	42
6.5.5	ARM: Optimizing Keil + thumb mode	43
6.6	scanf() result checking	44
6.6.1	MSVC: x86	44
6.6.2	MSVC: x86: IDA	45
6.6.3	MSVC: x86 + OllyDbg	48
6.6.4	MSVC: x86 + Hiew	49
6.6.5	GCC: x86	51
6.6.6	MSVC: x64	51
6.6.7	ARM: Optimizing Keil + thumb mode	52
7	Accessing passed arguments	53
7.1	x86	53
7.1.1	MSVC	53
7.1.2	MSVC + OllyDbg	54
7.1.3	GCC	54
7.2	x64	55
7.2.1	MSVC	55
7.2.2	GCC	57
7.2.3	GCC: uint64_t instead int	58
7.3	ARM	58
7.3.1	Non-optimizing Keil + ARM mode	58
7.3.2	Optimizing Keil + ARM mode	59
7.3.3	Optimizing Keil + thumb mode	59
8	One more word about results returning.	60
9	Pointers	63
9.1	Global variables example	63
9.2	Local variables example	66
9.3	Conclusion	68
10	Conditional jumps	69
10.1	x86	69
10.1.1	x86 + MSVC	69
10.1.2	x86 + MSVC + OllyDbg	71
10.1.3	x86 + MSVC + Hiew	73
10.1.4	Non-optimizing GCC	75
10.1.5	Optimizing GCC	75
10.2	ARM	76
10.2.1	Optimizing Keil + ARM mode	76
10.2.2	Optimizing Keil + thumb mode	77

11	switch()/case/default	79
11.1	Few number of cases	79
11.1.1	x86	79
11.1.2	ARM: Optimizing Keil + ARM mode	81
11.1.3	ARM: Optimizing Keil + thumb mode	81
11.2	A lot of cases	82
11.2.1	x86	82
11.2.2	ARM: Optimizing Keil + ARM mode	85
11.2.3	ARM: Optimizing Keil + thumb mode	86
12	Loops	89
12.1	x86	89
12.1.1	OllyDbg	92
12.1.2	tracer	93
12.2	ARM	95
12.2.1	Non-optimizing Keil + ARM mode	95
12.2.2	Optimizing Keil + thumb mode	95
12.2.3	Optimizing Xcode (LLVM) + thumb-2 mode	95
12.3	One more thing	96
13	strlen()	97
13.1	x86	97
13.2	ARM	100
13.2.1	Non-optimizing Xcode (LLVM) + ARM mode	100
13.2.2	Optimizing Xcode (LLVM) + thumb mode	101
13.2.3	Optimizing Keil + ARM mode	101
14	Division by 9	103
14.1	x86	103
14.2	ARM	104
14.2.1	Optimizing Xcode (LLVM) + ARM mode	104
14.2.2	Optimizing Xcode (LLVM) + thumb-2 mode	105
14.2.3	Non-optimizing Xcode (LLVM) and Keil	105
14.3	How it works	105
14.4	Getting divisor	106
14.4.1	Variant #1	106
14.4.2	Variant #2	107
15	Working with FPU	108
15.1	Simple example	108
15.1.1	x86	109
15.1.2	ARM: Optimizing Xcode (LLVM) + ARM mode	110
15.1.3	ARM: Optimizing Keil + thumb mode	111
15.2	Passing floating point number via arguments	112
15.2.1	x86	112
15.2.2	ARM + Non-optimizing Xcode (LLVM) + thumb-2 mode	113
15.2.3	ARM + Non-optimizing Keil + ARM mode	113
15.3	Comparison example	114
15.3.1	x86	114
15.3.2	Now let's compile it with MSVC 2010 with optimization option /Ox	115
15.3.3	GCC 4.4.1	116
15.3.4	GCC 4.4.1 with -O3 optimization turned on	117
15.3.5	ARM + Optimizing Xcode (LLVM) + ARM mode	118
15.3.6	ARM + Optimizing Xcode (LLVM) + thumb-2 mode	118
15.3.7	ARM + Non-optimizing Xcode (LLVM) + ARM mode	120
15.3.8	ARM + Optimizing Keil + thumb mode	120
15.4	x64	121

16 Arrays	122
16.1 Simple example	122
16.1.1 x86	122
16.1.2 ARM + Non-optimizing Keil + ARM mode	124
16.1.3 ARM + Optimizing Keil + thumb mode	125
16.2 Buffer overflow	126
16.3 Buffer overflow protection methods	129
16.3.1 Optimizing Xcode (LLVM) + thumb-2 mode	131
16.4 One more word about arrays	133
16.5 Multidimensional arrays	133
16.5.1 x86	134
16.5.2 ARM + Non-optimizing Xcode (LLVM) + thumb mode	135
16.5.3 ARM + Optimizing Xcode (LLVM) + thumb mode	135
17 Bit fields	137
17.1 Specific bit checking	137
17.1.1 x86	137
17.1.2 ARM	139
17.2 Specific bit setting/clearing	141
17.2.1 x86	141
17.2.2 ARM + Optimizing Keil + ARM mode	143
17.2.3 ARM + Optimizing Keil + thumb mode	143
17.2.4 ARM + Optimizing Xcode (LLVM) + ARM mode	143
17.3 Shifts	143
17.3.1 x86	144
17.3.2 ARM + Optimizing Xcode (LLVM) + ARM mode	146
17.3.3 ARM + Optimizing Xcode (LLVM) + thumb-2 mode	146
17.4 CRC32 calculation example	146
18 Structures	150
18.1 SYSTEMTIME example	150
18.2 Let's allocate space for structure using malloc()	152
18.3 struct tm	154
18.3.1 Linux	154
18.3.2 ARM + Optimizing Keil + thumb mode	157
18.3.3 ARM + Optimizing Xcode (LLVM) + thumb-2 mode	158
18.4 Fields packing in structure	159
18.4.1 x86	159
18.4.2 ARM + Optimizing Keil + thumb mode	161
18.4.3 ARM + Optimizing Xcode (LLVM) + thumb-2 mode	162
18.5 Nested structures	162
18.6 Bit fields in structure	163
18.6.1 CPUID example	163
18.6.2 Working with the float type as with a structure	166
19 Unions	170
19.1 Pseudo-random number generator example	170
20 Pointers to functions	173
20.1 GCC	175
21 64-bit values in 32-bit environment	177
21.1 Arguments passing, addition, subtraction	177
21.2 Multiplication, division	178
21.3 Shifting right	180
21.4 Converting of 32-bit value into 64-bit one	181
22 SIMD	183
22.1 Vectorization	183
22.1.1 Intel C++	184
22.1.2 GCC	187
22.2 SIMD strlen() implementation	189

23 64 bits	193
23.1 x86-64	193
23.2 ARM	200
23.3 Float point numbers	200
24 Working with float point numbers using SIMD in x64	201
24.1 Simple example	201
24.2 Passing floating point number via arguments	202
24.3 Comparison example	203
24.4 Summary	204
25 Temperature converting	205
25.1 Integer values	205
25.1.1 MSVC 2012 x86 /Ox	205
25.1.2 MSVC 2012 x64 /Ox	207
25.2 Float point values	207
26 C99 restrict	210
27 Inline functions	213
28 Incorrectly disassembled code	216
28.1 Disassembling started incorrectly (x86)	216
28.2 How random noise looks disassembled?	217
28.3 Information entropy of average code	233
28.3.1 x86	233
28.3.2 ARM (Thumb)	233
28.3.3 ARM (ARM mode)	234
28.3.4 MIPS (little endian)	234
29 Obfuscation	235
29.1 Text strings	235
29.2 Executable code	236
29.2.1 Inserting garbage	236
29.2.2 Replacing instructions to bloated equivalents	236
29.2.3 Always executed/never executed code	236
29.2.4 Making a lot of mess	236
29.2.5 Using indirect pointers	237
29.3 Virtual machine / pseudo-code	237
29.4 Other thing to mention	237
30 Windows 16-bit	238
30.1 Example#1	238
30.2 Example #2	238
30.3 Example #3	239
30.4 Example #4	240
30.5 Example #5	243
30.6 Example #6	247
30.6.1 Global variables	248
II C++	250
31 Classes	251
31.1 Simple example	251
31.1.1 MSVC—x86	251
31.1.2 MSVC—x86-64	254
31.1.3 GCC—x86	255
31.1.4 GCC—x86-64	257
31.2 Class inheritance	257
31.3 Encapsulation	260
31.4 Multiple inheritance	262

31.5 Virtual methods	265
32 ostream	269
33 References	271
34 STL	272
34.1 std::string	272
34.1.1 Internals	272
34.1.2 More complex example	274
34.1.3 std::string as a global variable	277
34.2 std::list	279
34.2.1 GCC	281
34.2.2 MSVC	285
34.2.3 C++11 std::forward_list	289
34.3 std::vector	289
34.4 std::map and std::set	297
34.4.1 MSVC	297
34.4.2 GCC	301
34.4.3 Rebalancing demo (GCC)	305
III Important fundamentals	308
35 Signed number representations	309
35.1 Integer overflow	309
36 Endianness	310
36.1 Big-endian	310
36.2 Little-endian	310
36.3 Bi-endian	310
36.4 Converting data	310
IV Finding important/interesting stuff in the code	311
37 Identification of executable files	313
37.1 Microsoft Visual C++	313
37.1.1 Name mangling	313
37.2 GCC	313
37.2.1 Name mangling	313
37.2.2 Cygwin	313
37.2.3 MinGW	313
37.3 Intel FORTRAN	313
37.4 Watcom, OpenWatcom	314
37.4.1 Name mangling	314
37.5 Borland	314
37.5.1 Delphi	314
37.6 Other known DLLs	315
38 Communication with the outer world (win32)	316
38.1 Often used functions in Windows API	316
38.2 tracer: Intercepting all functions in specific module	317
39 Strings	318
39.1 Text strings	318
39.1.1 Unicode	319
39.2 Error/debug messages	321
40 Calls to assert()	322

41 Constants	323
41.1 Magic numbers	323
41.1.1 DHCP	324
41.2 Constant searching	324
42 Finding the right instructions	325
43 Suspicious code patterns	327
43.1 XOR instructions	327
43.2 Hand-written assembly code	327
44 Using magic numbers while tracing	329
45 Other things	330
46 Old-school techniques, nevertheless, interesting to know	331
46.1 Memory “snapshots” comparing	331
V OS-specific	332
47 Thread Local Storage	333
48 System calls (syscall-s)	334
48.1 Linux	334
48.2 Windows	335
49 Linux	336
49.1 Position-independent code	336
49.1.1 Windows	338
49.2 LD_PRELOAD hack in Linux	338
50 Windows NT	342
50.1 CRT (win32)	342
50.2 Win32 PE	345
50.2.1 Terminology	346
50.2.2 Base address	346
50.2.3 Subsystem	346
50.2.4 OS version	346
50.2.5 Sections	347
50.2.6 Relocations (relocs)	348
50.2.7 Exports and imports	348
50.2.8 Resources	350
50.2.9 .NET	350
50.2.10 TLS	351
50.2.11 Tools	351
50.2.12 Further reading	351
50.3 Windows SEH	351
50.3.1 Let’s forget about MSVC	351
50.3.2 Now let’s get back to MSVC	356
50.3.3 Windows x64	371
50.3.4 Read more about SEH	375
50.4 Windows NT: Critical section	375
VI Tools	377
51 Disassembler	378
51.1 IDA	378
52 Debugger	379

53 System calls tracing	380
53.0.1 strace / dtruss	380
54 Other tools	381
 VII More examples	 382
55 Dongles	383
55.1 Example #1: MacOS Classic and PowerPC	383
55.2 Example #2: SCO OpenServer	391
55.2.1 Decrypting error messages	400
55.3 Example #3: MS-DOS	402
56 “QR9”: Rubik’s cube inspired amateur crypto-algorithm	409
57 SAP	440
57.1 About SAP client network traffic compression	440
57.2 SAP 6.0 password checking functions	451
58 Oracle RDBMS	455
58.1 V\$VERSION table in the Oracle RDBMS	455
58.2 X\$KSMRLRU table in Oracle RDBMS	463
58.3 V\$TIMER table in Oracle RDBMS	465
59 Handwritten assembly code	469
59.1 EICAR test file	469
60 Demos	471
60.1 10 PRINT CHR\$(205.5+RND(1)); : GOTO 10	471
60.1.1 Trixter’s 42 byte version	471
60.1.2 My attempt to reduce Trixter’s version: 27 bytes	472
60.1.3 Take a random memory garbage as a source of randomness	472
60.1.4 Conclusion	473
 VIII Other things	 474
61 npad	475
62 Compiler intrinsic	477
63 Compiler’s anomalies	478
64 OpenMP	479
64.1 MSVC	481
64.2 GCC	483
65 Itanium	485
66 8086 memory model	488
67 Basic blocks reordering	489
67.1 Profile-guided optimization	489
 IX Books/blogs worth reading	 491
68 Books	492
68.1 Windows	492
68.2 C/C++	492
68.3 x86 / x86-64	492
68.4 ARM	492

69 Blogs	493
69.1 Windows	493
70 Other	494
X Exercises	495
71 Level 1	497
71.1 Exercise 1.1	497
71.1.1 MSVC 2012 x64 + /Ox	497
71.1.2 Keil (ARM)	497
71.1.3 Keil (thumb)	497
71.2 Exercise 1.2	497
71.3 Exercise 1.3	497
72 Level 2	498
72.1 Exercise 2.1	498
72.1.1 MSVC 2010	498
72.1.2 GCC 4.4.1 + -O3	498
72.1.3 Keil (ARM) + -O3	499
72.1.4 Keil (thumb) + -O3	499
72.2 Exercise 2.2	499
72.2.1 MSVC 2010 + /Ox	499
72.2.2 GCC 4.4.1	500
72.2.3 Keil (ARM) + -O3	502
72.2.4 Keil (thumb) + -O3	502
72.3 Exercise 2.3	503
72.3.1 MSVC 2010 + /Ox	503
72.3.2 GCC 4.4.1	504
72.3.3 Keil (ARM) + -O3	504
72.3.4 Keil (thumb) + -O3	505
72.4 Exercise 2.4	505
72.4.1 MSVC 2010 + /Ox	505
72.4.2 GCC 4.4.1	506
72.4.3 Keil (ARM) + -O3	507
72.4.4 Keil (thumb) + -O3	508
72.5 Exercise 2.5	509
72.5.1 MSVC 2010 + /Ox	509
72.6 Exercise 2.6	509
72.6.1 MSVC 2010 + /Ox	509
72.6.2 Keil (ARM) + -O3	511
72.6.3 Keil (thumb) + -O3	511
72.7 Exercise 2.7	512
72.7.1 MSVC 2010 + /Ox	512
72.7.2 Keil (ARM) + -O3	513
72.7.3 Keil (thumb) + -O3	515
72.8 Exercise 2.8	516
72.8.1 MSVC 2010 + /O1	516
72.8.2 Keil (ARM) + -O3	517
72.8.3 Keil (thumb) + -O3	517
72.9 Exercise 2.9	518
72.9.1 MSVC 2010 + /O1	518
72.9.2 Keil (ARM) + -O3	519
72.9.3 Keil (thumb) + -O3	519
72.10 Exercise 2.10	520
72.11 Exercise 2.11	521
72.12 Exercise 2.12	521
72.12.1 MSVC 2012 x64 + /Ox	521
72.12.2 Keil (ARM)	522
72.12.3 Keil (thumb)	523

72.13 Exercise 2.13	523
72.13.1 MSVC 2012 + /Ox	524
72.13.2 Keil (ARM)	524
72.13.3 Keil (thumb)	524
72.14 Exercise 2.14	524
72.14.1 MSVC 2012	524
72.14.2 Keil (ARM mode)	525
72.14.3 GCC 4.6.3 for Raspberry Pi (ARM mode)	526
72.15 Exercise 2.15	527
72.15.1 MSVC 2012 x64 /Ox	527
72.15.2 GCC 4.4.6 -O3 x64	530
72.15.3 GCC 4.8.1 -O3 x86	531
72.15.4 Keil (ARM mode): Cortex-R4F CPU as target	532
72.16 Exercise 2.16	533
72.16.1 MSVC 2012 x64 /Ox	533
72.16.2 Keil (ARM) -O3	533
72.16.3 Keil (thumb) -O3	534
72.17 Exercise 2.17	534
73 Level 3	535
73.1 Exercise 3.1	535
73.2 Exercise 3.2	542
73.3 Exercise 3.3	542
73.4 Exercise 3.4	542
73.5 Exercise 3.5	542
73.6 Exercise 3.6	542
73.7 Exercise 3.7	543
74 crackme / keygenme	544
XI Exercise solutions	545
75 Level 1	546
75.1 Exercise 1.1	546
76 Level 2	547
76.1 Exercise 2.1	547
76.2 Exercise 2.2	547
76.3 Exercise 2.3	548
76.4 Exercise 2.4	548
76.5 Exercise 2.5	548
76.6 Exercise 2.6	549
76.7 Exercise 2.7	549
76.8 Exercise 2.8	550
76.9 Exercise 2.9	551
76.10 Exercise 2.11	551
76.11 Exercise 2.12	551
76.12 Exercise 2.13	551
76.13 Exercise 2.14	551
76.14 Exercise 2.15	551
76.15 Exercise 2.16	551
76.16 Exercise 2.17	552
77 Level 3	553
77.1 Exercise 3.1	553
77.2 Exercise 3.2	553
77.3 Exercise 3.3	553
77.4 Exercise 3.4	553
77.5 Exercise 3.5	553
77.6 Exercise 3.6	553

Afterword	555
78 Questions?	555
XII Appendix	556
79 Common terminology	557
80 x86	558
80.1 Terminology	558
80.2 General purpose registers	558
80.2.1 RAX/EAX/AX/AL	558
80.2.2 RBX/EBX/BX/BL	558
80.2.3 RCX/ECX/CX/CL	559
80.2.4 RDX/EDX/DX/DL	559
80.2.5 RSI/ESI/SI/SIL	559
80.2.6 RDI/EDI/DI/DIL	559
80.2.7 R8/R8D/R8W/R8L	559
80.2.8 R9/R9D/R9W/R9L	559
80.2.9 R10/R10D/R10W/R10L	559
80.2.10 R11/R11D/R11W/R11L	560
80.2.11 R12/R12D/R12W/R12L	560
80.2.12 R13/R13D/R13W/R13L	560
80.2.13 R14/R14D/R14W/R14L	560
80.2.14 R15/R15D/R15W/R15L	560
80.2.15 RSP/ESP/SP/SPL	560
80.2.16 RBP/EBP/BP/BPL	560
80.2.17 RIP/EIP/IP	561
80.2.18 CS/DS/ES/SS/FS/GS	561
80.2.19 Flags register	561
80.3 FPU-registers	562
80.3.1 Control Word	562
80.3.2 Status Word	562
80.3.3 Tag Word	563
80.4 SIMD-registers	563
80.4.1 MMX-registers	563
80.4.2 SSE and AVX-registers	563
80.5 Debugging registers	563
80.5.1 DR6	563
80.5.2 DR7	564
80.6 Instructions	564
80.6.1 Prefixes	565
80.6.2 Most frequently used instructions	565
80.6.3 Less frequently used instructions	569
80.6.4 FPU instructions	573
80.6.5 SIMD instructions	575
80.6.6 Instructions having printable ASCII opcode	575
81 ARM	577
81.1 General purpose registers	577
81.2 Current Program Status Register (CPSR)	578
81.3 VFP (floating point) and NEON registers	578
82 Some GCC library functions	579
83 Some MSVC library functions	580
Acronyms used	582
Bibliography	586

Glossary	588
Index	590

0.1 Preface

Here are some of my notes about [reverse engineering](#) in English language for those beginners who would like to learn to understand x86 (which accounts for almost all executable software in the world) and ARM code created by C/C++ compilers.

There are several popular meanings of the term “[reverse engineering](#)”: 1) reverse engineering of software: researching of compiled programs; 2) 3D model scanning and reworking in order to make a copy of it; 3) recreating [DBMS](#)¹ structure. These notes are related to the first meaning.

Topics discussed

x86, ARM.

Topics touched

Oracle RDBMS ([58](#)), Itanium ([65](#)), copy-protection dongles ([55](#)), LD_PRELOAD ([49.2](#)), stack overflow, [ELF](#)², win32 PE file format ([50.2](#)), x86-64 ([23.1](#)), critical sections ([50.4](#)), syscalls ([48](#)), [TLS](#)³, position-independent code ([PIC](#)⁴) ([49.1](#)), profile-guided optimization ([67.1](#)), C++ STL ([34](#)), OpenMP ([64](#)), SEH ().

Mini-FAQ⁵

- Q: Should one learn to understand assembly language these days?
A: Yes: in order to have deeper understanding of the internals and to debug your software better and faster.
- Q: Should one learn to write in assembly language these days?
A: Unless one writes low-level [OS](#)⁶ code, probably no.
- Q: But what about writing highly optimized routines?
A: No, modern C/C++ compilers do this job better.
- Q: Should I learn microprocessor internals?
A: Modern [CPU](#)⁷-s are very complex. If you do not plan to write highly optimized code or if you do not work on compiler's code generator then you may still learn internals in bare outlines. ⁸. At the same time, in order to understand and analyze compiled code it is enough to know only [ISA](#)⁹, register's descriptions, i.e., the “outside” part of a [CPU](#) that is available to an application programmer.
- Q: So why should I learn assembly language anyway?
A: Mostly to better understand what is going on while debugging and for [reverse engineering](#) without source code, including, but not limited to, malware.
- Q: How would I search for a reverse engineering job?
A: There are hiring threads that appear from time to time on reddit devoted to RE¹⁰ ([2013 Q3](#), [2014](#)). Try to take a look there.

About the author

Dennis Yurichev is an experienced reverse engineer and programmer. Also available as a freelance teacher of assembly language, [reverse engineering](#), C/C++. Can teach remotely via E-Mail, Skype, any other messengers, or personally in Kiev, Ukraine. His CV is available [here](#).

¹Database management systems

²Executable file format widely used in *NIX system including Linux

³Thread Local Storage

⁴Position Independent Code: [49.1](#)

⁵Frequently Asked Questions

⁶Operating System

⁷Central processing unit

⁸Very good text about it: [\[10\]](#)

⁹Instruction Set Architecture

¹⁰<http://www.reddit.com/r/ReverseEngineering/>

Thanks

Andrey “herm1t” Baranovich, Slava “Avid” Kazakov, Stanislav “Beaver” Bobrytskyy, Alexander Lysenko, Alexander “Lstar” Chernenkiy, Andrew Zubinski, Vladimir Botov, Mark “Logxen” Cooper, Shell Rocket, Arnaud Patard (rtp on #debian-arm IRC), and all the folks on github.com who have contributed notes and corrections.

A lot of $\text{\LaTeX}$ packages were used: I would thank their authors as well.

Praise for Reverse Engineering for Beginners

- “It’s very well done .. and for free .. amazing.”¹¹ Daniel Bilar, Siege Technologies, LLC.
- “...excellent and free”¹² Pete Finnigan, Oracle RDBMS security guru.
- “... book is interesting, great job!” Michael Sikorski, author of *Practical Malware Analysis: The Hands-On Guide to Dissecting Malicious Software*.
- “... my compliments for the very nice tutorial!” Herbert Bos, full professor at the Vrije Universiteit Amsterdam.
- “... It is amazing and unbelievable.” Luis Rocha, CISSP / ISSAP, Technical Manager, Network & Information Security at Verizon Business.

Donate

As it turns out, (technical) writing takes a lot of effort and work.

This book is free, available freely and available in source code form¹³ (LaTeX), and it will be so forever.

My current plan for this book is to add lots of information about: [PLANS](#).

If you want me to continue writing on all these topics you may consider donating.

I worked more than year on this book¹⁴, there are more than 500 pages. There are ≈ 300 $\text{\LaTeX}$ -files, ≈ 90 C/C++ source codes, ≈ 350 various listings.

Price of other books on the same subject varies between \$20 and \$50 on amazon.com.

Ways to donate are available on the page: <http://yurichev.com/donate.html>

Every donor’s name will be included in the book! Donors also have a right to ask me to rearrange items in my writing plan.

Why not try to publish? Because it’s technical literature which, as I believe, cannot be finished or frozen in paper state. Such technical references akin to Wikipedia or MSDN¹⁵ library. They can evolve and grow indefinitely. Someone can sit down and write everything from the begin to the end, publish it and forget about it. As it turns out, it’s not me. I have everyday thoughts like “that was written badly and can be rewritten better”, “that was a bad example, I know a better one”, “that is also a thing I can explain better and shorter”, etc. As you may see in commit history of this book’s source code, I make a lot of small changes almost every day: <https://github.com/dennis714/RE-for-beginners/commits/master>.

So the book will probably be a “rolling release” as they say about Linux distros like Gentoo. No fixed releases (and deadlines) at all, but continuous development. I don’t know how long it will take to write all I know. Maybe 10 years or more. Of course, it is not very convenient for readers who want something stable, but all I can offer is a [ChangeLog](#) file serving as a “what’s new” section. Those who are interested may check it from time to time, or my blog/twitter¹⁶.

Donors

6 * anonymous, Oleg Vygovsky, Daniel Bilar, James Truscott, Luis Rocha.

About illustrations

Those readers who are used to read a lot in the Internet, expects seeing illustrations at the places where they should be. It’s because there are no pages at all, only single one. It’s not possible to place illustrations in the book at the suitable context. So, in this book, illustrations can be at the end of section, and a referenceses in the text may be present, like “fig.1.1”.

¹¹https://twitter.com/daniel_bilar/status/436578617221742593

¹²<https://twitter.com/petefinnigan/status/400551705797869568>

¹³<https://github.com/dennis714/RE-for-beginners>

¹⁴Initial git commit from March 2013:

<https://github.com/dennis714/RE-for-beginners/tree/1e57ef540d827c7f7a92fcb3a4626af3e13c7ee4>

¹⁵Microsoft Developer Network

¹⁶<http://blog.yurichev.com/> <https://twitter.com/yurichev>

Part I

Code patterns

When I first learned C and then C++, I wrote small pieces of code, compiled them, and saw what was produced in the assembly language. This was easy for me. I did it many times and the relation between the C/C++ code and what the compiler produced was imprinted in my mind so deep that I can quickly understand what was in the original C code when I look at produced x86 code. Perhaps this technique may be helpful for someone else so I will try to describe some examples here.

Chapter 1

Short introduction to the CPU

The **CPU** is the unit which executes all of the programs.

Short glossary:

Instruction : a primitive command to the **CPU**. Simplest examples: moving data between registers, working with memory, arithmetic primitives. As a rule, each **CPU** has its own instruction set architecture (**ISA**).

Machine code : code for the **CPU**. Each instruction is usually encoded by several bytes.

Assembly language : mnemonic code and some extensions like macros which are intended to make a programmer's life easier.

CPU register : Each **CPU** has a fixed set of general purpose registers (**GPR**¹). ≈ 8 in x86, ≈ 16 in x86-64, ≈ 16 in ARM. The easiest way to understand a register is to think of it as an untyped temporary variable. Imagine you are working with a high-level **PL**² and you have only 8 32-bit variables. A lot of things can be done using only these!

What is the difference between machine code and a **PL**? It is much easier for humans to use a high-level **PL** like C/C++, Java, Python, etc., but it is easier for a **CPU** to use a much lower level of abstraction. Perhaps, it would be possible to invent a **CPU** which can execute high-level **PL** code, but it would be much more complex. On the contrary, it is very inconvenient for humans to use assembly language due to its low-levelness. Besides, it is very hard to do it without making a huge amount of annoying mistakes. The program which converts high-level **PL** code into assembly is called a *compiler*.

¹General Purpose Registers

²Programming language

Chapter 2

Hello, world!

Let's start with the famous example from the book "The C programming Language" [17]:

```
#include <stdio.h>

int main()
{
    printf("hello, world");
    return 0;
};
```

2.1 x86

2.1.1 MSVC—x86

Let's compile it in MSVC 2010:

```
cl 1.cpp /Fa1.asm
```

(/Fa option means generate assembly listing file)

Listing 2.1: MSVC 2010

```
CONST    SEGMENT
$SG3830 DB      'hello, world', 00H
CONST    ENDS
PUBLIC   _main
EXTRN    _printf:PROC
; Function compile flags: /OdtP
_TEXT    SEGMENT
_main    PROC
    push    ebp
    mov     ebp, esp
    push    OFFSET $SG3830
    call    _printf
    add     esp, 4
    xor     eax, eax
    pop     ebp
    ret     0
_main    ENDP
_TEXT    ENDS
```

MSVC produces assembly listings in Intel-syntax. The difference between Intel-syntax and AT&T-syntax will be discussed hereafter.

The compiler generated 1.obj file will be linked into 1.exe.

In our case, the file contain two segments: CONST (for data constants) and _TEXT (for code).

The string 'hello, world' in C/C++ has type `const char*`, however it does not have its own name.

The compiler needs to deal with the string somehow so it defines the internal name \$SG3830 for it.

So the example may be rewritten as:

```
#include <stdio.h>

const char *$SG3830="hello, world";

int main()
{
    printf($SG3830);
    return 0;
};
```

Let's back to the assembly listing. As we can see, the string is terminated by a zero byte which is standard for C/C++ strings. More about C strings: [39.1](#).

In the code segment, `_TEXT`, there is only one function so far: `main()`.

The function `main()` starts with prologue code and ends with epilogue code (like almost any function) ¹.

After the function prologue we see the call to the `printf()` function: `CALL _printf`.

Before the call the string address (or a pointer to it) containing our greeting is placed on the stack with the help of the `PUSH` instruction.

When the `printf()` function returns flow control to the `main()` function, string address (or pointer to it) is still in stack.

Since we do not need it anymore the [stack pointer](#) (the `ESP` register) needs to be corrected.

`ADD ESP, 4` means add 4 to the value in the `ESP` register.

Why 4? Since it is 32-bit code we need exactly 4 bytes for address passing through the stack. It is 8 bytes in x64-code.

“`ADD ESP, 4`” is effectively equivalent to “`POP register`” but without using any register ².

Some compilers (like Intel C++ Compiler) in the same situation may emit `POP ECX` instead of `ADD` (e.g. such a pattern can be observed in the Oracle RDBMS code as it is compiled by Intel C++ compiler). This instruction has almost the same effect but the `ECX` register contents will be rewritten.

The Intel C++ compiler probably uses `POP ECX` since this instruction's opcode is shorter than `ADD ESP, x` (1 byte against 3).

Read more about the stack in section [\(4\)](#).

After the call to `printf()`, in the original C/C++ code was `return 0`—return 0 as the result of the `main()` function.

In the generated code this is implemented by instruction `XOR EAX, EAX`

`XOR` is in fact, just “eXclusive OR” ³ but compilers often use it instead of `MOV EAX, 0`—again because it is a slightly shorter opcode (2 bytes against 5).

Some compilers emit `SUB EAX, EAX`, which means *SUBtract the value in the EAX from the value in EAX*, which in any case will result zero.

The last instruction `RET` returns control flow to the [caller](#). Usually, it is C/C++ [CRT](#) ⁴ code which in turn returns control to the [OS](#).

2.1.2 GCC—x86

Now let's try to compile the same C/C++ code in the GCC 4.4.1 compiler in Linux: `gcc 1.c -o 1`

After, with the assistance of the [IDA](#) ⁵ disassembler, let's see how the `main()` function was created.

([IDA](#), like [MSVC](#), shows code in Intel-syntax).

N.B. We could also have GCC produce assembly listings in Intel-syntax by applying the options `-S -masm=intel`

Listing 2.2: GCC

```
main                proc near
var_10              = dword ptr -10h

                    push    ebp
                    mov     ebp, esp
                    and     esp, 0FFFFFFF0h
                    sub     esp, 10h
                    mov     eax, offset aHelloWorld ; "hello, world"
                    mov     [esp+10h+var_10], eax
                    call    _printf
```

¹Read more about it in section about function prolog and epilog [\(3\)](#).

²CPU flags, however, are modified

³http://en.wikipedia.org/wiki/Exclusive_or

⁴C runtime library: `sec:CRT`

⁵Interactive Disassembler

```

        mov     eax, 0
        leave
        retn
main:    endp

```

The result is almost the same. The address of the “hello, world” string (stored in the data segment) is saved in the EAX register first and then it is stored on the stack. Also in the function prologue we see `AND ESP, 0FFFFFFF0h`—this instruction aligns the value in the ESP register on a 16-byte boundary. This results in all values in the stack being aligned. (The CPU performs better if the values it is dealing with are located in memory at addresses aligned on a 4- or 16-byte boundary)⁶.

`SUB ESP, 10h` allocates 16 bytes on the stack. Although, as we can see hereafter, only 4 are necessary here.

This is because the size of the allocated stack is also aligned on a 16-byte boundary.

The string address (or a pointer to the string) is then written directly onto the stack space without using the `PUSH` instruction. `var_10`—is a local variable and is also an argument for `printf()`. Read about it below.

Then the `printf()` function is called.

Unlike MSVC, when GCC is compiling without optimization turned on, it emits `MOV EAX, 0` instead of a shorter opcode.

The last instruction, `LEAVE`—is the equivalent of the `MOV ESP, EBP` and `POP EBP` instruction pair—in other words, this instruction sets the [stack pointer](#) (ESP) back and restores the EBP register to its initial state.

This is necessary since we modified these register values (ESP and EBP) at the beginning of the function (executing `MOV EBP, ESP` / `AND ESP, ...`).

2.1.3 GCC: AT&T syntax

Let’s see how this can be represented in the AT&T syntax of assembly language. This syntax is much more popular in the UNIX-world.

Listing 2.3: let’s compile in GCC 4.7.3

```
gcc -S 1_1.c
```

We get this:

Listing 2.4: GCC 4.7.3

```

.file    "1_1.c"
.section      .rodata
.LC0:
.string "hello, world"
.text
.globl main
.type main, @function
main:
.LFB0:
.cfi_startproc
pushl   %ebp
.cfi_def_cfa_offset 8
.cfi_offset 5, -8
movl    %esp, %ebp
.cfi_def_cfa_register 5
andl    $-16, %esp
subl    $16, %esp
movl    $.LC0, (%esp)
call    printf
movl    $0, %eax
leave
.cfi_restore 5
.cfi_def_cfa 4, 4
ret
.cfi_endproc
.LFE0:
.size   main, .-main
.ident  "GCC: (Ubuntu/Linaro 4.7.3-1ubuntu1) 4.7.3"
.section      .note.GNU-stack,"",@progbits

```

⁶[Wikipedia: Data structure alignment](#)

There are a lot of macros (beginning with dot). These are not very interesting to us so far. For now, for the sake of simplification, we can ignore them (except the *.string* macro which encodes a null-terminated character sequence just like a C-string). Then we'll see this ⁷:

Listing 2.5: GCC 4.7.3

```
.LC0:
    .string "hello, world"
main:
    pushl    %ebp
    movl     %esp, %ebp
    andl     $-16, %esp
    subl     $16, %esp
    movl     $.LC0, (%esp)
    call     printf
    movl     $0, %eax
    leave
    ret
```

Some of the major differences between Intel and AT&T syntax are:

- Operands are written backwards.

In Intel-syntax: <instruction> <destination operand> <source operand>.

In AT&T syntax: <instruction> <source operand> <destination operand>.

Here is a way to think about them: when you deal with Intel-syntax, you can put in equality sign (=) in your mind between operands and when you deal with AT&T-syntax put in a right arrow (→) ⁸.

- AT&T: Before register names a percent sign must be written (%) and before numbers a dollar sign (\$). Parentheses are used instead of brackets.
- AT&T: A special symbol is to be added to each instruction defining the type of data:
 - l — long (32 bits)
 - w — word (16 bits)
 - b — byte (8 bits)

Let's go back to the compiled result: it is identical to what we saw in [IDA](#). With one subtle difference: 0FFFFFFF0h is written as \$-16. It is the same: 16 in the decimal system is 0x10 in hexadecimal. -0x10 is equal to 0xFFFFFFF0 (for a 32-bit data type).

One more thing: the return value is to be set to 0 by using usual MOV, not XOR. MOV just loads value to a register. Its name is not felicitous (data are not moved), this instruction in other architectures has name “load” or something like that.

2.2 x86-64

2.2.1 MSVC—x86-64

Let's also try 64-bit MSVC:

Listing 2.6: MSVC 2012 x64

```
$SG2989 DB      'hello, world', 00H

main PROC
    sub     rsp, 40
    lea     rcx, OFFSET FLAT:$SG2923
    call    printf
    xor     eax, eax
    add     rsp, 40
    ret     0
main ENDP
```

⁷This GCC option can be used to eliminate “unnecessary” macros: *-fno-asynchronous-unwind-tables*

⁸ By the way, in some C standard functions (e.g., *memcpy()*, *strcpy()*) arguments are listed in the same way as in Intel-syntax: pointer to destination memory block at the beginning and then pointer to source memory block.

As of x86-64, all registers were extended to 64-bit and now have R- prefix. In order to use stack not that often (in other words, to access external memory not that often), there exist a popular way to pass function arguments via registers (fastcall: ??). I.e., one part of function arguments are passed in registers, other part—via stack. In Win64, 4 function arguments are passed in RCX, RDX, R8, R9 registers. That is what we see here: a pointer to the string for `printf()` is now passed not in stack, but in RCX register.

Pointers are 64-bit now, so they are passed in 64-bit part of registers (which have R- prefix). But for the backward compatibility, it is still possible to access 32-bit parts, using E- prefix.

That is how RAX/EAX/AX/AL looks like in 64-bit x86-compatible CPUs:

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RAX ^{x64}							
				EAX			
						AX	
						AH	AL

`main()` function returns *int*-typed value, which is, in C [PL](#), for the better backward compatibility and portability, is still 32-bit, so that is why EAX register is cleared at the function end (i.e., 32-bit part of register) instead of RAX.

2.2.2 GCC—x86-64

Let's also try GCC in 64-bit Linux:

Listing 2.7: GCC 4.4.6 x64

```

.string "hello, world"
main:
    sub     rsp, 8
    mov     edi, OFFSET FLAT:.LC0 ; "hello, world"
    xor     eax, eax ; number of vector registers passed
    call    printf
    xor     eax, eax
    add     rsp, 8
    ret

```

A method to pass function arguments in registers are also used in Linux, *BSD and MacOSX [\[21\]](#). 6 first arguments are passed in RDI, RSI, RDX, RCX, R8, R9 registers, and others—via stack.

So the pointer to the string is passed in EDI (32-bit part of register). But why not to use 64-bit part, RDI?

It is important to keep in mind that all MOV instructions in 64-bit mode writing something into lower 32-bit register part, clearing higher 32-bits [\[14\]](#). I.e., the MOV EAX, 011223344h will write a value correctly into RAX, higher bits will be cleared.

If to open compiled object file (.o), we will also see all instruction's opcodes ⁹:

Listing 2.8: GCC 4.4.6 x64

```

.text:00000000004004D0      main  proc near
.text:00000000004004D0  48 83 EC 08      sub     rsp, 8
.text:00000000004004D4  BF E8 05 40 00   mov     edi, offset format ; "hello, world"
.text:00000000004004D9  31 C0           xor     eax, eax
.text:00000000004004DB  E8 D8 FE FF FF   call    _printf
.text:00000000004004E0  31 C0           xor     eax, eax
.text:00000000004004E2  48 83 C4 08      add     rsp, 8
.text:00000000004004E6  C3             retn
.text:00000000004004E6      main  endp

```

As we can see, the instruction writing into EDI at 0x4004D4 occupies 5 bytes. The same instruction, writing 32-bit value into RDI will occupy 7 bytes. Apparently, GCC tries to save some space. Besides, it can be sure that the data segment containing the string will not be allocated at the addresses higher than 4GiB.

We also see EAX register clearance before `printf()` function call. This is done because a number of used vector registers is passed in EAX by standard: “with variable arguments passes information about the number of vector registers used” [\[21\]](#).

⁹This should be enabled in Options → Disassembly → Number of opcode bytes

2.3 ARM

For my experiments with ARM processors I chose two compilers: popular in the embedded area Keil Release 6/2013 and Apple Xcode 4.6.3 IDE (with LLVM-GCC 4.2 compiler), which produces code for ARM-compatible processors and [SOC¹⁰](#) in iPod/iPhone/iPad, Windows 8 and Window RT tables¹¹ and also such devices as Raspberry Pi.

32-bit ARM code is used in all cases in this book, if not mentioned otherwise.

2.3.1 Non-optimizing Keil + ARM mode

Let's start by compiling our example in Keil:

```
armcc.exe --arm --c90 -O0 1.c
```

The *armcc* compiler produces assembly listings in Intel-syntax but it has high-level ARM-processor related macros¹², but it is more important for us to see the instructions “as is” so let's see the compiled result in [IDA](#).

Listing 2.9: Non-optimizing Keil + ARM mode + [IDA](#)

```
.text:00000000          main
.text:00000000 10 40 2D E9      STMFD    SP!, {R4,LR}
.text:00000004 1E 0E 8F E2      ADR     R0, aHelloWorld ; "hello, world"
.text:00000008 15 19 00 EB      BL      __2printf
.text:0000000C 00 00 A0 E3      MOV     R0, #0
.text:00000010 10 80 BD E8      LDMFD    SP!, {R4,PC}

.text:000001EC 68 65 6C 6C+aHelloWorld  DCB "hello, world",0 ; DATA XREF: main+4
```

Here are a couple of ARM-related facts that we should know in order to proceed. An ARM processor has at least two major modes: ARM mode and thumb mode. In the first (ARM) mode, all instructions are enabled and each is 32 bits (4 bytes) in size. In the second (thumb) mode each instruction is 16 bits (2 bytes) in size¹³. Thumb mode may look attractive because programs that use it may 1) be compact and 2) execute faster on microcontrollers having a 16-bit memory datapath. Nothing comes for free. In thumb mode, there is a reduced instruction set, only 8 registers are accessible and one needs several thumb instructions for doing some operations when you only need one in ARM mode.

Starting at ARMv7 the thumb-2 instruction set is also present. This is an extended thumb which supports a much larger instruction set. There is a common misconception that thumb-2 is a mix of ARM and thumb. This is not correct. Rather, thumb-2 was extended to fully support processor features so it could compete with ARM mode. A program for the ARM processor may be a mix of procedures compiled for both modes. The majority of iPod/iPhone/iPad applications are compiled for the thumb-2 instruction set because Xcode does this by default.

In the example we can easily see each instruction has a size of 4 bytes. Indeed, we compiled our code for ARM mode, not for thumb.

The very first instruction, “STMFD SP!, {R4,LR}”¹⁴, works as an x86 PUSH instruction, writing the values of two registers (R4 and LR¹⁵) into the stack. Indeed, in the output listing from the *armcc* compiler, for the sake of simplification, actually shows the “PUSH {r4,lr}” instruction. But it is not quite correct. PUSH instruction are only available in thumb mode. So, to make things less messy, I offered to work in [IDA](#).

This instruction writes the values of the R4 and LR registers at the address in memory to which SP¹⁶¹⁷ is pointing, then it decrements SP so it will point to the place in the stack that is free for new entries.

This instruction (like the PUSH instruction in thumb mode) is able to save several register values at once and this may be useful. By the way, there is no such thing in x86. It can also be noted that the STMFD instruction is a generalization of the PUSH instruction (extending its features), since it can work with any register, not just with SP, and this can be very useful.

The “ADR R0, aHelloWorld” instruction adds the value in the PC¹⁸ register to the offset where the “hello, world” string is located. How is the PC register used here, one might ask? This is so-called “position-independent code”.¹⁹ It is intended to be executed at a non-fixed address in memory. In the opcode of the ADR instruction, the difference between the address of this instruction and the place where the string is located is encoded. The difference will always be the same, independent of

¹⁰System on Chip

¹¹http://en.wikipedia.org/wiki/List_of_Windows_8_and_RT_tablet_devices

¹²e.g. ARM mode lacks PUSH/POP instructions

¹³By the way, fixed-length instructions are handy in a way that one can calculate the next (or previous) instruction's address without effort. This feature will be discussed in switch() (11.2.2) section.

¹⁴Store Multiple Full Descending

¹⁵Link Register

¹⁶Stack Pointer

¹⁷ESP, RSP in x86

¹⁸Program Counter

¹⁹Read more about it in relevant section (49.1)

the address where the code is loaded by the OS. That's why all we need is to add the address of the current instruction (from PC) in order to get the absolute address of our C-string in memory.

“BL __2printf”²⁰ instruction calls the `printf()` function. Here's how this instruction works:

- write the address following the BL instruction (0xC) into the LR;
- then pass control flow into `printf()` by writing its address into the PC²¹ register.

When `printf()` finishes its work it must have information about where it must return control. That's why each function passes control to the address stored in the LR register.

That is the difference between “pure” RISC²²-processors like ARM and CISC²³-processors like x86, where the return address is stored on the stack²⁴.

By the way, an absolute 32-bit address or offset cannot be encoded in the 32-bit BL instruction because it only has space for 24 bits. It is also worth noting all ARM-mode instructions have a size of 4 bytes (32 bits). Hence they can only be located on 4-byte boundary addresses. This means the the last 2 bits of the instruction address (which are always zero bits) may be omitted. In summary, we have 26 bits for offset encoding. This is enough to represent offset $\pm \approx 32M$.

Next, the “MOV R0, #0”²⁵ instruction just writes 0 into the R0 register. That's because our C-function returns 0 and the return value is to be placed in the R0 register.

The last instruction “LDMFD SP!, R4,PC”²⁶ is an inverse instruction of STMFD. It loads values from the stack in order to save them into R4 and PC, and increments the stack pointer SP. It can be said that it is similar to POP. N.B. The very first instruction STMFD saves the R4 and LR registers pair on the stack, but R4 and PC are *restored* during execution of LDMFD.

As I wrote before, the address of the place to where each function must return control is usually saved in the LR register. The very first function saves its value in the stack because our `main()` function will use the register in order to call `printf()`. In the function end this value can be written to the PC register, thus passing control to where our function was called. Since our `main()` function is usually the primary function in C/C++, control will be returned to the OS loader or to a point in CRT, or something like that.

DCB —assembly language directive defining an array of bytes or ASCII strings, akin to the DB directive in x86-assembly language.

2.3.2 Non-optimizing Keil: thumb mode

Let's compile the same example using Keil in thumb mode:

```
armcc.exe --thumb --c90 -O0 1.c
```

We will get (in IDA):

Listing 2.10: Non-optimizing Keil + thumb mode + IDA

.text:00000000	main		
.text:00000000 10 B5		PUSH	{R4,LR}
.text:00000002 C0 A0		ADR	R0, aHelloWorld ; "hello, world"
.text:00000004 06 F0 2E F9		BL	__2printf
.text:00000008 00 20		MOVS	R0, #0
.text:0000000A 10 BD		POP	{R4,PC}
.text:00000304 68 65 6C 6C+aHelloWorld		DCB	"hello, world",0 ; DATA XREF: main+2

We can easily spot the 2-byte (16-bit) opcodes. This is, as I mentioned, thumb. The BL instruction however consists of two 16-bit instructions. This is because it is impossible to load an offset for the `printf()` function into PC while using the small space in one 16-bit opcode. That's why the first 16-bit instruction loads the higher 10 bits of the offset and the second instruction loads the lower 11 bits of the offset. As I mentioned, all instructions in thumb mode have a size of 2 bytes (or 16 bits). This mean it is impossible for a thumb-instruction to be at an odd address whatsoever. Given the above, the last address bit may be omitted while encoding instructions. Summarizing, in the BL thumb-instruction $\pm \approx 2M$ can be encoded as the offset from the current address.

As for the other instructions in the function: PUSH and POP work just like the described STMFD/LDMFD but the SP register is not mentioned explicitly here. ADR works just like in previous example. MOVS writes 0 into the R0 register in order to return zero.

²⁰Branch with Link

²¹EIP, RIP in x86

²²Reduced instruction set computing

²³Complex instruction set computing

²⁴Read more about this in next section (4)

²⁵MOVE

²⁶Load Multiple Full Descending

2.3.3 Optimizing Xcode (LLVM) + ARM mode

Xcode 4.6.3 without optimization turned on produces a lot of redundant code so we'll study the version where the instruction count is as small as possible: -O3.

Listing 2.11: Optimizing Xcode (LLVM) + ARM mode

```

__text:000028C4      _hello_world
__text:000028C4 80 40 2D E9      STMFD      SP!, {R7,LR}
__text:000028C8 86 06 01 E3      MOV        R0, #0x1686
__text:000028CC 0D 70 A0 E1      MOV        R7, SP
__text:000028D0 00 00 40 E3      MOVT       R0, #0
__text:000028D4 00 00 8F E0      ADD        R0, PC, R0
__text:000028D8 C3 05 00 EB      BL         _puts
__text:000028DC 00 00 A0 E3      MOV        R0, #0
__text:000028E0 80 80 BD E8      LDMFD      SP!, {R7,PC}

__cstring:00003F62 48 65 6C 6C+aHelloWorld_0 DCB "Hello world!",0

```

The instructions STMFD and LDMFD are familiar to us.

The MOV instruction just writes the number 0x1686 into the R0 register. This is the offset pointing to the “Hello world!” string.

The R7 register as it is standardized in [2] is a frame pointer. More on it below.

The MOVT R0, #0 instruction writes 0 into higher 16 bits of the register. The issue here is that the generic MOV instruction in ARM mode may write only the lower 16 bits of the register. Remember, all instruction opcodes in ARM mode are limited in size to 32 bits. Of course, this limitation is not related to moving between registers. That's why an additional instruction MOVT exists for writing into the higher bits (from 16 to 31 inclusive). However, its usage here is redundant because the “MOV R0, #0x1686” instruction above cleared the higher part of the register. This is probably a shortcoming of the compiler.

The “ADD R0, PC, R0” instruction adds the value in the PC to the value in the R0, to calculate absolute address of the “Hello world!” string. As we already know, it is “position-independent code” so this correction is essential here.

The BL instruction calls the puts() function instead of printf().

GCC replaced the first printf() call with puts(). Indeed: printf() with a sole argument is almost analogous to puts().

Almost because we need to be sure the string will not contain printf-control statements starting with %: then the effect of these two functions would be different²⁷.

Why did the compiler replace the printf() with puts()? Because puts() is faster²⁸.

puts() works faster because it just passes characters to stdout without comparing each to the % symbol.

Next, we see the familiar “MOV R0, #0” instruction intended to set the R0 register to 0.

2.3.4 Optimizing Xcode (LLVM) + thumb-2 mode

By default Xcode 4.6.3 generates code for thumb-2 in this manner:

Listing 2.12: Optimizing Xcode (LLVM) + thumb-2 mode

```

__text:00002B6C      _hello_world
__text:00002B6C 80 B5      PUSH      {R7,LR}
__text:00002B6E 41 F2 D8 30      MOVW      R0, #0x13D8
__text:00002B72 6F 46      MOV        R7, SP
__text:00002B74 C0 F2 00 00      MOVT.W    R0, #0
__text:00002B78 78 44      ADD        R0, PC
__text:00002B7A 01 F0 38 EA      BLX       _puts
__text:00002B7E 00 20      MOVS      R0, #0
__text:00002B80 80 BD      POP        {R7,PC}

...

__cstring:00003E70 48 65 6C 6C 6F 20+aHelloWorld DCB "Hello world!",0xA,0

```

The BL and BLX instructions in thumb mode, as we recall, are encoded as a pair of 16-bit instructions. In thumb-2 these *surrogate* opcodes are extended in such a way so that new instructions may be encoded here as 32-bit instructions. That's easily observable — opcodes of thumb-2 instructions also begin with 0xFx or 0Ex. But in the IDA listings two opcode bytes

²⁷It should also be noted the puts() does not require a '\n' new line symbol at the end of a string, so we do not see it here.

²⁸http://www.cisellant.de/projects/gcc_printf/gcc_printf.html

are swapped (for thumb and thumb-2 modes). For instructions in ARM mode, the order is the fourth byte, then the third, then the second and finally the first (due to different [endianness](#)). So as we can see, the MOVW, MOVT.W and BLX instructions begin with 0xFx.

One of the thumb-2 instructions is ‘MOVW R0, #0x13D8’—it writes a 16-bit value into the lower part of the R0 register.

Also, ‘MOVT.W R0, #0’—this instruction works just like MOVT from the previous example but it works in thumb-2.

Among other differences, here BLX instruction is used instead of BL. The difference is that, besides saving the [RA](#)²⁹ in the [LR](#) register and passing control to the puts() function, the processor is also switching from thumb mode to ARM (or back). This instruction is placed here since the instruction to which control is passed looks like (it is encoded in ARM mode):

__symbolstub1:00003FEC	_puts		; CODE XREF: _hello_world+E
__symbolstub1:00003FEC	44 F0 9F E5	LDR	PC, =__imp__puts

So, the observant reader may ask: why not call puts() right at the point in the code where it needed?

Because it is not very space-efficient.

Almost any program uses external dynamic libraries (like DLL in Windows, .so in *NIX or .dylib in Mac OS X). Often used library functions are stored in dynamic libraries, including the standard C-function puts().

In an executable binary file (Windows PE .exe, ELF or Mach-O) an import section is present. This is a list of symbols (functions or global variables) being imported from external modules along with the names of these modules.

The [OS](#) loader loads all modules it needs and, while enumerating import symbols in the primary module, determines the correct addresses of each symbol.

In our case, __imp__puts is a 32-bit variable where the [OS](#) loader will write the correct address of the function in an external library. Then the LDR instruction just takes the 32-bit value from this variable and writes it into the [PC](#) register, passing control to it.

So, in order to reduce the time that an [OS](#) loader needs for doing this procedure, it is good idea for it to write the address of each symbol only once to a specially-allocated place just for it.

Besides, as we have already figured out, it is impossible to load a 32-bit value into a register while using only one instruction without a memory access. So, it is optimal to allocate a separate function working in ARM mode with only one goal—to pass control to the dynamic library and then to jump to this short one-instruction function (the so-called [thunk function](#)) from thumb-code.

By the way, in the previous example (compiled for ARM mode) control passed by the BL instruction goes to the same [thunk function](#). However the processor mode is not switched (hence the absence of an ‘X’ in the instruction mnemonic).

²⁹Return Address

Chapter 3

Function prologue and epilogue

Function prologue is instructions at function start. It is often something like the following code fragment:

```
push    ebp
mov     ebp, esp
sub     esp, X
```

What these instructions do: saves the value in the EBP register, set value of the EBP register to the value of the ESP and then allocates space on the stack for local variables.

Value in the EBP is fixed over a period of function execution and it is to be used for local variables and arguments access. One can use ESP, but it is changing over time and it is not convenient.

Function epilogue annulled allocated space in stack, returns value in the EBP register back to initial state and returns flow control to [callee](#):

```
mov     esp, ebp
pop     ebp
ret     0
```

Epilogue and prologue can make recursion performance worse.

For example, once upon a time I wrote a function to seek right node in binary tree. As a recursive function it would look stylish but since an additional time is to be spent at each function call for prologue/epilogue, it was working couple of times slower than iterative (recursion-free) implementation.

By the way, that is the reason of [tail call](#) existence.

Chapter 4

Stack

A stack is one of the most fundamental data structures in computer science¹.

Technically, it is just a block of memory in process memory along with the ESP or RSP register in x86 or x64, or the SP register in ARM, as a pointer within the block.

The most frequently used stack access instructions are PUSH and POP (in both x86 and ARM thumb-mode). PUSH subtracts 4 in 32-bit mode (or 8 in 64-bit mode) from ESP/RSP/SP and then writes the contents of its sole operand to the memory address pointed to by ESP/RSP/SP.

POP is the reverse operation: get the data from memory pointed to by SP, put it in the operand (often a register) and then add 4 (or 8) to the stack pointer.

After stack allocation the stack pointer points to the end of stack. PUSH increases the stack pointer and POP decreases it. The end of the stack is actually at the beginning of the memory allocated for the stack block. It seems strange, but it is so.


Nevertheless ARM has not only instructions supporting ascending stacks but also descending stacks.

For example the STMFD²/LDMFD³, STMED⁴/LDMED⁵ instructions are intended to deal with a descending stack. The STMFA⁶/LMDFA⁷, STMEA⁸/LDMEA⁹ instructions are intended to deal with an ascending stack.

4.1 Why stack grows backward?

Intuitively, we might think that, like any other data structure, the stack may grow upward, i.e., towards higher addresses.

The reason the stack grows backward is probably historical. When computers were big and occupied a whole room, it was easy to divide memory into two parts, one for the heap and one for the stack. Of course, it was unknown how big the heap and the stack would be during program execution, so this solution was simplest possible.

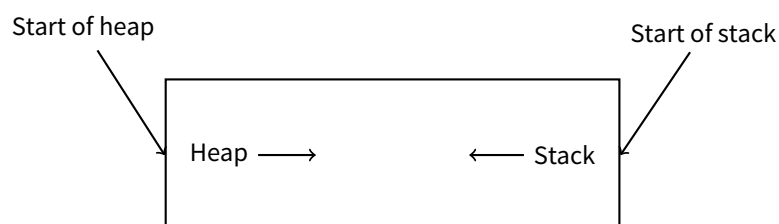

In [26] we can read:

The user-core part of an image is divided into three logical segments. The program text segment begins at location 0 in the virtual address space. During execution, this segment is write-protected and a single copy of it is shared among all processes executing the same program. At the first 8K byte boundary above the program text segment in the virtual address space begins a nonshared, writable data segment, the size

¹http://en.wikipedia.org/wiki/Call_stack

²Store Multiple Full Descending

³Load Multiple Full Descending

⁴Store Multiple Empty Descending

⁵Load Multiple Empty Descending

⁶Store Multiple Full Ascending

⁷Load Multiple Full Ascending

⁸Store Multiple Empty Ascending

⁹Load Multiple Empty Ascending

of which may be extended by a system call. Starting at the highest address in the virtual address space is a stack segment, which automatically grows downward as the hardware's stack pointer fluctuates.

4.2 What is the stack used for?

4.2.1 Save the return address where a function must return control after execution

x86

While calling another function with a CALL instruction the address of the point exactly after the CALL instruction is saved to the stack and then an unconditional jump to the address in the CALL operand is executed.

The CALL instruction is equivalent to a PUSH `address_after_call` / JMP `operand` instruction pair.

RET fetches a value from the stack and jumps to it—it is equivalent to a POP `tmp` / JMP `tmp` instruction pair.

Overflowing the stack is straightforward. Just run eternal recursion:

```
void f()
{
    f();
};
```

MSVC 2008 reports the problem:

```
c:\tmp6>cl ss.cpp /Fass.asm
Microsoft (R) 32-bit C/C++ Optimizing Compiler Version 15.00.21022.08 for 80x86
Copyright (C) Microsoft Corporation. All rights reserved.

ss.cpp
c:\tmp6\ss.cpp(4) : warning C4717: 'f' : recursive on all control paths, function will cause
runtime stack overflow
```

...but generates the right code anyway:

```
?f@@YAXXZ PROC                                ; f
; File c:\tmp6\ss.cpp
; Line 2
    push    ebp
    mov     ebp, esp
; Line 3
    call    ?f@@YAXXZ                          ; f
; Line 4
    pop     ebp
    ret     0
?f@@YAXXZ ENDP                                ; f
```

...Also if we turn on optimization (/Ox option) the optimized code will not overflow the stack but will work *correctly*¹⁰:

```
?f@@YAXXZ PROC                                ; f
; File c:\tmp6\ss.cpp
; Line 2
$LL3@f:
; Line 3
    jmp     SHORT $LL3@f
?f@@YAXXZ ENDP                                ; f
```

GCC 4.4.1 generates likewise code in both cases, although without issuing any warning about the problem.

¹⁰irony here

ARM

ARM programs also use the stack for saving return addresses, but differently. As it was mentioned in “Hello, world!” (2.3), the **RA** is saved to the **LR** (link register). However, if one needs to call another function and use the **LR** register one more time its value should be saved. Usually it is saved in the function prologue. Often, we see instructions like “**PUSH R4-R7, LR**” along with this instruction in epilogue “**POP R4-R7, PC**” —thus register values to be used in the function are saved in the stack, including **LR**.

Nevertheless, if a function never calls any other function, in ARM terminology it is called a *leaf function*¹¹. As a consequence, leaf functions do not use the **LR** register. If this function is small and uses a small number of registers, it may not use the stack at all. Thus, it is possible to call leaf functions without using the stack. This can be faster than on x86 because external RAM is not used for the stack¹². It can be useful for such situations when memory for the stack is not yet allocated or not available.

4.2.2 Passing function arguments

The most popular way to pass parameters in x86 is called “cdecl”:

```
push arg3
push arg2
push arg1
call f
add esp, 4*3
```

Callee functions get their arguments via the stack pointer.

Consequently, this is how values will be located in the stack before execution of the very first instruction of the **f()** function:

ESP	return address
ESP+4	argument#1, marked in IDA as arg_0
ESP+8	argument#2, marked in IDA as arg_4
ESP+0xC	argument#3, marked in IDA as arg_8
...	...

See also the section about other calling conventions (??). It is worth noting that nothing obliges programmers to pass arguments through the stack. It is not a requirement. One could implement any other method without using the stack at all.

For example, it is possible to allocate a space for arguments in the **heap**, fill it and pass it to a function via a pointer to this block in the **EAX** register. This will work.¹³ However, it is convenient tradition in x86 and ARM to use the stack for this.

By the way, the **callee** function does not have any information about how many arguments were passed. Functions with a variable number of arguments (like **printf()**) determine the number by specifiers (which begin with a % sign) in the format string. If we write something like

```
printf("%d %d %d", 1234);
```

printf() will dump 1234, and then also two random numbers, which were laying near it in the stack, by chance. That's why it is not very important how we declare the **main()** function: as **main()**, **main(int argc, char *argv[])** or **main(int argc, char *argv[], char *envp[])**.

In fact, **CRT**-code is calling **main()** roughly as:

```
push envp
push argv
push argc
call main
...
```

If you'll declare **main()** as **main()** without arguments, they are, nevertheless, still present in the stack, but not used. If you declare **main()** as **main(int argc, char *argv[])**, you will use two arguments, and third will remain “invisible” for your function. Even more than that, it is possible to declare **main(int argc)**, and it will work.

¹¹<http://infocenter.arm.com/help/index.jsp?topic=/com.arm.doc.faqs/ka13785.html>

¹²Some time ago, on PDP-11 and VAX, **CALL** instruction (calling other functions) was expensive, up to 50% of execution time might be spent on it, so it was common sense that big number of small function is *anti-pattern* [25, Chapter 4, Part II].

¹³For example, in the “The Art of Computer Programming” book by Donald Knuth, in section 1.4.1 dedicated to subroutines [18, section 1.4.1], we can read about one way to supply arguments to subroutine is simply to list them after the **JMP** instruction passing control to subroutine. Knuth writes this method was particularly convenient on System/360.

4.2.3 Local variable storage

A function could allocate space in the stack for its local variables just by shifting the [stack pointer](#) towards the stack bottom. It is also not a requirement. You could store local variables wherever you like, but traditionally this is how it's done.

4.2.4 x86: `alloca()` function

It is worth noting the `alloca()` function.¹⁴

This function works like `malloc()` but allocates memory just on the stack.

The allocated memory chunk does not need to be freed via a `free()` function call since the function epilogue (3) will return ESP back to its initial state and the allocated memory will be just annulled.

It is worth noting how `alloca()` is implemented.

This function, if to simplify, just shifts ESP downwards toward the stack bottom by the number of bytes you need and sets ESP as a pointer to the *allocated* block. Let's try:

```
#include <malloc.h>
#include <stdio.h>

void f()
{
    char *buf=(char*)alloca (600);
    _snprintf (buf, 600, "hi! %d, %d, %d\n", 1, 2, 3);

    puts (buf);
};
```

(`_snprintf()` function works just like `printf()`, but instead of dumping the result into stdout (e.g., to terminal or console), it writes to the `buf` buffer. `puts()` copies `buf` contents to stdout. Of course, these two function calls might be replaced by one `printf()` call, but I would like to illustrate small buffer usage.)

MSVC

Let's compile (MSVC 2010):

Listing 4.1: MSVC 2010

```
...

mov     eax, 600           ; 00000258H
call    __alloca_probe_16
mov     esi, esp

push    3
push    2
push    1
push    OFFSET $SG2672
push    600               ; 00000258H
push    esi
call    __snprintf

push    esi
call    _puts
add     esp, 28           ; 0000001cH

...
```

The sole `alloca()` argument passed via EAX (instead of pushing into stack)¹⁵. After the `alloca()` call, ESP points to the block of 600 bytes and we can use it as memory for the `buf` array.

¹⁴In MSVC, the function implementation can be found in `alloca16.asm` and `chkstk.asm` in `C:\Program Files (x86)\Microsoft Visual Studio 10.0\VC\crt\src\intel`

¹⁵It is because `alloca()` is rather compiler intrinsic (??) than usual function.

One of the reason there is a separate function instead of couple instructions just in the code, because [MSVC](#)¹⁶ implementation of the `alloca()` function also has a code which reads from the memory just allocated, in order to let [OS](#) to map physical memory to this [VM](#)¹⁷ region.

GCC + Intel syntax

GCC 4.4.1 can do the same without calling external functions:

Listing 4.2: GCC 4.7.3

```
.LC0:
    .string "hi! %d, %d, %d\n"
f:
    push    ebp
    mov     ebp, esp
    push    ebx
    sub     esp, 660
    lea     ebx, [esp+39]
    and     ebx, -16                ; align pointer by 16-bit border
    mov     DWORD PTR [esp], ebx    ; s
    mov     DWORD PTR [esp+20], 3
    mov     DWORD PTR [esp+16], 2
    mov     DWORD PTR [esp+12], 1
    mov     DWORD PTR [esp+8], OFFSET FLAT:.LC0 ; "hi! %d, %d, %d\n"
    mov     DWORD PTR [esp+4], 600  ; maxlen
    call    _snprintf
    mov     DWORD PTR [esp], ebx    ; s
    call    puts
    mov     ebx, DWORD PTR [ebp-4]
    leave
    ret
```

GCC + AT&T syntax

Let's see the same code, but in AT&T syntax:

Listing 4.3: GCC 4.7.3

```
.LC0:
    .string "hi! %d, %d, %d\n"
f:
    pushl   %ebp
    movl    %esp, %ebp
    pushl   %ebx
    subl    $660, %esp
    leal    39(%esp), %ebx
    andl    $-16, %ebx
    movl    %ebx, (%esp)
    movl    $3, 20(%esp)
    movl    $2, 16(%esp)
    movl    $1, 12(%esp)
    movl    $.LC0, 8(%esp)
    movl    $600, 4(%esp)
    call    _snprintf
    movl    %ebx, (%esp)
    call    puts
    movl    -4(%ebp), %ebx
    leave
    ret
```

The code is the same as in the previous listing.

N.B. E.g. `movl $3, 20(%esp)` is analogous to `mov DWORD PTR [esp+20], 3` in Intel-syntax—when addressing memory in form *register+offset*, it is written in AT&T syntax as `offset(%register)`.

4.2.5 (Windows) SEH

[SEH](#)¹⁸ records are also stored on the stack (if they present)..

Read more about it: [\(50.3\)](#).

4.2.6 Buffer overflow protection

More about it here [\(16.2\)](#).

4.3 Typical stack layout

A very typical stack layout in a 32-bit environment at the start of a function:

...	...
ESP-0xC	local variable #2, marked in IDA as var_8
ESP-8	local variable #1, marked in IDA as var_4
ESP-4	saved value of EBP
ESP	return address
ESP+4	argument#1, marked in IDA as arg_0
ESP+8	argument#2, marked in IDA as arg_4
ESP+0xC	argument#3, marked in IDA as arg_8
...	...

¹⁸Structured Exception Handling: [50.3](#)

Chapter 5

`printf()` with several arguments

Now let's extend the *Hello, world!* (2) example, replacing `printf()` in the `main()` function body by this:

```
#include <stdio.h>

int main()
{
    printf("a=%d; b=%d; c=%d", 1, 2, 3);
    return 0;
};
```

5.1 x86: 3 arguments

5.1.1 MSVC

Let's compile it by MSVC 2010 Express and we got:

```
$SG3830 DB      'a=%d; b=%d; c=%d', 00H

...

    push     3
    push     2
    push     1
    push     OFFSET $SG3830
    call     _printf
    add      esp, 16                ; 00000010H
```

Almost the same, but now we can see the `printf()` arguments are pushed onto the stack in reverse order. The first argument is pushed last.

By the way, variables of *int* type in 32-bit environment have 32-bit width, that is 4 bytes.

So, we have here 4 arguments. $4 * 4 = 16$ —they occupy exactly 16 bytes in the stack: a 32-bit pointer to a string and 3 numbers of type *int*.

When the *stack pointer* (ESP register) is corrected by “ADD ESP, X” instruction after a function call, often, the number of function arguments can be deduced here: just divide X by 4.

Of course, this is related only to *cdecl* calling convention.

See also the section about calling conventions (??).

It is also possible for the compiler to merge several “ADD ESP, X” instructions into one, after the last call:

```
push a1
push a2
call ...
...
push a1
call ...
...
push a1
```

```

push a2
push a3
call ...
add esp, 24

```

5.1.2 MSVC and OllyDbg

Now let's try to load this example in OllyDbg. It is one of the most popular user-land win32 debugger. We can try to compile our example in MSVC 2012 with /MD option, meaning, to link against MSVCR*.DLL, so we will be able to see imported functions clearly in debugger.

Then load executable in OllyDbg. The very first breakpoint is in `ntdll.dll`, press F9 (run). The second breakpoint is in **CRT**-code. Now we should find `main()` function.

Find this code by scrolling the code to the very bottom (MSVC allocates `main()` function at the very beginning of the code section): fig.5.3.

Click on `PUSH EBP` instruction, press F2 (set breakpoint) and press F9 (run). We need to do these manipulations in order to skip **CRT**-code, because we don't really interest in it yet.

Press F8 (step over) 6 times, i.e., skip 6 instructions: fig.5.4.

Now the **PC** points to the `CALL printf` instruction. OllyDbg, like other debuggers, highlights value of registers which were changed. So each time you press F8, EIP is changing and its value looking red. ESP is changing as well, because values are pushed into the stack.

Where are the values in the stack? Take a look into right/bottom window of debugger:

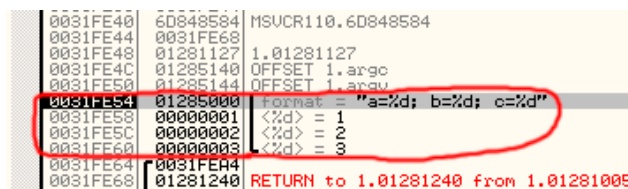


Figure 5.1: OllyDbg: stack after values pushed (I made round red mark here in graphics editor)

So we can see there 3 columns: address in the stack, value in the stack and some additional OllyDbg comments. OllyDbg understands `printf()`-like strings, so it reports the string here and 3 values *attached* to it.

It is possible to right-click on the format string, click on "Follow in dump", and the format string will appear in the window at the left-bottom part, where some memory part is always seen. These memory values can be edited. It is possible to change the format string, and then the result of our example will be different. It is probably not very useful now, but it's very good idea for doing it as exercise, to get feeling how everything is works here.

Press F8 (step over).

In the console we'll see the output:




Figure 5.2: `printf()` function executed

Let's see how registers and stack state are changed: fig.5.5.

EAX register now contains 0xD (13). That's correct, `printf()` returns number of characters printed. EIP value is changed: indeed, now there is address of the instruction after `CALL printf`. ECX and EDX values are changed as well. Apparently, `printf()` function's hidden machinery used them for its own needs.

A very important thing is that ESP value is not changed. And stack state too! We clearly see that format string and corresponding 3 values are still there. Indeed, that's *cdecl* calling convention, calling function doesn't clear arguments in stack. It's caller's duty to do so.

Press F8 again to execute `ADD ESP, 10` instruction: fig.5.6.

ESP is changed, but values are still in the stack! Yes, of course, no one needs to fill these values by zero or something like that. Because, everything above stack pointer (**SP**) is *noise* or *garbage*, it has no value at all. It would be time consuming to clear unused stack entries, besides, no one really needs to.

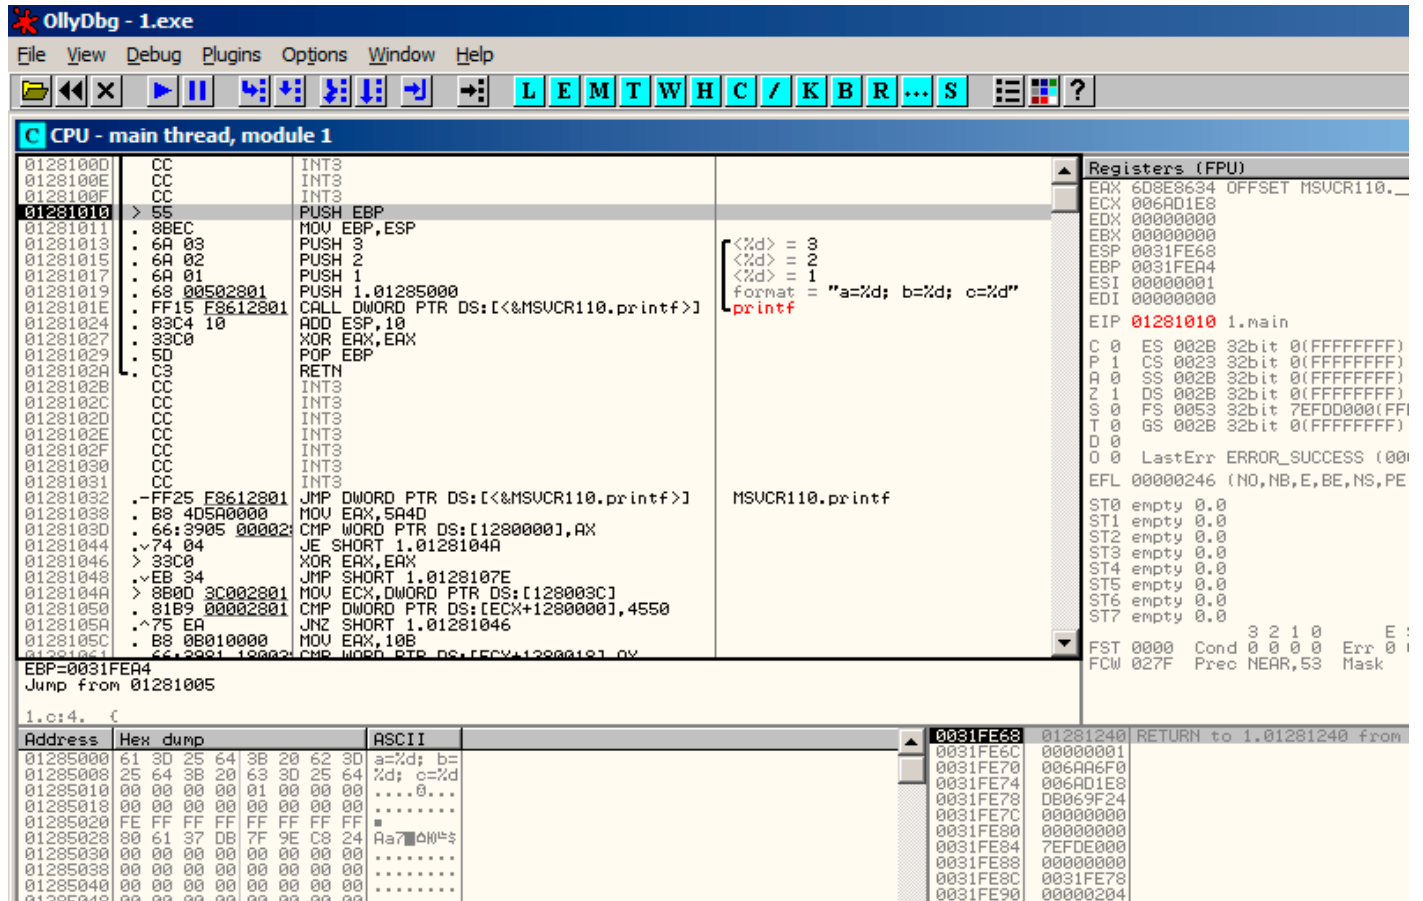


Figure 5.3: OllyDbg: the very start of the main() function

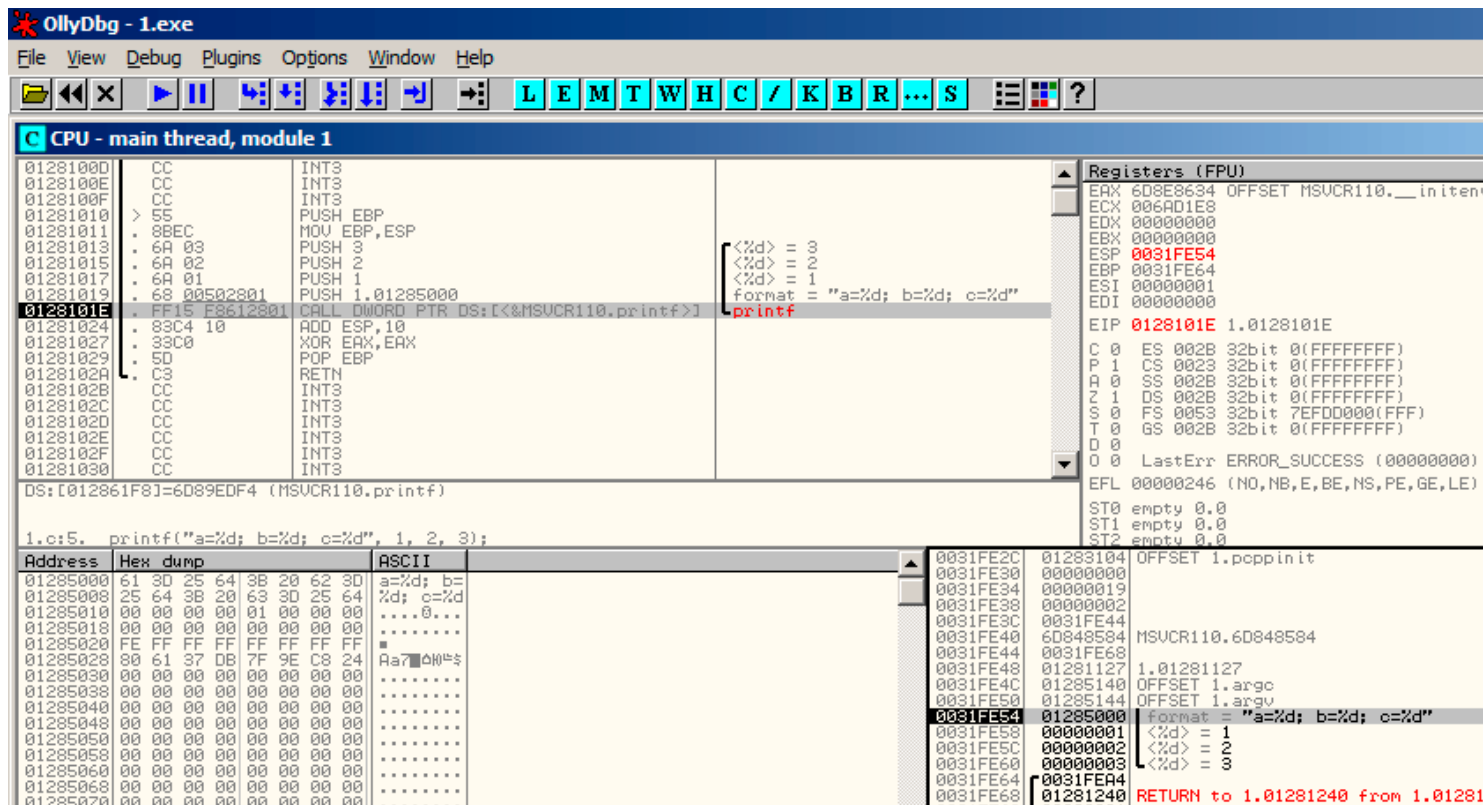
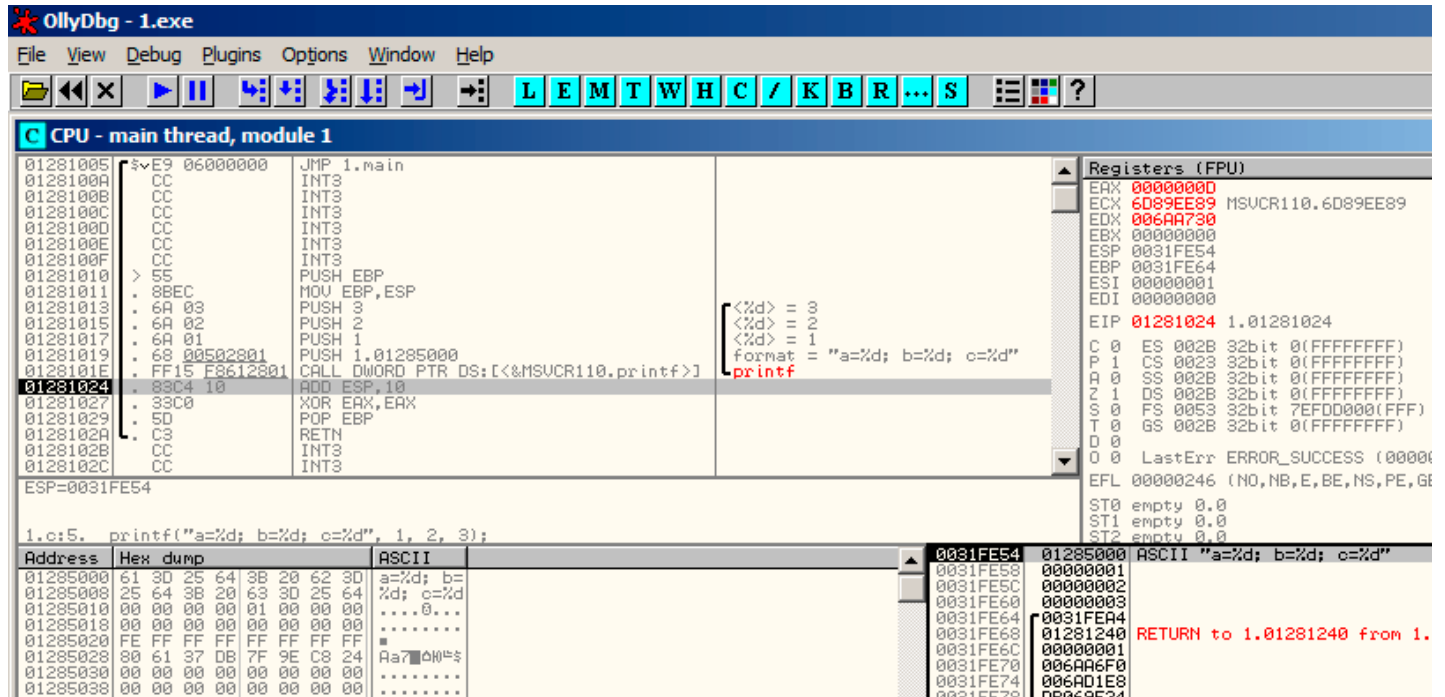
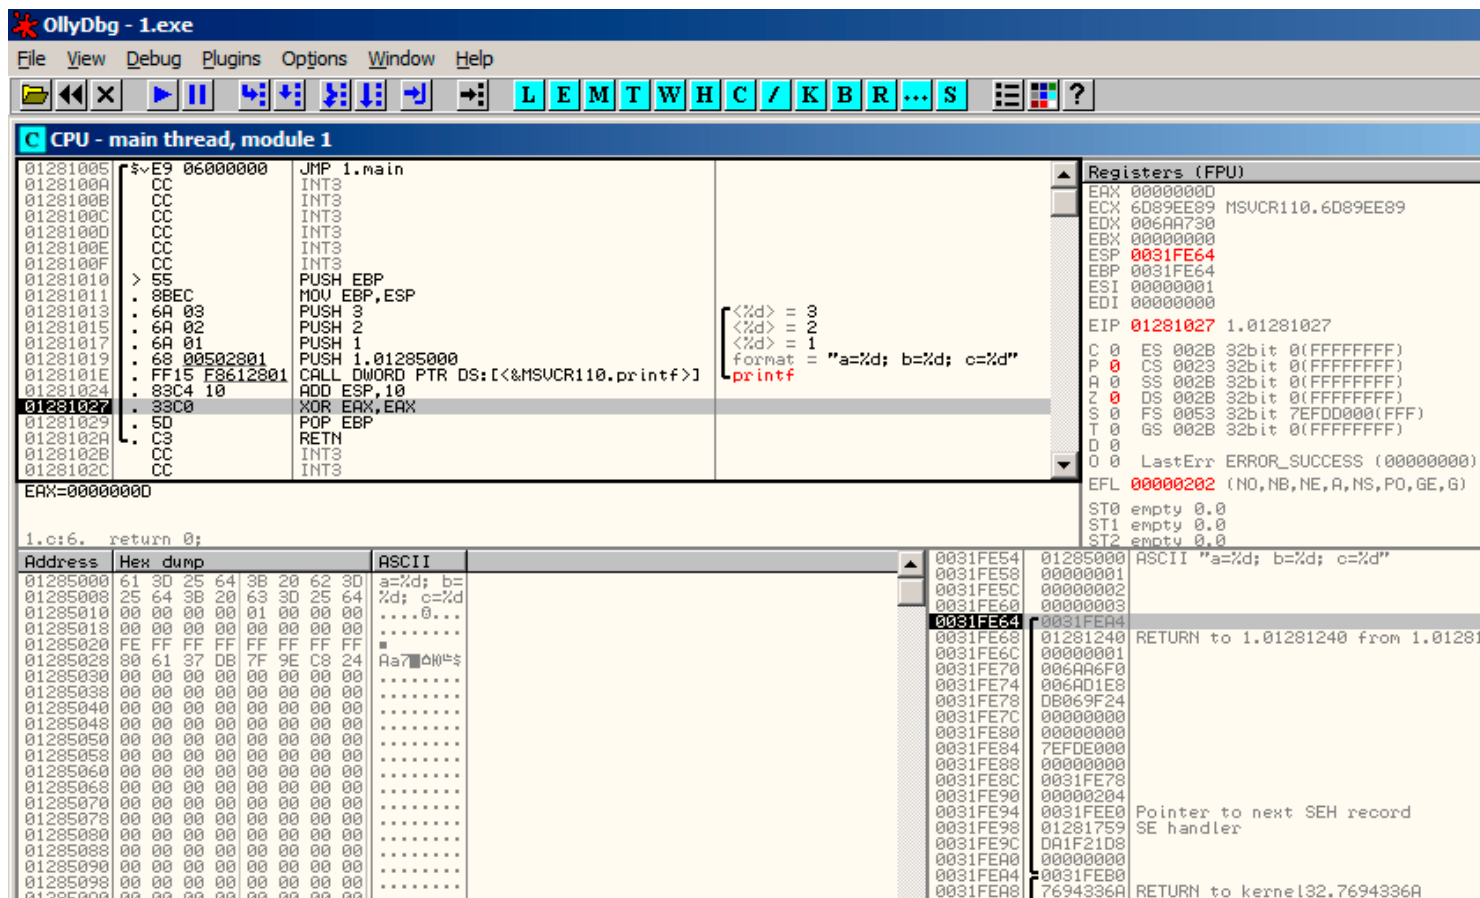


Figure 5.4: OllyDbg: before printf() execution

Figure 5.5: OllyDbg: after `printf()` executionFigure 5.6: OllyDbg: after `ADD ESP, 10` instruction execution

5.1.3 GCC

Now let's compile the same program in Linux using GCC 4.4.1 and take a look in [IDA](#) what we got:

```
main      proc near
```

```

var_10      = dword ptr -10h
var_C       = dword ptr -0Ch
var_8       = dword ptr -8
var_4       = dword ptr -4

        push    ebp
        mov     ebp, esp
        and     esp, 0FFFFFFF0h
        sub     esp, 10h
        mov     eax, offset aADBDCD ; "a=%d; b=%d; c=%d"
        mov     [esp+10h+var_4], 3
        mov     [esp+10h+var_8], 2
        mov     [esp+10h+var_C], 1
        mov     [esp+10h+var_10], eax
        call    _printf
        mov     eax, 0
        leave
        retn
main      endp

```

It can be said that the difference between code from MSVC and code from GCC is only in the method of placing arguments on the stack. Here GCC is working directly with the stack without PUSH/POP.

5.1.4 GCC and GDB

Let's try this example also in [GDB](#)¹ in Linux.

-g mean produce debug information into executable file.

```
$ gcc 1.c -g -o 1
```

```

$ gdb 1
GNU gdb (GDB) 7.6.1-ubuntu
Copyright (C) 2013 Free Software Foundation, Inc.
License GPLv3+: GNU GPL version 3 or later <http://gnu.org/licenses/gpl.html>
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law. Type "show copying"
and "show warranty" for details.
This GDB was configured as "i686-linux-gnu".
For bug reporting instructions, please see:
<http://www.gnu.org/software/gdb/bugs/>...
Reading symbols from /home/dennis/polygon/1...done.

```

Listing 5.1: let's set breakpoint on printf()

```

(gdb) b printf
Breakpoint 1 at 0x80482f0

```

Run. There are no printf() function source code here, so [GDB](#) can't show its source, but may do so.

```

(gdb) run
Starting program: /home/dennis/polygon/1

Breakpoint 1, __printf (format=0x80484f0 "a=%d; b=%d; c=%d") at printf.c:29
29      printf.c: No such file or directory.

```

Print 10 stack elements. Left column is an address in stack.

```

(gdb) x/10w $esp
0xbffff11c:    0x0804844a    0x080484f0    0x00000001    0x00000002
0xbffff12c:    0x00000003    0x08048460    0x00000000    0x00000000
0xbffff13c:    0xb7e29905    0x00000001

```

¹GNU debugger

The very first element is [RA](#) (0x0804844a). We can be sure in it by disassembling the memory at this address:

```
(gdb) x/5i 0x0804844a
0x0804844a <main+45>: mov     $0x0,%eax
0x0804844f <main+50>: leave
0x08048450 <main+51>: ret
0x08048451:   xchg  %ax,%ax
0x08048453:   xchg  %ax,%ax
```

Two XCHG instructions, apparently, is some random garbage, which we can ignore so far.

The second element (0x080484f0) is an address of format string:

```
(gdb) x/s 0x080484f0
0x080484f0:      "a=%d; b=%d; c=%d"
```

Other 3 elements (1, 2, 3) are `printf()` arguments. Other elements may be just “garbage” present in stack, but also may be values from other functions, their local variables, etc. We can ignore it yet.

Execute “finish”. This mean, execute till function end. Here it means: execute till the finish of `printf()`.

```
(gdb) finish
Run till exit from #0  __printf (format=0x080484f0 "a=%d; b=%d; c=%d") at printf.c:29
main () at 1.c:6
6          return 0;
Value returned is $2 = 13
```

[GDB](#) shows what `printf()` returned in EAX (13). This is number of characters printed, just like in the example with OllyDbg.

We also see “return 0;” and the information that this expression is in the 1.c file at the line 6. Indeed, the 1.c file is located in the current directory, and [GDB](#) finds the string there. How [GDB](#) knows, which C-code line is being executed now? This is related to the fact that compiler, while generating debugging information, also saves a table of relations between source code line numbers and instruction addresses. GDB is source-level debugger, after all.

Let’s examine registers. 13 in EAX:

```
(gdb) info registers
eax          0xd          13
ecx          0x0          0
edx          0x0          0
ebx          0xb7fc0000    -1208221696
esp          0xbffff120    0xbffff120
ebp          0xbffff138    0xbffff138
esi          0x0          0
edi          0x0          0
eip          0x0804844a     0x0804844a <main+45>
...
```

Let’s disassemble current instructions. Arrow points to the instruction being executed next.

```
(gdb) disas
Dump of assembler code for function main:
0x0804841d <+0>:   push    %ebp
0x0804841e <+1>:   mov     %esp,%ebp
0x08048420 <+3>:   and     $0xffffffff0,%esp
0x08048423 <+6>:   sub     $0x10,%esp
0x08048426 <+9>:   movl    $0x3,0xc(%esp)
0x0804842e <+17>:  movl    $0x2,0x8(%esp)
0x08048436 <+25>:  movl    $0x1,0x4(%esp)
0x0804843e <+33>:  movl    $0x080484f0, (%esp)
0x08048445 <+40>:  call    0x080482f0 <printf@plt>
=> 0x0804844a <+45>:  mov     $0x0,%eax
0x0804844f <+50>:  leave
0x08048450 <+51>:  ret
End of assembler dump.
```

[GDB](#) shows disassembly in AT&T syntax by default. It’s possible to switch to Intel syntax:

```
(gdb) set disassembly-flavor intel
(gdb) disas
Dump of assembler code for function main:
0x0804841d <+0>:    push    ebp
0x0804841e <+1>:    mov     ebp,esp
0x08048420 <+3>:    and     esp,0xffffffff
0x08048423 <+6>:    sub     esp,0x10
0x08048426 <+9>:    mov     DWORD PTR [esp+0xc],0x3
0x0804842e <+17>:   mov     DWORD PTR [esp+0x8],0x2
0x08048436 <+25>:   mov     DWORD PTR [esp+0x4],0x1
0x0804843e <+33>:   mov     DWORD PTR [esp],0x80484f0
0x08048445 <+40>:   call    0x80482f0 <printf@plt>
=> 0x0804844a <+45>:   mov     eax,0x0
0x0804844f <+50>:   leave
0x08048450 <+51>:   ret
End of assembler dump.
```

Execute next instruction. GDB shows ending bracket, meaning, this is ending block of function.

```
(gdb) step
7      };
```

Let's see registers after MOV EAX, 0 instruction execution. EAX here is zero indeed.

```
(gdb) info registers
eax            0x0          0
ecx            0x0          0
edx            0x0          0
ebx            0xb7fc0000    -1208221696
esp            0xbffff120    0xbffff120
ebp            0xbffff138    0xbffff138
esi            0x0          0
edi            0x0          0
eip            0x804844f      0x804844f <main+50>
...
```

5.2 x64: 8 arguments

To see how other arguments will be passed via the stack, let's change our example again by increasing the number of arguments to be passed to 9 (printf() format string + 8 int variables):

```
#include <stdio.h>

int main()
{
    printf("a=%d; b=%d; c=%d; d=%d; e=%d; f=%d; g=%d; h=%d\n", 1, 2, 3, 4, 5, 6, 7, 8);
    return 0;
};
```

5.2.1 MSVC

As we saw before, the first 4 arguments are passed in the RCX, RDX, R8, R9 registers in Win64, while all the rest—via the stack. That is what we see here. However, the MOV instruction, instead of PUSH, is used for preparing the stack, so the values are written to the stack in a straightforward manner.

Listing 5.2: MSVC 2012 x64

```
$SG2923 DB      'a=%d; b=%d; c=%d; d=%d; e=%d; f=%d; g=%d; h=%d', 0aH, 00H

main      PROC
          sub     rsp, 88
```

```

    mov     DWORD PTR [rsp+64], 8
    mov     DWORD PTR [rsp+56], 7
    mov     DWORD PTR [rsp+48], 6
    mov     DWORD PTR [rsp+40], 5
    mov     DWORD PTR [rsp+32], 4
    mov     r9d, 3
    mov     r8d, 2
    mov     edx, 1
    lea     rcx, OFFSET FLAT:$SG2923
    call    printf

; return 0
xor     eax, eax

add     rsp, 88
ret     0
main    ENDP
_TEXT  ENDS
END

```

5.2.2 GCC

In *NIX OS-es, it's the same story for x86-64, except that the first 6 arguments are passed in the RDI, RSI, RDX, RCX, R8, R9 registers. All the rest—via the stack. GCC generates the code writing string pointer into EDI instead of RDI—we saw this thing before: [2.2.2](#).

We also saw before the EAX register being cleared before a `printf()` call: [2.2.2](#).

Listing 5.3: GCC 4.4.6 -O3 x64

```

.LC0:
    .string "a=%d; b=%d; c=%d; d=%d; e=%d; f=%d; g=%d; h=%d\n"

main:
    sub     rsp, 40

    mov     r9d, 5
    mov     r8d, 4
    mov     ecx, 3
    mov     edx, 2
    mov     esi, 1
    mov     edi, OFFSET FLAT:.LC0
    xor     eax, eax ; number of vector registers passed
    mov     DWORD PTR [rsp+16], 8
    mov     DWORD PTR [rsp+8], 7
    mov     DWORD PTR [rsp], 6
    call    printf

; return 0

xor     eax, eax
add     rsp, 40
ret

```

5.2.3 GCC + GDB

Let's try this example in [GDB](#).

```
$ gcc -g 2.c -o 2
```

```
$ gdb 2
GNU gdb (GDB) 7.6.1-ubuntu
Copyright (C) 2013 Free Software Foundation, Inc.
License GPLv3+: GNU GPL version 3 or later <http://gnu.org/licenses/gpl.html>
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law. Type "show copying"
and "show warranty" for details.
This GDB was configured as "x86_64-linux-gnu".
For bug reporting instructions, please see:
<http://www.gnu.org/software/gdb/bugs/>...
Reading symbols from /home/dennis/polygon/2...done.
```

Listing 5.4: let's set breakpoint to printf(), and run

```
(gdb) b printf
Breakpoint 1 at 0x400410
(gdb) run
Starting program: /home/dennis/polygon/2

Breakpoint 1, __printf (format=0x400628 "a=%d; b=%d; c=%d; d=%d; e=%d; f=%d; g=%d; h=%d\n") at
  printf.c:29
29      printf.c: No such file or directory.
```

Registers RSI/RDX/RCX/R8/R9 has the values which are should be there. RIP has an address of the very first instruction of the printf() function.

```
(gdb) info registers
rax             0x0          0
rbx             0x0          0
rcx             0x3          3
rdx             0x2          2
rsi             0x1          1
rdi             0x400628 4195880
rbp             0x7fffffffdf60 0x7fffffffdf60
rsp             0x7fffffffdf38 0x7fffffffdf38
r8              0x4          4
r9              0x5          5
r10             0x7fffffff dce0 140737488346336
r11             0x7ffff7a65f60 140737348263776
r12             0x400440 4195392
r13             0x7fffffff e040 140737488347200
r14             0x0          0
r15             0x0          0
rip             0x7ffff7a65f60 0x7ffff7a65f60 <__printf>
...
```

Listing 5.5: let's inspect format string

```
(gdb) x/s $rdi
0x400628:      "a=%d; b=%d; c=%d; d=%d; e=%d; f=%d; g=%d; h=%d\n"
```

Let's dump stack with x/g command this time—g means *giant words*, i.e., 64-bit words.

```
(gdb) x/10g $rsp
0x7fffffffdf38: 0x0000000000400576      0x0000000000000006
0x7fffffffdf48: 0x0000000000000007      0x00007fff00000008
0x7fffffffdf58: 0x0000000000000000      0x0000000000000000
0x7fffffffdf68: 0x00007ffff7a33de5      0x0000000000000000
0x7fffffffdf78: 0x00007fffffe048      0x0000000100000000
```

The very first stack element, just like in previous case, is RA. 3 values are also passed in stack: 6, 7, 8. We also see that 8 is passed with high 32-bits not cleared: 0x00007fff00000008. That's OK, because, values has *int* type, which is 32-bit type. So, high register or stack element part may contain "random garbage".

If to take a look, where control flow will return after `printf()` execution, [GDB](#) will show the whole `main()` function:

```
(gdb) set disassembly-flavor intel
(gdb) disas 0x000000000400576
Dump of assembler code for function main:
0x00000000040052d <+0>:      push    rbp
0x00000000040052e <+1>:      mov     rbp, rsp
0x000000000400531 <+4>:      sub     rsp, 0x20
0x000000000400535 <+8>:      mov     DWORD PTR [rsp+0x10], 0x8
0x00000000040053d <+16>:     mov     DWORD PTR [rsp+0x8], 0x7
0x000000000400545 <+24>:     mov     DWORD PTR [rsp], 0x6
0x00000000040054c <+31>:     mov     r9d, 0x5
0x000000000400552 <+37>:     mov     r8d, 0x4
0x000000000400558 <+43>:     mov     ecx, 0x3
0x00000000040055d <+48>:     mov     edx, 0x2
0x000000000400562 <+53>:     mov     esi, 0x1
0x000000000400567 <+58>:     mov     edi, 0x400628
0x00000000040056c <+63>:     mov     eax, 0x0
0x000000000400571 <+68>:     call   0x400410 <printf@plt>
0x000000000400576 <+73>:     mov     eax, 0x0
0x00000000040057b <+78>:     leave
0x00000000040057c <+79>:     ret
End of assembler dump.
```

Let's finish `printf()` execution, execute the instruction zeroing EAX, take a notice that EAX register has exactly zero. RIP now points to the LEAVE instruction, i.e., penultimate in `main()` function.

```
(gdb) finish
Run till exit from #0  __printf (format=0x400628 "a=%d; b=%d; c=%d; d=%d; e=%d; f=%d; g=%d; h=%d\n") at printf.c:29
a=1; b=2; c=3; d=4; e=5; f=6; g=7; h=8
main () at 2.c:6
6      return 0;
Value returned is $1 = 39
(gdb) next
7      };
(gdb) info registers
rax             0x0             0
rbx             0x0             0
rcx             0x26             38
rdx             0x7ffff7dd59f0    140737351866864
rsi             0x7fffffd9        2147483609
rdi             0x0             0
rbp             0x7ffffffffffdf60  0x7ffffffffffdf60
rsp             0x7ffffffffffdf40  0x7ffffffffffdf40
r8              0x7ffff7dd26a0    140737351853728
r9              0x7ffff7a60134    140737348239668
r10             0x7ffffffffffd5b0    140737488344496
r11             0x7ffff7a95900    140737348458752
r12             0x400440 4195392
r13             0x7ffffffffffe040    140737488347200
r14             0x0             0
r15             0x0             0
rip             0x40057b 0x40057b <main+78>
...
```

5.3 ARM: 3 arguments

Traditionally, ARM's scheme for passing arguments (calling convention) is as follows: the first 4 arguments are passed in the R0-R3 registers; the remaining arguments, via the stack. This resembles the arguments passing scheme in `fastcall` (??) or `win64` (??).

5.3.1 Non-optimizing Keil + ARM mode

Listing 5.6: Non-optimizing Keil + ARM mode

```
.text:00000014          printf_main1
.text:00000014 10 40 2D E9          STMFD    SP!, {R4,LR}
.text:00000018 03 30 A0 E3          MOV      R3, #3
.text:0000001C 02 20 A0 E3          MOV      R2, #2
.text:00000020 01 10 A0 E3          MOV      R1, #1
.text:00000024 1D 0E 8F E2          ADR      R0, aADBDCD      ; "a=%d; b=%d; c=%d\n"
.text:00000028 0D 19 00 EB          BL       __2printf
.text:0000002C 10 80 BD E8          LDMFD    SP!, {R4,PC}
```

So, the first 4 arguments are passed via the R0-R3 registers in this order: a pointer to the `printf()` format string in R0, then 1 in R1, 2 in R2 and 3 in R3.

There is nothing unusual so far.

5.3.2 Optimizing Keil + ARM mode

Listing 5.7: Optimizing Keil + ARM mode

```
.text:00000014          EXPORT printf_main1
.text:00000014          printf_main1
.text:00000014 03 30 A0 E3          MOV      R3, #3
.text:00000018 02 20 A0 E3          MOV      R2, #2
.text:0000001C 01 10 A0 E3          MOV      R1, #1
.text:00000020 1E 0E 8F E2          ADR      R0, aADBDCD      ; "a=%d; b=%d; c=%d\n"
.text:00000024 CB 18 00 EA          B        __2printf
```

This is optimized (`-O3`) version for ARM mode and here we see `B` as the last instruction instead of the familiar `BL`. Another difference between this optimized version and the previous one (compiled without optimization) is also in the fact that there is no function prologue and epilogue (instructions that save R0 and `LR` registers values). The `B` instruction just jumps to another address, without any manipulation of the `LR` register, that is, it is analogous to `JMP` in x86. Why does it work? Because this code is, in fact, effectively equivalent to the previous. There are two main reasons: 1) neither the stack nor `SP`, the [stack pointer](#), is modified; 2) the call to `printf()` is the last instruction, so there is nothing going on after it. After finishing, the `printf()` function will just return control to the address stored in `LR`. But the address of the point from where our function was called is now in `LR`! Consequently, control from `printf()` will be returned to that point. As a consequence, we do not need to save `LR` since we do not need to modify `LR`. We do not need to modify `LR` since there are no other function calls except `printf()`. Furthermore, after this call we do not to do anything! That's why this optimization is possible.

Another similar example was described in “`switch()/case/default`” section, here [\(11.1.1\)](#).

5.3.3 Optimizing Keil + thumb mode

Listing 5.8: Optimizing Keil + thumb mode

```
.text:0000000C          printf_main1
.text:0000000C 10 B5          PUSH     {R4,LR}
.text:0000000E 03 23          MOVS     R3, #3
.text:00000010 02 22          MOVS     R2, #2
.text:00000012 01 21          MOVS     R1, #1
.text:00000014 A4 A0          ADR      R0, aADBDCD      ; "a=%d; b=%d; c=%d\n"
.text:00000016 06 F0 EB F8          BL       __2printf
.text:0000001A 10 BD          POP      {R4,PC}
```

There is no significant difference from the non-optimized code for ARM mode.

5.4 ARM: 8 arguments

Let's use again the example with 9 arguments from the previous section: [5.2](#).

```
void printf_main2()
{
    printf("a=%d; b=%d; c=%d; d=%d; e=%d; f=%d; g=%d; h=%d\n", 1, 2, 3, 4, 5, 6, 7, 8);
};
```

5.4.1 Optimizing Keil: ARM mode

```
.text:00000028          printf_main2
.text:00000028
.text:00000028          var_18          = -0x18
.text:00000028          var_14          = -0x14
.text:00000028          var_4           = -4
.text:00000028
.text:00000028 04 E0 2D E5          STR     LR, [SP,#var_4]!
.text:0000002C 14 D0 4D E2          SUB     SP, SP, #0x14
.text:00000030 08 30 A0 E3          MOV     R3, #8
.text:00000034 07 20 A0 E3          MOV     R2, #7
.text:00000038 06 10 A0 E3          MOV     R1, #6
.text:0000003C 05 00 A0 E3          MOV     R0, #5
.text:00000040 04 C0 8D E2          ADD     R12, SP, #0x18+var_14
.text:00000044 0F 00 8C E8          STMIA  R12, {R0-R3}
.text:00000048 04 00 A0 E3          MOV     R0, #4
.text:0000004C 00 00 8D E5          STR     R0, [SP,#0x18+var_18]
.text:00000050 03 30 A0 E3          MOV     R3, #3
.text:00000054 02 20 A0 E3          MOV     R2, #2
.text:00000058 01 10 A0 E3          MOV     R1, #1
.text:0000005C 6E 0F 8F E2          ADR     R0, aADBDCDDDEDFDGD ; "a=%d; b=%d; c=%d; d=%d;
    e=%d; f=%d; g=%d"...
.text:00000060 BC 18 00 EB          BL     __2printf
.text:00000064 14 D0 8D E2          ADD     SP, SP, #0x14
.text:00000068 04 F0 9D E4          LDR     PC, [SP+4+var_4],#4
```

This code can be divided into several parts:

- Function prologue:

The very first “STR LR, [SP,#var_4]!” instruction saves [LR](#) on the stack, because we will use this register for the `printf()` call.

The second “SUB SP, SP, #0x14” instruction decreases [SP](#), the [stack pointer](#), in order to allocate 0x14 (20) bytes on the stack. Indeed, we need to pass 5 32-bit values via the stack to the `printf()` function, and each one occupies 4 bytes, that is $5 * 4 = 20$ —exactly. The other 4 32-bit values will be passed in registers.

- Passing 5, 6, 7 and 8 via stack:

Then, the values 5, 6, 7 and 8 are written to the R0, R1, R2 and R3 registers respectively. Then, the “ADD R12, SP, #0x18+var_14” instruction writes an address of the point in the stack, where these 4 variables will be written, into the R12 register. `var_14` is an assembly macro, equal to `-0x14`, such macros are created by [IDA](#) to succinctly denote code accessing the stack. `var_?` macros created by [IDA](#) reflecting local variables in the stack. So, `SP + 4` will be written into the R12 register. The next “STMIA R12, R0-R3” instruction writes R0-R3 registers contents at the point in memory to which R12 pointing. STMIA instruction meaning *Store Multiple Increment After*. *Increment After* means that R12 will be increased by 4 after each register value is written.

- Passing 4 via stack: 4 is stored in R0 and then, this value, with the help of “STR R0, [SP,#0x18+var_18]” instruction, is saved on the stack. `var_18` is `-0x18`, offset will be 0, so, the value from the R0 register (4) will be written to the point where [SP](#) is pointing to.

- Passing 1, 2 and 3 via registers:

Values of the first 3 numbers (a, b, c) (1, 2, 3 respectively) are passed in the R1, R2 and R3 registers right before the `printf()` call, and the other 5 values are passed via the stack:

- `printf()` call:

- Function epilogue:

The “ADD SP, SP, #0x14” instruction returns the [SP](#) pointer back to its former point, thus cleaning the stack. Of course, what was written on the stack will stay there, but it all will be rewritten during the execution of subsequent functions.

The “LDR PC, [SP+4+var_4], #4” instruction loads the saved [LR](#) value from the stack into the [PC](#) register, thus causing the function to exit.

5.4.2 Optimizing Keil: thumb mode

```
.text:0000001C      printf_main2
.text:0000001C
.text:0000001C      var_18          = -0x18
.text:0000001C      var_14          = -0x14
.text:0000001C      var_8           = -8
.text:0000001C
.text:0000001C 00 B5          PUSH      {LR}
.text:0000001E 08 23          MOVS     R3, #8
.text:00000020 85 B0          SUB      SP, SP, #0x14
.text:00000022 04 93          STR      R3, [SP,#0x18+var_8]
.text:00000024 07 22          MOVS     R2, #7
.text:00000026 06 21          MOVS     R1, #6
.text:00000028 05 20          MOVS     R0, #5
.text:0000002A 01 AB          ADD      R3, SP, #0x18+var_14
.text:0000002C 07 C3          STMIA   R3!, {R0-R2}
.text:0000002E 04 20          MOVS     R0, #4
.text:00000030 00 90          STR      R0, [SP,#0x18+var_18]
.text:00000032 03 23          MOVS     R3, #3
.text:00000034 02 22          MOVS     R2, #2
.text:00000036 01 21          MOVS     R1, #1
.text:00000038 A0 A0          ADR      R0, aADBDCDDDEDFDGD ; "a=%d; b=%d; c=%d; d=%d;
    e=%d; f=%d; g=%"...
.text:0000003A 06 F0 D9 F8      BL       __2printf
.text:0000003E
.text:0000003E      loc_3E                      ; CODE XREF: example13_f+16
.text:0000003E 05 B0          ADD      SP, SP, #0x14
.text:00000040 00 BD          POP      {PC}
```

Almost same as in previous example, however, this is thumb code and values are packed into stack differently: 8 for the first time, then 5, 6, 7 for the second and 4 for the third.

5.4.3 Optimizing Xcode (LLVM): ARM mode

```
__text:0000290C      _printf_main2
__text:0000290C
__text:0000290C      var_1C          = -0x1C
__text:0000290C      var_C          = -0xC
__text:0000290C
__text:0000290C 80 40 2D E9      STMFD    SP!, {R7,LR}
__text:00002910 0D 70 A0 E1      MOV      R7, SP
__text:00002914 14 D0 4D E2      SUB      SP, SP, #0x14
__text:00002918 70 05 01 E3      MOV      R0, #0x1570
__text:0000291C 07 C0 A0 E3      MOV      R12, #7
__text:00002920 00 00 40 E3      MOVT     R0, #0
__text:00002924 04 20 A0 E3      MOV      R2, #4
__text:00002928 00 00 8F E0      ADD      R0, PC, R0
__text:0000292C 06 30 A0 E3      MOV      R3, #6
__text:00002930 05 10 A0 E3      MOV      R1, #5
__text:00002934 00 20 8D E5      STR      R2, [SP,#0x1C+var_1C]
__text:00002938 0A 10 8D E9      STMFA    SP, {R1,R3,R12}
```

__text:0000293C	08 90 A0 E3	MOV	R9, #8
__text:00002940	01 10 A0 E3	MOV	R1, #1
__text:00002944	02 20 A0 E3	MOV	R2, #2
__text:00002948	03 30 A0 E3	MOV	R3, #3
__text:0000294C	10 90 8D E5	STR	R9, [SP,#0x1C+var_C]
__text:00002950	A4 05 00 EB	BL	_printf
__text:00002954	07 D0 A0 E1	MOV	SP, R7
__text:00002958	80 80 BD E8	LDMFD	SP!, {R7,PC}

Almost the same what we already figured out, with the exception of STMFA (Store Multiple Full Ascending) instruction, it is synonym to STMIB (Store Multiple Increment Before) instruction. This instruction increasing value in the `SP` register and only then writing next register value into memory, but not vice versa.

Another thing we easily spot is the instructions are ostensibly located randomly. For instance, value in the `R0` register is prepared in three places, at addresses `0x2918`, `0x2920` and `0x2928`, when it would be possible to do it in one single point. However, optimizing compiler has its own reasons about how to place instructions better. Usually, processor attempts to simultaneously execute instructions located side-by-side. For example, instructions like ‘`MOVT R0, #0`’ and ‘`ADD R0, PC, R0`’ cannot be executed simultaneously since they both modifying the `R0` register. On the other hand, ‘`MOVT R0, #0`’ and ‘`MOV R2, #4`’ instructions can be executed simultaneously since effects of their execution are not conflicting with each other. Presumably, compiler tries to generate code in such a way, where it is possible, of course.

5.4.4 Optimizing Xcode (LLVM): thumb-2 mode

__text:00002BA0	_printf_main2		
__text:00002BA0			
__text:00002BA0	var_1C	=	-0x1C
__text:00002BA0	var_18	=	-0x18
__text:00002BA0	var_C	=	-0xC
__text:00002BA0			
__text:00002BA0	80 B5	PUSH	{R7,LR}
__text:00002BA2	6F 46	MOV	R7, SP
__text:00002BA4	85 B0	SUB	SP, SP, #0x14
__text:00002BA6	41 F2 D8 20	MOVW	R0, #0x12D8
__text:00002BAA	4F F0 07 0C	MOV.W	R12, #7
__text:00002BAE	C0 F2 00 00	MOVT.W	R0, #0
__text:00002BB2	04 22	MOVS	R2, #4
__text:00002BB4	78 44	ADD	R0, PC ; char *
__text:00002BB6	06 23	MOVS	R3, #6
__text:00002BB8	05 21	MOVS	R1, #5
__text:00002BBA	0D F1 04 0E	ADD.W	LR, SP, #0x1C+var_18
__text:00002BBE	00 92	STR	R2, [SP,#0x1C+var_1C]
__text:00002BC0	4F F0 08 09	MOV.W	R9, #8
__text:00002BC4	8E E8 0A 10	STMIA.W	LR, {R1,R3,R12}
__text:00002BC8	01 21	MOVS	R1, #1
__text:00002BCA	02 22	MOVS	R2, #2
__text:00002BCC	03 23	MOVS	R3, #3
__text:00002BCE	CD F8 10 90	STR.W	R9, [SP,#0x1C+var_C]
__text:00002BD2	01 F0 0A EA	BLX	_printf
__text:00002BD6	05 B0	ADD	SP, SP, #0x14
__text:00002BD8	80 BD	POP	{R7,PC}

Almost the same as in previous example, with the exception the thumb-instructions are used here instead.

5.5 By the way

By the way, this difference between passing arguments in x86, x64, fastcall and ARM is a good illustration the CPU is not aware of how arguments is passed to functions. It is also possible to create hypothetical compiler which is able to pass arguments via a special structure not using stack at all.

Chapter 6

scanf()

Now let's use `scanf()`.

```
#include <stdio.h>

int main()
{
    int x;
    printf ("Enter X:\n");

    scanf ("%d", &x);

    printf ("You entered %d...\n", x);

    return 0;
};
```

OK, I agree, it is not clever to use `scanf()` today. But I wanted to illustrate passing pointer to `int`.

6.1 About pointers

It is one of the most fundamental things in computer science. Often, large array, structure or object, it is too costly to pass to other function, while passing its address is much easier. More than that: if calling function must modify something in the large array or structure, to return it as a whole is absurdly as well. So the simplest thing to do is to pass an address of array or structure to function, and let it change what must be changed.

In C/C++ it is just an address of some point in memory.

In x86, address is represented as 32-bit number (i.e., occupying 4 bytes), while in x86-64 it is 64-bit number (occupying 8 bytes). By the way, that is the reason of some people's indignation related to switching to x86-64 —all pointers on x64-architecture will require twice as more space.

With some effort, it is possible to work only with untyped pointers; e.g. standard C function `memcpy()`, copying a block from one place in memory to another, takes 2 pointers of `void*` type on input, since it is impossible to predict block type you would like to copy. And it is not even important to know, only block size is important.

Also pointers are widely used when function needs to return more than one value (we will back to this in future (9)). `scanf()` is just that case. In addition to the function's need to show how many values were read successfully, it also should return all these values.

In C/C++ pointer type is needed only for type checking on compiling stage. Internally, in compiled code, there is no information about pointers types.

6.2 x86

6.2.1 MSVC

What we got after compiling in MSVC 2010:

CONST	SEGMENT	
\$SG3831	DB	'Enter X:', 0aH, 00H
\$SG3832	DB	'%d', 00H

```

$SG3833    DB      'You entered %d...', 0aH, 00H
CONST      ENDS
PUBLIC     _main
EXTRN      _scanf:PROC
EXTRN      _printf:PROC
; Function compile flags: /Odtp
_TEXT      SEGMENT
_x$ = -4                                ; size = 4
_main      PROC
    push    ebp
    mov     ebp, esp
    push    ecx
    push    OFFSET $SG3831 ; 'Enter X:'
    call    _printf
    add     esp, 4
    lea     eax, DWORD PTR _x$[ebp]
    push    eax
    push    OFFSET $SG3832 ; '%d'
    call    _scanf
    add     esp, 8
    mov     ecx, DWORD PTR _x$[ebp]
    push    ecx
    push    OFFSET $SG3833 ; 'You entered %d...'
    call    _printf
    add     esp, 8

    ; return 0
    xor     eax, eax
    mov     esp, ebp
    pop     ebp
    ret     0
_main      ENDP
_TEXT      ENDS

```

Variable `x` is local.

C/C++ standard tell us it must be visible only in this function and not from any other point. Traditionally, local variables are placed in the stack. Probably, there could be other ways, but in x86 it is so.

Next instruction after function prologue, `PUSH ECX`, has not a goal to save `ECX` state (notice absence of corresponding `POP ECX` at the function end).

In fact, this instruction just allocates 4 bytes on the stack for `x` variable storage.

`x` will be accessed with the assistance of the `_x$` macro (it equals to `-4`) and the `EBP` register pointing to current frame.

Over a span of function execution, `EBP` is pointing to current [stack frame](#) and it is possible to have an access to local variables and function arguments via `EBP+offset`.

It is also possible to use `ESP`, but it is often changing and not very convenient. So it can be said, the value of the `EBP` is *frozen state* of the value of the `ESP` at the moment of function execution start.

A very typical [stack frame](#) layout in 32-bit environment is:

...	...
EBP-8	local variable #2, marked in IDA as <code>var_8</code>
EBP-4	local variable #1, marked in IDA as <code>var_4</code>
EBP	saved value of <code>EBP</code>
EBP+4	return address
EBP+8	argument#1, marked in IDA as <code>arg_0</code>
EBP+0xC	argument#2, marked in IDA as <code>arg_4</code>
EBP+0x10	argument#3, marked in IDA as <code>arg_8</code>
...	...

Function `scanf()` in our example has two arguments.

First is pointer to the string containing `"%d"` and second —address of variable `x`.

First of all, address of the `x` variable is placed into the `EAX` register by `lea eax, DWORD PTR _x$[ebp]` instruction `LEA` meaning *load effective address* but over a time it changed its primary application ([80.6.2](#)).

It can be said, LEA here just stores sum of the value in the EBP register and `_x$` macro to the EAX register.

It is the same as `lea eax, [ebp-4]`.

So, 4 subtracting from value in the EBP register and result is placed to the EAX register. And then value in the EAX register is pushing into stack and `scanf()` is called.

After that, `printf()` is called. First argument is pointer to string: "You entered %d...\n".

Second argument is prepared as: `mov ecx, [ebp-4]`, this instruction places to the ECX not address of the `x` variable, but its contents.

After, value in the ECX is placed on the stack and the last `printf()` called.

6.2.2 MSVC + OllyDbg

Let's try this example in OllyDbg. Let's load, press F8 (step over) until we get into our executable file instead of `ntdll.dll`. Scroll up until `main()` appears. Let's click on the first instruction (`PUSH EBP`), press F2, then F9 (Run) and breakpoint triggers on the `main()` begin.

Let's trace to the place where the address of `x` variable is prepared: fig.6.2.

It is possible to right-click on EAX in registers window and then "Follow in stack". This address will appear in stack window. Look, this is a variable in the local stack. I drew a red arrow there. And there are some garbage (0x77D478). Now address of the stack element, with the help of `PUSH`, will be written to the same stack, nearly. Let's trace by F8 until `scanf()` execution finished. During the moment of `scanf()` execution, we enter, for example, 123, in the console window:




Figure 6.1: Console output

`scanf()` executed here: fig.6.3. `scanf()` returns 1 in EAX, which means, it have read one value successfully. The element of stack of our attention now contain 0x7B (123).

Further, this value is copied from the stack to the ECX register and passed into `printf()`: fig.6.4.

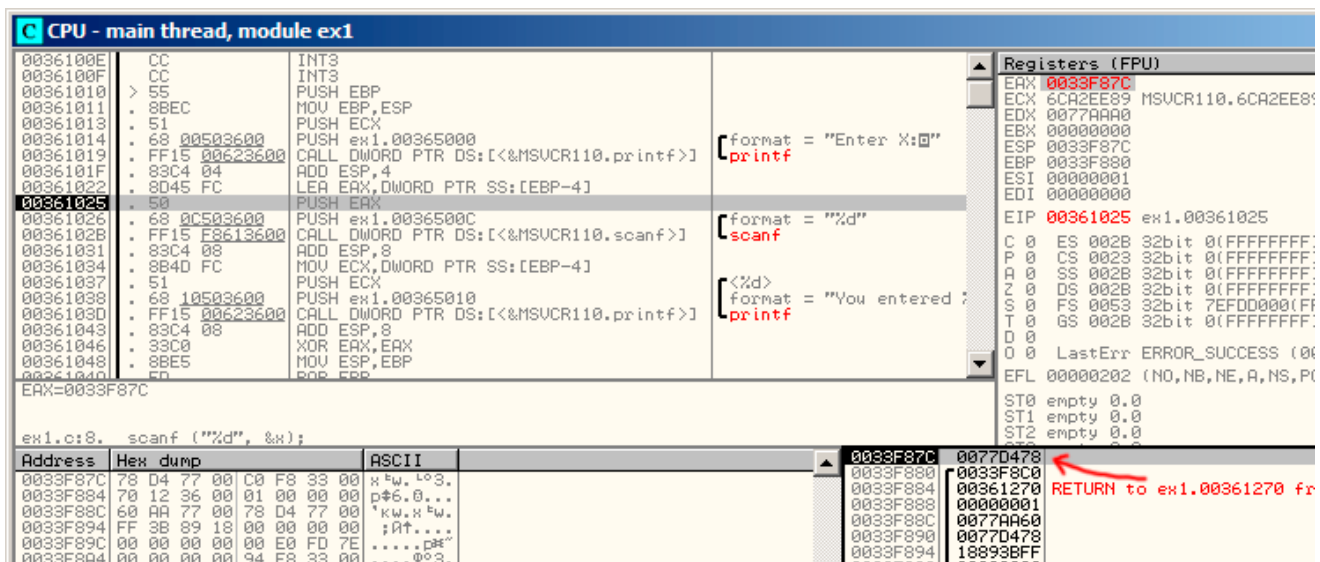


Figure 6.2: OllyDbg: address of the local variable is computed

CPU - main thread, module ex1

Address	Hex dump	ASCII
003F87C	7B 00 00 00 C0 F8 33 00	{...}L03.
003F884	70 12 36 00 01 00 00 00	p#6.0...
003F88C	60 AA 77 00 78 D4 77 00	'k.w.x'w.
003F894	FF 3B 89 18 00 00 00 00	;A↑....
003F89C	00 00 00 00 00 F0 FD 7E	p#

Registers (FPU)

Register	Value
EAX	00000001
ECX	6CA2F1E7
EDX	0077C980
EBX	00000000
ESP	003F87C
EBP	003F880
ESI	00000001
EDI	00000000
EIP	00361031

hex.c:8. scanf ("%d", &x);

Figure 6.3: OllyDbg: scanf () executed

CPU - main thread, module ex1

Address	Hex dump	ASCII
003F87C	7B 00 00 00 C0 F8 33 00	{...}L03.
003F884	70 12 36 00 01 00 00 00	p#6.0...
003F88C	60 AA 77 00 78 D4 77 00	'k.w.x'w.
003F894	FF 3B 89 18 00 00 00 00	;A↑....
003F89C	00 00 00 00 00 F0 FD 7E	p#

Registers (FPU)

Register	Value
EAX	00000001
ECX	0000007B
EDX	0077C980
EBX	00000000
ESP	003F87C
EBP	003F880
ESI	00000001
EDI	00000000
EIP	00361037

hex.c:10. printf ("You entered %d...\n", x);

Figure 6.4: OllyDbg: preparing the value for passing into printf ()

6.2.3 GCC

Let's try to compile this code in GCC 4.4.1 under Linux:

```
main      proc near
var_20    = dword ptr -20h
var_1C    = dword ptr -1Ch
var_4     = dword ptr -4

    push    ebp
    mov     ebp, esp
    and     esp, 0FFFFFFF0h
    sub     esp, 20h
    mov     [esp+20h+var_20], offset aEnterX ; "Enter X:"
    call    _puts
    mov     eax, offset aD ; "%d"
    lea     edx, [esp+20h+var_4]
    mov     [esp+20h+var_1C], edx
    mov     [esp+20h+var_20], eax
```

```

        call    ___isoc99_scanf
        mov     edx, [esp+20h+var_4]
        mov     eax, offset aYouEnteredD___ ; "You entered %d...\n"
        mov     [esp+20h+var_1C], edx
        mov     [esp+20h+var_20], eax
        call    _printf
        mov     eax, 0
        leave
        retn
main     endp

```

GCC replaced first the `printf()` call to the `puts()`, it was already described (2.3.3) why it was done. As before —arguments are placed on the stack by `MOV` instruction.

6.3 x64

All the same, but registers are used instead of stack for arguments passing.

6.3.1 MSVC

Listing 6.1: MSVC 2012 x64

```

_DATA    SEGMENT
$SG1289 DB      'Enter X:', 0aH, 00H
$SG1291 DB      '%d', 00H
$SG1292 DB      'You entered %d...', 0aH, 00H
_DATA    ENDS

_TEXT    SEGMENT
x$ = 32
main     PROC
$LN3:
        sub     rsp, 56
        lea     rcx, OFFSET FLAT:$SG1289 ; 'Enter X:'
        call    printf
        lea     rdx, QWORD PTR x$[rsp]
        lea     rcx, OFFSET FLAT:$SG1291 ; '%d'
        call    scanf
        mov     edx, DWORD PTR x$[rsp]
        lea     rcx, OFFSET FLAT:$SG1292 ; 'You entered %d...'
        call    printf

        ; return 0
        xor     eax, eax
        add     rsp, 56
        ret     0
main     ENDP
_TEXT    ENDS

```

6.3.2 GCC

Listing 6.2: GCC 4.4.6 -O3 x64

```

.LC0:
        .string "Enter X:"
.LC1:
        .string "%d"
.LC2:
        .string "You entered %d...\n"

```

```

main:
    sub     rsp, 24
    mov     edi, OFFSET FLAT:.LC0 ; "Enter X:"
    call    puts
    lea     rsi, [rsp+12]
    mov     edi, OFFSET FLAT:.LC1 ; "%d"
    xor     eax, eax
    call    __isoc99_scanf
    mov     esi, DWORD PTR [rsp+12]
    mov     edi, OFFSET FLAT:.LC2 ; "You entered %d...\n"
    xor     eax, eax
    call    printf

    ; return 0
    xor     eax, eax
    add     rsp, 24
    ret

```

6.4 ARM

6.4.1 Optimizing Keil + thumb mode

```

.text:00000042      scanf_main
.text:00000042
.text:00000042      var_8          = -8
.text:00000042
.text:00000042 08 B5          PUSH     {R3,LR}
.text:00000044 A9 A0          ADR     R0, aEnterX      ; "Enter X:\n"
.text:00000046 06 F0 D3 F8      BL     __2printf
.text:0000004A 69 46          MOV     R1, SP
.text:0000004C AA A0          ADR     R0, aD          ; "%d"
.text:0000004E 06 F0 CD F8      BL     __0scanf
.text:00000052 00 99          LDR     R1, [SP,#8+var_8]
.text:00000054 A9 A0          ADR     R0, aYouEnteredD___ ; "You entered %d...\n"
.text:00000056 06 F0 CB F8      BL     __2printf
.text:0000005A 00 20          MOVS    R0, #0
.text:0000005C 08 BD          POP     {R3,PC}

```

A pointer to a *int*-typed variable must be passed to a `scanf()` so it can return value via it. *int* is 32-bit value, so we need 4 bytes for storing it somewhere in memory, and it fits exactly in 32-bit register. A place for the local variable `x` is allocated in the stack and *IDA* named it `var_8`, however, it is not necessary to allocate it since *SP stack pointer* is already pointing to the space may be used instantly. So, *SP stack pointer* value is copied to the R1 register and, together with format-string, passed into `scanf()`. Later, with the help of the LDR instruction, this value is moved from stack into the R1 register in order to be passed into `printf()`.

Examples compiled for ARM-mode and also examples compiled with Xcode LLVM are not differ significantly from what we saw here, so they are omitted.

6.5 Global variables

What if `x` variable from previous example will not be local but global variable? Then it will be accessible from any point, not only from function body. Global variables are considered as *anti-pattern*, but for the sake of experiment we could do this.

```

#include <stdio.h>

int x;

int main()
{

```

```

    printf ("Enter X:\n");

    scanf ("%d", &x);

    printf ("You entered %d...\n", x);

    return 0;
};

```

6.5.1 MSVC: x86

```

_DATA    SEGMENT
COMM     _x:DWORD
$SG2456  DB    'Enter X:', 0aH, 00H
$SG2457  DB    '%d', 00H
$SG2458  DB    'You entered %d...', 0aH, 00H
_DATA    ENDS
PUBLIC   _main
EXTRN    _scanf:PROC
EXTRN    _printf:PROC
; Function compile flags: /Odtp
_TEXT    SEGMENT
_main    PROC
    push    ebp
    mov     ebp, esp
    push    OFFSET $SG2456
    call    _printf
    add     esp, 4
    push    OFFSET _x
    push    OFFSET $SG2457
    call    _scanf
    add     esp, 8
    mov     eax, DWORD PTR _x
    push    eax
    push    OFFSET $SG2458
    call    _printf
    add     esp, 8
    xor     eax, eax
    pop     ebp
    ret     0
_main    ENDP
_TEXT    ENDS

```

Now `x` variable is defined in the `_DATA` segment. Memory in local stack is not allocated anymore. All accesses to it are not via stack but directly to process memory. Not initialized global variables takes no place in the executable file (indeed, why we should allocate a place in the executable file for initially zeroed variables?), but when someone will access this place in memory, [OS](#) will allocate a block of zeroes there¹.

Now let's assign value to variable explicitly:

```
int x=10; // default value
```

We got:

```

_DATA    SEGMENT
_x       DD      0aH
...

```

Here we see value `0xA` of `DWORD` type (`DD` meaning `DWORD` = 32 bit).

¹That is how [VM](#) behaves

If you will open compiled .exe in [IDA](#), you will see the `x` variable placed at the beginning of the `_DATA` segment, and after you'll see text strings.

If you will open compiled .exe in [IDA](#) from previous example where `x` value is not defined, you'll see something like this:

.data:0040FA80	_x	dd ?	; DATA XREF: _main+10
.data:0040FA80			; _main+22
.data:0040FA84	dword_40FA84	dd ?	; DATA XREF: _memset+1E
.data:0040FA84			; unknown_libname_1+28
.data:0040FA88	dword_40FA88	dd ?	; DATA XREF: ___sbh_find_block+5
.data:0040FA88			; ___sbh_free_block+2BC
.data:0040FA8C	; LPVOID lpMem		
.data:0040FA8C	lpMem	dd ?	; DATA XREF: ___sbh_find_block+B
.data:0040FA8C			; ___sbh_free_block+2CA
.data:0040FA90	dword_40FA90	dd ?	; DATA XREF: _V6_HeapAlloc+13
.data:0040FA90			; __calloc_impl+72
.data:0040FA94	dword_40FA94	dd ?	; DATA XREF: ___sbh_free_block+2FE

`_x` marked as ? among other variables not required to be initialized. This means that after loading .exe to memory, a space for all these variables will be allocated and a random garbage will be here. But in an .exe file these not initialized variables are not occupy anything. E.g. it is suitable for large arrays.

6.5.2 MSVC: x86 + OllyDbg

Things are even simpler here: [fig.6.5](#). Variable is located in the data segment. By the way, after `PUSH` instruction, pushing `x` address, is executed, the address will appear in stack, and it is possible to right-click on that element and select "Follow in dump". And the variable will appear in the memory window at left.

After we enter 123 in the console, 0x7B will appear here.

But why the very first byte is 7B? Thinking logically, a 00 00 00 7B should be there. This is what called [endianness](#), and *little-endian* is used in x86. This mean that lowest byte is written first, and highest written last. More about it: [36](#).

Some time after, 32-bit value from this place of memory is loaded into `EAX` and passed into `printf()`.

`x` variable address in the memory is 0xDC3390. In OllyDbg we can see process memory map (Alt-M) and we will see that this address is inside of .data PE-segment of our program: [fig.6.6](#).

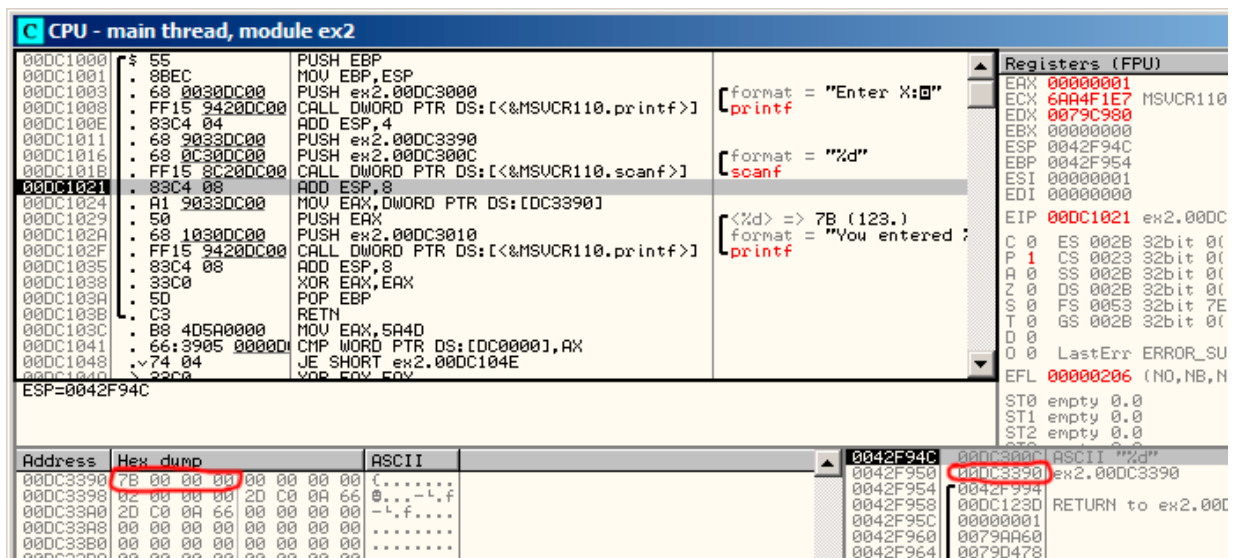


Figure 6.5: OllyDbg: after `scanf()` execution

Address	Size	Owner	Section	Contains	Type	Access	Initial	Mapped as
00010000	00010000				Map	RW	RW	
00020000	00010000				Map	RW	RW	
00040000	00001000				Imag	R	RWE	
00050000	00004000				Map	R	R	
00060000	00001000				Priv	RW	RW	
00070000	00067000				Map	R	R	
00149000	00007000				Priv	RW	Gua: RW	
0042C000	00001000				Priv	RW	Gua: RW	
0042D000	00003000				Priv	RW	Gua: RW	
005A0000	00009000				Priv	RW	RW	
00790000	0000E000				Priv	RW	RW	
00DC0000	00001000	ex2		PE header	Imag	R	RWE	
00DC1000	00001000	ex2	.text	code	Imag	R	RWE	
00DC2000	00001000	ex2	.rdata	imports	Imag	R	RWE	
00DC3000	00001000	ex2	.data	data	Imag	R	RWE	
00DC4000	00001000	ex2	.reloc	relocations	Imag	R	RWE	
6A9D0000	00001000	MSVCRI10		PE header	Imag	R	RWE	
6A9D1000	00006000	MSVCRI10	.text	code,export	Imag	R	RWE	
6A9D7000	00006000	MSVCRI10	.data	data	Imag	R	RWE	
6A9D9000	00002000	MSVCRI10	.idata	imports	Imag	R	RWE	
6A9DF000	00001000	MSVCRI10	.rsrc	resources	Imag	R	RWE	
6A9E0000	00006000	MSVCRI10	.reloc	relocations	Imag	R	RWE	
74FE0000	00008000				Imag	R	RWE	
74FF0000	0005C000				Imag	R	RWE	
75050000	0003F000				Imag	R	RWE	
76930000	00010000	kernel32		PE header	Imag	R	RWE	
76940000	000C1000	kernel32	.text	code,import	Imag	R	RWE	
76A10000	00002000	kernel32	.data	data	Imag	RW	RWE	
76A20000	00001000	kernel32	.rsrc	resources	Imag	R	RWE	
76A30000	0000B000	kernel32	.reloc	relocations	Imag	R	RWE	
77060000	00001000	KERNELBA		PE header	Imag	R	RWE	
77061000	00040000	KERNELBA	.text	code,import	Imag	R	RWE	
770A1000	00002000	KERNELBA	.data	data	Imag	R	RWE	
770A3000	00001000	KERNELBA	.rsrc	resources	Imag	R	RWE	
770A4000	00003000	KERNELBA	.reloc	relocations	Imag	R	RWE	
774B0000	001A9000				Imag	R	RWE	
77690000	00001000	ntdll		PE header	Imag	R	RWE	
776A0000	000D6000	ntdll	.text	code,export	Imag	R E	RWE	
77780000	00001000	ntdll	RT		Imag	R E	RWE	
77790000	00009000	ntdll	.data	data	Imag	RW	RWE	
777D0000	00057000	ntdll	.rsrc	resources	Imag	R	RWE	

Figure 6.6: OllyDbg: process memory map

6.5.3 GCC: x86

It is almost the same in Linux, except segment names and properties: not initialized variables are located in the `_bss` segment. In `ELF` file format this segment has such attributes:

```
; Segment type: Uninitialized
; Segment permissions: Read/Write
```

If to statically assign a value to variable, e.g. 10, it will be placed in the `_data` segment, this is segment with the following attributes:

```
; Segment type: Pure data
; Segment permissions: Read/Write
```

6.5.4 MSVC: x64

Listing 6.3: MSVC 2012 x64

```
_DATA SEGMENT
COMM x:DWORD
$SG2924 DB 'Enter X:', 0aH, 00H
$SG2925 DB '%d', 00H
$SG2926 DB 'You entered %d...', 0aH, 00H
_DATA ENDS

_TEXT SEGMENT
main PROC
$LN3:
    sub     rsp, 40

    lea     rcx, OFFSET FLAT:$SG2924 ; 'Enter X:'
    call    printf
    lea     rdx, OFFSET FLAT:x
    lea     rcx, OFFSET FLAT:$SG2925 ; '%d'
    call    scanf
    mov     edx, DWORD PTR x
```

```

        lea     rcx, OFFSET FLAT:$SG2926 ; 'You entered %d...'
        call    printf

        ; return 0
        xor     eax, eax

        add     rsp, 40
        ret     0
main     ENDP
_TEXT    ENDS

```

Almost the same code as in x86. Take a notice that *x* variable address is passed to `scanf()` using `LEA` instruction, while the value of variable is passed to the second `printf()` using `MOV` instruction. ‘`DWORD PTR`’—is a part of assembly language (no related to machine codes), showing that the variable data type is 32-bit and the `MOV` instruction should be encoded accordingly.

6.5.5 ARM: Optimizing Keil + thumb mode

```

.text:00000000 ; Segment type: Pure code
.text:00000000          AREA .text, CODE
...
.text:00000000 main
.text:00000000          PUSH    {R4,LR}
.text:00000002          ADR     R0, aEnterX      ; "Enter X:\n"
.text:00000004          BL      __2printf
.text:00000008          LDR     R1, =x
.text:0000000A          ADR     R0, aD           ; "%d"
.text:0000000C          BL      __0scanf
.text:00000010          LDR     R0, =x
.text:00000012          LDR     R1, [R0]
.text:00000014          ADR     R0, aYouEnteredD___ ; "You entered %d...\n"
.text:00000016          BL      __2printf
.text:0000001A          MOVS    R0, #0
.text:0000001C          POP     {R4,PC}
...
.text:00000020 aEnterX    DCB "Enter X:",0xA,0      ; DATA XREF: main+2
.text:0000002A          DCB     0
.text:0000002B          DCB     0
.text:0000002C off_2C     DCD x                      ; DATA XREF: main+8
.text:0000002C                      ; main+10
.text:00000030 aD          DCB "%d",0                ; DATA XREF: main+A
.text:00000033          DCB     0
.text:00000034 aYouEnteredD___ DCB "You entered %d...",0xA,0 ; DATA XREF: main+14
.text:00000047          DCB     0
.text:00000047 ; .text    ends
.text:00000047
...
.data:00000048 ; Segment type: Pure data
.data:00000048          AREA .data, DATA
.data:00000048          ; ORG 0x48
.data:00000048          EXPORT x
.data:00000048 x          DCD 0xA                    ; DATA XREF: main+8
.data:00000048                      ; main+10
.data:00000048 ; .data    ends

```

So, *x* variable is now global and somehow, it is now located in another segment, namely data segment (*.data*). One could ask, why text strings are located in code segment (*.text*) and *x* can be located right here? Since this is variable, and by its definition, it can be changed. And probably, can be changed very often. Segment of code not infrequently can be located in microcontroller ROM (remember, we now deal with embedded microelectronics, and memory scarcity is common here), and changeable variables—in [RAM²](#). It is not very economically to store constant variables in RAM when one have ROM.

²Random-access memory

Furthermore, data segment with constants in RAM must be initialized before, since after RAM turning on, obviously, it contain random information.

Onwards, we see, in code segment, a pointer to the `x` (`off_2C`) variable, and all operations with variable occurred via this pointer. This is because `x` variable can be located somewhere far from this code fragment, so its address must be saved somewhere in close proximity to the code. `LDR` instruction in thumb mode can address only variable in range of 1020 bytes from the point it is located. Same instruction in ARM-mode —variables in range ± 4095 bytes, this, address of the `x` variable must be located somewhere in close proximity, because, there is no guarantee the linker will be able to place this variable near the code, it could be even in external memory chip!

One more thing: if variable will be declared as *const*, Keil compiler shall allocate it in the `.constdata` segment. Perhaps, thereafter, linker will be able to place this segment in ROM too, along with code segment.

6.6 scanf() result checking

As I noticed before, it is slightly old-fashioned to use `scanf()` today. But if we have to, we need at least check if `scanf()` finished correctly without error.

```
#include <stdio.h>

int main()
{
    int x;
    printf ("Enter X:\n");

    if (scanf ("%d", &x)==1)
        printf ("You entered %d...\n", x);
    else
        printf ("What you entered? Huh?\n");

    return 0;
};
```

By standard, `scanf()`³ function returns number of fields it successfully read.

In our case, if everything went fine and user entered a number, `scanf()` will return 1 or 0 or EOF in case of error.

I added C code for `scanf()` result checking and printing error message in case of error.

This works predictably:

```
C:\...>ex3.exe
Enter X:
123
You entered 123...

C:\...>ex3.exe
Enter X:
ouch
What you entered? Huh?
```

6.6.1 MSVC: x86

What we got in assembly language (MSVC 2010):

```
lea    eax, DWORD PTR _x$[ebp]
push   eax
push   OFFSET $SG3833 ; '%d', 00H
call   _scanf
add    esp, 8
cmp    eax, 1
jne    SHORT $LN2@main
mov    ecx, DWORD PTR _x$[ebp]
push   ecx
```

³MSDN: [scanf](#), [wscanf](#)

```

    push    OFFSET $SG3834 ; 'You entered %d...', 0aH, 00H
    call    _printf
    add     esp, 8
    jmp     SHORT $LN1@main
$LN2@main:
    push    OFFSET $SG3836 ; 'What you entered? Huh?', 0aH, 00H
    call    _printf
    add     esp, 4
$LN1@main:
    xor     eax, eax

```

Caller function (main()) must have access to the result of callee function (scanf()), so callee leaves this value in the EAX register.

After, we check it with the help of instruction `CMP EAX, 1 (CoMPare)`, in other words, we compare value in the EAX register with 1.

JNE conditional jump follows CMP instruction. JNE means *Jump if Not Equal*.

So, if value in the EAX register not equals to 1, then the processor will pass execution to the address mentioned in operand of JNE, in our case it is \$LN2@main. Passing control to this address, CPU will execute function `printf()` with argument “What you entered? Huh?”. But if everything is fine, conditional jump will not be taken, and another `printf()` call will be executed, with two arguments: ‘You entered %d.’ and value of variable x.

Since second subsequent `printf()` not needed to be executed, there is JMP after (unconditional jump), it will pass control to the point after second `printf()` and before `XOR EAX, EAX` instruction, which implement `return 0`.

So, it can be said that comparing a value with another is *usually* implemented by `CMP/Jcc` instructions pair, where *cc* is *condition code*. `CMP` comparing two values and set processor flags⁴. `Jcc` check flags needed to be checked and pass control to mentioned address (or not pass).

But in fact, this could be perceived paradoxical, but `CMP` instruction is in fact `SUB` (subtract). All arithmetic instructions set processor flags too, not only `CMP`. If we compare 1 and 1, $1 - 1$ will be 0 in result, `ZF` flag will be set (meaning the last result was 0). There is no any other circumstances when it is possible except when operands are equal. `JNE` checks only `ZF` flag and jumping only if it is not set. `JNE` is in fact a synonym of `JNZ (Jump if Not Zero)` instruction. Assembler translating both `JNE` and `JNZ` instructions into one single opcode. So, `CMP` instruction can be replaced to `SUB` instruction and almost everything will be fine, but the difference is in the `SUB` alter the value of the first operand. `CMP` is “*SUB without saving result*”.

6.6.2 MSVC: x86: IDA

It’s time to run `IDA` and try to do something in it. By the way, it is good idea to use `/MD` option in `MSVC` for beginners: this mean that all these standard functions will not be linked with executable file, but will be imported from the `MSVCR*.DLL` file instead. Thus it will be easier to see which standard function used and where.

While analysing code in `IDA`, it is very advisable to do notes for oneself (and others). For example, analysing this example, we see that `JNZ` will be triggered in case of error. So it’s possible to move cursor to the label, press “n” and rename it to “error”. Another label—into “exit”. What I’ve got:

```

.text:00401000 _main          proc near
.text:00401000
.text:00401000 var_4         = dword ptr -4
.text:00401000 argc          = dword ptr 8
.text:00401000 argv          = dword ptr 0Ch
.text:00401000 envp          = dword ptr 10h
.text:00401000
.text:00401000             push    ebp
.text:00401001             mov     ebp, esp
.text:00401003             push    ecx
.text:00401004             push    offset Format ; "Enter X:\n"
.text:00401009             call    ds:printf
.text:0040100F             add     esp, 4
.text:00401012             lea     eax, [ebp+var_4]
.text:00401015             push    eax
.text:00401016             push    offset aD ; "%d"
.text:0040101B             call    ds:scanf
.text:00401021             add     esp, 8
.text:00401024             cmp     eax, 1

```

⁴About x86 flags, see also: [http://en.wikipedia.org/wiki/FLAGS_register_\(computing\)](http://en.wikipedia.org/wiki/FLAGS_register_(computing)).

```

.text:00401027      jnz      short error
.text:00401029      mov      ecx, [ebp+var_4]
.text:0040102C      push     ecx
.text:0040102D      push     offset aYou      ; "You entered %d...\n"
.text:00401032      call     ds:printf
.text:00401038      add      esp, 8
.text:0040103B      jmp      short exit
.text:0040103D ; -----
.text:0040103D error:
.text:0040103D      push     offset aWhat      ; CODE XREF: _main+27
                                   ; "What you entered? Huh?\n"
.text:00401042      call     ds:printf
.text:00401048      add      esp, 4
.text:0040104B exit:
.text:0040104B      xor      eax, eax      ; CODE XREF: _main+3B
.text:0040104D      mov      esp, ebp
.text:0040104F      pop      ebp
.text:00401050      retn
.text:00401050 _main      endp

```

Now it's slightly easier to understand the code. However, it's not good idea to comment every instruction excessively.

A part of function can also be hidden in [IDA](#): a block should be marked, then “-” on numerical pad is pressed and text to be entered.

I've hide two parts and gave names to them:

```

.text:00401000 _text      segment para public 'CODE' use32
.text:00401000      assume cs:_text
.text:00401000      ;org 401000h
.text:00401000 ; ask for X
.text:00401012 ; get X
.text:00401024      cmp      eax, 1
.text:00401027      jnz      short error
.text:00401029 ; print result
.text:0040103B      jmp      short exit
.text:0040103D ; -----
.text:0040103D error:
.text:0040103D      push     offset aWhat      ; CODE XREF: _main+27
                                   ; "What you entered? Huh?\n"
.text:00401042      call     ds:printf
.text:00401048      add      esp, 4
.text:0040104B exit:
.text:0040104B      xor      eax, eax      ; CODE XREF: _main+3B
.text:0040104D      mov      esp, ebp
.text:0040104F      pop      ebp
.text:00401050      retn
.text:00401050 _main      endp

```

To unhide these parts, “+” on numerical pad can be used.

By pressing “space”, we can see how [IDA](#) can represent a function as a graph: fig. 6.7. There are two arrows after each conditional jump: green and red. Green arrow pointing to the block which will be executed if jump is triggered, and red if otherwise.

It is possible to fold nodes in this mode and give them names as well (“group nodes”). I did it for 3 blocks: fig. 6.8.

It's very useful. It can be said, a very important part of reverse engineer's job is to reduce information he/she have.

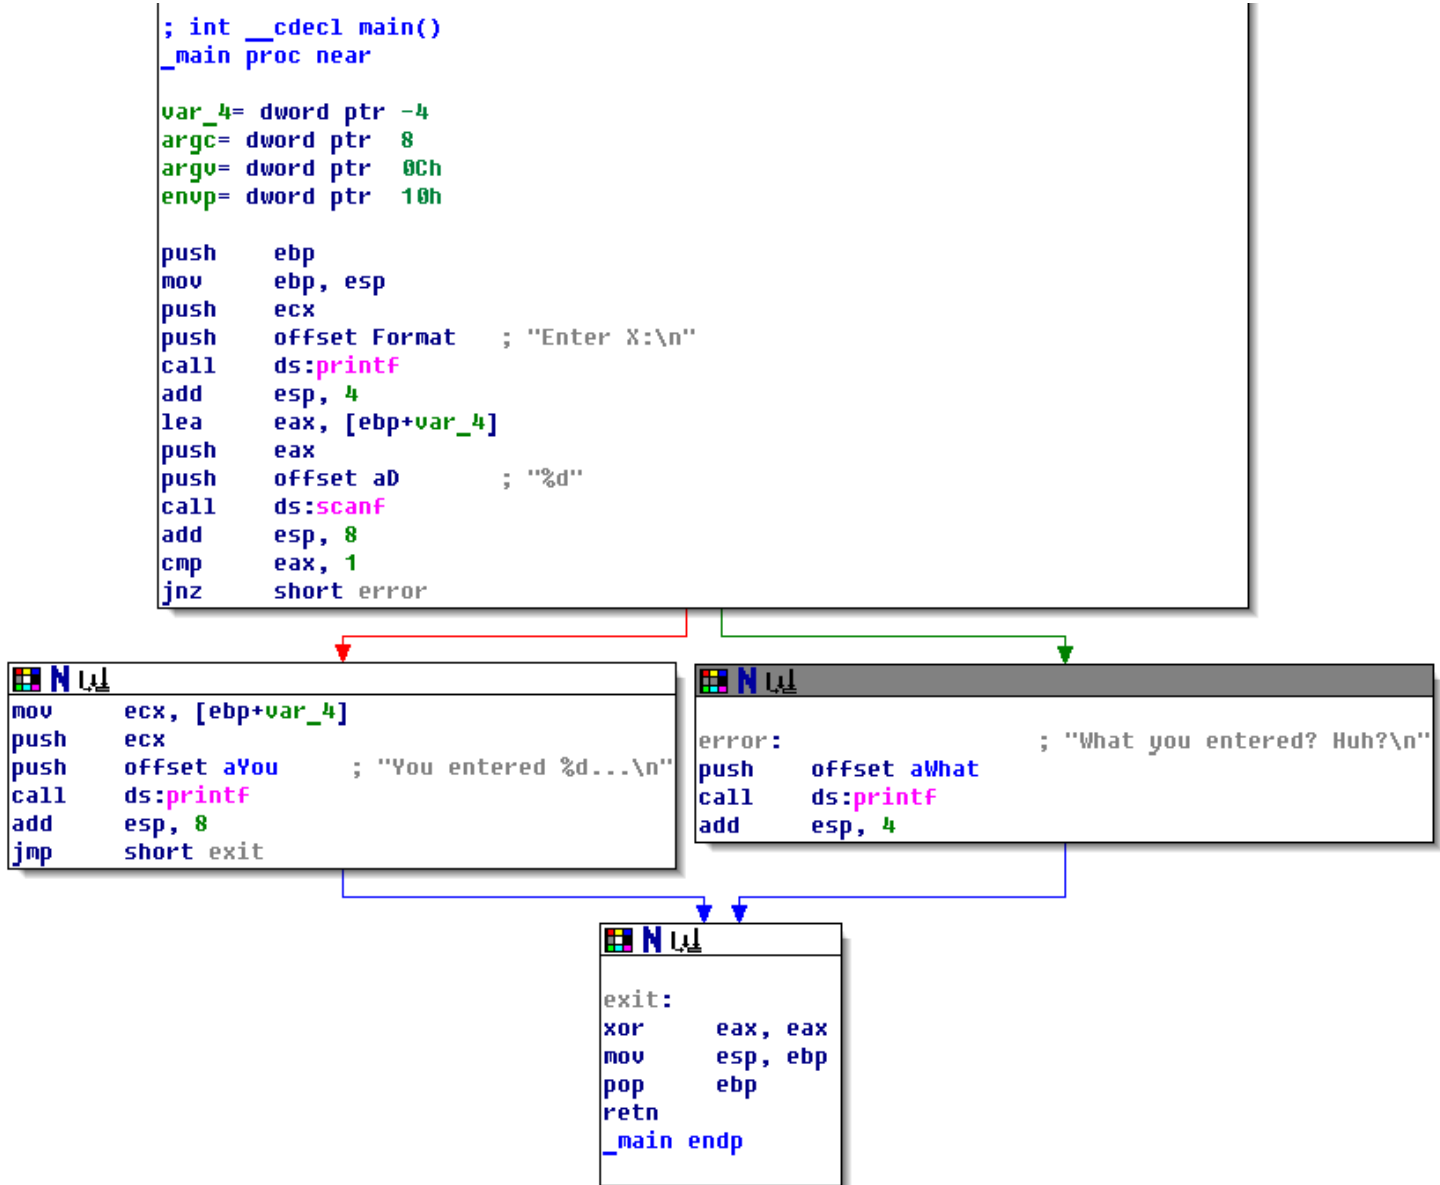


Figure 6.7: Graph mode in IDA

```

; int __cdecl main()
_main proc near

var_4= dword ptr -4
argC= dword ptr 8
argv= dword ptr 0Ch
envp= dword ptr 10h

push    ebp
mov     ebp, esp
push    ecx
push    offset Format    ; "Enter X:\n"
call    ds:printf
add     esp, 4
lea     eax, [ebp+var_4]
push    eax
push    offset aD        ; "%d"
call    ds:scanf
add     esp, 8
cmp     eax, 1
jnz     short error

```

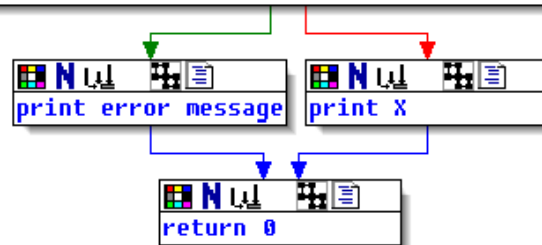


Figure 6.8: Graph mode in IDA with 3 nodes folded

6.6.3 MSVC: x86 + OllyDbg

Let's try to hack our program in OllyDbg, forcing it to think `scanf()` working always without error.

When address of local variable is passed into `scanf()`, initially this variable contain some random garbage, that is `0x4CD478` in case: fig.6.10.

When `scanf()` is executing, I enter in the console something definitely not a number, like "asdasd". `scanf()` finishing with 0 in EAX, which mean, an error occurred: fig.6.11.

We can also see to the local variable in the stack and notice that it's not changed. Indeed, what `scanf()` would write there? It just did nothing except returning zero.

Now let's try to "hack" our program. Let's right-click on EAX, there will also be "Set to 1" among other options. This is what we need.

1 now in EAX, so the following check will executed as we need, and `printf()` will print value of variable in the stack.

Let's run (F9) and we will see this in console window:

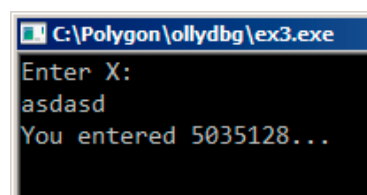


Figure 6.9: console window

Indeed, 5035128 is a decimal representation of the number in stack (`0x4CD478`)!

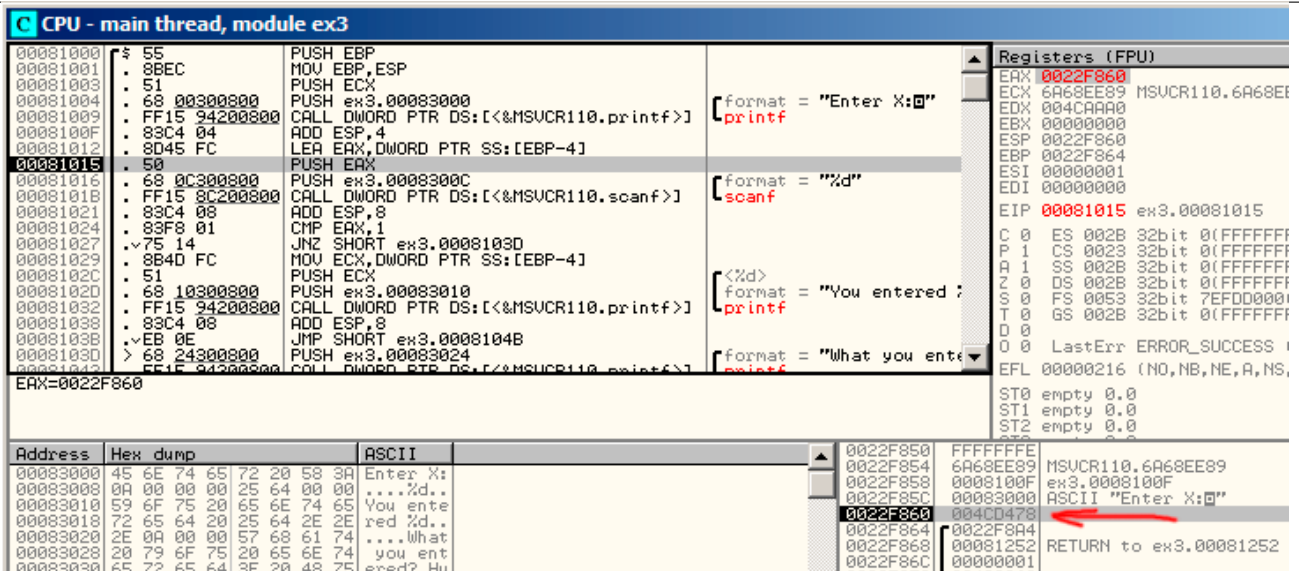


Figure 6.10: OllyDbg: passing variable address into scanf ()

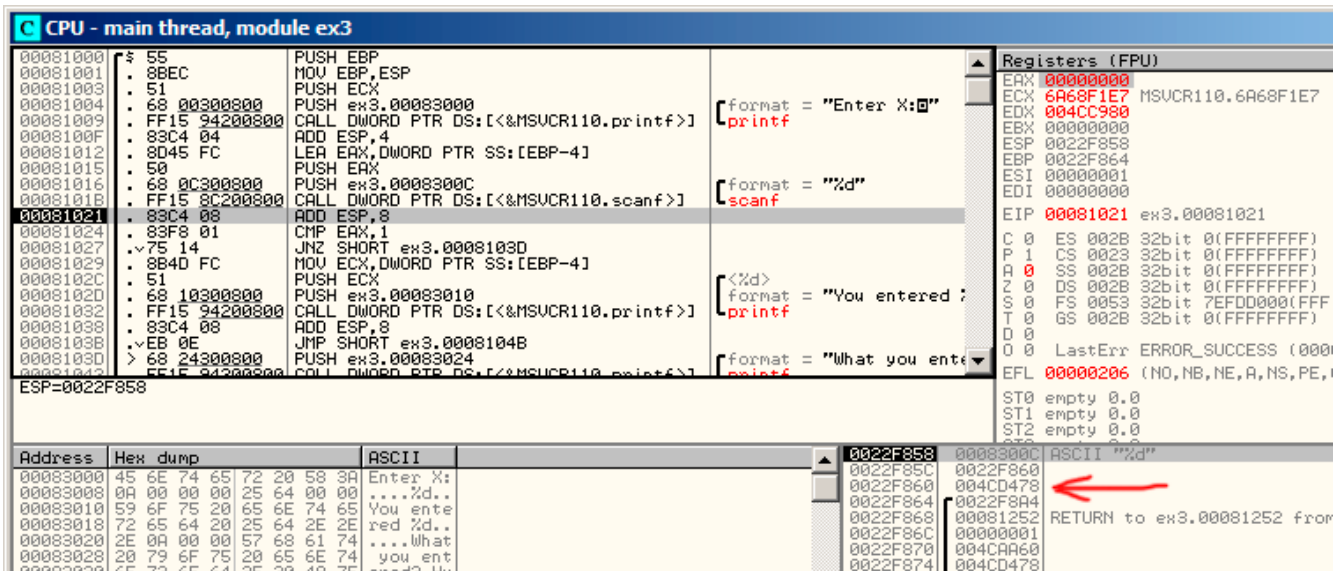


Figure 6.11: OllyDbg: scanf () returning error

6.6.4 MSVC: x86 + Hiew

This can be also a simple example of executable file patching. We may try to patch executable, so the program will always print numbers, no matter what we entered.

Assuming the executable compiled against external MSVCRT*.DLL (i.e., with /MD option)⁵, we may find main() function at the very beginning of .text section. Let's open executable in Hiew, find the very beginning of .text section (Enter, F8, F6, Enter, Enter).

We will see this: fig.6.12.

Hiew finds ASCII⁶ strings and displays them, as well as imported function names.

Move cursor to the address .00401027 (with the JNZ instruction we should bypass), press F3, and then type "9090" (meaning two NOP⁷-s): fig.6.13.

Then F9 (update). Now the executable saved to disk. It will behave as we wanted.

Two NOP-s are probably not quite aesthetically as it could be. Other way to patch this instruction is to write just 0 to the second opcode byte (jump offset), so that JNZ will always jump to the next instruction.

⁵that's what also called "dynamic linking"

⁶ASCII Zero (null-terminated ASCII string)

⁷No Operation

We can do the opposite: replace first byte to EB while not touching the second byte (jump offset). We'll got here always triggered unconditional jump. The error message will be printed always, no matter what number was entered.

```

Hiew: ex3.exe
C:\Polygon\ollydbg\ex3.exe  FPO ----- a32 PE .00401000 Hiew 8.02 (c)SEN
.00401000: 55          push     ebp
.00401001: 8BEC       mov      ebp,esp
.00401003: 51         push     ecx
.00401004: 6800304000 push     000403000 ;'Enter X:' --E1
.00401009: FF1594204000 call     printf
.0040100F: 83C404     add      esp,4
.00401012: 8D45FC     lea      eax,[ebp][-4]
.00401015: 50         push     eax
.00401016: 680C304000 push     00040300C --E2
.0040101B: FF158C204000 call     scanf
.00401021: 83C408     add      esp,8
.00401024: 83F801     cmp      eax,1
.00401027: 7514       jnz      .00040103D --E3
.00401029: 8B4DFC     mov      ecx,[ebp][-4]
.0040102C: 51         push     ecx
.0040102D: 6810304000 push     000403010 ;'You entered %d...' --E4
.00401032: FF1594204000 call     printf
.00401038: 83C408     add      esp,8
.0040103B: EB0E       jmps     .00040104B --E5
.0040103D: 6824304000 3push    000403024 ;'What you entered? Huh?' --E6
.00401042: FF1594204000 call     printf
.00401048: 83C404     add      esp,4
.0040104B: 33C0       xor      eax,eax
.0040104D: 8BE5       mov      esp,ebp
.0040104F: 5D         pop      ebp
.00401050: C3        retn     ; ^^^^
.00401051: B84D5A0000 mov      eax,000005A4D ;' ZM'
1Global 2FileBlk 3CryBlk 4ReLoad 5OrdLdr 6String 7Direct 8Table 9byte 10Leave 11Naked 12AddNam

```

Figure 6.12: Hiew: main() function

```

Hiew: ex3.exe
C:\Polygon\ollydbg\ex3.exe  FPU EDITMODE  a32 PE  00000429 Hiew 8.02 (c)SEN
00000400: 55          push     ebp
00000401: 8BEC       mov      ebp,esp
00000403: 51          push     ecx
00000404: 6800304000 push     000403000 ;' @0 '
00000409: FF1594204000 call     d,[000402094]
0000040F: 83C404     add      esp,4
00000412: 8D45FC     lea      eax,[ebp][-4]
00000415: 50          push     eax
00000416: 680C304000 push     00040300C ;' @00 '
0000041B: FF158C204000 call     d,[00040208C]
00000421: 83C408     add      esp,8
00000424: 83F801     cmp      eax,1
00000427: 90          nop
00000428: 90          nop
00000429: 8B4DFC     mov      ecx,[ebp][-4]
0000042C: 51          push     ecx
0000042D: 6810304000 push     000403010 ;' @00 '
00000432: FF1594204000 call     d,[000402094]
00000438: 83C408     add      esp,8
0000043B: EB0E     jmps     00000044B
0000043D: 6824304000 push     000403024 ;' @0$ '
00000442: FF1594204000 call     d,[000402094]
00000448: 83C404     add      esp,4
0000044B: 33C0     xor      eax,eax
0000044D: 8BE5     mov      esp,ebp
0000044F: 5D          pop      ebp
00000450: C3          retn     ; ~-~-~-~-~-~-~-~-~-~-~-~-~-~-~-
1 2 NOPS 3 4 5 6 7 8 Table 9 10 11 12

```

Figure 6.13: Hiew: replacing JNZ by two NOP-s

6.6.5 GCC: x86

Code generated by GCC 4.4.1 in Linux is almost the same, except differences we already considered.

6.6.6 MSVC: x64

Since we work here with *int*-typed variables, which are still 32-bit in x86-64, we see how 32-bit part of registers (prefixed with E-) are used here as well. While working with pointers, however, 64-bit register parts are used, prefixed with R-.

Listing 6.4: MSVC 2012 x64

```

_DATA    SEGMENT
$SG2924 DB      'Enter X:', 0aH, 00H
$SG2926 DB      '%d', 00H
$SG2927 DB      'You entered %d...', 0aH, 00H
$SG2929 DB      'What you entered? Huh?', 0aH, 00H
_DATA    ENDS

_TEXT    SEGMENT
x$ = 32
main     PROC
$LN5:
    sub     rsp, 56
    lea     rcx, OFFSET FLAT:$SG2924 ; 'Enter X:'
    call    printf
    lea     rdx, QWORD PTR x$[rsp]
    lea     rcx, OFFSET FLAT:$SG2926 ; '%d'
    call    scanf

```

```

    cmp     eax, 1
    jne     SHORT $LN2@main
    mov     edx, DWORD PTR x$[rsp]
    lea     rcx, OFFSET FLAT:$SG2927 ; 'You entered %d...'
    call    printf
    jmp     SHORT $LN1@main
$LN2@main:
    lea     rcx, OFFSET FLAT:$SG2929 ; 'What you entered? Huh?'
    call    printf
$LN1@main:
    ; return 0
    xor     eax, eax
    add     rsp, 56
    ret     0
main      ENDP
_TEXT     ENDS
END

```

6.6.7 ARM: Optimizing Keil + thumb mode

Listing 6.5: Optimizing Keil + thumb mode

```

var_8      = -8

    PUSH    {R3,LR}
    ADR     R0, aEnterX      ; "Enter X:\n"
    BL     __2printf
    MOV     R1, SP
    ADR     R0, aD           ; "%d"
    BL     __0scanf
    CMP     R0, #1
    BEQ     loc_1E
    ADR     R0, aWhatYouEntered ; "What you entered? Huh?\n"
    BL     __2printf

loc_1A                                ; CODE XREF: main+26
    MOVS    R0, #0
    POP     {R3,PC}

loc_1E                                ; CODE XREF: main+12
    LDR     R1, [SP,#8+var_8]
    ADR     R0, aYouEnteredD___ ; "You entered %d...\n"
    BL     __2printf
    B       loc_1A

```

New instructions here are CMP and BEQ⁸.

CMP is akin to the x86 instruction bearing the same name, it subtracts one argument from another and saves flags.

BEQ is jumping to another address if operands while comparing were equal to each other, or, if result of last computation was 0, or if Z flag is 1. Same thing as JZ in x86.

Everything else is simple: execution flow is forking into two branches, then the branches are converging at the point where 0 is written into the R0, as a value returned from the function, and then function finishing.

⁸(PowerPC, ARM) Branch if Equal

Chapter 7

Accessing passed arguments

Now we figured out the [caller](#) function passing arguments to the [callee](#) via stack. But how [callee](#) access them?

Listing 7.1: simple example

```
#include <stdio.h>

int f (int a, int b, int c)
{
    return a*b+c;
};

int main()
{
    printf ("%d\n", f(1, 2, 3));
    return 0;
};
```

7.1 x86

7.1.1 MSVC

What we have after compilation (MSVC 2010 Express):

Listing 7.2: MSVC 2010 Express

```
_TEXT    SEGMENT
_a$ = 8                                     ; size = 4
_b$ = 12                                    ; size = 4
_c$ = 16                                    ; size = 4
_f      PROC
    push    ebp
    mov     ebp, esp
    mov     eax, DWORD PTR _a$[ebp]
    imul    eax, DWORD PTR _b$[ebp]
    add     eax, DWORD PTR _c$[ebp]
    pop     ebp
    ret     0
_f      ENDP

_main   PROC
    push    ebp
    mov     ebp, esp
    push    3 ; 3rd argument
    push    2 ; 2nd argument
    push    1 ; 1st argument
    call    _f
    add     esp, 12
```

```

push    eax
push    OFFSET $SG2463 ; '%d', 0aH, 00H
call    _printf
add     esp, 8
; return 0
xor     eax, eax
pop     ebp
ret     0
_main   ENDP

```

What we see is the 3 numbers are pushing to stack in function `main()` and `f(int, int, int)` is called then. Argument access inside `f()` is organized with the help of macros like: `_a$ = 8`, in the same way as local variables accessed, but the difference is that these offsets are positive (addressed with *plus* sign). So, adding `_a$` macro to the value in the EBP register, *outer* side of **stack frame** is addressed.

Then a value is stored into EAX. After `IMUL` instruction execution, value in the EAX is a product¹ of value in EAX and what is stored in `_b`. After `IMUL` execution, `ADD` is summing value in EAX and what is stored in `_c`. Value in the EAX is not needed to be moved: it is already in place it must be. Now return to **caller** —it will take value from the EAX and used it as `printf()` argument.

7.1.2 MSVC + OllyDbg

Let's illustrate this in OllyDbg. When we trace until the very first instruction in `f()` that uses one of the arguments (first one), we see that EBP is pointing to the **stack frame**, I marked its begin with red arrow. The first element of **stack frame** is saved EBP value, second is **RA**, third is first function argument, then second argument and third one. To access the first function argument, one need to add exactly 8 (2 32-bit words) to EBP.

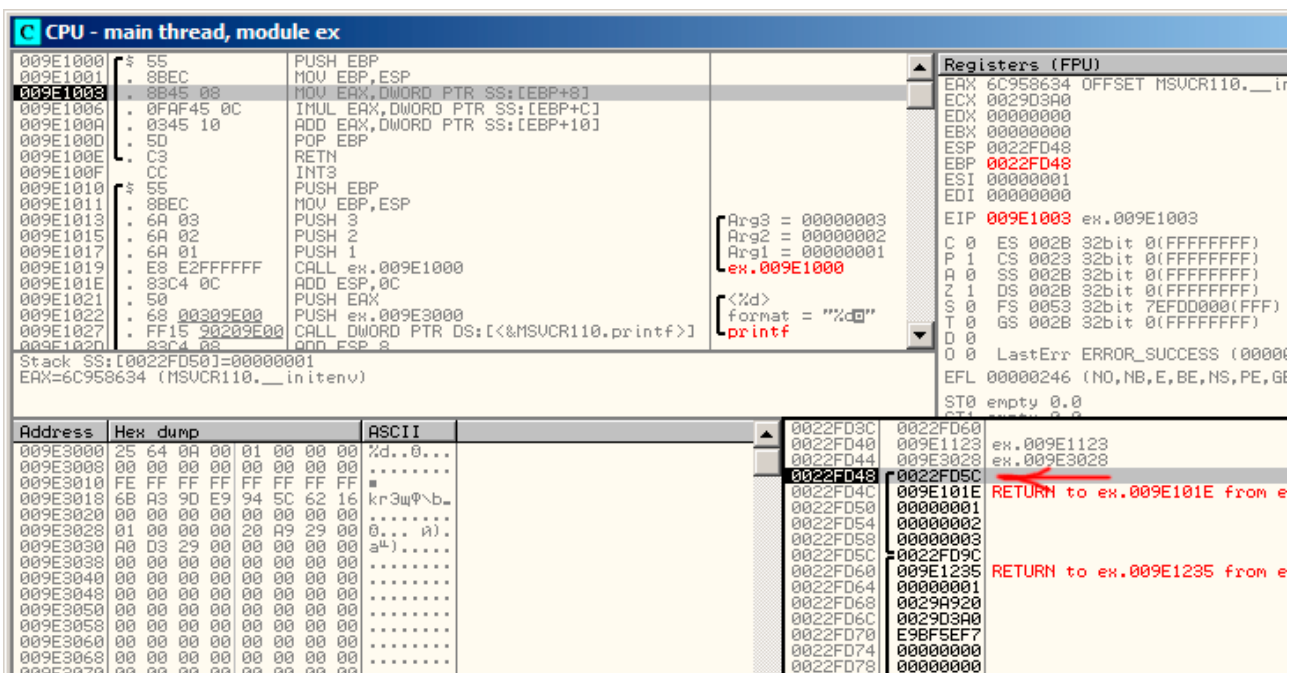


Figure 7.1: OllyDbg: inside of `f()` function

7.1.3 GCC

Let's compile the same in GCC 4.4.1 and let's see results in **IDA**:

Listing 7.3: GCC 4.4.1

```

public f
f      proc near
arg_0  = dword ptr 8

```

¹result of multiplication

```

arg_4      = dword ptr  0Ch
arg_8      = dword ptr  10h

        push    ebp
        mov     ebp, esp
        mov     eax, [ebp+arg_0] ; 1st argument
        imul    eax, [ebp+arg_4] ; 2nd argument
        add     eax, [ebp+arg_8] ; 3rd argument
        pop     ebp
        retn
f
endp

        public main
main
        proc near

var_10     = dword ptr -10h
var_C      = dword ptr -0Ch
var_8      = dword ptr -8

        push    ebp
        mov     ebp, esp
        and     esp, 0FFFFFFF0h
        sub     esp, 10h
        mov     [esp+10h+var_8], 3 ; 3rd argument
        mov     [esp+10h+var_C], 2 ; 2nd argument
        mov     [esp+10h+var_10], 1 ; 1st argument
        call    f
        mov     edx, offset aD ; "%d\n"
        mov     [esp+10h+var_C], eax
        mov     [esp+10h+var_10], edx
        call    _printf
        mov     eax, 0
        leave
        retn
main
endp

```

Almost the same result.

The [stack pointer](#) is not returning back after both function execution, because penultimate LEAVE ([80.6.2](#)) instruction will do this, at the end.

7.2 x64

The story is a bit different in x86-64, function arguments (4 or 6) are passed in registers, and a [callee](#) reading them from there instead of stack accessing.

7.2.1 MSVC

Optimizing MSVC:

Listing 7.4: MSVC 2012 /Ox x64

```

$SG2997 DB      '%d', 0aH, 00H

main PROC
    sub     rsp, 40
    mov     edx, 2
    lea     r8d, QWORD PTR [rdx+1] ; R8D=3
    lea     ecx, QWORD PTR [rdx-1] ; ECX=1
    call    f
    lea     rcx, OFFSET FLAT:$SG2997 ; '%d'
    mov     edx, eax

```

```

    call    printf
    xor     eax, eax
    add     rsp, 40
    ret     0
main      ENDP

f         PROC
; ECX - 1st argument
; EDX - 2nd argument
; R8D - 3rd argument
    imul    ecx, edx
    lea     eax, DWORD PTR [r8+rcx]
    ret     0
f         ENDP

```

As we can see, very compact `f()` function takes arguments right from the registers. LEA instruction is used here for addition, apparently, compiler considered this instruction here faster than ADD. LEA is also used in `main()` for the first and third arguments preparing, apparently, compiler thinks that it will work faster than usual value loading to the register using MOV instruction.

Let's try to take a look on output of non-optimizing MSVC:

Listing 7.5: MSVC 2012 x64

```

f          proc near

; shadow space:
arg_0      = dword ptr  8
arg_8      = dword ptr 10h
arg_10     = dword ptr 18h

; ECX - 1st argument
; EDX - 2nd argument
; R8D - 3rd argument
    mov     [rsp+arg_10], r8d
    mov     [rsp+arg_8], edx
    mov     [rsp+arg_0], ecx
    mov     eax, [rsp+arg_0]
    imul    eax, [rsp+arg_8]
    add     eax, [rsp+arg_10]
    retn
f          endp

main       proc near
    sub     rsp, 28h
    mov     r8d, 3 ; 3rd argument
    mov     edx, 2 ; 2nd argument
    mov     ecx, 1 ; 1st argument
    call    f
    mov     edx, eax
    lea     rcx, $SG2931 ; "%d\n"
    call    printf

; return 0
    xor     eax, eax
    add     rsp, 28h
    retn
main       endp

```

Somewhat puzzling: all 3 arguments from registers are saved to the stack for some reason. This is called “shadow space”²: every Win64 may (but not required to) save all 4 register values there. This is done by two reasons: 1) it is too lavish to

²[http://msdn.microsoft.com/en-us/library/zthk2dkh\(v=vs.80\).aspx](http://msdn.microsoft.com/en-us/library/zthk2dkh(v=vs.80).aspx)

allocate the whole register (or even 4 registers) for the input argument, so it will be accessed via stack; 2) debugger is always aware where to find function arguments at a break³.

It is duty of **caller** to allocate “shadow space” in stack.

7.2.2 GCC

Optimizing GCC does more or less understandable code:

Listing 7.6: GCC 4.4.6 -O3 x64

```
f:
    ; EDI - 1st argument
    ; ESI - 2nd argument
    ; EDX - 3rd argument
    imul    esi, edi
    lea     eax, [rdx+rsi]
    ret

main:
    sub     rsp, 8
    mov     edx, 3
    mov     esi, 2
    mov     edi, 1
    call    f
    mov     edi, OFFSET FLAT:.LC0 ; "%d\n"
    mov     esi, eax
    xor     eax, eax ; number of vector registers passed
    call    printf
    xor     eax, eax
    add     rsp, 8
    ret
```

Non-optimizing GCC:

Listing 7.7: GCC 4.4.6 x64

```
f:
    ; EDI - 1st argument
    ; ESI - 2nd argument
    ; EDX - 3rd argument
    push    rbp
    mov     rbp, rsp
    mov     DWORD PTR [rbp-4], edi
    mov     DWORD PTR [rbp-8], esi
    mov     DWORD PTR [rbp-12], edx
    mov     eax, DWORD PTR [rbp-4]
    imul    eax, DWORD PTR [rbp-8]
    add     eax, DWORD PTR [rbp-12]
    leave
    ret

main:
    push    rbp
    mov     rbp, rsp
    mov     edx, 3
    mov     esi, 2
    mov     edi, 1
    call    f
    mov     edx, eax
    mov     eax, OFFSET FLAT:.LC0 ; "%d\n"
    mov     esi, edx
    mov     rdi, rax
    mov     eax, 0 ; number of vector registers passed
```

³[http://msdn.microsoft.com/en-us/library/ew5tede7\(v=VS.90\).aspx](http://msdn.microsoft.com/en-us/library/ew5tede7(v=VS.90).aspx)

```

call    printf
mov     eax, 0
leave
ret

```

There are no “shadow space” requirement in System V *NIX [21], but *callee* may need to save arguments somewhere, because, again, it may be registers shortage.

7.2.3 GCC: uint64_t instead int

Our example worked with 32-bit *int*, that is why 32-bit register parts were used (prefixed by E-).

It can be altered slightly in order to use 64-bit values:

```

#include <stdio.h>
#include <stdint.h>

uint64_t f (uint64_t a, uint64_t b, uint64_t c)
{
    return a*b*c;
};

int main()
{
    printf ("%lld\n", f(0x1122334455667788,
                        0x1111111122222222,
                        0x3333333344444444));
    return 0;
};

```

Listing 7.8: GCC 4.4.6 -O3 x64

```

f                proc near
                imul     rsi, rdi
                lea      rax, [rdx+rsi]
                retn
f                endp

main            proc near
                sub      rsp, 8
                mov      rdx, 3333333344444444h ; 3rd argument
                mov      rsi, 1111111122222222h ; 2nd argument
                mov      rdi, 1122334455667788h ; 1st argument
                call     f
                mov      edi, offset format ; "%lld\n"
                mov      rsi, rax
                xor      eax, eax ; number of vector registers passed
                call     _printf
                xor      eax, eax
                add      rsp, 8
                retn
main            endp

```

The code is very same, but registers (prefixed by R-) are *used as a whole*.

7.3 ARM

7.3.1 Non-optimizing Keil + ARM mode

```

.text:000000A4 00 30 A0 E1      MOV     R3, R0
.text:000000A8 93 21 20 E0      MLA     R0, R3, R1, R2
.text:000000AC 1E FF 2F E1      BX      LR

```

```

...
.text:000000B0          main
.text:000000B0 10 40 2D E9          STMFD    SP!, {R4,LR}
.text:000000B4 03 20 A0 E3          MOV     R2, #3
.text:000000B8 02 10 A0 E3          MOV     R1, #2
.text:000000BC 01 00 A0 E3          MOV     R0, #1
.text:000000C0 F7 FF FF EB          BL      f
.text:000000C4 00 40 A0 E1          MOV     R4, R0
.text:000000C8 04 10 A0 E1          MOV     R1, R4
.text:000000CC 5A 0F 8F E2          ADR     R0, aD_0          ; "%d\n"
.text:000000D0 E3 18 00 EB          BL      __2printf
.text:000000D4 00 00 A0 E3          MOV     R0, #0
.text:000000D8 10 80 BD E8          LDMFD    SP!, {R4,PC}

```

In `main()` function, two other functions are simply called, and three values are passed to the first one (`f`).

As I mentioned before, in ARM, first 4 values are usually passed in first 4 registers (R0-R3).

`f` function, as it seems, use first 3 registers (R0-R2) as arguments.

`MLA` (*Multiply Accumulate*) instruction multiplies two first operands (R3 and R1), adds third operand (R2) to product and places result into zeroth operand (R0), via which, by standard, values are returned from functions.

Multiplication and addition at once⁴ (*Fused multiply-add*) is very useful operation, by the way, there is no such instruction in x86, if not to count new FMA-instruction⁵ in SIMD.

The very first `MOV R3, R0`, instruction, apparently, redundant (single `MLA` instruction could be used here instead), compiler was not optimized it, since this is non-optimizing compilation.

`BX` instruction returns control to the address stored in the `LR` register and, if it is necessary, switches processor mode from thumb to ARM or vice versa. This can be necessary since, as we can see, `f` function is not aware, from which code it may be called, from ARM or thumb. This, if it will be called from thumb code, `BX` will not only return control to the calling function, but also will switch processor mode to thumb mode. Or not switch, if the function was called from ARM code.

7.3.2 Optimizing Keil + ARM mode

```

.text:00000098          f
.text:00000098 91 20 20 E0          MLA     R0, R1, R0, R2
.text:0000009C 1E FF 2F E1          BX      LR

```

And here is `f` function compiled by Keil compiler in full optimization mode (`-O3`). `MOV` instruction was optimized (or reduced) and now `MLA` uses all input registers and also places result right into R0, exactly where calling function will read it and use.

7.3.3 Optimizing Keil + thumb mode

```

.text:0000005E 48 43          MULS    R0, R1
.text:00000060 80 18          ADDS    R0, R0, R2
.text:00000062 70 47          BX      LR

```

`MLA` instruction is not available in thumb mode, so, compiler generates the code doing these two operations separately. First `MULS` instruction multiply R0 by R1 leaving result in the R1 register. Second (`ADDS`) instruction adds result and R2 leaving result in the R0 register.

⁴[wikipedia: Multiply-accumulate operation](https://en.wikipedia.org/wiki/Multiply-accumulate_operation)

⁵https://en.wikipedia.org/wiki/FMA_instruction_set

Chapter 8

One more word about results returning.

As of x86, function execution result is usually returned¹ in the EAX register. If it is byte type or character (*char*) —then in the lowest register EAX part —AL. If function returns *float* number, the FPU register ST(0) is to be used instead. In ARM, result is usually returned in the R0 register.

By the way, what if returning value of the `main()` function will be declared not as *int* but as *void*?
so-called startup-code is calling `main()` roughly as:

```
push envp
push argv
push argc
call main
push eax
call exit
```

In other words:

```
exit(main(argc,argv,envp));
```

If you declare `main()` as *void* and nothing will be returned explicitly (by *return* statement), then something random, that was stored in the EAX register at the moment of the `main()` finish, will come into the sole `exit()` function argument. Most likely, there will be a random value, leaved from your function execution. So, `exit` code of program will be pseudorandom.

I can illustrate this fact. Please notice, the `main()` function has *void* type:

```
#include <stdio.h>

void main()
{
    printf ("Hello, world!\n");
};
```

Let's compile it in Linux.

GCC 4.8.1 replaced `printf()` to `puts()` (we saw this before: 2.3.3), but that's OK, since `puts()` returns number of characters printed, just like `printf()`. Please notice that EAX is not zeroed before `main()` finish. This means, EAX value at the `main()` finish will contain what `puts()` leaved there.

Listing 8.1: GCC 4.8.1

```
.LC0:
    .string "Hello, world!"
main:
    push    ebp
    mov     ebp, esp
    and     esp, -16
    sub     esp, 16
    mov     DWORD PTR [esp], OFFSET FLAT:.LC0
    call    puts
```

¹See also: [MSDN: Return Values \(C++\)](#)

```
leave
ret
```

Let's write bash script, showing exit status:

Listing 8.2: tst.sh

```
#!/bin/sh
./hello_world
echo $?
```

And run it:

```
$ tst.sh
Hello, world!
14
```

14 is a number of characters printed.

Let's back to the fact the returning value is leaved in the EAX register. That is why old C compilers cannot create functions capable of returning something not fitting in one register (usually type *int*) but if one needs it, one should return information via pointers passed in function arguments. Now it is possible, to return, let's say, whole structure, but still it is not very popular. If function must return a large structure, *caller* must allocate it and pass pointer to it via first argument, transparently for programmer. That is almost the same as to pass pointer in first argument manually, but compiler hide this.

Small example:

```
struct s
{
    int a;
    int b;
    int c;
};

struct s get_some_values (int a)
{
    struct s rt;

    rt.a=a+1;
    rt.b=a+2;
    rt.c=a+3;

    return rt;
};
```

...what we got (MSVC 2010 /Ox):

```
$T3853 = 8 ; size = 4
_a$ = 12 ; size = 4
?get_some_values@@YA?AUs@@H@Z PROC ; get_some_values
    mov     ecx, DWORD PTR _a$[esp-4]
    mov     eax, DWORD PTR $T3853[esp-4]
    lea     edx, DWORD PTR [ecx+1]
    mov     DWORD PTR [eax], edx
    lea     edx, DWORD PTR [ecx+2]
    add     ecx, 3
    mov     DWORD PTR [eax+4], edx
    mov     DWORD PTR [eax+8], ecx
    ret     0
?get_some_values@@YA?AUs@@H@Z ENDP ; get_some_values
```

Macro name for internal variable passing pointer to structure is \$T3853 here.

This example can be rewritten using C99 language extensions:

```
struct s
{
```

```

    int a;
    int b;
    int c;
};

struct s get_some_values (int a)
{
    return (struct s){.a=a+1, .b=a+2, .c=a+3};
};

```

Listing 8.3: GCC 4.8.1

```

_get_some_values proc near
ptr_to_struct    = dword ptr  4
a                = dword ptr  8

        mov     edx, [esp+a]
        mov     eax, [esp+ptr_to_struct]
        lea     ecx, [edx+1]
        mov     [eax], ecx
        lea     ecx, [edx+2]
        add     edx, 3
        mov     [eax+4], ecx
        mov     [eax+8], edx
        retn
_get_some_values endp

```

As we may see, the function is just filling fields in the structure, allocated by caller function. So there are no performance drawbacks.

Chapter 9

Pointers

Pointers are often used to return values from function (recall `scanf()` case (6)). For example, when function should return two values.

9.1 Global variables example

```
#include <stdio.h>

void f1 (int x, int y, int *sum, int *product)
{
    *sum=x+y;
    *product=x*y;
};

int sum, product;

void main()
{
    f1(123, 456, &sum, &product);
    printf ("sum=%d, product=%d\n", sum, product);
};
```

This compiling into:

Listing 9.1: Optimizing MSVC 2010 (/Ox /Ob0)

```
COMM    _product:DWORD
COMM    _sum:DWORD
$SG2803 DB    'sum=%d, product=%d', 0aH, 00H

_x$ = 8                                     ; size = 4
_y$ = 12                                    ; size = 4
_sum$ = 16                                  ; size = 4
_product$ = 20                              ; size = 4
_f1     PROC
    mov     ecx, DWORD PTR _y$[esp-4]
    mov     eax, DWORD PTR _x$[esp-4]
    lea     edx, DWORD PTR [eax+ecx]
    imul    eax, ecx
    mov     ecx, DWORD PTR _product$[esp-4]
    push    esi
    mov     esi, DWORD PTR _sum$[esp]
    mov     DWORD PTR [esi], edx
    mov     DWORD PTR [ecx], eax
    pop     esi
    ret     0
_f1     ENDP
```

```

_main  PROC
        push    OFFSET _product
        push    OFFSET _sum
        push    456                                ; 000001c8H
        push    123                                ; 0000007bH
        call    _f1
        mov     eax, DWORD PTR _product
        mov     ecx, DWORD PTR _sum
        push    eax
        push    ecx
        push    OFFSET $SG2803
        call    DWORD PTR __imp__printf
        add     esp, 28                             ; 0000001cH
        xor     eax, eax
        ret     0
_main  ENDP

```

Let's see this in OllyDbg: fig.9.1. At first, global variables addresses are passed into `f1()`. We can click "Follow in dump" on the stack element, and we will see a place in data segment allocated for two variables. These variables are cleared, because non-initialized data (BSS¹) are cleared before execution begin. They are residing in data segment, we can be sure it is so, by pressing Alt-M and seeing memory map: fig.9.5.

Let's trace (F7) until execution of `f1()` fig.9.2. Two values are seen in the stack 456 (0x1C8) and 123 (0x7B), and two global variables addresses as well.

Let's trace until the end of `f1()`. At the window at left we see how calculation results are appeared in the global variables fig.9.3.

Now values of global variables are loaded into registers for passing into `printf()`: fig.9.4.

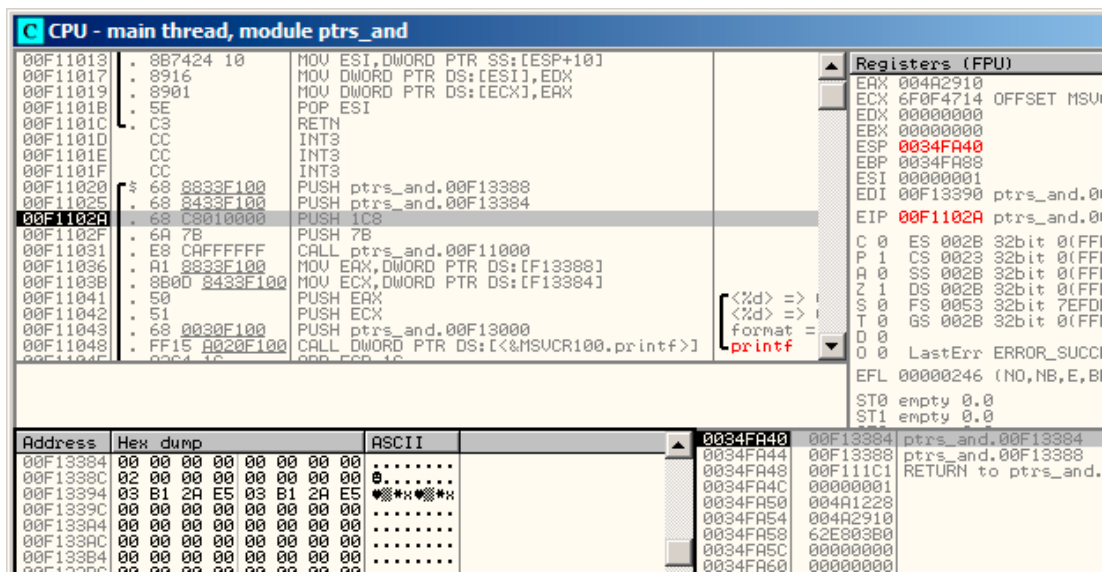


Figure 9.1: OllyDbg: global variables addresses are passing into `f1()`

¹Block Started by Symbol

CPU - main thread, module ptrs_and

Address	Hex dump	ASCII
00F11000	8B4C24 08	MOV ECX,DWORD PTR SS:[ESP+8]
00F11004	8B4424 04	MOV EAX,DWORD PTR SS:[ESP+4]
00F11008	8D1408	LEA EDX,DWORD PTR DS:[EAX+ECX]
00F1100B	0FAFC1	IMUL EAX,ECX
00F1100E	8B4C24 10	MOV ECX,DWORD PTR SS:[ESP+10]
00F11012	56	PUSH ESI
00F11013	8B7424 10	MOV ESI,DWORD PTR SS:[ESP+10]
00F11017	8916	MOV DWORD PTR DS:[ESI],EDX
00F11019	8901	MOV DWORD PTR DS:[ECX],EAX
00F1101B	5E	POP ESI
00F1101C	C3	RETN
00F1101D	CC	INT3
00F1101E	CC	INT3
00F1101F	CC	INT3
00F11020	68 8833F100	PUSH ptrs_and.00F13388
00F11025	68 8433F100	PUSH ptrs_and.00F13384
00F1102A	68 C8010000	PUSH 1C8
00F1102F	6A 7B	PUSH 7B
00F11031	E8 CAFFFFFF	CALL ptrs_and.00F11000
00F11032	04 00000000	MOV EAX,DWORD PTR DS:[EAX+0]

Stack [0034FA3C]=000001C8
ECX=6F0F4714 (MSUCR100..._initenv)
Local call from 00F11031

Registers (FPU)

Register	Value	Comment
EAX	004A2910	
ECX	6F0F4714	OFFSET MS
EDX	00000000	
EBX	00000000	
ESP	0034FA34	
EBP	0034FA38	
ESI	00000001	
EDI	00F13390	ptrs_and.
EIP	00F11000	ptrs_and.

Address Hex dump ASCII

Address	Hex dump	ASCII
00F13384	00 00 00 00 00 00 00 00	
00F1338C	02 00 00 00 00 00 00 00	
00F13394	03 B1 2A E5 03 B1 2A E5	***x***x
00F1339C	00 00 00 00 00 00 00 00	
00F133A4	00 00 00 00 00 00 00 00	
00F133AC	00 00 00 00 00 00 00 00	
00F133B4	00 00 00 00 00 00 00 00	
00F133BC	00 00 00 00 00 00 00 00	
00F133C4	00 00 00 00 00 00 00 00	

0034FA34 00F11036 RETURN to ptrs_and

Figure 9.2: OllyDbg: f1() is started

CPU - main thread, module ptrs_and

Address	Hex dump	ASCII
00F11000	8B4C24 08	MOV ECX,DWORD PTR SS:[ESP+8]
00F11004	8B4424 04	MOV EAX,DWORD PTR SS:[ESP+4]
00F11008	8D1408	LEA EDX,DWORD PTR DS:[EAX+ECX]
00F1100B	0FAFC1	IMUL EAX,ECX
00F1100E	8B4C24 10	MOV ECX,DWORD PTR SS:[ESP+10]
00F11012	56	PUSH ESI
00F11013	8B7424 10	MOV ESI,DWORD PTR SS:[ESP+10]
00F11017	8916	MOV DWORD PTR DS:[ESI],EDX
00F11019	8901	MOV DWORD PTR DS:[ECX],EAX
00F1101B	5E	POP ESI
00F1101C	C3	RETN
00F1101D	CC	INT3
00F1101E	CC	INT3
00F1101F	CC	INT3
00F11020	68 8833F100	PUSH ptrs_and.00F13388
00F11025	68 8433F100	PUSH ptrs_and.00F13384
00F1102A	68 C8010000	PUSH 1C8
00F1102F	6A 7B	PUSH 7B
00F11031	E8 CAFFFFFF	CALL ptrs_and.00F11000
00F11032	04 00000000	MOV EAX,DWORD PTR DS:[EAX+0]

Stack [0034FA30]=00000001
ESI=00F13384 (ptrs_and.00F13384)

Registers (FPU)

Register	Value	Comment
EAX	00000B18	
ECX	00F13388	ptrs_and.00F13388
EDX	00000243	
EBX	00000000	
ESP	0034FA30	
EBP	0034FA38	
ESI	00F13384	ptrs_and.00F13384
EDI	00F13390	ptrs_and.00F13390
EIP	00F1101B	ptrs_and.00F1101E

Address Hex dump ASCII

Address	Hex dump	ASCII
00F13384	43 02 00 00 18 DB 00 00	C0..f...
00F1338C	02 00 00 00 00 00 00 00	
00F13394	03 B1 2A E5 03 B1 2A E5	***x***x
00F1339C	00 00 00 00 00 00 00 00	
00F133A4	00 00 00 00 00 00 00 00	
00F133AC	00 00 00 00 00 00 00 00	
00F133B4	00 00 00 00 00 00 00 00	
00F133BC	00 00 00 00 00 00 00 00	
00F133C4	00 00 00 00 00 00 00 00	

0034FA30 00F11036 RETURN to ptrs_and.00F110

Figure 9.3: OllyDbg: f1() finishes

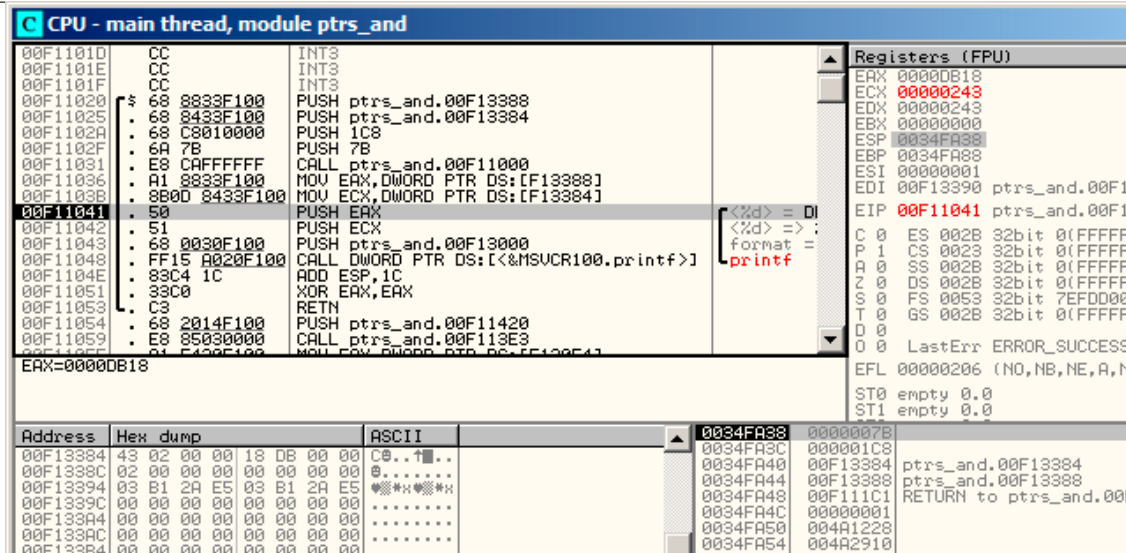


Figure 9.4: OllyDbg: global variables addresses are passed into printf()

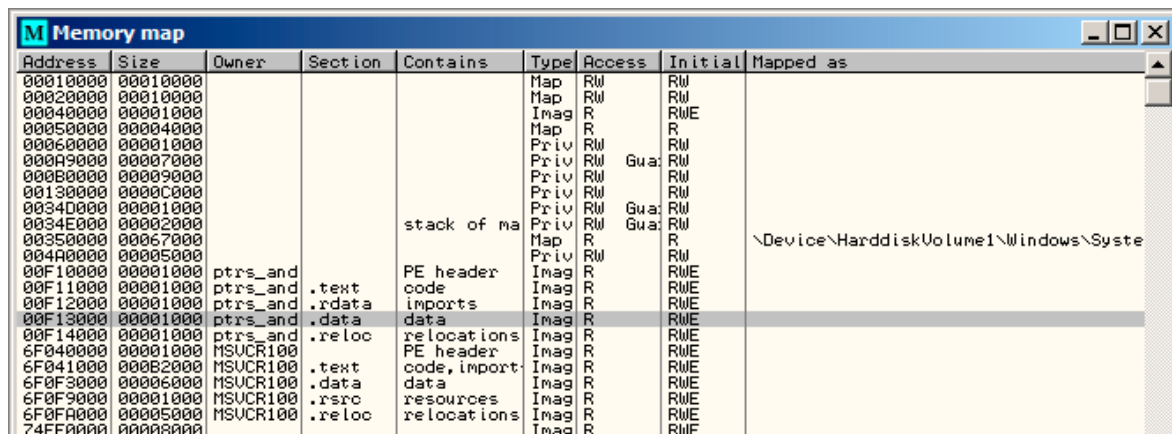


Figure 9.5: OllyDbg: memory map

9.2 Local variables example

Let's rework our example slightly:

Listing 9.2: now variables are local

```
void main()
{
    int sum, product; // now variables are here

    f1(123, 456, &sum, &product);
    printf ("sum=%d, product=%d\n", sum, product);
};
```

f1() function code will not changed. Only main() code will:

Listing 9.3: Optimizing MSVC 2010 (/Ox/Ob0)

```
_product$ = -8 ; size = 4
_sum$ = -4 ; size = 4
_main PROC
; Line 10
    sub     esp, 8
; Line 13
```

```

    lea    eax, DWORD PTR _product$[esp+8]
    push   eax
    lea    ecx, DWORD PTR _sum$[esp+12]
    push   ecx
    push   456                                ; 000001c8H
    push   123                                ; 0000007bH
    call   _f1
; Line 14
    mov    edx, DWORD PTR _product$[esp+24]
    mov    eax, DWORD PTR _sum$[esp+24]
    push   edx
    push   eax
    push   OFFSET $SG2803
    call   DWORD PTR __imp__printf
; Line 15
    xor     eax, eax
    add     esp, 36                            ; 00000024H
    ret     0

```

Let's again take a look into OllyDbg. Local variable addresses in the stack are 0x35FCF4 and 0x35FCF8. We see how these are pushed into the stack: fig.9.6.

f1() is started. Random garbage are at 0x35FCF4 and 0x35FCF8 so far fig.9.7.

f1() finished. There are 0xDB18 and 0x243 now at 0x35FCF4 and 0x35FCF8 addresses, these values are f1() function result.

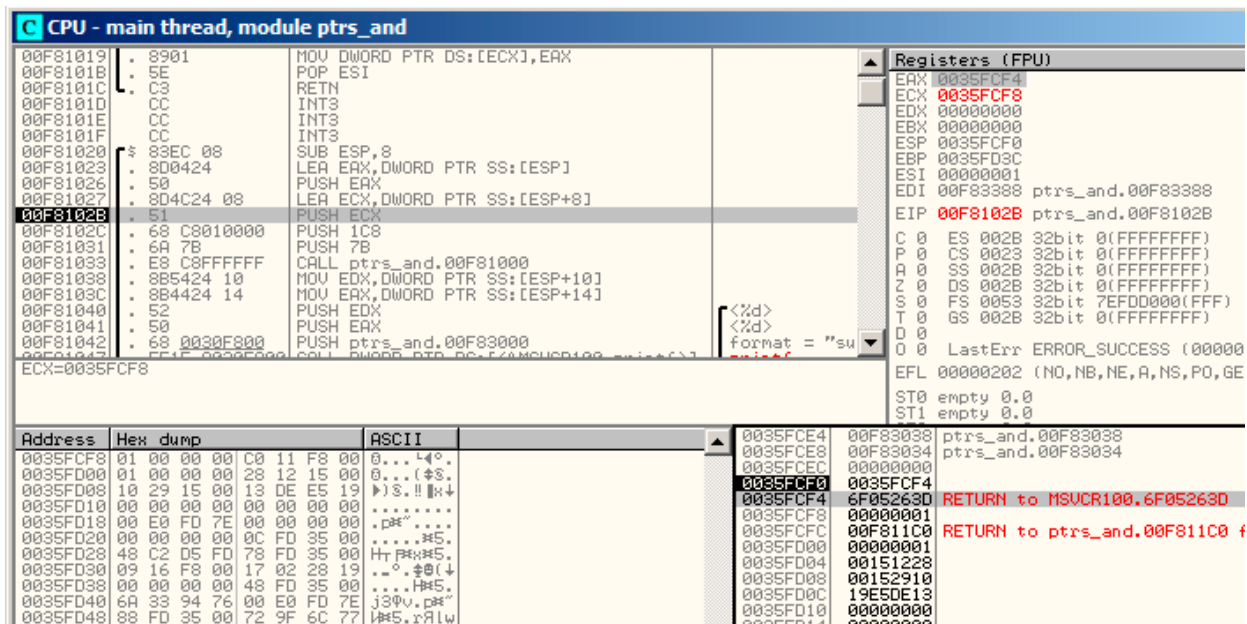


Figure 9.6: OllyDbg: addresses of local variables are pushed into the stack

CPU - main thread, module ptrs_and

Address	Hex dump	ASCII	Comment
00F81000	8B4C24 08		MOV ECX, DWORD PTR SS:[ESP+8]
00F81004	8B4424 04		MOV EAX, DWORD PTR SS:[ESP+4]
00F81008	8D1408		LEA EDX, DWORD PTR DS:[EAX+ECX]
00F8100B	0FAFC1		IMUL EAX, ECX
00F8100E	8B4C24 10		MOV ECX, DWORD PTR SS:[ESP+10]
00F81012	56		PUSH ESI
00F81013	8B7424 10		MOV ESI, DWORD PTR SS:[ESP+10]
00F81017	8916		MOV DWORD PTR DS:[ESI], EDX
00F81019	8901		MOV DWORD PTR DS:[ECX], EAX
00F8101B	5E		POP ESI
00F8101C	C3		RET
00F8101D	CC		INT3
00F8101E	CC		INT3
00F8101F	CC		INT3
00F81020	83EC 08		SUB ESP, 8
00F81023	8D0424		LEA EAX, DWORD PTR SS:[ESP]
00F81026	50		PUSH EAX
00F81027	8D4C24 08		LEA ECX, DWORD PTR SS:[ESP+8]
00F8102B	51		PUSH ECX

Stack SS:[0035FCE8]=000001C8
ECX=0035FCF8
Local call from 00F81033

Registers (FPU)

Register	Value	Comment
EAX	0035FCF4	
ECX	0035FCF8	
EDX	00000000	
EBX	00000000	
ESP	0035FCE0	
EBP	0035FD3C	
ESI	00000001	
EDI	00F83388	ptrs_and.00
EIP	00F81000	ptrs_and.00

Stack

Address	Hex dump	ASCII
0035FCF8	01 00 00 00 C0 11 F8 00	0...4°
0035FD00	01 00 00 00 28 12 15 00	0...(\$S
0035FD08	10 29 15 00 13 DE E5 19	)\$.!!K↓
0035FD10	00 00 00 00 00 00 00 00	
0035FD18	00 E0 FD 7E 00 00 00 00	.p#....
0035FD20	00 00 00 00 0C FD 35 00	#5.
0035FD28	48 C2 D5 FD 78 FD 35 00	Ht p#H5.
0035FD30	09 16 F8 00 17 02 28 19	..°.#0(↓

Figure 9.7: OllyDbg: f1() starting

CPU - main thread, module ptrs_and

Address	Hex dump	ASCII	Comment
00F81000	8B4C24 08		MOV ECX, DWORD PTR SS:[ESP+8]
00F81004	8B4424 04		MOV EAX, DWORD PTR SS:[ESP+4]
00F81008	8D1408		LEA EDX, DWORD PTR DS:[EAX+ECX]
00F8100B	0FAFC1		IMUL EAX, ECX
00F8100E	8B4C24 10		MOV ECX, DWORD PTR SS:[ESP+10]
00F81012	56		PUSH ESI
00F81013	8B7424 10		MOV ESI, DWORD PTR SS:[ESP+10]
00F81017	8916		MOV DWORD PTR DS:[ESI], EDX
00F81019	8901		MOV DWORD PTR DS:[ECX], EAX
00F8101B	5E		POP ESI
00F8101C	C3		RET
00F8101D	CC		INT3
00F8101E	CC		INT3
00F8101F	CC		INT3
00F81020	83EC 08		SUB ESP, 8
00F81023	8D0424		LEA EAX, DWORD PTR SS:[ESP]
00F81026	50		PUSH EAX
00F81027	8D4C24 08		LEA ECX, DWORD PTR SS:[ESP+8]
00F8102B	51		PUSH ECX

Stack [0035FCE0]=00000001
ESI=0035FCF8

Registers (FPU)

Register	Value	Comment
EAX	00000B18	
ECX	0035FCF4	
EDX	00000243	
EBX	00000000	
ESP	0035FCE0	
EBP	0035FD3C	
ESI	0035FCF8	
EDI	00F83388	ptrs_and
EIP	00F8101B	ptrs_and

Stack

Address	Hex dump	ASCII
0035FCF8	43 02 00 00 C0 11 F8 00	C@..4°
0035FD00	01 00 00 00 28 12 15 00	0...(\$S
0035FD08	10 29 15 00 13 DE E5 19	)\$.!!K↓
0035FD10	00 00 00 00 00 00 00 00	
0035FD18	00 E0 FD 7E 00 00 00 00	.p#....
0035FD20	00 00 00 00 0C FD 35 00	#5.
0035FD28	48 C2 D5 FD 78 FD 35 00	Ht p#H5.
0035FD30	09 16 F8 00 17 02 28 19	..°.#0(↓

Figure 9.8: OllyDbg: f1() finished

9.3 Conclusion

f1() can return results to any place in memory, located anywhere. This is essence and usefulness of pointers. By the way, C++ *references* works just in the same way. Read more about them: (33).

Chapter 10

Conditional jumps

Now about conditional jumps.

```
#include <stdio.h>

void f_signed (int a, int b)
{
    if (a>b)
        printf ("a>b\n");
    if (a==b)
        printf ("a==b\n");
    if (a<b)
        printf ("a<b\n");
};

void f_unsigned (unsigned int a, unsigned int b)
{
    if (a>b)
        printf ("a>b\n");
    if (a==b)
        printf ("a==b\n");
    if (a<b)
        printf ("a<b\n");
};

int main()
{
    f_signed(1, 2);
    f_unsigned(1, 2);
    return 0;
};
```

10.1 x86

10.1.1 x86 + MSVC

What we have in the `f_signed()` function:

Listing 10.1: Non-optimizing MSVC 2010

```
_a$ = 8
_b$ = 12
_f_signed PROC
    push    ebp
    mov     ebp, esp
    mov     eax, DWORD PTR _a$[ebp]
    cmp     eax, DWORD PTR _b$[ebp]
```

```

    jle     SHORT $LN3@f_signed
    push    OFFSET $SG737          ; 'a>b'
    call    _printf
    add     esp, 4
$LN3@f_signed:
    mov     ecx, DWORD PTR _a$[ebp]
    cmp     ecx, DWORD PTR _b$[ebp]
    jne     SHORT $LN2@f_signed
    push    OFFSET $SG739          ; 'a==b'
    call    _printf
    add     esp, 4
$LN2@f_signed:
    mov     edx, DWORD PTR _a$[ebp]
    cmp     edx, DWORD PTR _b$[ebp]
    jge     SHORT $LN4@f_signed
    push    OFFSET $SG741          ; 'a<b'
    call    _printf
    add     esp, 4
$LN4@f_signed:
    pop     ebp
    ret     0
_f_signed ENDP

```

First instruction JLE means *Jump if Less or Equal*. In other words, if second operand is larger than first or equal, control flow will be passed to address or label mentioned in instruction. But if this condition will not trigger (second operand less than first), control flow will not be altered and first `printf()` will be called. The second check is JNE: *Jump if Not Equal*. Control flow will not be altered if operands are equals to each other. The third check is JGE: *Jump if Greater or Equal*—jump if the first operand is larger than the second or if they are equals to each other. By the way, if all three conditional jumps are triggered, no `printf()` will be called whatsoever. But, without special intervention, it is nearly impossible.

`f_unsigned()` function is likewise, with the exception the JBE and JAE instructions are used here instead of JLE and JGE, see below about it:

Now let's take a look to the `f_unsigned()` function

Listing 10.2: GCC

```

_a$ = 8                                ; size = 4
_b$ = 12                               ; size = 4
_f_unsigned PROC
    push    ebp
    mov     ebp, esp
    mov     eax, DWORD PTR _a$[ebp]
    cmp     eax, DWORD PTR _b$[ebp]
    jbe     SHORT $LN3@f_unsigned
    push    OFFSET $SG2761 ; 'a>b'
    call    _printf
    add     esp, 4
$LN3@f_unsigned:
    mov     ecx, DWORD PTR _a$[ebp]
    cmp     ecx, DWORD PTR _b$[ebp]
    jne     SHORT $LN2@f_unsigned
    push    OFFSET $SG2763 ; 'a==b'
    call    _printf
    add     esp, 4
$LN2@f_unsigned:
    mov     edx, DWORD PTR _a$[ebp]
    cmp     edx, DWORD PTR _b$[ebp]
    jae     SHORT $LN4@f_unsigned
    push    OFFSET $SG2765 ; 'a<b'
    call    _printf
    add     esp, 4
$LN4@f_unsigned:
    pop     ebp

```

```
ret    0
_f_unsigned ENDP
```

Almost the same, with exception of instructions: JBE—Jump if Below or Equal and JAE—Jump if Above or Equal. These instructions (JA/JAE/JBE/JBE) are distinct from JG/JGE/JL/JLE in that way, they works with unsigned numbers.

See also section about signed number representations (35). So, where we see usage of JG/JL instead of JA/JBE or otherwise, we can almost be sure about signed or unsigned type of variable.

Here is also main() function, where nothing much new to us:

Listing 10.3: main()

```
_main PROC
    push    ebp
    mov     ebp, esp
    push    2
    push    1
    call    _f_signed
    add     esp, 8
    push    2
    push    1
    call    _f_unsigned
    add     esp, 8
    xor     eax, eax
    pop     ebp
    ret     0
_main ENDP
```

10.1.2 x86 + MSVC + OllyDbg

We can see how flags are set by running this example in OllyDbg. Let's begin with f_unsigned() function, which works with unsigned number. CMP executed thrice here, but for the same arguments, so flags will be the same each time.

First comparison results: fig.10.1. So, the flags are: C=1, P=1, A=1, Z=0, S=1, T=0, D=0, O=0. Flags are named by one characters in OllyDbg for brevity.

OllyDbg gives a hint that (JBE) jump will be triggered. Indeed, if to take a look into [14], we will read there that JBE will trigger if CF=1 or ZF=1. Condition is true here, so jump is triggered.

The next conditional jump:fig.10.2. OllyDbg gives a hint that JNZ will trigger. Indeed, JNZ will trigger if ZF=0 (zero flag).

The third conditional jump JNB: fig.10.3. In [14] we may find that JNB will trigger if CF=0 (carry flag). It's not true in our case, so the third printf() will execute.

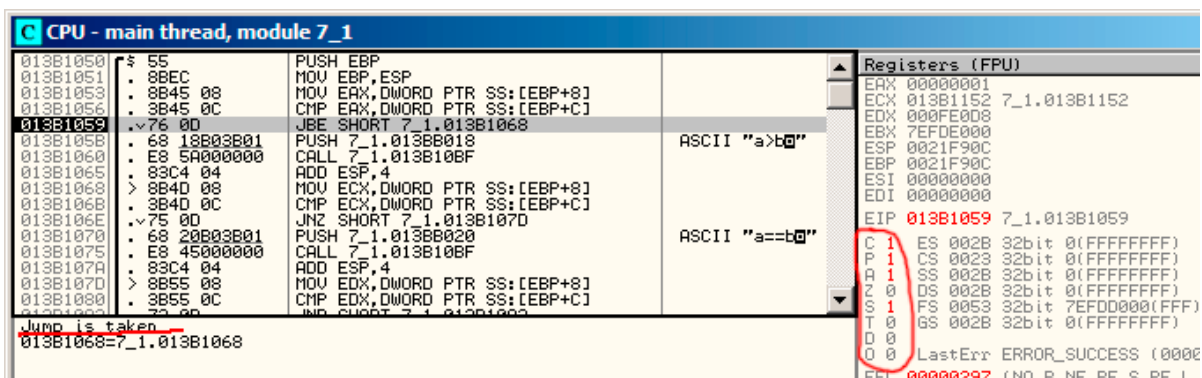


Figure 10.1: OllyDbg: f_unsigned(): first conditional jump

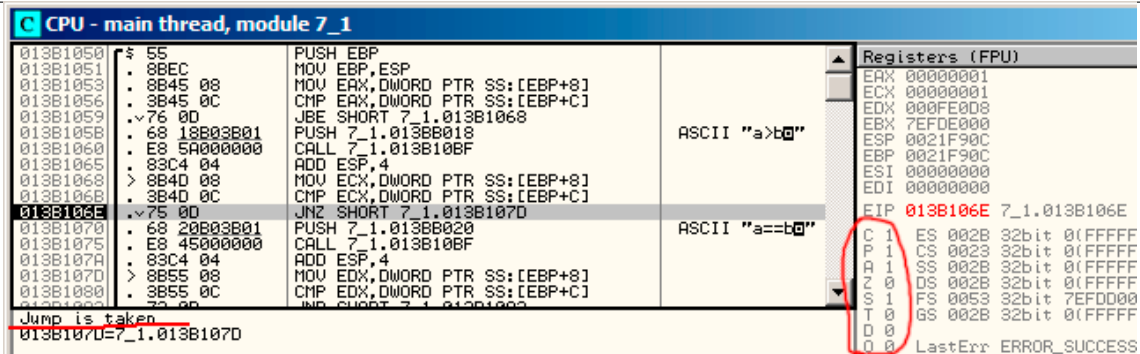


Figure 10.2: OllyDbg: f_unsigned(): second conditional jump

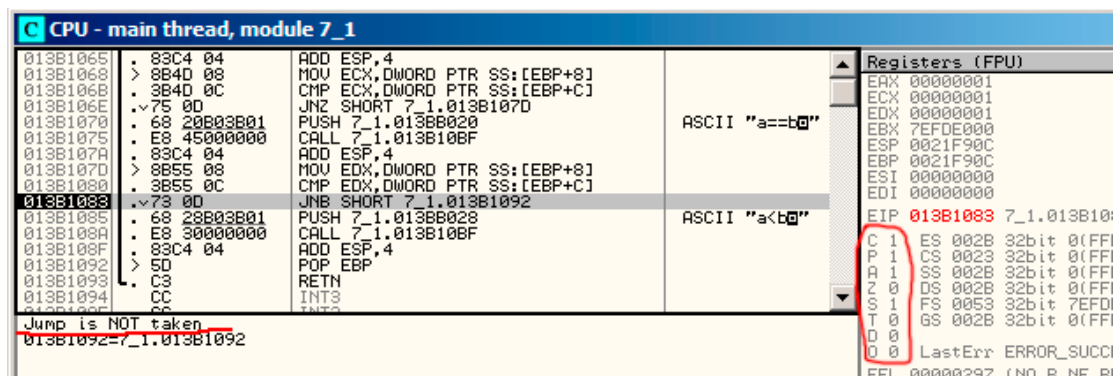


Figure 10.3: OllyDbg: f_unsigned(): third conditional jump

Now we can try in OllyDbg the f_signed() function working with signed values.

Flags are set in the same way: C=1, P=1, A=1, Z=0, S=1, T=0, D=0, O=0.

The first conditional jump JLE will trigger. fig.10.4. In [14] we may find that this instruction is triggering if ZF=1 or SF≠OF. SF≠OF in our case, so jump is triggering.

The next JNZ conditional jump will trigger: it does if ZF=0 (zero flag): fig.10.5.

The third conditional jump JGE will not trigger because it will only if SF=OF, and that is not true in our case: fig.10.6.

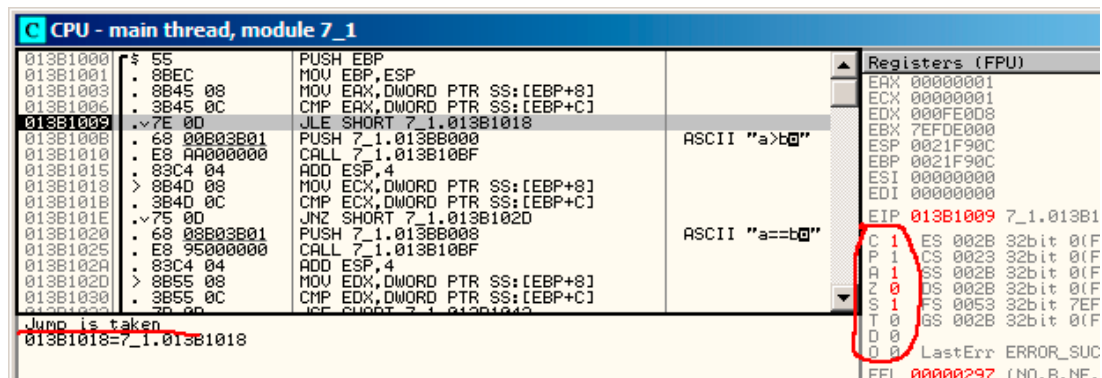
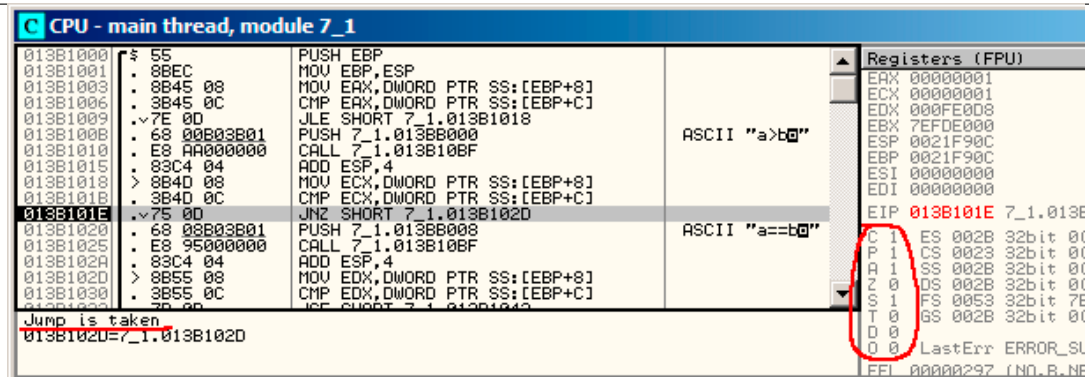
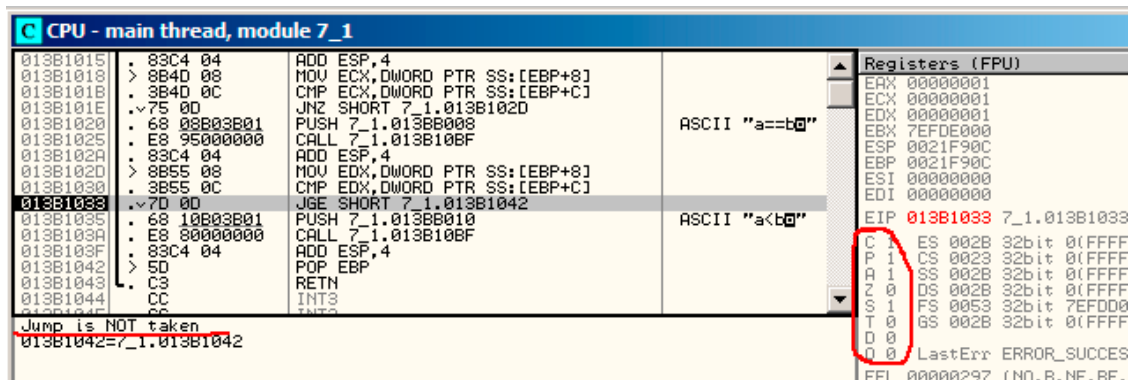


Figure 10.4: OllyDbg: f_signed(): first conditional jump

Figure 10.5: OllyDbg: `f_unsigned()`: second conditional jumpFigure 10.6: OllyDbg: `f_unsigned()`: third conditional jump

10.1.3 x86 + MSVC + Hiew

We can try patch executable file in that way, that `f_unsigned()` function will always print “a=b”, for any input values.

Here is how it looks in Hiew: fig.10.7.

Essentially, we’ve got three tasks:

- force first jump to be always triggered;
- force second jump to be never triggered;
- force third jump to be always triggered.

Thus we can point code flow into the second `printf()`, and it always print “a=b”.

Three instructions (or bytes) should be patched:

- The first jump will now be `JMP`, but `jump offset` will be same.
- The second jump may be triggered sometimes, but in any case it will jump to the next instruction, because, we set `jump offset` to 0. `Jump offset` is just to be added to the address of the next instruction in these instructions. So if offset is 0, jump will be done to the next instruction.
- The third jump we convert into `JMP` just as the first one, so it will be triggered always.

That’s what we do: fig.10.8.

If we could forget about any of these jumps, then several `printf()` calls may execute, but this behaviour is not we’re need.

The screenshot shows the OllyDbg interface with the assembly window displaying the code for the `f_unsigned()` function. The address range is from `00401000` to `00401048`. The code includes stack frame setup, comparisons, and conditional jumps. Comments in the original image indicate the logic of the function, such as checking if `a` is less than or equal to `b` and if `a` is greater than or equal to `b`.

```

00401000: 55          push     ebp
00401001: 8BEC       mov      ebp, esp
00401003: 8B4508     mov      eax, [ebp+8]
00401006: 3B450C     cmp      eax, [ebp+0C]
00401009: 7E0D      jle      .00401018 ;--1
0040100B: 6800B04000 push     00040B000 ;--2
00401010: E8AA000000 call     .004010BF ;--3
00401015: 83C404     add      esp, 4
00401018: 8B4D08     1mov     ecx, [ebp+8]
0040101B: 3B4D0C     cmp      ecx, [ebp+0C]
0040101E: 750D      jnz      .0040102D ;--4
00401020: 6800B04000 push     00040B008 ; 'a==b' ;--5
00401025: E895000000 call     .004010BF ;--3
0040102A: 83C404     add      esp, 4
0040102D: 8B5508     4mov     edx, [ebp+8]
00401030: 3B550C     cmp      edx, [ebp+0C]
00401033: 7D0D      jge      .00401042 ;--6
00401035: 6810B04000 push     00040B010 ;--7
0040103A: E880000000 call     .004010BF ;--3
0040103F: 83C404     add      esp, 4
00401042: 5D        6pop     ebp
00401043: C3        retn ; --^--^--^--^--^--^--^--^--^--^
00401044: CC        int      3
00401045: CC        int      3
00401046: CC        int      3
00401047: CC        int      3
00401048: CC        int      3

```

Legend: 1Global 2FillBlk 3CryBlk 4ReLoad 5OrdLdr 6String 7Direct 8Table 9byte 10Leave 11Naked 12AddName

Figure 10.7: Hiew: `f_unsigned()` function

Figure 10.8: Hiew: let's modify `f_unsigned()` function

10.1.4 Non-optimizing GCC

Non-optimizing GCC 4.4.1 produce almost the same code, but with `puts()` (2.3.3) instead of `printf()`.

10.1.5 Optimizing GCC

Observant reader may ask, why to execute `CMP` so many times, if flags are same all the time? Perhaps, optimizing MSVC can't do this, but optimizing GCC 4.8.1 can do deep optimization:

Listing 10.4: GCC 4.8.1 `f_signed()`

```
f_signed:
    mov     eax, DWORD PTR [esp+8]
    cmp     DWORD PTR [esp+4], eax
    jg      .L6
    je      .L7
    jge     .L1
    mov     DWORD PTR [esp+4], OFFSET FLAT:.LC2 ; "a<b"
    jmp     puts
.L6:
    mov     DWORD PTR [esp+4], OFFSET FLAT:.LC0 ; "a>b"
    jmp     puts
.L1:
    rep     ret
.L7:
    mov     DWORD PTR [esp+4], OFFSET FLAT:.LC1 ; "a==b"
    jmp     puts
```

We also see `JMP puts` here instead of `CALL puts / RETN`. This kind of trick will be described later: [11.1.1](#).

Needless to say, that type of x86 code is rare. MSVC 2012, as it seems, can't do that. On the other case, assembly language programmers are fully aware of the fact that `Jcc` instructions can be stacked. So if you see it somewhere, it may be a good probability that the code is hand-written.

`f_unsigned()` function is not that aesthetically short:

Listing 10.5: GCC 4.8.1 `f_unsigned()`

```
f_unsigned:
    push    esi
    push    ebx
    sub     esp, 20
    mov     esi, DWORD PTR [esp+32]
    mov     ebx, DWORD PTR [esp+36]
    cmp     esi, ebx
    ja      .L13
    cmp     esi, ebx      ; instruction may be removed
    je      .L14
.L10:
    jb      .L15
    add     esp, 20
    pop     ebx
    pop     esi
    ret
.L15:
    mov     DWORD PTR [esp+32], OFFSET FLAT:.LC2 ; "a<b"
    add     esp, 20
    pop     ebx
    pop     esi
    jmp     puts
.L13:
    mov     DWORD PTR [esp], OFFSET FLAT:.LC0 ; "a>b"
    call    puts
    cmp     esi, ebx
    jne     .L10
.L14:
    mov     DWORD PTR [esp+32], OFFSET FLAT:.LC1 ; "a==b"
    add     esp, 20
    pop     ebx
    pop     esi
    jmp     puts
```

So, optimization algorithms of GCC 4.8.1 are probably not always perfect yet.

10.2 ARM

10.2.1 Optimizing Keil + ARM mode

Listing 10.6: Optimizing Keil + ARM mode

```
.text:000000B8          EXPORT f_signed
.text:000000B8          f_signed          ; CODE XREF: main+C
.text:000000B8 70 40 2D E9      STMFD     SP!, {R4-R6,LR}
.text:000000BC 01 40 A0 E1      MOV      R4, R1
.text:000000C0 04 00 50 E1      CMP      R0, R4
.text:000000C4 00 50 A0 E1      MOV      R5, R0
.text:000000C8 1A 0E 8F C2      ADRGT    R0, aAB          ; "a>b\n"
.text:000000CC A1 18 00 CB      BLGT     __2printf
.text:000000D0 04 00 55 E1      CMP      R5, R4
.text:000000D4 67 0F 8F 02      ADREQ    R0, aAB_0        ; "a==b\n"
.text:000000D8 9E 18 00 0B      BLEQ     __2printf
.text:000000DC 04 00 55 E1      CMP      R5, R4
```

```
.text:000000E0 70 80 BD A8          LDMGEFD SP!, {R4-R6,PC}
.text:000000E4 70 40 BD E8          LDMFD    SP!, {R4-R6,LR}
.text:000000E8 19 0E 8F E2          ADR      R0, aAB_1          ; "a<b\n"
.text:000000EC 99 18 00 EA          B        __2printf
.text:000000EC          ; End of function f_signed
```

A lot of instructions in ARM mode can be executed only when specific flags are set. E.g. this is often used while numbers comparing.

For instance, ADD instruction is ADDAL internally in fact, where AL meaning *Always*, i.e., execute always. Predicates are encoded in 4 high bits of 32-bit ARM instructions (*condition field*). B instruction of unconditional jump is in fact conditional and encoded just like any other conditional jumps, but has AL in the *condition field*, and what it means, executing always, ignoring flags.

ADRGt instructions works just like ADR but will execute only in the case when previous CMP instruction, while comparing two numbers, found one number greater than another (*Greater Than*).

The next BLGT instruction behaves exactly as BL and will be triggered only if result of comparison was the same (*Greater Than*). ADRGT writes a pointer to the string “a>b\n”, into R0 and BLGT calls `printf()`. Consequently, these instructions with -GT suffix, will be executed only in the case when value in the R0 (*a* is there) was bigger than value in the R4 (*b* is there).

Then we see ADREQ and BLEQ instructions. They behave just like ADR and BL but is to be executed only in the case when operands were equal to each other while comparison. Another CMP is before them (since `printf()` call may tamper state of flags).

Then we see LDMGEFD, this instruction works just like LDMFD¹, but will be triggered only in the case when one value was greater or equal to another while comparison (*Greater or Equal*).

The sense of “LDMGEFD SP!, {R4-R6,PC}” instruction is that is like function epilogue, but it will be triggered only if $a \geq b$, only then function execution will be finished. But if it is not true, i.e., $a < b$, then control flow come to next “LDMFD SP!, {R4-R6,LR}” instruction, this is one more function epilogue, this instruction restores R4-R6 registers state, but also LR instead of PC, thus, it does not returns from function. Last two instructions calls `printf()` with the string «a<b\n» as sole argument. Unconditional jump to the `printf()` function instead of function return, is what we already examined in «`printf()` with several arguments» section, here (5.3.2).

`f_unsigned` is likewise, but ADRHI, BLHI, and LDMCSFD instructions are used there, these predicates (*HI = Unsigned higher*, *CS = Carry Set (greater than or equal)*) are analogical to those examined before, but serving for unsigned values.

There is not much new in the `main()` function for us:

Listing 10.7: `main()`

```
.text:00000128          EXPORT main
.text:00000128          main
.text:00000128 10 40 2D E9          STMFD    SP!, {R4,LR}
.text:0000012C 02 10 A0 E3          MOV      R1, #2
.text:00000130 01 00 A0 E3          MOV      R0, #1
.text:00000134 DF FF FF EB          BL       f_signed
.text:00000138 02 10 A0 E3          MOV      R1, #2
.text:0000013C 01 00 A0 E3          MOV      R0, #1
.text:00000140 EA FF FF EB          BL       f_unsigned
.text:00000144 00 00 A0 E3          MOV      R0, #0
.text:00000148 10 80 BD E8          LDMFD    SP!, {R4,PC}
.text:00000148          ; End of function main
```

That’s how to get rid of conditional jumps in ARM mode.

Why it is so good? Since ARM is RISC-processor with pipeline for instructions executing. In short, pipelined processor is not very good on jumps at all, so that is why branch predictor units are critical here. It is very good if the program has as few jumps as possible, conditional and unconditional, so that is why, predicated instructions can help in reducing conditional jumps count.

There is no such feature in x86, if not to count `CMOVcc` instruction, it is the same as MOV, but triggered only when specific flags are set, usually set while value comparison by CMP.

10.2.2 Optimizing Keil + thumb mode

Listing 10.8: Optimizing Keil + thumb mode

```
.text:00000072          f_signed          ; CODE XREF: main+6
.text:00000072 70 B5          PUSH      {R4-R6,LR}
```

¹Load Multiple Full Descending

```

.text:00000074 0C 00          MOVS    R4, R1
.text:00000076 05 00          MOVS    R5, R0
.text:00000078 A0 42          CMP     R0, R4
.text:0000007A 02 DD          BLE     loc_82
.text:0000007C A4 A0          ADR     R0, aAB          ; "a>b\n"
.text:0000007E 06 F0 B7 F8        BL      __2printf
.text:00000082
.text:00000082          loc_82          ; CODE XREF: f_signed+8
.text:00000082 A5 42          CMP     R5, R4
.text:00000084 02 D1          BNE     loc_8C
.text:00000086 A4 A0          ADR     R0, aAB_0        ; "a==b\n"
.text:00000088 06 F0 B2 F8        BL      __2printf
.text:0000008C
.text:0000008C          loc_8C          ; CODE XREF: f_signed+12
.text:0000008C A5 42          CMP     R5, R4
.text:0000008E 02 DA          BGE     locret_96
.text:00000090 A3 A0          ADR     R0, aAB_1        ; "a<b\n"
.text:00000092 06 F0 AD F8        BL      __2printf
.text:00000096
.text:00000096          locret_96        ; CODE XREF: f_signed+1C
.text:00000096 70 BD          POP     {R4-R6,PC}
.text:00000096          ; End of function f_signed

```

Only B instructions in thumb mode may be supplemented by *condition codes*, so the thumb code looks more ordinary.

BLE is usual conditional jump *Less than or Equal*, BNE—*Not Equal*, BGE—*Greater than or Equal*.

f_unsigned function is just likewise, but other instructions are used while dealing with unsigned values: BLS (*Unsigned lower or same*) and BCS (*Carry Set (Greater than or equal)*).

Chapter 11

switch()/case/default

11.1 Few number of cases

```
void f (int a)
{
    switch (a)
    {
        case 0: printf ("zero\n"); break;
        case 1: printf ("one\n"); break;
        case 2: printf ("two\n"); break;
        default: printf ("something unknown\n"); break;
    };
};
```

11.1.1 x86

Result (MSVC 2010):

Listing 11.1: MSVC 2010

```
tv64 = -4 ; size = 4
_a$ = 8 ; size = 4
_f PROC
    push ebp
    mov ebp, esp
    push ecx
    mov eax, DWORD PTR _a$[ebp]
    mov DWORD PTR tv64[ebp], eax
    cmp DWORD PTR tv64[ebp], 0
    je SHORT $LN40f
    cmp DWORD PTR tv64[ebp], 1
    je SHORT $LN30f
    cmp DWORD PTR tv64[ebp], 2
    je SHORT $LN20f
    jmp SHORT $LN10f
$LN40f:
    push OFFSET $SG739 ; 'zero', 0aH, 00H
    call _printf
    add esp, 4
    jmp SHORT $LN70f
$LN30f:
    push OFFSET $SG741 ; 'one', 0aH, 00H
    call _printf
    add esp, 4
    jmp SHORT $LN70f
$LN20f:
    push OFFSET $SG743 ; 'two', 0aH, 00H
```

```

    call    _printf
    add     esp, 4
    jmp     SHORT $LN70f
$LN10f:
    push    OFFSET $SG745 ; 'something unknown', 0aH, 00H
    call    _printf
    add     esp, 4
$LN70f:
    mov     esp, ebp
    pop     ebp
    ret     0
_f        ENDP

```

Out function with a few cases in switch(), in fact, is analogous to this construction:

```

void f (int a)
{
    if (a==0)
        printf ("zero\n");
    else if (a==1)
        printf ("one\n");
    else if (a==2)
        printf ("two\n");
    else
        printf ("something unknown\n");
};

```

When few cases in switch(), and we see such code, it is impossible to say with certainty, was it switch() in source code, or just pack of if(). This means, switch() is syntactic sugar for large number of nested checks constructed using if().

Nothing especially new to us in generated code, with the exception the compiler moving input variable a to temporary local variable tv64.

If to compile the same in GCC 4.4.1, we'll get almost the same, even with maximal optimization turned on (-O3 option).

Now let's turn on optimization in MSVC (/Ox): c1 1.c /Fa1.asm /Ox

Listing 11.2: MSVC

```

_a$ = 8 ; size = 4
_f    PROC
    mov     eax, DWORD PTR _a$[esp-4]
    sub     eax, 0
    je      SHORT $LN40f
    sub     eax, 1
    je      SHORT $LN30f
    sub     eax, 1
    je      SHORT $LN20f
    mov     DWORD PTR _a$[esp-4], OFFSET $SG791 ; 'something unknown', 0aH, 00H
    jmp     _printf
$LN20f:
    mov     DWORD PTR _a$[esp-4], OFFSET $SG789 ; 'two', 0aH, 00H
    jmp     _printf
$LN30f:
    mov     DWORD PTR _a$[esp-4], OFFSET $SG787 ; 'one', 0aH, 00H
    jmp     _printf
$LN40f:
    mov     DWORD PTR _a$[esp-4], OFFSET $SG785 ; 'zero', 0aH, 00H
    jmp     _printf
_f    ENDP

```

Here we can see even dirty hacks.

First: the value of the a variable is placed into EAX and 0 subtracted from it. Sounds absurdly, but it may needs to check if 0 was in the EAX register before? If yes, flag ZF will be set (this also means that subtracting from 0 is 0) and first conditional jump JE (*Jump if Equal* or synonym JZ — *Jump if Zero*) will be triggered and control flow passed to the \$LN40f label, where 'zero' message is begin printed. If first jump was not triggered, 1 subtracted from the input value and if at some stage 0 will be resulted, corresponding jump will be triggered.

And if no jump triggered at all, control flow passed to the `printf()` with argument 'something unknown'.

Second: we see unusual thing for us: string pointer is placed into the `a` variable, and then `printf()` is called not via `CALL`, but via `JMP`. This could be explained simply. **Caller** pushing to stack a value and calling our function via `CALL`. `CALL` itself pushing returning address to stack and do unconditional jump to our function address. Our function at any point of execution (since it do not contain any instruction moving stack pointer) has the following stack layout:

- ESP—pointing to **RA**
- ESP+4—pointing to the `a` variable

On the other side, when we need to call `printf()` here, we need exactly the same stack layout, except of first `printf()` argument pointing to string. And that is what our code does.

It replaces function's first argument to different and jumping to the `printf()`, as if not our function `f()` was called firstly, but immediately `printf()`. `printf()` printing a string to `stdout` and then execute `RET` instruction, which POPping **RA** from stack and control flow is returned not to `f()` but to the `f()`'s **callee**, escaping `f()`.

All this is possible since `printf()` is called right at the end of the `f()` function in any case. In some way, it is all similar to the `longjmp()`¹ function. And of course, it is all done for the sake of speed.

Similar case with ARM compiler described in "printf() with several arguments", section, here (5.3.2).

11.1.2 ARM: Optimizing Keil + ARM mode

```
.text:0000014C          f1
.text:0000014C 00 00 50 E3      CMP     R0, #0
.text:00000150 13 0E 8F 02      ADREQ   R0, aZero      ; "zero\n"
.text:00000154 05 00 00 0A      BEQ     loc_170
.text:00000158 01 00 50 E3      CMP     R0, #1
.text:0000015C 4B 0F 8F 02      ADREQ   R0, aOne       ; "one\n"
.text:00000160 02 00 00 0A      BEQ     loc_170
.text:00000164 02 00 50 E3      CMP     R0, #2
.text:00000168 4A 0F 8F 12      ADRNE   R0, aSomethingUnkno ; "something unknown\n"
.text:0000016C 4E 0F 8F 02      ADREQ   R0, aTwo       ; "two\n"
.text:00000170
.text:00000170          loc_170          ; CODE XREF: f1+8
.text:00000170          ; f1+14
.text:00000170 78 18 00 EA      B       __2printf
```

Again, by investigating this code, we cannot say, was it `switch()` in the original source code, or pack of `if()` statements.

Anyway, we see here predicated instructions again (like `ADREQ` (*Equal*)) which will be triggered only in `R0 = 0` case, and the, address of the «zero\n» string will be loaded into the `R0`. The next instruction `BEQ` will redirect control flow to `loc_170`, if `R0 = 0`. By the way, astute reader may ask, will `BEQ` triggered right since `ADREQ` before it is already filled the `R0` register with another value. Yes, it will since `BEQ` checking flags set by `CMP` instruction, and `ADREQ` not modifying flags at all.

By the way, there is `-S` suffix for some instructions in ARM, indicating the instruction will set the flags according to the result, and without it—the flags will not be touched. For example `ADD` unlike `ADDS` will add two numbers, but flags will not be touched. Such instructions are convenient to use between `CMP` where flags are set and, e.g. conditional jumps, where flags are used.

Other instructions are already familiar to us. There is only one call to `printf()`, at the end, and we already examined this trick here (5.3.2). There are three paths to `printf()` at the end.

Also pay attention to what is going on if `a = 2` and if `a` is not in range of constants it is comparing against. «`CMP R0, #2`» instruction is needed here to know, if `a = 2` or not. If it is not true, then `ADRNE` will load pointer to the string «something unknown\n» into `R0` since `a` was already checked before to be equal to 0 or 1, so we can be assured the `a` variable is not equal to these numbers at this point. And if `R0 = 2`, a pointer to string «two\n» will be loaded by `ADREQ` into `R0`.

11.1.3 ARM: Optimizing Keil + thumb mode

```
.text:000000D4          f1
.text:000000D4 10 B5          PUSH    {R4,LR}
.text:000000D6 00 28          CMP     R0, #0
.text:000000D8 05 D0          BEQ     zero_case
.text:000000DA 01 28          CMP     R0, #1
```

¹<http://en.wikipedia.org/wiki/Setjmp.h>

```

.text:000000DC 05 D0      BEQ      one_case
.text:000000DE 02 28      CMP      R0, #2
.text:000000E0 05 D0      BEQ      two_case
.text:000000E2 91 A0      ADR      R0, aSomethingUnkno ; "something unknown\n"
.text:000000E4 04 E0      B        default_case
.text:000000E6          ;
-----
.text:000000E6          zero_case          ; CODE XREF: f1+4
.text:000000E6 95 A0      ADR      R0, aZero          ; "zero\n"
.text:000000E8 02 E0      B        default_case
.text:000000EA          ;
-----
.text:000000EA          one_case          ; CODE XREF: f1+8
.text:000000EA 96 A0      ADR      R0, aOne          ; "one\n"
.text:000000EC 00 E0      B        default_case
.text:000000EE          ;
-----
.text:000000EE          two_case          ; CODE XREF: f1+C
.text:000000EE 97 A0      ADR      R0, aTwo          ; "two\n"
.text:000000F0          default_case      ; CODE XREF: f1+10
.text:000000F0          ; f1+14
.text:000000F0 06 F0 7E F8      BL      __2printf
.text:000000F4 10 BD      POP      {R4,PC}
.text:000000F4          ; End of function f1

```

As I already mentioned, there is no feature of *connecting* predicates to majority of instructions in thumb mode, so the thumb-code here is somewhat similar to the easily understandable x86 [CISC](#)-code

11.2 A lot of cases

If `switch()` statement contain a lot of case's, it is not very convenient for compiler to emit too large code with a lot JE/JNE instructions.

```

void f (int a)
{
    switch (a)
    {
        case 0: printf ("zero\n"); break;
        case 1: printf ("one\n"); break;
        case 2: printf ("two\n"); break;
        case 3: printf ("three\n"); break;
        case 4: printf ("four\n"); break;
        default: printf ("something unknown\n"); break;
    };
};

```

11.2.1 x86

We got (MSVC 2010):

Listing 11.3: MSVC 2010

```

tv64 = -4          ; size = 4
_a$ = 8           ; size = 4
_f      PROC
    push    ebp
    mov     ebp, esp
    push    ecx
    mov     eax, DWORD PTR _a$[ebp]
    mov     DWORD PTR tv64[ebp], eax
    cmp     DWORD PTR tv64[ebp], 4

```

```

    ja     SHORT $LN10f
    mov    ecx, DWORD PTR tv64[ebp]
    jmp    DWORD PTR $LN110f[ecx*4]
$LN60f:
    push   OFFSET $SG739 ; 'zero', 0aH, 00H
    call   _printf
    add    esp, 4
    jmp    SHORT $LN90f
$LN50f:
    push   OFFSET $SG741 ; 'one', 0aH, 00H
    call   _printf
    add    esp, 4
    jmp    SHORT $LN90f
$LN40f:
    push   OFFSET $SG743 ; 'two', 0aH, 00H
    call   _printf
    add    esp, 4
    jmp    SHORT $LN90f
$LN30f:
    push   OFFSET $SG745 ; 'three', 0aH, 00H
    call   _printf
    add    esp, 4
    jmp    SHORT $LN90f
$LN20f:
    push   OFFSET $SG747 ; 'four', 0aH, 00H
    call   _printf
    add    esp, 4
    jmp    SHORT $LN90f
$LN10f:
    push   OFFSET $SG749 ; 'something unknown', 0aH, 00H
    call   _printf
    add    esp, 4
$LN90f:
    mov    esp, ebp
    pop    ebp
    ret    0
    npad   2
$LN110f:
    DD     $LN60f ; 0
    DD     $LN50f ; 1
    DD     $LN40f ; 2
    DD     $LN30f ; 3
    DD     $LN20f ; 4
_f       ENDP

```

OK, what we see here is: there is a set of the `printf()` calls with various arguments. All they has not only addresses in process memory, but also internal symbolic labels assigned by compiler. Besides, all these labels are also places into `$LN110f` internal table.

At the function beginning, if `a` is greater than 4, control flow is passed to label `$LN10f`, where `printf()` with argument 'something unknown' is called.

And if a value is less or equals to 4, let's multiply it by 4 and add `$LN10f` table address. That is how address inside of table is constructed, pointing exactly to the element we need. For example, let's say `a` is equal to 2. $2 * 4 = 8$ (all table elements are addresses within 32-bit process that is why all elements contain 4 bytes). Address of the `$LN110f` table + 8 —it will be table element where `$LN40f` label is stored. `JMP` fetches `$LN40f` address from the table and jump to it.

This table called sometimes *jump table*.

Then corresponding `printf()` is called with argument 'two'. Literally, `jmp DWORD PTR $LN110f[ecx*4]` instruction means *jump to DWORD, which is stored at address `$LN110f + ecx * 4`*.

`npad (61)` is assembly language macro, aligning next label so that it will be stored at address aligned on a 4 byte (or 16 byte) border. This is very suitable for processor since it is able to fetch 32-bit values from memory through memory bus, cache memory, etc, in much effective way if it is aligned.

Let's see what GCC 4.4.1 generates:

Listing 11.4: GCC 4.4.1

```

public f
f      proc near                ; CODE XREF: main+10

var_18 = dword ptr -18h
arg_0  = dword ptr  8

        push    ebp
        mov     ebp, esp
        sub     esp, 18h        ; char *
        cmp     [ebp+arg_0], 4
        ja      short loc_8048444
        mov     eax, [ebp+arg_0]
        shl     eax, 2
        mov     eax, ds:off_804855C[eax]
        jmp     eax

loc_80483FE:                ; DATA XREF: .rodata:off_804855C
        mov     [esp+18h+var_18], offset aZero ; "zero"
        call    _puts
        jmp     short locret_8048450

loc_804840C:                ; DATA XREF: .rodata:08048560
        mov     [esp+18h+var_18], offset aOne ; "one"
        call    _puts
        jmp     short locret_8048450

loc_804841A:                ; DATA XREF: .rodata:08048564
        mov     [esp+18h+var_18], offset aTwo ; "two"
        call    _puts
        jmp     short locret_8048450

loc_8048428:                ; DATA XREF: .rodata:08048568
        mov     [esp+18h+var_18], offset aThree ; "three"
        call    _puts
        jmp     short locret_8048450

loc_8048436:                ; DATA XREF: .rodata:0804856C
        mov     [esp+18h+var_18], offset aFour ; "four"
        call    _puts
        jmp     short locret_8048450

loc_8048444:                ; CODE XREF: f+A
        mov     [esp+18h+var_18], offset aSomethingUnkno ; "something unknown"
        call    _puts

locret_8048450:                ; CODE XREF: f+26
                                ; f+34...
        leave
        retn
f      endp

off_804855C dd offset loc_80483FE ; DATA XREF: f+12
            dd offset loc_804840C
            dd offset loc_804841A
            dd offset loc_8048428
            dd offset loc_8048436

```

It is almost the same, except little nuance: argument `arg_0` is multiplied by 4 with by shifting it to left by 2 bits (it is almost the same as multiplication by 4) (17.3.1). Then label address is taken from `off_804855C` array, address calculated and stored into EAX, then “JMP EAX” do actual jump.

11.2.2 ARM: Optimizing Keil + ARM mode

```

00000174          f2
00000174 05 00 50 E3          CMP      R0, #5          ; switch 5 cases
00000178 00 F1 8F 30          ADDCC   PC, PC, R0,LSL#2 ; switch jump
0000017C 0E 00 00 EA          B        default_case    ; jumptable 00000178 default case
00000180          ; -----
00000180
00000180          loc_180          ; CODE XREF: f2+4
00000180 03 00 00 EA          B        zero_case    ; jumptable 00000178 case 0
00000184          ; -----
00000184
00000184          loc_184          ; CODE XREF: f2+4
00000184 04 00 00 EA          B        one_case     ; jumptable 00000178 case 1
00000188          ; -----
00000188
00000188          loc_188          ; CODE XREF: f2+4
00000188 05 00 00 EA          B        two_case     ; jumptable 00000178 case 2
0000018C          ; -----
0000018C
0000018C          loc_18C          ; CODE XREF: f2+4
0000018C 06 00 00 EA          B        three_case    ; jumptable 00000178 case 3
00000190          ; -----
00000190
00000190          loc_190          ; CODE XREF: f2+4
00000190 07 00 00 EA          B        four_case    ; jumptable 00000178 case 4
00000194          ; -----
00000194
00000194          zero_case          ; CODE XREF: f2+4
00000194          ; f2:loc_180
00000194 EC 00 8F E2          ADR      R0, aZero    ; jumptable 00000178 case 0
00000198 06 00 00 EA          B        loc_1B8
0000019C          ; -----
0000019C
0000019C          one_case          ; CODE XREF: f2+4
0000019C          ; f2:loc_184
0000019C EC 00 8F E2          ADR      R0, aOne     ; jumptable 00000178 case 1
000001A0 04 00 00 EA          B        loc_1B8
000001A4          ; -----
000001A4
000001A4          two_case          ; CODE XREF: f2+4
000001A4          ; f2:loc_188
000001A4 01 0C 8F E2          ADR      R0, aTwo     ; jumptable 00000178 case 2
000001A8 02 00 00 EA          B        loc_1B8
000001AC          ; -----
000001AC
000001AC          three_case         ; CODE XREF: f2+4
000001AC          ; f2:loc_18C
000001AC 01 0C 8F E2          ADR      R0, aThree    ; jumptable 00000178 case 3
000001B0 00 00 00 EA          B        loc_1B8
000001B4          ; -----
000001B4
000001B4          four_case          ; CODE XREF: f2+4
000001B4          ; f2:loc_190
000001B4 01 0C 8F E2          ADR      R0, aFour     ; jumptable 00000178 case 4
000001B8
000001B8          loc_1B8          ; CODE XREF: f2+24
000001B8          ; f2+2C
000001B8 66 18 00 EA          B        __2printf
000001BC          ; -----
000001BC

```

```

000001BC          default_case          ; CODE XREF: f2+4
000001BC          ; f2+8
000001BC D4 00 8F E2          ADR      R0, aSomethingUnkno ; jumtable 00000178 default case
000001C0 FC FF FF EA          B        loc_1B8
000001C0          ; End of function f2

```

This code makes use of the ARM feature in which all instructions in the ARM mode has size of 4 bytes.

Let's keep in mind the maximum value for a is 4 and any greater value must cause «something unknown\n» string printing.

The very first “CMP R0, #5” instruction compares a input value with 5.

The next “ADDCC PC, PC, R0, LSL#2”² instruction will execute only if $R0 < 5$ (CC=Carry clear / Less than). Consequently, if ADDCC will not trigger (it is a $R0 \geq 5$ case), a jump to *default_caselabel* will be occurred.

But if $R0 < 5$ and ADDCC will trigger, following events will happen:

Value in the R0 is multiplied by 4. In fact, LSL#2 at the instruction's ending means “shift left by 2 bits”. But as we will see later (17.3.1) in “Shifts” section, shift left by 2 bits is just equivalently to multiplying by 4.

Then, $R0 * 4$ value we got, is added to current value in the PC, thus jumping to one of B (Branch) instructions located below.

At the moment of ADDCC execution, value in the PC is 8 bytes ahead (0x180) than address at which ADDCC instruction is located (0x178), or, in other words, 2 instructions ahead.

This is how ARM processor pipeline works: when ADDCC instruction is executed, the processor at the moment is beginning to process instruction after the next one, so that is why PC pointing there.

If $a = 0$, then nothing will be added to the value in the PC, and actual value in the PC is to be written into the PC (which is 8 bytes ahead) and jump to the label *loc_180* will happen, this is 8 bytes ahead of the point where ADDCC instruction is.

In case of $a = 1$, then $PC + 8 + a * 4 = PC + 8 + 1 * 4 = PC + 16 = 0x184$ will be written to the PC, this is the address of the *loc_184* label.

With every 1 added to a , resulting PC increasing by 4. 4 is also instruction length in ARM mode and also, length of each B instruction length, there are 5 of them in row.

Each of these five B instructions passing control further, where something is going on, what was programmed in *switch()*. Pointer loading to corresponding string occurring there, etc.

11.2.3 ARM: Optimizing Keil + thumb mode

```

000000F6          EXPORT f2
000000F6          f2
000000F6 10 B5          PUSH    {R4,LR}
000000F8 03 00          MOV     R3, R0
000000FA 06 F0 69 F8    BL      __ARM_common_switch8_thumb ; switch 6 cases
000000FA          ;
-----
000000FE 05          DCB     5
000000FF 04 06 08 0A 0C 10 DCB     4, 6, 8, 0xA, 0xC, 0x10 ; jump table for switch
statement
00000105 00          ALIGN   2
00000106
00000106          zero_case          ; CODE XREF: f2+4
00000106 8D A0          ADR      R0, aZero ; jumtable 000000FA case 0
00000108 06 E0          B        loc_118
0000010A          ;
-----
0000010A
0000010A          one_case          ; CODE XREF: f2+4
0000010A 8E A0          ADR      R0, aOne ; jumtable 000000FA case 1
0000010C 04 E0          B        loc_118
0000010E          ;
-----
0000010E
0000010E          two_case          ; CODE XREF: f2+4
0000010E 8F A0          ADR      R0, aTwo ; jumtable 000000FA case 2
00000110 02 E0          B        loc_118

```

²ADD—addition

```

00000112                ;
-----
00000112
00000112                three_case                ; CODE XREF: f2+4
00000112 90 A0                ADR    R0, aThree      ; jumtable 000000FA case 3
00000114 00 E0                B      loc_118
00000116                ;
-----
00000116
00000116                four_case                ; CODE XREF: f2+4
00000116 91 A0                ADR    R0, aFour      ; jumtable 000000FA case 4
00000118
00000118                loc_118                ; CODE XREF: f2+12
00000118                ; f2+16
00000118 06 F0 6A F8          BL     __2printf
0000011C 10 BD                POP    {R4,PC}
0000011E                ;
-----
0000011E
0000011E                default_case                ; CODE XREF: f2+4
0000011E 82 A0                ADR    R0, aSomethingUnkno ; jumtable 000000FA default
case
00000120 FA E7                B      loc_118

000061D0                EXPORT __ARM_common_switch8_thumb
000061D0                __ARM_common_switch8_thumb    ; CODE XREF: example6_f2+4
000061D0 78 47                BX     PC
000061D0                ;
-----
000061D2 00 00                ALIGN 4
000061D2                ; End of function __ARM_common_switch8_thumb
000061D2
000061D4                CODE32
000061D4
000061D4                ; ===== S U B R O U T I N E
=====
000061D4
000061D4
000061D4                __32__ARM_common_switch8_thumb    ; CODE XREF:
__ARM_common_switch8_thumb
000061D4 01 C0 5E E5          LDRB    R12, [LR,#-1]
000061D8 0C 00 53 E1          CMP     R3, R12
000061DC 0C 30 DE 27          LDRCSB  R3, [LR,R12]
000061E0 03 30 DE 37          LDRCCB  R3, [LR,R3]
000061E4 83 C0 8E E0          ADD     R12, LR, R3,LSL#1
000061E8 1C FF 2F E1          BX     R12
000061E8                ; End of function __32__ARM_common_switch8_thumb

```

One cannot be sure all instructions in thumb and thumb-2 modes will have same size. It is even can be said that in these modes instructions has variable length, just like in x86.

So there is a special table added, containing information about how much cases are there, not including default-case, and offset, for each, each encoding a label, to which control must be passed in corresponding case.

A special function here present in order to deal with the table and pass control, named `__ARM_common_switch8_thumb`. It is beginning with ‘BX PC’ instruction, which function is to switch processor to ARM-mode. Then you may see the function for table processing. It is too complex for describing it here now, so I will omit elaborations.

But it is interesting to note the function uses `LR` register as a pointer to the table. Indeed, after this function calling, `LR` will contain address after

‘BL `__ARM_common_switch8_thumb`’ instruction, and the table is beginning right there.

It is also worth noting the code is generated as a separate function in order to reuse it, in similar places, in similar cases, for *switch()* processing, so compiler will not generate same code at each point.

IDA successfully perceived it as a service function and table, automatically, and added commentaries to labels like `jumptable 000000FA case 0`.

Chapter 12

Loops

12.1 x86

There is a special LOOP instruction in x86 instruction set, it is checking value in the ECX register and if it is not 0, do ECX [decrement](#) and pass control flow to the label mentioned in the LOOP operand. Probably, this instruction is not very convenient, so, I did not ever see any modern compiler emit it automatically. So, if you see the instruction somewhere in code, it is most likely this is manually written piece of assembly code.

By the way, as home exercise, you could try to explain, why this instruction is not very convenient.

In C/C++ loops are constructed using `for()`, `while()`, `do/while()` statements.

Let's start with `for()`.

This statement defines loop initialization (set loop counter to initial value), loop condition (is counter is bigger than a limit?), what is done at each iteration ([increment/decrement](#)) and of course loop body.

```
for (initialization; condition; at each iteration)
{
    loop_body;
}
```

So, generated code will be consisted of four parts too.

Let's start with simple example:

```
#include <stdio.h>

void f(int i)
{
    printf ("f(%d)\n", i);
};

int main()
{
    int i;

    for (i=2; i<10; i++)
        f(i);

    return 0;
};
```

Result (MSVC 2010):

Listing 12.1: MSVC 2010

```
_i$ = -4
_main PROC
    push    ebp
    mov     ebp, esp
    push    ecx
    mov     DWORD PTR _i$[ebp], 2    ; loop initialization
    jmp     SHORT $LN3@main
```

```

$LN2@main:
    mov     eax, DWORD PTR _i$[ebp] ; here is what we do after each iteration:
    add     eax, 1                   ; add 1 to i value
    mov     DWORD PTR _i$[ebp], eax
$LN3@main:
    cmp     DWORD PTR _i$[ebp], 10  ; this condition is checked *before* each iteration
    jge     SHORT $LN1@main         ; if i is biggest or equals to 10, let's finish loop
    mov     ecx, DWORD PTR _i$[ebp] ; loop body: call f(i)
    push    ecx
    call    _f
    add     esp, 4
    jmp     SHORT $LN2@main         ; jump to loop begin
$LN1@main:
                                ; loop end
    xor     eax, eax
    mov     esp, ebp
    pop     ebp
    ret     0
_main     ENDP

```

Nothing very special, as we see.

GCC 4.4.1 emits almost the same code, with one subtle difference:

Listing 12.2: GCC 4.4.1

```

main          proc near          ; DATA XREF: _start+17

var_20        = dword ptr -20h
var_4         = dword ptr -4

                push    ebp
                mov     ebp, esp
                and     esp, 0FFFFFFF0h
                sub     esp, 20h
                mov     [esp+20h+var_4], 2 ; i initializing
                jmp     short loc_8048476

loc_8048465:
                mov     eax, [esp+20h+var_4]
                mov     [esp+20h+var_20], eax
                call    f
                add     [esp+20h+var_4], 1 ; i increment

loc_8048476:
                cmp     [esp+20h+var_4], 9
                jle     short loc_8048465 ; if i<=9, continue loop
                mov     eax, 0
                leave
                retn
main          endp

```

Now let's see what we will get if optimization is turned on (/Ox):

Listing 12.3: Optimizing MSVC

```

_main        PROC
    push     esi
    mov     esi, 2
$LL3@main:
    push     esi
    call    _f
    inc     esi
    add     esp, 4
    cmp     esi, 10 ; 0000000aH
    jl      SHORT $LL3@main

```

```

    xor    eax, eax
    pop    esi
    ret    0
_main    ENDP

```

What is going on here is: space for the *i* variable is not allocated in local stack anymore, but even individual register: the ESI. This is possible in such small functions where not so many local variables are present.

One very important property is the `f()` function must not change the value in the ESI. Our compiler is sure here. And if compiler decided to use the ESI register in `f()` too, its value would be saved then at the `f()` function's prologue and restored at the `f()` function's epilogue. Almost like in our listing: please note `PUSH ESI/POP ESI` at the function begin and end.

Let's try GCC 4.4.1 with maximal optimization turned on (`-O3` option):

Listing 12.4: Optimizing GCC 4.4.1

```

main          proc near
var_10        = dword ptr -10h

    push     ebp
    mov     ebp, esp
    and     esp, 0FFFFFFF0h
    sub     esp, 10h
    mov     [esp+10h+var_10], 2
    call    f
    mov     [esp+10h+var_10], 3
    call    f
    mov     [esp+10h+var_10], 4
    call    f
    mov     [esp+10h+var_10], 5
    call    f
    mov     [esp+10h+var_10], 6
    call    f
    mov     [esp+10h+var_10], 7
    call    f
    mov     [esp+10h+var_10], 8
    call    f
    mov     [esp+10h+var_10], 9
    call    f
    xor     eax, eax
    leave
    retn
main          endp

```

Huh, GCC just unwind our loop.

[Loop unwinding](#) has advantage in these cases when there is not so much iterations and we could economy some execution speed by removing all loop supporting instructions. On the other side, resulting code is obviously larger.

OK, let's increase maximal value of the *i* variable to 100 and try again. GCC resulting:

Listing 12.5: GCC

```

main          public main
              proc near
var_20        = dword ptr -20h

    push     ebp
    mov     ebp, esp
    and     esp, 0FFFFFFF0h
    push     ebx
    mov     ebx, 2      ; i=2
    sub     esp, 1Ch
    nop     ; aligning label loc_80484D0 (loop body begin) by 16-byte border

loc_80484D0:

```

```

mov     [esp+20h+var_20], ebx ; pass i as first argument to f()
add     ebx, 1      ; i++
call    f
cmp     ebx, 64h    ; i==100?
jnz     short loc_80484D0 ; if not, continue
add     esp, 1Ch
xor     eax, eax    ; return 0
pop     ebx
mov     esp, ebp
pop     ebp
retn
main     endp

```

It is quite similar to what MSVC 2010 with optimization (/Ox) produce. With the exception the EBX register will be fixed to the `i` variable. GCC is sure this register will not be modified inside of the `f()` function, and if it will, it will be saved at the function prologue and restored at epilogue, just like here in the `main()` function.

12.1.1 OllyDbg

Let's compile our example in MSVC 2010 with /Ox and /Ob0 options and load it into OllyDbg.

It seems, OllyDbg is able to detect simple loops and show them in square brackets, for convenience: fig.12.1.

By tracing (F8 (step over)) we see how ESI [incrementing](#). Here, for instance, ESI =i=6: fig.12.2.

9 is a last loop value. That's why JL will not trigger after [increment](#), and function finishing: fig.12.3.

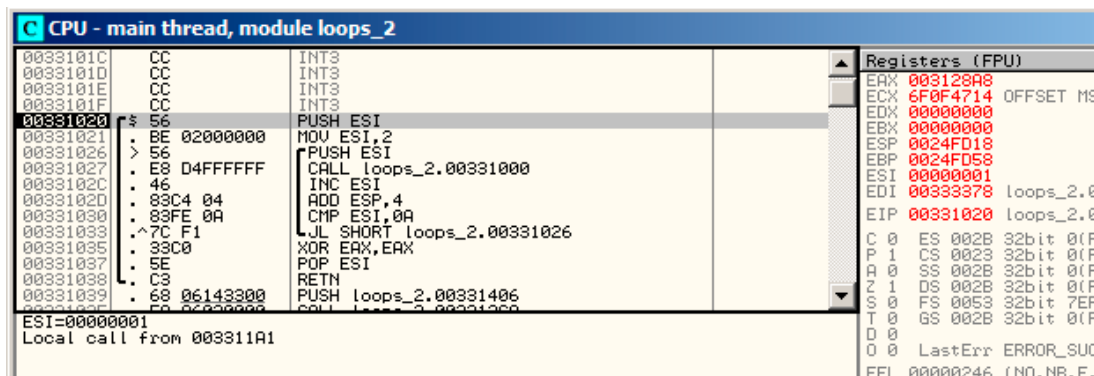


Figure 12.1: OllyDbg: main() begin

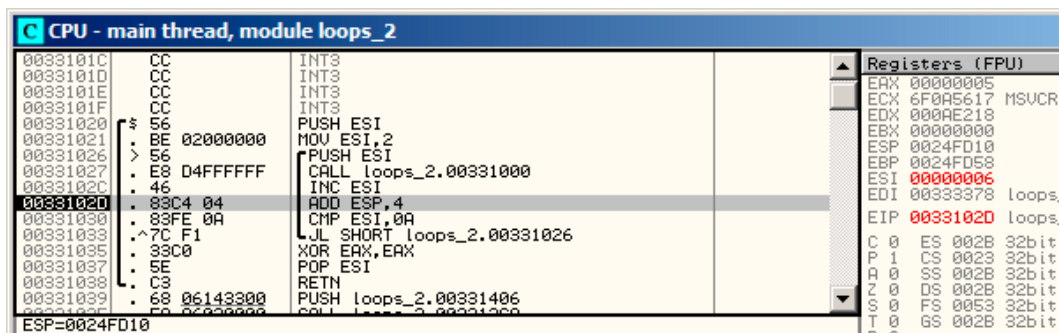


Figure 12.2: OllyDbg: loop body just executed with i=6

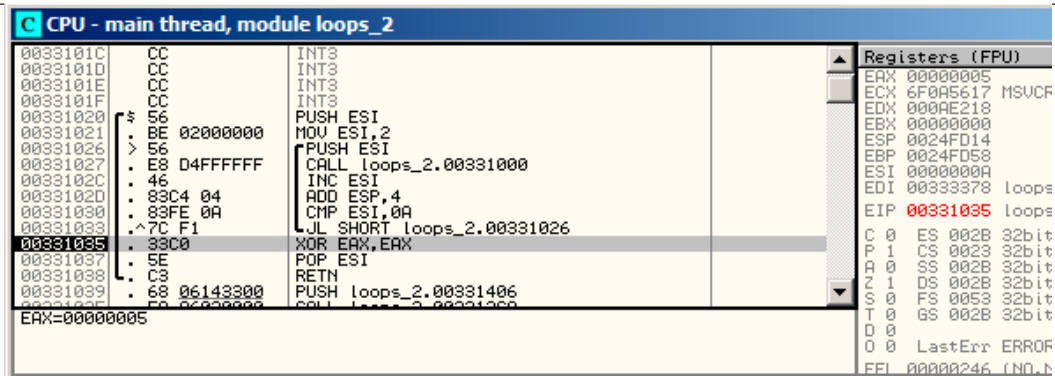


Figure 12.3: OllyDbg: ESI =10, loop end

12.1.2 tracer

As we might see, it is not very convenient to trace in debugger manually. That's one of the reasons I write [tracer](#) for myself.

I open compiled example in [IDA](#), I find the address of the instruction `PUSH ESI` (passing sole argument into `f()`) and this is `0x401026` for me and I run [tracer](#):

```
tracer.exe -l:loops_2.exe bpx=loops_2.exe!0x00401026
```

BPX just sets breakpoint at address and then will print registers state.

In the `tracer.log` I see after running:

```
PID=12884|New process loops_2.exe
(0) loops_2.exe!0x401026
EAX=0x00a328c8 EBX=0x00000000 ECX=0x6f0f4714 EDX=0x00000000
ESI=0x00000002 EDI=0x00333378 EBP=0x0024fbfc ESP=0x0024fbb8
EIP=0x00331026
FLAGS=PF ZF IF
(0) loops_2.exe!0x401026
EAX=0x00000005 EBX=0x00000000 ECX=0x6f0a5617 EDX=0x000ee188
ESI=0x00000003 EDI=0x00333378 EBP=0x0024fbfc ESP=0x0024fbb8
EIP=0x00331026
FLAGS=CF PF AF SF IF
(0) loops_2.exe!0x401026
EAX=0x00000005 EBX=0x00000000 ECX=0x6f0a5617 EDX=0x000ee188
ESI=0x00000004 EDI=0x00333378 EBP=0x0024fbfc ESP=0x0024fbb8
EIP=0x00331026
FLAGS=CF PF AF SF IF
(0) loops_2.exe!0x401026
EAX=0x00000005 EBX=0x00000000 ECX=0x6f0a5617 EDX=0x000ee188
ESI=0x00000005 EDI=0x00333378 EBP=0x0024fbfc ESP=0x0024fbb8
EIP=0x00331026
FLAGS=CF AF SF IF
(0) loops_2.exe!0x401026
EAX=0x00000005 EBX=0x00000000 ECX=0x6f0a5617 EDX=0x000ee188
ESI=0x00000006 EDI=0x00333378 EBP=0x0024fbfc ESP=0x0024fbb8
EIP=0x00331026
FLAGS=CF PF AF SF IF
(0) loops_2.exe!0x401026
EAX=0x00000005 EBX=0x00000000 ECX=0x6f0a5617 EDX=0x000ee188
ESI=0x00000007 EDI=0x00333378 EBP=0x0024fbfc ESP=0x0024fbb8
EIP=0x00331026
FLAGS=CF AF SF IF
(0) loops_2.exe!0x401026
EAX=0x00000005 EBX=0x00000000 ECX=0x6f0a5617 EDX=0x000ee188
ESI=0x00000008 EDI=0x00333378 EBP=0x0024fbfc ESP=0x0024fbb8
EIP=0x00331026
FLAGS=CF AF SF IF
```

```
(0) loops_2.exe!0x401026
EAX=0x00000005 EBX=0x00000000 ECX=0x6f0a5617 EDX=0x000ee188
ESI=0x00000009 EDI=0x00333378 EBP=0x0024fbfc ESP=0x0024fbb8
EIP=0x00331026
FLAGS=CF PF AF SF IF
PID=12884|Process loops_2.exe exited. ExitCode=0 (0x0)
```

We see how value of ESI register is changed from 2 to 9.

Even more than that, [tracer](#) can collect register values on all addresses within function. This is called *trace* there. Each instruction is being traced, all interesting register values are noticed and collected. .idc-script for [IDA](#) is then generated. So, in the [IDA](#) I've learned that `main()` function address is `0x00401020` and I run:

```
tracer.exe -l:loops_2.exe bpf=loops_2.exe!0x00401020,trace:cc
```

BPF mean set breakpoint on function.

As a result, I have got `loops_2.exe.idc` and `loops_2.exe_clear.idc` scripts. I'm loading `loops_2.exe.idc` into [IDA](#) and I see: [fig.12.4](#)

We see that ESI can be from 2 to 9 at the begin of loop body, but from 3 to 0xA (10) after increment. We can also see that `main()` is finishing with 0 in EAX.

[tracer](#) also generates `loops_2.exe.txt`, containing information about how many times each instruction was executed and register values:

Listing 12.6: `loops_2.exe.txt`

```
0x401020 (.text+0x20), e=      1 [PUSH ESI] ESI=1
0x401021 (.text+0x21), e=      1 [MOV ESI, 2]
0x401026 (.text+0x26), e=      8 [PUSH ESI] ESI=2..9
0x401027 (.text+0x27), e=      8 [CALL 8D1000h] tracing nested maximum level (1) reached,
    skipping this CALL 8D1000h=0x8d1000
0x40102c (.text+0x2c), e=      8 [INC ESI] ESI=2..9
0x40102d (.text+0x2d), e=      8 [ADD ESP, 4] ESP=0x38fcbc
0x401030 (.text+0x30), e=      8 [CMP ESI, 0Ah] ESI=3..0xa
0x401033 (.text+0x33), e=      8 [JL 8D1026h] SF=false,true OF=false
0x401035 (.text+0x35), e=      1 [XOR EAX, EAX]
0x401037 (.text+0x37), e=      1 [POP ESI]
0x401038 (.text+0x38), e=      1 [RETN] EAX=0
```

`grep` can be used here.

```
.text:00401020
.text:00401020 ; ===== S U B R O U T I N E =====
.text:00401020
.text:00401020
.text:00401020 ; int __cdecl main(int argc, const char **argv, const char **envp)
.text:00401020 _main      proc near      ; CODE XREF: __tmainCRTStartup+11D↓p
.text:00401020
.text:00401020 argc       = dword ptr  4
.text:00401020 argv      = dword ptr  8
.text:00401020 envp      = dword ptr  0Ch
.text:00401020
.text:00401020      push    esi      ; ESI=1
.text:00401021      mov     esi, 2
.text:00401026
.text:00401026 loc_401026:      ; CODE XREF: _main+13↓j
.text:00401026      push    esi      ; ESI=2..9
.text:00401027      call    sub_401000 ; tracing nested maximum level (1) reached,
.text:0040102c      inc     esi      ; ESI=2..9
.text:0040102d      add     esp, 4      ; ESP=0x38fcbc
.text:00401030      cmp     esi, 0Ah   ; ESI=3..0xa
.text:00401033      jl     short loc_401026 ; SF=false,true OF=false
.text:00401035      xor     eax, eax
.text:00401037      pop     esi
.text:00401038      retn     ; EAX=0
.text:00401038 _main      endp
```

Figure 12.4: [IDA](#) with .idc-script loaded

12.2 ARM

12.2.1 Non-optimizing Keil + ARM mode

```

main
    STMFD    SP!, {R4,LR}
    MOV      R4, #2
    B        loc_368
; -----

loc_35C
    MOV      R0, R4          ; CODE XREF: main+1C
    BL       f
    ADD      R4, R4, #1

loc_368
    CMP      R4, #0xA        ; CODE XREF: main+8
    BLT      loc_35C
    MOV      R0, #0
    LDMFD    SP!, {R4,PC}

```

Iteration counter *i* is to be stored in the R4 register.

‘MOV R4, #2’ instruction just initializing *i*.

‘MOV R0, R4’ and ‘BL f’ instructions are compose loop body, the first instruction preparing argument for *f* () function and the second is calling it.

‘ADD R4, R4, #1’ instruction is just adding 1 to the *i* variable during each iteration.

‘CMP R4, #0xA’ comparing *i* with 0xA (10). Next instruction BLT (*Branch Less Than*) will jump if *i* is less than 10.

Otherwise, 0 will be written into R0 (since our function returns 0) and function execution ended.

12.2.2 Optimizing Keil + thumb mode

```

_main
    PUSH     {R4,LR}
    MOVS     R4, #2

loc_132
    MOVS     R0, R4          ; CODE XREF: _main+E
    BL       example7_f
    ADDS     R4, R4, #1
    CMP      R4, #0xA
    BLT      loc_132
    MOVS     R0, #0
    POP      {R4,PC}

```

Practically, the same.

12.2.3 Optimizing Xcode (LLVM) + thumb-2 mode

```

_main
    PUSH     {R4,R7,LR}
    MOVW     R4, #0x1124 ; "%d\n"
    MOVS     R1, #2
    MOVT.W   R4, #0
    ADD      R7, SP, #4
    ADD      R4, PC
    MOV      R0, R4
    BLX      _printf
    MOV      R0, R4
    MOVS     R1, #3
    BLX      _printf

```

```

MOV      R0, R4
MOVS     R1, #4
BLX      _printf
MOV      R0, R4
MOVS     R1, #5
BLX      _printf
MOV      R0, R4
MOVS     R1, #6
BLX      _printf
MOV      R0, R4
MOVS     R1, #7
BLX      _printf
MOV      R0, R4
MOVS     R1, #8
BLX      _printf
MOV      R0, R4
MOVS     R1, #9
BLX      _printf
MOVS     R0, #0
POP      {R4,R7,PC}

```

In fact, this was in my `f()` function:

```

void f(int i)
{
    // do something here
    printf ("%d\n", i);
};

```

So, LLVM not just *unrolled* the loop, but also represented my very simple function `f()` as *inlined*, and inserted its body 8 times instead of loop. This is possible when function is so primitive (like mine) and when it is called not many times (like here).

12.3 One more thing

On the code generated we can see: after *i* initialization, loop body will not be executed, but *i* condition checked first, and only after loop body is to be executed. And that is correct. Because, if loop condition is not met at the beginning, loop body must not be executed. For example, this is possible in the following case:

```

for (i=0; i<total_entries_to_process; i++)
    loop_body;

```

If `total_entries_to_process` equals to 0, loop body must not be executed whatsoever. So that is why condition checked before loop body execution.

However, optimizing compiler may swap condition check and loop body, if it sure that the situation described here is not possible (like in case of our very simple example and Keil, Xcode (LLVM), MSVC in optimization mode).

Chapter 13

strlen()

Now let's talk about loops one more time. Often, `strlen()` function¹ is implemented using `while()` statement. Here is how it is done in MSVC standard libraries:

```
int strlen (const char * str)
{
    const char *eos = str;

    while( *eos++ );

    return( eos - str - 1 );
}
```

13.1 x86

Let's compile:

```
_eos$ = -4 ; size = 4
_str$ = 8 ; size = 4
_strlen PROC
    push    ebp
    mov     ebp, esp
    push    ecx
    mov     eax, DWORD PTR _str$[ebp] ; place pointer to string from str
    mov     DWORD PTR _eos$[ebp], eax ; place it to local varuable eos
$LN2@strlen_:
    mov     ecx, DWORD PTR _eos$[ebp] ; ECX=eos

    ; take 8-bit byte from address in ECX and place it as 32-bit value to EDX with sign extension

    movsx   edx, BYTE PTR [ecx]
    mov     eax, DWORD PTR _eos$[ebp] ; EAX=eos
    add     eax, 1 ; increment EAX
    mov     DWORD PTR _eos$[ebp], eax ; place EAX back to eos
    test    edx, edx ; EDX is zero?
    je      SHORT $LN1@strlen_ ; yes, then finish loop
    jmp     SHORT $LN2@strlen_ ; continue loop
$LN1@strlen_:

    ; here we calculate the difference between two pointers

    mov     eax, DWORD PTR _eos$[ebp]
    sub     eax, DWORD PTR _str$[ebp]
    sub     eax, 1 ; subtract 1 and return result
    mov     esp, ebp
```

¹counting characters in string in C language

```

    pop    ebp
    ret    0
_strlen_  ENDP

```

Two new instructions here: `MOVSX` (13.1) and `TEST`.

About first: `MOVSX` (13.1) is intended to take byte from a point in memory and store value in a 32-bit register. `MOVSX` (13.1) meaning *MOV with Sign-Extent*. Rest bits starting at 8th till 31th `MOVSX` (13.1) will set to 1 if source byte in memory has *minus* sign or to 0 if *plus*.

And here is why all this.

C/C++ standard defines *char* type as signed. If we have two values, one is *char* and another is *int*, (*int* is signed too), and if first value contain -2 (it is coded as `0xFE`) and we just copying this byte into *int* container, there will be `0x000000FE`, and this, from the point of signed *int* view is 254, but not -2 . In signed *int*, -2 is coded as `0xFFFFF0FE`. So if we need to transfer `0xFE` value from variable of *char* type to *int*, we need to identify its sign and extend it. That is what `MOVSX` (13.1) does.

See also in section “Signed number representations” (35).

I’m not sure if the compiler needs to store *char* variable in the `EDX`, it could take 8-bit register part (let’s say `DL`). Apparently, compiler’s [register allocator](#) works like that.

Then we see `TEST EDX, EDX`. About `TEST` instruction, read more in section about bit fields (17). But here, this instruction just checking value in the `EDX`, if it is equals to 0.

Let’s try GCC 4.4.1:

```

public strlen
proc near
strlen
    eos      = dword ptr -4
    arg_0    = dword ptr 8

    push    ebp
    mov     ebp, esp
    sub     esp, 10h
    mov     eax, [ebp+arg_0]
    mov     [ebp+eos], eax

loc_80483F0:
    mov     eax, [ebp+eos]
    movzx   eax, byte ptr [eax]
    test    al, al
    setnz   al
    add     [ebp+eos], 1
    test    al, al
    jnz     short loc_80483F0
    mov     edx, [ebp+eos]
    mov     eax, [ebp+arg_0]
    mov     ecx, edx
    sub     ecx, eax
    mov     eax, ecx
    sub     eax, 1
    leave
    retn

strlen     endp

```

The result almost the same as MSVC did, but here we see `MOVZX` instead of `MOVSX` (13.1). `MOVZX` means *MOV with Zero-Extent*. This instruction copies 8-bit or 16-bit value into 32-bit register and sets the rest bits to 0. In fact, this instruction is convenient only since it enable us to replace two instructions at once: `xor eax, eax / mov al, [...]`.

On the other hand, it is obvious to us the compiler could produce the code: `mov al, byte ptr [eax] / test al, al`—it is almost the same, however, the highest `EAX` register bits will contain random noise. But let’s think it is compiler’s drawback—it cannot produce more understandable code. Strictly speaking, compiler is not obliged to emit understandable (to humans) code at all.

Next new instruction for us is `SETNZ`. Here, if `AL` contain not zero, `test al, al` will set 0 to the `ZF` flag, but `SETNZ`, if `ZF==0` (`NZ` means *not zero*) will set 1 to the `AL`. Speaking in natural language, *if AL is not zero, let’s jump to loc_80483F0*. Compiler emitted slightly redundant code, but let’s not forget the optimization is turned off.

Now let’s compile all this in MSVC 2010, with optimization turned on (`/Ox`):

```

_str$ = 8 ; size = 4
_strlen PROC
    mov     ecx, DWORD PTR _str$[esp-4] ; ECX -> pointer to the string
    mov     eax, ecx ; move to EAX
$LL2@strlen_:
    mov     dl, BYTE PTR [eax] ; DL = *EAX
    inc     eax ; EAX++
    test    dl, dl ; DL==0?
    jne     SHORT $LL2@strlen_ ; no, continue loop
    sub     eax, ecx ; calculate pointers difference
    dec     eax ; decrement EAX
    ret     0
_strlen_ ENDP

```

Now it is all simpler. But it is needless to say the compiler could use registers such efficiently only in small functions with small number of local variables.

INC/DEC—are [increment/decrement](#) instruction, in other words: add 1 to variable or subtract.

Let's check GCC 4.4.1 with optimization turned on (-O3 key):

```

strlen      public strlen
strlen      proc near

arg_0       = dword ptr 8

            push    ebp
            mov     ebp, esp
            mov     ecx, [ebp+arg_0]
            mov     eax, ecx

loc_8048418:
            movzx   edx, byte ptr [eax]
            add     eax, 1
            test    dl, dl
            jnz     short loc_8048418
            not     ecx
            add     eax, ecx
            pop     ebp
            retn
strlen      endp

```

Here GCC is almost the same as MSVC, except of MOVZX presence.

However, MOVZX could be replaced here to `mov dl, byte ptr [eax]`.

Probably, it is simpler for GCC compiler's code generator to *remember* the whole register is allocated for *char* variable and it can be sure the highest bits will not contain any noise at any point.

After, we also see new instruction NOT. This instruction inverts all bits in operand. It can be said, it is synonym to the XOR ECX, 0fffffffh instruction. NOT and following ADD calculating pointer difference and subtracting 1. At the beginning ECX, where pointer to *str* is stored, inverted and 1 is subtracted from it.

See also: "Signed number representations" ([35](#)).

In other words, at the end of function, just after loop body, these operations are executed:

```

ecx=str;
eax=eos;
ecx=(-ecx)-1;
eax=eax+ecx
return eax

```

... and this is effectively equivalent to:

```

ecx=str;
eax=eos;
eax=eax-ecx;
eax=eax-1;
return eax

```

Why GCC decided it would be better? I cannot be sure. But I'm sure the both variants are effectively equivalent in efficiency sense.

13.2 ARM

13.2.1 Non-optimizing Xcode (LLVM) + ARM mode

Listing 13.1: Non-optimizing Xcode (LLVM) + ARM mode

```

_strlen

eos      = -8
str      = -4

        SUB     SP, SP, #8 ; allocate 8 bytes for local variables
        STR     R0, [SP,#8+str]
        LDR     R0, [SP,#8+str]
        STR     R0, [SP,#8+eos]

loc_2CB8                                ; CODE XREF: _strlen+28
        LDR     R0, [SP,#8+eos]
        ADD     R1, R0, #1
        STR     R1, [SP,#8+eos]
        LDRSB   R0, [R0]
        CMP     R0, #0
        BEQ     loc_2CD4
        B       loc_2CB8

; -----

loc_2CD4                                ; CODE XREF: _strlen+24
        LDR     R0, [SP,#8+eos]
        LDR     R1, [SP,#8+str]
        SUB     R0, R0, R1 ; R0=eos-str
        SUB     R0, R0, #1 ; R0=R0-1
        ADD     SP, SP, #8 ; deallocate 8 bytes for local variables
        BX      LR

```

Non-optimizing LLVM generates too much code, however, here we can see how function works with local variables in the stack. There are only two local variables in our function, *eos* and *str*.

In this listing, generated by [IDA](#), I renamed *var_8* and *var_4* into *eos* and *str* manually.

So, first instructions are just saves input value in *str* and *eos*.

Loop body is beginning at *loc_2CB8* label.

First three instruction in loop body (LDR, ADD, STR) loads *eos* value into R0, then value is [incremented](#) and it is saved back into *eos* local variable located in the stack.

The next “LDRSB R0, [R0]” (*Load Register Signed Byte*) instruction loading byte from memory at R0 address and sign-extends it to 32-bit. This is similar to MOVSB (13.1) instruction in x86. The compiler treating this byte as signed since *char* type in C standard is signed. I already wrote about it (13.1) in this section, but related to x86.

It should be noted, it is impossible in ARM to use 8-bit part or 16-bit part of 32-bit register separately of the whole register, as it is in x86. Apparently, it is because x86 has a huge history of compatibility with its ancestors like 16-bit 8086 and even 8-bit 8080, but ARM was developed from scratch as 32-bit RISC-processor. Consequently, in order to process separate bytes in ARM, one have to use 32-bit registers anyway.

So, LDRSB loads symbol from string into R0, one by one. Next CMP and BEQ instructions checks, if loaded symbol is 0. If not 0, control passing to loop body begin. And if 0, loop is finishing.

At the end of function, a difference between *eos* and *str* is calculated, 1 is also subtracting, and resulting value is returned via R0.

N.B. Registers was not saved in this function. That's because by ARM calling convention, R0-R3 registers are “scratch registers”, they are intended for arguments passing, its values may not be restored upon function exit since calling function will not use them anymore. Consequently, they may be used for anything we want. Other registers are not used here, so that is why we have nothing to save on the stack. Thus, control may be returned back to calling function by simple jump (BX), to address in the LR register.

13.2.2 Optimizing Xcode (LLVM) + thumb mode

Listing 13.2: Optimizing Xcode (LLVM) + thumb mode

```

_strlen
    MOV        R1, R0

loc_2DF6                ; CODE XREF: _strlen+8
    LDRB.W     R2, [R1],#1
    CMP        R2, #0
    BNE        loc_2DF6
    MVNS       R0, R0
    ADD        R0, R1
    BX         LR

```

As optimizing LLVM concludes, space on the stack for *eos* and *str* may not be allocated, and these variables may always be stored right in registers. Before loop body beginning, *str* will always be in R0, and *eos*—in R1.

“LDRB.W R2, [R1],#1” instruction loads byte from memory at the address R1 into R2, sign-extending it to 32-bit value, but not only that. #1 at the instruction’s end calling “Post-indexed addressing”, this means, 1 is to be added to the R1 after byte load. That’s convenient when accessing arrays.

There is no such addressing mode in x86, but it is present in some other processors, even on PDP-11. There is a legend the pre-increment, post-increment, pre-decrement and post-decrement modes in PDP-11, were “guilty” in appearance such C language (which developed on PDP-11) constructs as **ptr++*, *++ptr*, **ptr--*, *--ptr*. By the way, this is one of hard to memorize C feature. This is how it is:

C term	ARM term	C statement	how it works
Post-increment	post-indexed addressing	<i>*ptr++</i>	use <i>*ptr</i> value, then increment <i>ptr</i> pointer
Post-decrement	post-indexed addressing	<i>*ptr--</i>	use <i>*ptr</i> value, then decrement <i>ptr</i> pointer
Pre-increment	pre-indexed addressing	<i>++ptr</i>	increment <i>ptr</i> pointer, then use <i>*ptr</i> value
Pre-decrement	post-indexed addressing	<i>--ptr</i>	decrement <i>ptr</i> pointer, then use <i>*ptr</i> value

Dennis Ritchie (one of C language creators) mentioned that it is, probably, was invented by Ken Thompson (another C creator) because this processor feature was present in PDP-7 [28] [29]. Thus, C language compilers may use it, if it is present in target processor.

Then one may spot CMP and **BNE**² in loop body, these instructions continue operation until 0 will be met in string.

MVNS³ (inverting all bits, NOT in x86 analogue) instructions and ADD computes $eos - str - 1$. In fact, these two instructions computes $R0 = str + eos$, which is effectively equivalent to what was in source code, and why it is so, I already described here (13.1).

Apparently, LLVM, just like GCC, concludes this code will be shorter, or faster.

13.2.3 Optimizing Keil + ARM mode

Listing 13.3: Optimizing Keil + ARM mode

```

_strlen
    MOV        R1, R0

loc_2C8                ; CODE XREF: _strlen+14
    LDRB       R2, [R1],#1
    CMP        R2, #0
    SUBEQ      R0, R1, R0
    SUBEQ      R0, R0, #1
    BNE        loc_2C8
    BX         LR

```

²(PowerPC, ARM) Branch if Not Equal

³MoVe Not

Almost the same what we saw before, with the exception the $str - eos - 1$ expression may be computed not at the function's end, but right in loop body. `-EQ` suffix, as we may recall, means the instruction will be executed only if operands in executed before `CMP` were equal to each other. Thus, if 0 will be in the `R0` register, both `SUBEQ` instructions are to be executed and result is leaving in the `R0` register.

Chapter 14

Division by 9

Very simple function:

```
int f(int a)
{
    return a/9;
};
```

14.1 x86

...is compiled in a very predictable way:

Listing 14.1: MSVC

```
_a$ = 8                ; size = 4
_f    PROC
    push    ebp
    mov     ebp, esp
    mov     eax, DWORD PTR _a$[ebp]
    cdq                     ; sign extend EAX to EDX:EAX
    mov     ecx, 9
    idiv    ecx
    pop     ebp
    ret     0
_f    ENDP
```

IDIV divides 64-bit number stored in the EDX:EAX register pair by value in the ECX register. As a result, EAX will contain quotient¹, and EDX —remainder. Result is returning from the `f()` function in the EAX register, so, the value is not moved anymore after division operation, it is in right place already. Since IDIV requires value in the EDX:EAX register pair, CDQ instruction (before IDIV) extending value in the EAX to 64-bit value taking value sign into account, just as MOVSBX (13.1) does. If we turn optimization on (/Ox), we got:

Listing 14.2: Optimizing MSVC

```
_a$ = 8                ; size = 4
_f    PROC

    mov     ecx, DWORD PTR _a$[esp-4]
    mov     eax, 954437177    ; 38e38e39H
    imul    ecx
    sar     edx, 1
    mov     eax, edx
    shr     eax, 31          ; 0000001fH
    add     eax, edx
    ret     0
_f    ENDP
```

¹result of division

This is —division by multiplication. Multiplication operation works much faster. And it is possible to use the trick ² to produce a code which is effectively equivalent and faster.

This is also called “strength reduction” in compiler optimization.

GCC 4.4.1 even without optimization turned on, generates almost the same code as MSVC with optimization turned on:

Listing 14.3: Non-optimizing GCC 4.4.1

```

public f
f      proc near

arg_0  = dword ptr 8

        push    ebp
        mov     ebp, esp
        mov     ecx, [ebp+arg_0]
        mov     edx, 954437177 ; 38E38E39h
        mov     eax, ecx
        imul    edx
        sar     edx, 1
        mov     eax, ecx
        sar     eax, 1Fh
        mov     ecx, edx
        sub     ecx, eax
        mov     eax, ecx
        pop     ebp
        retn
f      endp

```

14.2 ARM

ARM processor, just like in any other “pure” RISC-processors, lacks division instruction. It lacks also a single instruction for multiplication by 32-bit constant. By taking advantage of the one clever trick (or *hack*), it is possible to do division using only three instructions: addition, subtraction and bit shifts (17).

Here is an example of 32-bit number division by 10 from [20, 3.3 Division by a Constant]. Quotient and remainder on output.

```

; takes argument in a1
; returns quotient in a1, remainder in a2
; cycles could be saved if only divide or remainder is required
SUB     a2, a1, #10           ; keep (x-10) for later
SUB     a1, a1, a1, lsr #2
ADD     a1, a1, a1, lsr #4
ADD     a1, a1, a1, lsr #8
ADD     a1, a1, a1, lsr #16
MOV     a1, a1, lsr #3
ADD     a3, a1, a1, asl #2
SUBS    a2, a2, a3, asl #1    ; calc (x-10) - (x/10)*10
ADDPL   a1, a1, #1           ; fix-up quotient
ADDMI   a2, a2, #10          ; fix-up remainder
MOV     pc, lr

```

14.2.1 Optimizing Xcode (LLVM) + ARM mode

__text:00002C58 39 1E 08 E3 E3 18 43 E3	MOV	R1, 0x38E38E39
__text:00002C60 10 F1 50 E7	SMMUL	R0, R0, R1
__text:00002C64 C0 10 A0 E1	MOV	R1, R0, ASR#1
__text:00002C68 A0 0F 81 E0	ADD	R0, R1, R0, LSR#31
__text:00002C6C 1E FF 2F E1	BX	LR

²Read more about division by multiplication in [35, 10-3]

This code is mostly the same to what was generated by optimizing MSVC and GCC. Apparently, LLVM use the same algorithm for constants generating.

Observant reader may ask, how MOV writes 32-bit value in register, while this is not possible in ARM mode. it is impossible indeed, but, as we see, there are 8 bytes per instruction instead of standard 4, in fact, there are two instructions. First instruction loading 0x8E39 value into low 16 bit of register and second instruction is in fact MOVN, it loading 0x383E into high 16-bit of register. IDA is aware of such sequences, and for the sake of compactness, reduced it to one single “pseudo-instruction”.

SMMUL (*Signed Most Significant Word Multiply*) instruction multiply numbers treating them as signed numbers, and leaving high 32-bit part of result in the R0 register, dropping low 32-bit part of result.

“MOV R1, R0, ASR#1” instruction is arithmetic shift right by one bit.

“ADD R0, R1, R0, LSR#31” is $R0 = R1 + R0 \gg 31$

As a matter of fact, there is no separate shifting instruction in ARM mode. Instead, an instructions like (MOV, ADD, SUB, RSB)³ may be supplied by option, is the second operand must be shifted, if yes, by what value and how. ASR meaning *Arithmetic Shift Right*, LSR—*Logican Shift Right*.

14.2.2 Optimizing Xcode (LLVM) + thumb-2 mode

MOV	R1, 0x38E38E39
SMMUL.W	R0, R0, R1
ASRS	R1, R0, #1
ADD.W	R0, R1, R0, LSR#31
BX	LR

There are separate instructions for shifting in thumb mode, and one of them is used here—ASRS (arithmetic shift right).

14.2.3 Non-optimizing Xcode (LLVM) and Keil

Non-optimizing LLVM does not generate code we saw before in this section, but inserts a call to library function `__divsi3` instead.

What about Keil: it inserts call to library function `__aeabi_idivmod` in all cases.

14.3 How it works

That’s how division can be replaced by multiplication and division by 2^n numbers:

$$result = \frac{input}{divisor} = \frac{input \cdot \frac{2^n}{divisor}}{2^n} = \frac{input \cdot M}{2^n}$$

Where M is *magic*-coefficient.

That’s how M can be computed:

$$M = \frac{2^n}{divisor}$$

So these code snippets are usually have this form:

$$result = \frac{input \cdot M}{2^n}$$

n can be arbitrary number, it may be 32 (then high part of multiplication result is taked from EDX or RDX register), or 31 (then high part of multiplication result is shifted right additionally).

n is choosen in order to minimize error.

When doing signed division, sign of multiplication result also added to the output result.

Take a look at the difference:

```
int f3_32_signed(int a)
{
    return a/3;
};

unsigned int f3_32_unsigned(unsigned int a)
{
    return a/3;
```

³These instructions are also called “data processing instructions”

};

In the unsigned version of function, *magic*-coefficient is 0xAAAAAAB and multiplication result is divided by 2^{33} .

In the signed version of function, *magic*-coefficient is 0x5555556 and multiplication result is divided by 2^{32} . Sign also taken from multiplication result: high 32 bits of result is shifted by 31 (leaving sign in least significant bit of EAX). 1 is added to the final result if sign is negative.

Listing 14.4: MSVC 2012 /Ox

```
_f3_32_unsigned PROC
    mov     eax, -1431655765                ; aaaaaaabH
    mul     DWORD PTR _a$[esp-4] ; unsigned multiply
    shr     edx, 1
    mov     eax, edx
    ret     0
_f3_32_unsigned ENDP

_f3_32_signed PROC
    mov     eax, 1431655766                ; 55555556H
    imul    DWORD PTR _a$[esp-4] ; signed multiply
    mov     eax, edx
    shr     eax, 31                        ; 0000001fH
    add     eax, edx ; add 1 if sign is negative
    ret     0
_f3_32_signed ENDP
```

Read more about it in [35, 10-3].

14.4 Getting divisor

14.4.1 Variant #1

Often, the code has a form of:

```
mov     eax, MAGICAL_CONSTANT
imul    input value
sar     edx, SHIFTING_COEFFICIENT ; signed division by 2^x using arithmetic shift right
mov     eax, edx
shr     eax, 31
add     eax, edx
```

Let's denote 32-bit *magic*-coefficient as M , shifting coefficient by C and divisor by D .
The divisor we need to get is:

$$D = \frac{2^{32+C}}{M}$$

For example:

Listing 14.5: Optimizing MSVC 2012

```
mov     eax, 2021161081                ; 78787879H
imul    DWORD PTR _a$[esp-4]
sar     edx, 3
mov     eax, edx
shr     eax, 31                        ; 0000001fH
add     eax, edx
```

This is:

$$D = \frac{2^{32+3}}{2021161081}$$

Numbers are larger than 32-bit ones, so I use Wolfram Mathematica for convenience:

Listing 14.6: Wolfram Mathematica

```
In[1]:=N[2^(32+3)/2021161081]
Out[1]:=17.
```

So the divisor from the code I used for example is 17.

As of x64 division, things are the same, but 2^{64} should be used instead of 2^{32} :

```
uint64_t f1234(uint64_t a)
{
    return a/1234;
};
```

Listing 14.7: MSVC 2012 x64 /Ox

```
f1234 PROC
    mov     rax, 7653754429286296943          ; 6a37991a23aead6fH
    mul     rcx
    shr     rdx, 9
    mov     rax, rdx
    ret     0
f1234 ENDP
```

Listing 14.8: Wolfram Mathematica

```
In[1]:=N[2^(64+9)/16^^6a37991a23aead6f]
Out[1]:=1234.
```

14.4.2 Variant #2

A variant with omitted arithmetic shift is also exist:

```
mov     eax, 55555555h ; 1431655766
imul    ecx
mov     eax, edx
shr     eax, 1Fh
```

The method of getting divisor is simplified:

$$D = \frac{2^{32}}{M}$$

As of my example, this is:

$$D = \frac{2^{32}}{1431655766}$$

And again I use Wolfram Mathematica:

Listing 14.9: Wolfram Mathematica

```
In[1]:=N[2^32/16^^55555556]
Out[1]:=3.
```

The divisor is 3.

Chapter 15

Working with FPU

FPU¹—is a device within main CPU specially designed to deal with floating point numbers.

It was called coprocessor in past. It stay aside of the main CPU and looks like programmable calculator in some way and.

It is worth to study stack machines² before FPU studying, or learn Forth language basics³.

It is interesting to know that in past (before 80486 CPU) coprocessor was a separate chip and it was not always settled on motherboard. It was possible to buy it separately and install ⁴.

Starting at 80486 DX CPU, FPU is always present in it.

FWAIT instruction may remind us that fact—it switches CPU to waiting state, so it can wait until FPU finishes its work. Another rudiment is the fact that FPU-instruction opcodes are started with so called “escape”-opcodes (D8 . . DF), i.e., opcodes passed into FPU.

FPU has a stack capable to hold 8 80-bit registers, each register can hold a number in IEEE 754⁵ format.

C/C++ language offer at least two floating number types, *float* (*single-precision*⁶, 32 bits) ⁷ and *double* (*double-precision*⁸, 64 bits).

GCC also supports *long double* type (*extended precision*⁹, 80 bit) but MSVC is not.

float type requires the same number of bits as *int* type in 32-bit environment, but number representation is completely different.

Number consisting of sign, significand (also called *fraction*) and exponent.

Function having *float* or *double* among argument list is getting the value via stack. If function returns *float* or *double* value, it leaves the value in the ST(0) register—at top of FPU stack.

15.1 Simple example

Let’s consider simple example:

```
double f (double a, double b)
{
    return a/3.14 + b*4.1;
```

¹Floating-point unit

²http://en.wikipedia.org/wiki/Stack_machine

³[http://en.wikipedia.org/wiki/Forth_\(programming_language\)](http://en.wikipedia.org/wiki/Forth_(programming_language))

⁴For example, John Carmack used fixed-point arithmetic values in his Doom video game, stored in 32-bit GPR registers (16 bit for intergral part and another 16 bit for fractional part), so the Doom could work on 32-bit computer without FPU, i.e., 80386 and 80486 SX

⁵http://en.wikipedia.org/wiki/IEEE_754-2008

⁶http://en.wikipedia.org/wiki/Single-precision_floating-point_format

⁷single precision float numbers format is also addressed in the *Working with the float type as with a structure* (18.6.2) section

⁸http://en.wikipedia.org/wiki/Double-precision_floating-point_format

⁹http://en.wikipedia.org/wiki/Extended_precision

};

15.1.1 x86

Compile it in MSVC 2010:

Listing 15.1: MSVC 2010

```

CONST    SEGMENT
__real@4010666666666666 DQ 0401066666666666r    ; 4.1
CONST    ENDS
CONST    SEGMENT
__real@40091eb851eb851f DQ 040091eb851eb851fr    ; 3.14
CONST    ENDS
_TEXT    SEGMENT
_a$ = 8          ; size = 8
_b$ = 16         ; size = 8
_f PROC
    push    ebp
    mov     ebp, esp
    fld     QWORD PTR _a$[ebp]

; current stack state: ST(0) = _a

    fdiv    QWORD PTR __real@40091eb851eb851f

; current stack state: ST(0) = result of _a divided by 3.13

    fld     QWORD PTR _b$[ebp]

; current stack state: ST(0) = _b; ST(1) = result of _a divided by 3.13

    fmul    QWORD PTR __real@4010666666666666

; current stack state: ST(0) = result of _b * 4.1; ST(1) = result of _a divided by 3.13

    faddp   ST(1), ST(0)

; current stack state: ST(0) = result of addition

    pop     ebp
    ret     0
_f ENDP

```

FLD takes 8 bytes from stack and load the number into the ST(0) register, automatically converting it into internal 80-bit format *extended precision*).

FDIV divides value in the ST(0) register by number storing at address `__real@40091eb851eb851f` —3.14 value is coded there. Assembler syntax missing floating point numbers, so, what we see here is hexadecimal representation of 3.14 number in 64-bit IEEE 754 encoded.

After FDIV execution, ST(0) will hold quotient¹⁰.

By the way, there is also FDIVP instruction, which divides ST(1) by ST(0), popping both these values from stack and then pushing result. If you know Forth language¹¹, you will quickly understand that this is stack machine¹².

Next FLD instruction pushing *b* value into stack.

After that, quotient is placed to the ST(1) register, and the ST(0) will hold *b* value.

Next FMUL instruction do multiplication: *b* from the ST(0) register by value at `__real@4010666666666666` (4.1 number is there) and leaves result in the ST(0) register.

Very last FADDP instruction adds two values at top of stack, storing result to the ST(1) register and then popping value at ST(1), hereby leaving result at top of stack in the ST(0).

¹⁰result of division

¹¹[http://en.wikipedia.org/wiki/Forth_\(programming_language\)](http://en.wikipedia.org/wiki/Forth_(programming_language))

¹²http://en.wikipedia.org/wiki/Stack_machine

The function must return result in the ST(0) register, so, after FADDP there are no any other instructions except of function epilogue.

GCC 4.4.1 (with -O3 option) emits the same code, however, slightly different:

Listing 15.2: Optimizing GCC 4.4.1

```

f                public f
                proc near

arg_0            = qword ptr 8
arg_8            = qword ptr 10h

                push    ebp
                fld     ds:dbl_8048608 ; 3.14

; stack state now: ST(0) = 3.13

                mov     ebp, esp
                fdivr   [ebp+arg_0]

; stack state now: ST(0) = result of division

                fld     ds:dbl_8048610 ; 4.1

; stack state now: ST(0) = 4.1, ST(1) = result of division

                fmul    [ebp+arg_8]

; stack state now: ST(0) = result of multiplication, ST(1) = result of division

                pop     ebp
                faddp   st(1), st

; stack state now: ST(0) = result of addition

                retn
f                endp

```

The difference is that, first of all, 3.14 is pushed to stack (into ST(0)), and then value in `arg_0` is divided by value in the ST(0) register.

FDIVR meaning *Reverse Divide* —to divide with divisor and dividend swapped with each other. There is no likewise instruction for multiplication since multiplication is commutative operation, so we have just FMUL without its -R counterpart.

FADDP adding two values but also popping one value from stack. After that operation, ST(0) holds the sum.

This fragment of disassembled code was produced using [IDA](#) which named the ST(0) register as ST for short.

15.1.2 ARM: Optimizing Xcode (LLVM) + ARM mode

Until ARM has floating standardized point support, several processor manufacturers may add their own instructions extensions. Then, VFP (*Vector Floating Point*) was standardized.

One important difference from x86, there you working with FPU-stack, but here, in ARM, there are no any stack, you work just with registers.

```

f
    VLDR        D16, =3.14
    VMOV        D17, R0, R1 ; load a
    VMOV        D18, R2, R3 ; load b
    VDIV.F64    D16, D17, D16 ; a/3.14
    VLDR        D17, =4.1
    VMUL.F64    D17, D18, D17 ; b*4.1
    VADD.F64    D16, D17, D16 ; +
    VMOV        R0, R1, D16
    BX          LR

```

dbl_2C98	DCFD 3.14	; DATA XREF: f
dbl_2CA0	DCFD 4.1	; DATA XREF: f+10

So, we see here new registers used, with D prefix. These are 64-bit registers, there are 32 of them, and these can be used both for floating-point numbers (double) but also for SIMD (it is called NEON here in ARM).

There are also 32 32-bit S-registers, they are intended to be used for single precision floating pointer numbers (float).

It is easy to remember: D-registers are intended for double precision numbers, while S-registers —for single precision numbers.

Both (3.14 and 4.1) constants are stored in memory in IEEE 754 form.

VLDR and VMOV instructions, as it can be easily deduced, are analogous to the LDR and MOV instructions, but they work with D-registers. It should be noted that these instructions, just like D-registers, are intended not only for floating point numbers, but can be also used for SIMD (NEON) operations and this will also be revealed soon.

Arguments are passed to function in common way, via R-registers, however, each number having double precision has size 64-bits, so, for passing each, two R-registers are needed.

“VMOV D17, R0, R1” at the very beginning, composing two 32-bit values from R0 and R1 into one 64-bit value and saves it to D17.

“VMOV R0, R1, D16” is inverse operation, what was in D16 leaving in two R0 and R1 registers, since double-precision number, needing 64 bits for storage, is returning in the R0 and R1 registers pair.

VDIV, VMUL and VADD, are instruction for floating point numbers processing, computing, quotient¹³, product¹⁴ and sum¹⁵, respectively.

The code for thumb-2 is same.

15.1.3 ARM: Optimizing Keil + thumb mode

```
f
    PUSH    {R3-R7,LR}
    MOVS    R7, R2
    MOVS    R4, R3
    MOVS    R5, R0
    MOVS    R6, R1
    LDR     R2, =0x66666666
    LDR     R3, =0x40106666
    MOVS    R0, R7
    MOVS    R1, R4
    BL      __aeabi_dmul
    MOVS    R7, R0
    MOVS    R4, R1
    LDR     R2, =0x51EB851F
    LDR     R3, =0x40091EB8
    MOVS    R0, R5
    MOVS    R1, R6
    BL      __aeabi_ddiv
    MOVS    R2, R7
    MOVS    R3, R4
    BL      __aeabi_dadd
    POP     {R3-R7,PC}

dword_364    DCD 0x66666666    ; DATA XREF: f+A
dword_368    DCD 0x40106666    ; DATA XREF: f+C
dword_36C    DCD 0x51EB851F    ; DATA XREF: f+1A
dword_370    DCD 0x40091EB8    ; DATA XREF: f+1C
```

Keil generates for processors not supporting FPU or NEON. So, double-precision floating numbers are passed via generic R-registers, and instead of FPU-instructions, service library functions are called (like `__aeabi_dmul`, `__aeabi_ddiv`, `__aeabi_dadd`) which emulates multiplication, division and addition floating-point numbers. Of course, that is slower than FPU-coprocessor, but it is better than nothing.

By the way, similar FPU-emulating libraries were very popular in x86 world when coprocessors were rare and expensive, and were installed only on expensive computers.

¹³result of division

¹⁴result of multiplication

¹⁵result of addition

FPU-coprocessor emulating called *soft float* or *armel* in ARM world, while using coprocessor's FPU-instructions called *hard float* or *armhf*.

For example, Linux kernel for Raspberry Pi is compiled in two variants. In *soft float* case, arguments will be passed via R-registers, and in *hard float* case —via D-registers.

And that is what do not let you use e.g. *armhf*-libraries from *armel*-code or vice versa, so that is why all code in Linux distribution must be compiled according to the chosen calling convention.

15.2 Passing floating point number via arguments

```
#include <math.h>
#include <stdio.h>

int main ()
{
    printf ("32.01 ^ 1.54 = %lf\n", pow (32.01,1.54));

    return 0;
}
```

15.2.1 x86

Let's see what we got in (MSVC 2010):

Listing 15.3: MSVC 2010

```
CONST    SEGMENT
__real@40400147ae147ae1 DQ 040400147ae147ae1r    ; 32.01
__real@3ff8a3d70a3d70a4 DQ 03ff8a3d70a3d70a4r    ; 1.54
CONST    ENDS

_main    PROC
    push    ebp
    mov     ebp, esp
    sub     esp, 8 ; allocate place for the first variable
    fld     QWORD PTR __real@3ff8a3d70a3d70a4
    fstp    QWORD PTR [esp]
    sub     esp, 8 ; allocate place for the second variable
    fld     QWORD PTR __real@40400147ae147ae1
    fstp    QWORD PTR [esp]
    call    _pow
    add     esp, 8 ; "return back" place of one variable.

; in local stack here 8 bytes still reserved for us.
; result now in ST(0)

    fstp    QWORD PTR [esp] ; move result from ST(0) to local stack for printf()
    push    OFFSET $SG2651
    call    _printf
    add     esp, 12
    xor     eax, eax
    pop     ebp
    ret     0
_main    ENDP
```

FLD and FSTP are moving variables from/to data segment to FPU stack. `pow()`¹⁶ taking both values from FPU-stack and returns result in the ST(0) register. `printf()` takes 8 bytes from local stack and interpret them as *double* type variable.

¹⁶standard C function, raises a number to the given power

15.2.2 ARM + Non-optimizing Xcode (LLVM) + thumb-2 mode

```

_main
var_C          = -0xC

        PUSH      {R7,LR}
        MOV       R7, SP
        SUB       SP, SP, #4
        VLDR      D16, =32.01
        VMOV      R0, R1, D16
        VLDR      D16, =1.54
        VMOV      R2, R3, D16
        BLX       _pow
        VMOV      D16, R0, R1
        MOV       R0, 0xFC1 ; "32.01 ~ 1.54 = %lf\n"
        ADD       R0, PC
        VMOV      R1, R2, D16
        BLX       _printf
        MOVS      R1, 0
        STR       R0, [SP,#0xC+var_C]
        MOV       R0, R1
        ADD       SP, SP, #4
        POP       {R7,PC}

dbl_2F90      DCFD 32.01          ; DATA XREF: _main+6
dbl_2F98      DCFD 1.54          ; DATA XREF: _main+E

```

As I wrote before, 64-bit floating pointer numbers passing in R-registers pairs. This is code is redundant for a little (certainly because optimization is turned off), because, it is actually possible to load values into R-registers straightforwardly without touching D-registers.

So, as we see, `_pow` function receiving first argument in R0 and R1, and the second one in R2 and R3. Function leaves result in R0 and R1. Result of `_pow` is moved into D16, then in R1 and R2 pair, from where `printf()` will take this number.

15.2.3 ARM + Non-optimizing Keil + ARM mode

```

_main
        STMFD     SP!, {R4-R6,LR}
        LDR       R2, =0xA3D70A4 ; y
        LDR       R3, =0x3FF8A3D7
        LDR       R0, =0xAE147AE1 ; x
        LDR       R1, =0x40400147
        BL        pow
        MOV       R4, R0
        MOV       R2, R4
        MOV       R3, R1
        ADR       R0, a32_011_54Lf ; "32.01 ~ 1.54 = %lf\n"
        BL        __2printf
        MOV       R0, #0
        LDMFD     SP!, {R4-R6,PC}

y        DCD 0xA3D70A4          ; DATA XREF: _main+4
dword_520 DCD 0x3FF8A3D7        ; DATA XREF: _main+8
; double x
x        DCD 0xAE147AE1          ; DATA XREF: _main+C
dword_528 DCD 0x40400147        ; DATA XREF: _main+10
a32_011_54Lf DCB "32.01 ~ 1.54 = %lf",0xA,0
                                                ; DATA XREF: _main+24

```

D-registers are not used here, only R-register pairs are used.

15.3 Comparison example

Let's try this:

```
double d_max (double a, double b)
{
    if (a>b)
        return a;

    return b;
};
```

15.3.1 x86

Despite simplicity of the function, it will be harder to understand how it works.

Msvc 2010 generated:

Listing 15.4: MSVC 2010

```
PUBLIC      _d_max
_TEXT      SEGMENT
_a$ = 8          ; size = 8
_b$ = 16         ; size = 8
_d_max      PROC
    push     ebp
    mov      ebp, esp
    fld      QWORD PTR _b$[ebp]

; current stack state: ST(0) = _b
; compare _b (ST(0)) and _a, and pop register

    fcomp    QWORD PTR _a$[ebp]

; stack is empty here

    fnstsw   ax
    test     ah, 5
    jp       SHORT $LN1@d_max

; we are here only if a>b

    fld      QWORD PTR _a$[ebp]
    jmp      SHORT $LN2@d_max
$LN1@d_max:
    fld      QWORD PTR _b$[ebp]
$LN2@d_max:
    pop      ebp
    ret      0
_d_max      ENDP
```

So, FLD loading `_b` into the `ST(0)` register.

FCOMP compares the value in the `ST(0)` register with what is in `_a` value and set `C3/C2/C0` bits in FPU status word register. This is 16-bit register reflecting current state of FPU.

For now `C3/C2/C0` bits are set, but unfortunately, CPU before Intel P6¹⁷ has not any conditional jumps instructions which are checking these bits. Probably, it is a matter of history (remember: FPU was separate chip in past). Modern CPU starting at Intel P6 has `FCOMI/FCOMIP/FUCOMI/FUCOMIP` instructions—which does the same, but modifies CPU flags `ZF/PF/CF`.

After bits are set, the `FCOMP` instruction popping one variable from stack. This is what distinguish it from `FCOM`, which is just comparing values, leaving the stack at the same state.

`FNSTSW` copies FPU status word register to the `AX`. Bits `C3/C2/C0` are placed at positions 14/10/8, they will be at the same positions in the `AX` register and all they are placed in high part of the `AX`—`AH`.

¹⁷Intel P6 is Pentium Pro, Pentium II, etc

- If $b > a$ in our example, then C3/C2/C0 bits will be set as following: 0, 0, 0.
- If $a > b$, then bits will be set: 0, 0, 1.
- If $a = b$, then bits will be set: 1, 0, 0.

After test `ah, 5` execution, bits C3 and C1 will be set to 0, but at positions 0 and 2 (in the AH registers) C0 and C2 bits will be leaved.

Now let's talk about parity flag. Another notable epoch rudiment:

One common reason to test the parity flag actually has nothing to do with parity. The FPU has four condition flags (C0 to C3), but they can not be tested directly, and must instead be first copied to the flags register. When this happens, C0 is placed in the carry flag, C2 in the parity flag and C3 in the zero flag. The C2 flag is set when e.g. incomparable floating point values (NaN or unsupported format) are compared with the FUCOM instructions.¹⁸

This flag is to be set to 1 if ones number is even. And to 0 if odd.

Thus, PF flag will be set to 1 if both C0 and C2 are set to 0 or both are 1. And then following JP (*jump if PF==1*) will be triggered. If we recall values of the C3/C2/C0 for various cases, we will see the conditional jump JP will be triggered in two cases: if $b > a$ or $a == b$ (C3 bit is already not considering here since it was cleared while execution of the test `ah, 5` instruction).

It is all simple thereafter. If conditional jump was triggered, FLD will load the `_b` value to the ST(0) register, and if it is not triggered, the value of the `_a` variable will be loaded.

But it is not over yet!

15.3.2 Now let's compile it with MSVC 2010 with optimization option /Ox

Listing 15.5: Optimizing MSVC 2010

```
_a$ = 8                ; size = 8
_b$ = 16               ; size = 8
_d_max PROC
    fld     QWORD PTR _b$[esp-4]
    fld     QWORD PTR _a$[esp-4]

; current stack state: ST(0) = _a, ST(1) = _b

    fcom    ST(1) ; compare _a and ST(1) = (_b)
    fnstsw  ax
    test    ah, 65                ; 00000041H
    jne     SHORT $LN5@d_max
    fstp    ST(1) ; copy ST(0) to ST(1) and pop register, leave (_a) on top

; current stack state: ST(0) = _a

    ret     0
$LN5@d_max:
    fstp    ST(0) ; copy ST(0) to ST(0) and pop register, leave (_b) on top

; current stack state: ST(0) = _b

    ret     0
_d_max ENDP
```

FCOM is distinguished from FCOMP in that sense that it just comparing values and leaves FPU stack in the same state. Unlike previous example, operands here in reversed order. And that is why result of comparison in the C3/C2/C0 will be different:

- If $a > b$ in our example, then C3/C2/C0 bits will be set as: 0, 0, 0.
- If $b > a$, then bits will be set as: 0, 0, 1.
- If $a = b$, then bits will be set as: 1, 0, 0.

It can be said, test ah, 65 instruction just leaves two bits —C3 and C0. Both will be zeroes if $a > b$: in that case JNE jump will not be triggered. Then FSTP ST(1) is following —this instruction copies value in the ST(0) into operand and popping one value from FPU stack. In other words, the instruction copies ST(0) (where `_a` value is now) into the ST(1). After that, two values of the `_a` are at the top of stack now. After that, one value is popping. After that, ST(0) will contain `_a` and function is finished.

Conditional jump JNE is triggered in two cases: of $b > a$ or $a == b$. ST(0) into ST(0) will be copied, it is just like idle (NOP) operation, then one value is popping from stack and top of stack (ST(0)) will contain what was in the ST(1) before (that is `_b`). Then function finishes. The instruction used here probably since FPU has no instruction to pop value from stack and not to store it anywhere.

Well, but it is still not over.

15.3.3 GCC 4.4.1

Listing 15.6: GCC 4.4.1

```
d_max proc near
b          = qword ptr -10h
a          = qword ptr -8
a_first_half = dword ptr 8
a_second_half = dword ptr 0Ch
b_first_half = dword ptr 10h
b_second_half = dword ptr 14h

    push    ebp
    mov     ebp, esp
    sub     esp, 10h

; put a and b to local stack:

    mov     eax, [ebp+a_first_half]
    mov     dword ptr [ebp+a], eax
    mov     eax, [ebp+a_second_half]
    mov     dword ptr [ebp+a+4], eax
    mov     eax, [ebp+b_first_half]
    mov     dword ptr [ebp+b], eax
    mov     eax, [ebp+b_second_half]
    mov     dword ptr [ebp+b+4], eax

; load a and b to FPU stack:

    fld     [ebp+a]
    fld     [ebp+b]

; current stack state: ST(0) - b; ST(1) - a

    fxch    st(1) ; this instruction swapping ST(1) and ST(0)

; current stack state: ST(0) - a; ST(1) - b

    fucompp    ; compare a and b and pop two values from stack, i.e., a and b
    fnstsw    ax ; store FPU status to AX
    sahf      ; load SF, ZF, AF, PF, and CF flags state from AH
    setnbe    al ; store 1 to AL if CF=0 and ZF=0
    test      al, al ; AL==0 ?
    jz        short loc_8048453 ; yes
    fld       [ebp+a]
    jmp       short locret_8048456

loc_8048453:
    fld       [ebp+b]
```

```
locret_8048456:
    leave
    retn
d_max endp
```

FUCOMPP —is almost like FCOM, but popping both values from stack and handling “not-a-numbers” differently.

More about *not-a-numbers*:

FPU is able to deal with a special values which are *not-a-numbers* or NaNs¹⁹. These are infinity, result of dividing by 0, etc. Not-a-numbers can be “quiet” and “signaling”. It is possible to continue to work with “quiet” NaNs, but if one try to do any operation with “signaling” NaNs —an exception will be raised.

FCOM will raise exception if any operand —NaN. FUCOM will raise exception only if any operand —signaling NaN (SNaN).

The following instruction is SAHF —this is rare instruction in the code which is not use FPU. 8 bits from AH is movinto into lower 8 bits of CPU flags in the following order: SF:ZF:-:AF:-:PF:-:CF <- AH.

Let’s remember the FNSTSW is moving interesting for us bits C3/C2/C0 into the AH and they will be in positions 6, 2, 0 in the AH register.

In other words, fnstsw ax / sahf instruction pair is moving C3/C2/C0 into ZF, PF, CF CPU flags.

Now let’s also recall, what values of the C3/C2/C0 bits will be set:

- If a is greater than b in our example, then C3/C2/C0 bits will be set as: 0, 0, 0.
- if a is less than b, then bits will be set as: 0, 0, 1.
- If a=b, then bits will be set: 1, 0, 0.

In other words, after FUCOMPP/FNSTSW/SAHF instructions, we will have these CPU flags states:

- If a>b, CPU flags will be set as: ZF=0, PF=0, CF=0.
- If a<b, then CPU flags will be set as: ZF=0, PF=0, CF=1.
- If a=b, then CPU flags will be set as: ZF=1, PF=0, CF=0.

How SETNBE instruction will store 1 or 0 to AL: it is depends of CPU flags. It is almost JNBE instruction counterpart, with the exception the SETcc²⁰ is storing 1 or 0 to the AL, but Jcc do actual jump or not. SETNBE store 1 only if CF=0 and ZF=0. If it is not true, 0 will be stored into AL.

Both CF is 0 and ZF is 0 simultaneously only in one case: if a>b.

Then one will be stored to the AL and the following JZ will not be triggered and function will return _a. In all other cases, _b will be returned.

But it is still not over.

15.3.4 GCC 4.4.1 with -O3 optimization turned on

Listing 15.7: Optimizing GCC 4.4.1

```
public d_max
d_max:
    proc near
        arg_0 = qword ptr 8
        arg_8 = qword ptr 10h

        push    ebp
        mov     ebp, esp
        fld     [ebp+arg_0] ; _a
        fld     [ebp+arg_8] ; _b

; stack state now: ST(0) = _b, ST(1) = _a
        fxch    st(1)

; stack state now: ST(0) = _a, ST(1) = _b
        fucom   st(1) ; compare _a and _b
```

¹⁹<http://en.wikipedia.org/wiki/NaN>

²⁰cc is condition code

```

        fnstsw  ax
        sahf
        ja      short loc_8048448

; store ST(0) to ST(0) (idle operation), pop value at top of stack, leave _b at top
        fstp    st
        jmp     short loc_804844A

loc_8048448:
; store _a to ST(0), pop value at top of stack, leave _a at top
        fstp    st(1)

loc_804844A:
        pop     ebp
        retn
d_max    endp

```

It is almost the same except one: JA usage instead of SAHF. Actually, conditional jump instructions checking “larger”, “lesser” or “equal” for unsigned number comparison (JA, JAE, JBE, JBE, JE/JZ, JNA, JNAE, JNB, JNBE, JNE/JNZ) are checking only CF and ZF flags. And C3/C2/C0 bits after comparison are moving into these flags exactly in the same fashion so conditional jumps will work here. JA will work if both CF are ZF zero.

Thereby, conditional jumps instructions listed here can be used after FNSTSW/SAHF instructions pair.

It seems, FPU C3/C2/C0 status bits was placed there intentionally so to map them to base CPU flags without additional permutations.

15.3.5 ARM + Optimizing Xcode (LLVM) + ARM mode

Listing 15.8: Optimizing Xcode (LLVM) + ARM mode

```

VMOV      D16, R2, R3 ; b
VMOV      D17, R0, R1 ; a
VCMPE.F64 D17, D16
VMRS      APSR_nzcv, FPSCR
VMOVGT.F64 D16, D17 ; copy b to D16
VMOV      R0, R1, D16
BX        LR

```

A very simple case. Input values are placed into the D17 and D16 registers and then compared with the help of VCMPE instruction. Just like in x86 coprocessor, ARM coprocessor has its own status and flags register, (FPSCR), since there is a need to store coprocessor-specific flags.

And just like in x86, there are no conditional jump instruction in ARM, checking bits in coprocessor status register, so there is VMRS instruction, copying 4 bits (N, Z, C, V) from the coprocessor status word into bits of *general* status (APSR register).

VMOVGT is analogue of MOVGT, instruction, to be executed if one operand is greater than other while comparing (*GT—Greater Than*).

If it will be executed, *b* value will be written into D16, stored at the moment in D17.

And if it will not be triggered, then *a* value will stay in the D16 register.

Penultimate instruction VMOV will prepare value in the D16 register for returning via R0 and R1 registers pair.

15.3.6 ARM + Optimizing Xcode (LLVM) + thumb-2 mode

Listing 15.9: Optimizing Xcode (LLVM) + thumb-2 mode

```

VMOV      D16, R2, R3 ; b
VMOV      D17, R0, R1 ; a
VCMPE.F64 D17, D16
VMRS      APSR_nzcv, FPSCR
IT GT
VMOVGT.F64 D16, D17
VMOV      R0, R1, D16
BX        LR

```

Almost the same as in previous example, however slightly different. As a matter of fact, many instructions in ARM mode can be supplied by condition predicate, and the instruction is to be executed if condition is true.

But there is no such thing in thumb mode. There is no place in 16-bit instructions for spare 4 bits where condition can be encoded.

However, thumb-2 was extended to make possible to specify predicates to old thumb instructions.

Here, is the [IDA](#)-generated listing, we see VMOVGT instruction, the same as in previous example.

But in fact, usual VMOV is encoded there, but [IDA](#) added -GT suffix to it, since there is ‘IT GT’ instruction placed right before.

IT instruction defines so-called *if-then block*. After the instruction, it is possible to place up to 4 instructions, to which predicate suffix will be added. In our example, ‘IT GT’ meaning, the next instruction will be executed, if GT (*Greater Than*) condition is true.

Now more complex code fragment, by the way, from “Angry Birds” (for iOS):

Listing 15.10: Angry Birds Classic

```
ITE NE
VMOVNE      R2, R3, D16
VMOVEQ      R2, R3, D17
```

ITE meaning *if-then-else* and it encode suffixes for two next instructions. First instruction will execute if condition encoded in ITE (*NE, not equal*) will be true at the moment, and the second—if the condition will not be true. (Inverse condition of NE is EQ (*equal*)).

Slightly harder, and this fragment from “Angry Birds” as well:

Listing 15.11: Angry Birds Classic

```
ITTTT EQ
MOVEQ       R0, R4
ADDEQ       SP, SP, #0x20
POPEQ.W     {R8,R10}
POPEQ       {R4-R7,PC}
```

4 “T” symbols in instruction mnemonic means the 4 next instructions will be executed if condition is true. That’s why [IDA](#) added -EQ suffix to each 4 instructions.

And if there will be e.g. ITEEE EQ (*if-then-else-else-else*), then suffixes will be set as follows:

```
-EQ
-NE
-NE
-NE
```

Another fragment from “Angry Birds”:

Listing 15.12: Angry Birds Classic

```
CMP.W       R0, #0xFFFFFFFF
ITTE LE
SUBLE.W     R10, R0, #1
NEGLE      R0, R0
MOVGT      R10, R0
```

ITTE (*if-then-then-else*) means the 1st and 2nd instructions will be executed, if LE (*Less or Equal*) condition is true, and 3rd—if inverse condition (GT—*Greater Than*) is true.

Compilers usually are not generating all possible combinations. For example, it mentioned “Angry Birds” game (*classic* version for iOS) only these cases of IT instruction are used: IT, ITE, ITT, ITTE, ITTT, ITTTT. How I learnt this? In [IDA](#) it is possible to produce listing files, so I did it, but I also set in options to show 4 bytes of each opcodes. Then, knowing the high part of 16-bit opcode IT is 0xBF, I did this with `grep`:

```
cat AngryBirdsClassic.lst | grep " BF" | grep "IT" > results.lst
```

By the way, if to program in ARM assembly language manually for thumb-2 mode, with adding conditional suffixes, assembler will add IT instructions automatically, with respectable flags, where it is necessary.

15.3.7 ARM + Non-optimizing Xcode (LLVM) + ARM mode

Listing 15.13: Non-optimizing Xcode (LLVM) + ARM mode

```

b          = -0x20
a          = -0x18
val_to_return = -0x10
saved_R7   = -4

        STR        R7, [SP,#saved_R7]!
        MOV        R7, SP
        SUB        SP, SP, #0x1C
        BIC        SP, SP, #7
        VMOV       D16, R2, R3
        VMOV       D17, R0, R1
        VSTR       D17, [SP,#0x20+a]
        VSTR       D16, [SP,#0x20+b]
        VLDR       D16, [SP,#0x20+a]
        VLDR       D17, [SP,#0x20+b]
        VCMPE.F64  D16, D17
        VMRS       APSR_nzcv, FPSCR
        BLE        loc_2E08
        VLDR       D16, [SP,#0x20+a]
        VSTR       D16, [SP,#0x20+val_to_return]
        B          loc_2E10

loc_2E08
        VLDR       D16, [SP,#0x20+b]
        VSTR       D16, [SP,#0x20+val_to_return]

loc_2E10
        VLDR       D16, [SP,#0x20+val_to_return]
        VMOV       R0, R1, D16
        MOV        SP, R7
        LDR        R7, [SP+0x20+b], #4
        BX        LR

```

Almost the same we already saw, but too much redundant code because of *a* and *b* variables storage in local stack, as well as returning value.

15.3.8 ARM + Optimizing Keil + thumb mode

Listing 15.14: Optimizing Keil + thumb mode

```

        PUSH       {R3-R7,LR}
        MOVS       R4, R2
        MOVS       R5, R3
        MOVS       R6, R0
        MOVS       R7, R1
        BL         __aeabi_cdrcmple
        BCS        loc_1C0
        MOVS       R0, R6
        MOVS       R1, R7
        POP        {R3-R7,PC}

loc_1C0
        MOVS       R0, R4
        MOVS       R1, R5
        POP        {R3-R7,PC}

```

Keil not generates special instruction for float numbers comparing since it cannot rely it will be supported on the target CPU, and it cannot be done by straightforward bitwise comparing. So there is called external library function for comparing:

`__aeabi_cdrcmple`. N.B. Comparison result is to be leaved in flags, so the following BCS (*Carry set - Greater than or equal*) instruction may work without any additional code.

15.4 x64

Read more [here](#) about how float point numbers are processed in x86-64.

Chapter 16

Arrays

Array is just a set of variables in memory, always lying next to each other, always has same type¹.

16.1 Simple example

```
#include <stdio.h>

int main()
{
    int a[20];
    int i;

    for (i=0; i<20; i++)
        a[i]=i*2;

    for (i=0; i<20; i++)
        printf ("a[%d]=%d\n", i, a[i]);

    return 0;
};
```

16.1.1 x86

Let's compile:

Listing 16.1: MSVC

```
_TEXT    SEGMENT
_i$ = -84                ; size = 4
_a$ = -80                ; size = 80
_main    PROC
    push    ebp
    mov     ebp, esp
    sub     esp, 84        ; 00000054H
    mov     DWORD PTR _i$[ebp], 0
    jmp     SHORT $LN6@main
$LN5@main:
    mov     eax, DWORD PTR _i$[ebp]
    add     eax, 1
    mov     DWORD PTR _i$[ebp], eax
$LN6@main:
    cmp     DWORD PTR _i$[ebp], 20    ; 00000014H
    jge     SHORT $LN4@main
    mov     ecx, DWORD PTR _i$[ebp]
```

¹AKA² “homogeneous container”

```

    shl     ecx, 1
    mov     edx, DWORD PTR _i$[ebp]
    mov     DWORD PTR _a$[ebp+edx*4], ecx
    jmp     SHORT $LN5@main
$LN4@main:
    mov     DWORD PTR _i$[ebp], 0
    jmp     SHORT $LN3@main
$LN2@main:
    mov     eax, DWORD PTR _i$[ebp]
    add     eax, 1
    mov     DWORD PTR _i$[ebp], eax
$LN3@main:
    cmp     DWORD PTR _i$[ebp], 20      ; 00000014H
    jge     SHORT $LN1@main
    mov     ecx, DWORD PTR _i$[ebp]
    mov     edx, DWORD PTR _a$[ebp+ecx*4]
    push    edx
    mov     eax, DWORD PTR _i$[ebp]
    push    eax
    push    OFFSET $SG2463
    call    _printf
    add     esp, 12                    ; 0000000cH
    jmp     SHORT $LN2@main
$LN1@main:
    xor     eax, eax
    mov     esp, ebp
    pop     ebp
    ret     0
_main     ENDP

```

Nothing very special, just two loops: first is filling loop and second is printing loop. `shl ecx, 1` instruction is used for value multiplication by 2 in the ECX, more about below [17.3.1](#).

80 bytes are allocated on the stack for array, that is 20 elements of 4 bytes.

Here is what GCC 4.4.1 does:

Listing 16.2: GCC 4.4.1

```

main          public main
              proc near          ; DATA XREF: _start+17

var_70        = dword ptr -70h
var_6C        = dword ptr -6Ch
var_68        = dword ptr -68h
i_2          = dword ptr -54h
i             = dword ptr -4

              push    ebp
              mov     ebp, esp
              and     esp, 0FFFFFFF0h
              sub     esp, 70h
              mov     [esp+70h+i], 0          ; i=0
              jmp     short loc_804840A

loc_80483F7:
              mov     eax, [esp+70h+i]
              mov     edx, [esp+70h+i]
              add     edx, edx                ; edx=i*2
              mov     [esp+eax*4+70h+i_2], edx
              add     [esp+70h+i], 1          ; i++

loc_804840A:
              cmp     [esp+70h+i], 13h

```

```

        jle     short loc_80483F7
        mov     [esp+70h+i], 0
        jmp     short loc_8048441

loc_804841B:
        mov     eax, [esp+70h+i]
        mov     edx, [esp+eax*4+70h+i_2]
        mov     eax, offset aADD ; "a[%d]=%d\n"
        mov     [esp+70h+var_68], edx
        mov     edx, [esp+70h+i]
        mov     [esp+70h+var_6C], edx
        mov     [esp+70h+var_70], eax
        call    _printf
        add     [esp+70h+i], 1

loc_8048441:
        cmp     [esp+70h+i], 13h
        jle     short loc_804841B
        mov     eax, 0
        leave
        retn

main     endp

```

By the way, *a* variable has *int** type (the pointer to *int*) —you can try to pass a pointer to array to another function, but it much correctly to say the pointer to the first array element is passed (addresses of another element's places are calculated in obvious way). If to index this pointer as *a[idx]*, *idx* just to be added to the pointer and the element placed there (to which calculated pointer is pointing) returned.

An interesting example: string of characters like “string” is array of characters and it has *const char** type. Index can be applied to this pointer. And that is why it is possible to write like “string”[i] —this is correct C/C++ expression!

16.1.2 ARM + Non-optimizing Keil + ARM mode

```

EXPORT _main

_main
    STMFD     SP!, {R4,LR}
    SUB      SP, SP, #0x50      ; allocate place for 20 int variables

; first loop

    MOV      R4, #0             ; i
    B        loc_4A0

loc_494
    MOV      R0, R4,LSL#1       ; R0=R4*2
    STR      R0, [SP,R4,LSL#2]   ; store R0 to SP+R4<<2 (same as SP+R4*4)
    ADD      R4, R4, #1         ; i=i+1

loc_4A0
    CMP      R4, #20            ; i<20?
    BLT      loc_494            ; yes, run loop body again

; second loop

    MOV      R4, #0             ; i
    B        loc_4C4

loc_4B0
    LDR      R2, [SP,R4,LSL#2]   ; (second printf argument) R2=*(SP+R4<<4) (same as *(
    SP+R4*4))
    MOV      R1, R4             ; (first printf argument) R1=i
    ADR      R0, aADD           ; "a[%d]=%d\n"
    BL       __2printf
    ADD      R4, R4, #1         ; i=i+1

```

```

loc_4C4
        CMP     R4, #20           ; i<20?
        BLT     loc_4B0           ; yes, run loop body again
        MOV     R0, #0            ; value to return
        ADD     SP, SP, #0x50     ; deallocate place, allocated for 20 int variables
        LDMFD   SP!, {R4,PC}

```

int type requires 32 bits for storage, or 4 bytes, so for storage of 20 *int* variables, 80 (0x50) bytes are needed, so that is why “SUB SP, SP, #0x50” instruction in function epilogue allocates exactly this amount of space in local stack.

In both first and second loops, *i* loop iterator will be placed in the R4 register.

A number to be written into array, is calculating as $i * 2$ which is effectively equivalent to shifting left by one bit, so “MOV R0, R4, LSL#1” instruction do this.

“STR R0, [SP, R4, LSL#2]” writes R0 contents into array. Here is how a pointer to array element is to be calculated: *SP* pointing to array begin, *R4* is *i*. So shift *i* left by 2 bits, that is effectively equivalent to multiplication by 4 (since each array element has size of 4 bytes) and add it to address of array begin.

The second loop has inverse “LDR R2, [SP, R4, LSL#2]”, instruction, it loads from array value we need, and the pointer to it is calculated likewise.

16.1.3 ARM + Optimizing Keil + thumb mode

```

_main
        PUSH    {R4,R5,LR}
; allocate place for 20 int variables + one more variable
        SUB     SP, SP, #0x54

; first loop

        MOV     R0, #0           ; i
        MOV     R5, SP           ; pointer to first array element

loc_1CE
        LSLS    R1, R0, #1       ; R1=i<<1 (same as i*2)
        LSLS    R2, R0, #2       ; R2=i<<2 (same as i*4)
        ADDS    R0, R0, #1       ; i=i+1
        CMP     R0, #20          ; i<20?
        STR     R1, [R5,R2]      ; store R1 to *(R5+R2) (same R5+i*4)
        BLT     loc_1CE          ; yes, i<20, run loop body again

; second loop

        MOV     R4, #0           ; i=0

loc_1DC
        LSLS    R0, R4, #2       ; R0=i<<2 (same as i*4)
        LDR     R2, [R5,R0]      ; load from *(R5+R0) (same as R5+i*4)
        MOV     R1, R4
        ADR     R0, aADD         ; "a[%d]=%d\n"
        BL      __2printf
        ADDS    R4, R4, #1       ; i=i+1
        CMP     R4, #20          ; i<20?
        BLT     loc_1DC          ; yes, i<20, run loop body again
        MOV     R0, #0           ; value to return
; deallocate place, allocated for 20 int variables + one more variable
        ADD     SP, SP, #0x54
        POP     {R4,R5,PC}

```

Thumb code is very similar. Thumb mode has special instructions for bit shifting (like LSLS), which calculates value to be written into array and address of each element in array as well.

Compiler allocates slightly more space in local stack, however, last 4 bytes are not used.

16.2 Buffer overflow

So, array indexing is just `array[index]`. If you study generated code closely, you'll probably note missing index bounds checking, which could check index, *if it is less than 20*. What if index will be greater than 20? That's the one C/C++ feature it is often blamed for.

Here is a code successfully compiling and working:

```
#include <stdio.h>

int main()
{
    int a[20];
    int i;

    for (i=0; i<20; i++)
        a[i]=i*2;

    printf ("a[100]=%d\n", a[100]);

    return 0;
};
```

Compilation results (MSVC 2010):

```
_TEXT    SEGMENT
_i$ = -84                                ; size = 4
_a$ = -80                                ; size = 80
_main    PROC
    push    ebp
    mov     ebp, esp
    sub     esp, 84                      ; 00000054H
    mov     DWORD PTR _i$[ebp], 0
    jmp     SHORT $LN3@main
$LN2@main:
    mov     eax, DWORD PTR _i$[ebp]
    add     eax, 1
    mov     DWORD PTR _i$[ebp], eax
$LN3@main:
    cmp     DWORD PTR _i$[ebp], 20 ; 00000014H
    jge     SHORT $LN1@main
    mov     ecx, DWORD PTR _i$[ebp]
    shl     ecx, 1
    mov     edx, DWORD PTR _i$[ebp]
    mov     DWORD PTR _a$[ebp+edx*4], ecx
    jmp     SHORT $LN2@main
$LN1@main:
    mov     eax, DWORD PTR _a$[ebp+400]
    push    eax
    push    OFFSET $SG2460
    call    _printf
    add     esp, 8
    xor     eax, eax
    mov     esp, ebp
    pop     ebp
    ret     0
_main     ENDP
```

I'm running it, and I got:

```
a[100]=760826203
```

It is just *something*, occasionally lying in the stack near to array, 400 bytes from its first element.

Indeed, how it could be done differently? Compiler may generate some additional code for checking index value to be always in array's bound (like in higher-level programming languages³) but this makes running code slower.

OK, we read some values from the stack *illegally* but what if we could write something to it?

Here is what we will write:

```
#include <stdio.h>

int main()
{
    int a[20];
    int i;

    for (i=0; i<30; i++)
        a[i]=i;

    return 0;
};
```

And what we've got:

```
_TEXT      SEGMENT
_i$ = -84           ; size = 4
_a$ = -80           ; size = 80
_main      PROC
push       ebp
mov        ebp, esp
sub        esp, 84          ; 00000054H
mov        DWORD PTR _i$[ebp], 0
jmp        SHORT $LN3@main
$LN2@main:
mov        eax, DWORD PTR _i$[ebp]
add        eax, 1
mov        DWORD PTR _i$[ebp], eax
$LN3@main:
cmp        DWORD PTR _i$[ebp], 30      ; 0000001eH
jge        SHORT $LN1@main
mov        ecx, DWORD PTR _i$[ebp]
mov        edx, DWORD PTR _i$[ebp]      ; that instruction is obviously redundant
mov        DWORD PTR _a$[ebp+ecx*4], edx ; ECX could be used as second operand here instead
jmp        SHORT $LN2@main
$LN1@main:
xor        eax, eax
mov        esp, ebp
pop        ebp
ret        0
_main      ENDP
```

Run compiled program and its crashing. No wonder. Let's see, where exactly it is crashing.

I'm not using debugger anymore since I tried to run it each time, move mouse, etc, when I need just to spot a register's state at the specific point. That's why I wrote very minimalistic tool for myself, [tracer](#), which is enough for my tasks.

I can also use it just to see, where [debuggee](#) is crashed. So let's see:

generic tracer 0.4 (WIN32), <http://conus.info/gt>

New process: C:\PRJ\...\1.exe, PID=7988

EXCEPTION_ACCESS_VIOLATION: 0x15 (<symbol (0x15) is in unknown module>), ExceptionInformation [0]=8

EAX=0x00000000 EBX=0x7EFDE000 ECX=0x0000001D EDX=0x0000001D

ESI=0x00000000 EDI=0x00000000 EBP=0x00000014 ESP=0x0018FF48

EIP=0x00000015

FLAGS=PF ZF IF RF

PID=7988|Process exit, return code -1073740791

³Java, Python, etc

Now please keep your eyes on registers.

Exception occurred at address 0x15. It is not legal address for code—at least for win32 code! We trapped there somehow against our will. It is also interesting fact the EBP register contain 0x14, ECX and EDX —0x1D.

Let's study stack layout more.

After control flow was passed into `main()`, the value in the EBP register was saved on the stack. Then, 84 bytes was allocated for array and `i` variable. That's $(20+1)*\text{sizeof}(\text{int})$. The ESP pointing now to the `_i` variable in the local stack and after execution of next `PUSH something`, *something* will be appeared next to `_i`.

That's stack layout while control is inside `main()`:

ESP	4 bytes for <i>i</i>
ESP+4	80 bytes for a[20] array
ESP+84	saved EBP value
ESP+88	returning address

Instruction `a[19]=something` writes last *int* in array bounds (in bounds so far!)

Instruction `a[20]=something` writes *something* to the place where value from the EBP is saved.

Please take a look at registers state at the crash moment. In our case, number 20 was written to 20th element. By the function ending, function epilogue restores original EBP value. (20 in decimal system is 0x14 in hexadecimal). Then, `RET` instruction was executed, which is effectively equivalent to `POP EIP` instruction.

`RET` instruction taking returning address from the stack (that is the address inside of `CRT`), which was called `main()`, and 21 was stored there (0x15 in hexadecimal). The CPU trapped at the address 0x15, but there is no executable code, so exception was raised.

Welcome! It is called *buffer overflow*⁴.

Replace *int* array by string (*char* array), create a long string deliberately, and pass it to the program, to the function which is not checking string length and copies it to short buffer, and you'll able to point to a program an address to which it must jump. Not that simple in reality, but that is how it was emerged⁵

Let's try the same code in GCC 4.4.1. We got:

```

main                public main
                   proc near

a                   = dword ptr -54h
i                   = dword ptr -4

                   push    ebp
                   mov     ebp, esp
                   sub     esp, 60h
                   mov     [ebp+i], 0
                   jmp     short loc_80483D1

loc_80483C3:        mov     eax, [ebp+i]
                   mov     edx, [ebp+i]
                   mov     [ebp+eax*4+a], edx
                   add     [ebp+i], 1

loc_80483D1:        cmp     [ebp+i], 1Dh
                   jle     short loc_80483C3
                   mov     eax, 0
                   leave
                   retn

main               endp

```

Running this in Linux will produce: Segmentation fault.

If we run this in GDB debugger, we getting this:

```

(gdb) r
Starting program: /home/dennis/RE/1

Program received signal SIGSEGV, Segmentation fault.
0x00000016 in ?? ()

```

⁴http://en.wikipedia.org/wiki/Stack_buffer_overflow

⁵Classic article about it: [22].

```
(gdb) info registers
eax            0x0          0
ecx            0xd2f96388    -755407992
edx            0x1d         29
ebx            0x26eff4     2551796
esp            0xbffff4b0    0xbffff4b0
ebp            0x15         0x15
esi            0x0          0
edi            0x0          0
eip            0x16         0x16
eflags        0x10202     [ IF RF ]
cs             0x73         115
ss             0x7b         123
ds             0x7b         123
es             0x7b         123
fs             0x0          0
gs             0x33         51
(gdb)
```

Register values are slightly different then in win32 example since stack layout is slightly different too.

16.3 Buffer overflow protection methods

There are several methods to protect against it, regardless of C/C++ programmers' negligence. MSVC has options like⁶:

```
/RTCs Stack Frame runtime checking
/GZ Enable stack checks (/RTCs)
```

One of the methods is to write random value among local variables to stack at function prologue and to check it in function epilogue before function exiting. And if value is not the same, do not execute last instruction RET, but halt (or hang). Process will hang, but that is much better then remote attack to your host.

This random value is called “canary” sometimes, it is related to miner’s canary⁷, they were used by miners in these days, in order to detect poisonous gases quickly. Canaries are very sensitive to mine gases, they become very agitated in case of danger, or even dead.

If to compile our very simple array example (16.1) in MSVC with RTC1 and RTCs option, you will see call to `@_RTC_CheckStackVars@8` function at the function end, checking “canary” correctness.

Let’s see how GCC handles this. Let’s take `alloca()` (4.2.4) example:

```
#include <malloc.h>
#include <stdio.h>

void f()
{
    char *buf=(char*)alloca (600);
    _snprintf (buf, 600, "hi! %d, %d, %d\n", 1, 2, 3);

    puts (buf);
};
```

By default, without any additional options, GCC 4.7.3 will insert “canary” check into code:

Listing 16.3: GCC 4.7.3

```
.LC0:
    .string "hi! %d, %d, %d\n"
f:
    push    ebp
    mov     ebp, esp
    push    ebx
    sub     esp, 676
```

⁶Wikipedia: compiler-side buffer overflow protection methods

⁷Wikipedia: Miner’s canary

```

    lea    ebx, [esp+39]
    and    ebx, -16
    mov    DWORD PTR [esp+20], 3
    mov    DWORD PTR [esp+16], 2
    mov    DWORD PTR [esp+12], 1
    mov    DWORD PTR [esp+8], OFFSET FLAT:.LC0 ; "hi! %d, %d, %d\n"
    mov    DWORD PTR [esp+4], 600
    mov    DWORD PTR [esp], ebx
    mov    eax, DWORD PTR gs:20                ; canary
    mov    DWORD PTR [ebp-12], eax
    xor    eax, eax
    call   _snprintf
    mov    DWORD PTR [esp], ebx
    call   puts
    mov    eax, DWORD PTR [ebp-12]
    xor    eax, DWORD PTR gs:20                ; canary
    jne    .L5
    mov    ebx, DWORD PTR [ebp-4]
    leave
    ret
.L5:
    call   __stack_chk_fail

```

Random value is located in `gs:20`. It is to be written on the stack and then, at the function end, value in the stack is compared with correct “canary” in `gs:20`. If values are not equal to each other, `__stack_chk_fail` function will be called and we will see something like that in console (Ubuntu 13.04 x86):

```

*** buffer overflow detected ***: ./2_1 terminated
===== Backtrace: =====
/lib/i386-linux-gnu/libc.so.6(__fortify_fail+0x63) [0xb7699bc3]
/lib/i386-linux-gnu/libc.so.6(+0x10593a) [0xb769893a]
/lib/i386-linux-gnu/libc.so.6(+0x105008) [0xb7698008]
/lib/i386-linux-gnu/libc.so.6(_IO_default_xsputn+0x8c) [0xb7606e5c]
/lib/i386-linux-gnu/libc.so.6(_IO_vfprintf+0x165) [0xb75d7a45]
/lib/i386-linux-gnu/libc.so.6(__vsprintf_chk+0xc9) [0xb76980d9]
/lib/i386-linux-gnu/libc.so.6(__sprintf_chk+0x2f) [0xb7697fef]
./2_1[0x8048404]
/lib/i386-linux-gnu/libc.so.6(__libc_start_main+0xf5) [0xb75ac935]
===== Memory map: =====
08048000-08049000 r-xp 00000000 08:01 2097586 /home/dennis/2_1
08049000-0804a000 r--p 00000000 08:01 2097586 /home/dennis/2_1
0804a000-0804b000 rw-p 00001000 08:01 2097586 /home/dennis/2_1
094d1000-094f2000 rw-p 00000000 00:00 0 [heap]
b7560000-b757b000 r-xp 00000000 08:01 1048602 /lib/i386-linux-gnu/libgcc_s.so.1
b757b000-b757c000 r--p 0001a000 08:01 1048602 /lib/i386-linux-gnu/libgcc_s.so.1
b757c000-b757d000 rw-p 0001b000 08:01 1048602 /lib/i386-linux-gnu/libgcc_s.so.1
b7592000-b7593000 rw-p 00000000 00:00 0
b7593000-b7740000 r-xp 00000000 08:01 1050781 /lib/i386-linux-gnu/libc-2.17.so
b7740000-b7742000 r--p 001ad000 08:01 1050781 /lib/i386-linux-gnu/libc-2.17.so
b7742000-b7743000 rw-p 001af000 08:01 1050781 /lib/i386-linux-gnu/libc-2.17.so
b7743000-b7746000 rw-p 00000000 00:00 0
b775a000-b775d000 rw-p 00000000 00:00 0
b775d000-b775e000 r-xp 00000000 00:00 0 [vdso]
b775e000-b777e000 r-xp 00000000 08:01 1050794 /lib/i386-linux-gnu/ld-2.17.so
b777e000-b777f000 r--p 0001f000 08:01 1050794 /lib/i386-linux-gnu/ld-2.17.so
b777f000-b7780000 rw-p 00020000 08:01 1050794 /lib/i386-linux-gnu/ld-2.17.so
bff35000-bff56000 rw-p 00000000 00:00 0 [stack]
Aborted (core dumped)

```

`gs`—is so-called segment register, these registers were used widely in MS-DOS and DOS-extenders times. Today, its function is different. If to say briefly, the `gs` register in Linux is always pointing to the [TLS \(47\)](#)—various information specific to

thread is stored there (by the way, in win32 environment, the `fs` register plays the same role, it pointing to [TIB](#)^{8 9}).

More information can be found in Linux source codes (at least in 3.11 version), in `arch/x86/include/asm/stackprotector.h` file this variable is described in comments.

16.3.1 Optimizing Xcode (LLVM) + thumb-2 mode

Let's back to our simple array example (16.1), again, now we can see how LLVM will check "canary" correctness:

```
_main

var_64      = -0x64
var_60      = -0x60
var_5C      = -0x5C
var_58      = -0x58
var_54      = -0x54
var_50      = -0x50
var_4C      = -0x4C
var_48      = -0x48
var_44      = -0x44
var_40      = -0x40
var_3C      = -0x3C
var_38      = -0x38
var_34      = -0x34
var_30      = -0x30
var_2C      = -0x2C
var_28      = -0x28
var_24      = -0x24
var_20      = -0x20
var_1C      = -0x1C
var_18      = -0x18
canary      = -0x14
var_10      = -0x10

        PUSH        {R4-R7,LR}
        ADD         R7, SP, #0xC
        STR.W       R8, [SP,#0xC+var_10]!
        SUB         SP, SP, #0x54
        MOVW        R0, #objc_meth_type ; "objc_meth_type"
        MOVS        R2, #0
        MOVT.W      R0, #0
        MOVS        R5, #0
        ADD         R0, PC
        LDR.W       R8, [R0]
        LDR.W       R0, [R8]
        STR         R0, [SP,#0x64+canary]
        MOVS        R0, #2
        STR         R2, [SP,#0x64+var_64]
        STR         R0, [SP,#0x64+var_60]
        MOVS        R0, #4
        STR         R0, [SP,#0x64+var_5C]
        MOVS        R0, #6
        STR         R0, [SP,#0x64+var_58]
        MOVS        R0, #8
        STR         R0, [SP,#0x64+var_54]
        MOVS        R0, #0xA
        STR         R0, [SP,#0x64+var_50]
        MOVS        R0, #0xC
        STR         R0, [SP,#0x64+var_4C]
        MOVS        R0, #0xE
```

⁸Thread Information Block

⁹https://en.wikipedia.org/wiki/Win32_Thread_Information_Block

```

        STR        R0, [SP,#0x64+var_48]
        MOVS       R0, #0x10
        STR        R0, [SP,#0x64+var_44]
        MOVS       R0, #0x12
        STR        R0, [SP,#0x64+var_40]
        MOVS       R0, #0x14
        STR        R0, [SP,#0x64+var_3C]
        MOVS       R0, #0x16
        STR        R0, [SP,#0x64+var_38]
        MOVS       R0, #0x18
        STR        R0, [SP,#0x64+var_34]
        MOVS       R0, #0x1A
        STR        R0, [SP,#0x64+var_30]
        MOVS       R0, #0x1C
        STR        R0, [SP,#0x64+var_2C]
        MOVS       R0, #0x1E
        STR        R0, [SP,#0x64+var_28]
        MOVS       R0, #0x20
        STR        R0, [SP,#0x64+var_24]
        MOVS       R0, #0x22
        STR        R0, [SP,#0x64+var_20]
        MOVS       R0, #0x24
        STR        R0, [SP,#0x64+var_1C]
        MOVS       R0, #0x26
        STR        R0, [SP,#0x64+var_18]
        MOV        R4, 0xFDA ; "a[%d]=%d\n"
        MOV        R0, SP
        ADDS       R6, R0, #4
        ADD        R4, PC
        B          loc_2F1C

; second loop begin

loc_2F14
        ADDS       R0, R5, #1
        LDR.W      R2, [R6,R5,LSL#2]
        MOV        R5, R0

loc_2F1C
        MOV        R0, R4
        MOV        R1, R5
        BLX        _printf
        CMP        R5, #0x13
        BNE        loc_2F14
        LDR.W      R0, [R8]
        LDR        R1, [SP,#0x64+canary]
        CMP        R0, R1
        ITTTT EQ           ; canary still correct?
        MOVEQ      R0, #0
        ADDEQ      SP, SP, #0x54
        LDREQ.W    R8, [SP+0x64+var_64], #4
        POPEQ      {R4-R7,PC}
        BLX        ___stack_chk_fail

```

First of all, as we see, LLVM made loop “unrolled” and all values are written into array one-by-one, already calculated since LLVM concluded it will be faster. By the way, ARM mode instructions may help to do this even faster, and finding this way could be your homework.

At the function end we see “canaries” comparison—that laying in local stack and correct one, to which the R8 register pointing. If they are equal to each other, 4-instruction block is triggered by “ITTTT EQ”, it is writing 0 into R0, function epilogue and exit. If “canaries” are not equal, block will not be triggered, and jump to `___stack_chk_fail` function will be occurred, which, as I suppose, will halt execution.

16.4 One more word about arrays

Now we understand, why it is impossible to write something like that in C/C++ code ¹⁰:

```
void f(int size)
{
    int a[size];
    ...
};
```

That's just because compiler must know exact array size to allocate space for it in local stack layout or in data segment (in case of global variable) on compiling stage.

If you need array of arbitrary size, allocate it by `malloc()`, then access allocated memory block as array of variables of type you need. Or use C99 standard feature [15, 6.7.5/2], but it will be looks like `alloca()` (4.2.4) internally.

16.5 Multidimensional arrays

Internally, multidimensional array is essentially the same thing as linear array.

Since computer memory in linear, it is one-dimensional array. But this one-dimensional array can be easily represented as multidimensional for convenience.

For example, that is how `a[3][4]` array elements will be placed in one-dimensional array of 12 cells:

[0][0]
[0][1]
[0][2]
[0][3]
[1][0]
[1][1]
[1][2]
[1][3]
[2][0]
[2][1]
[2][2]
[2][3]

That is how two-dimensional array with one-dimensional (memory) array index numbers can be represented:

0	1	2	3
4	5	6	7
8	9	10	11

So, in order to address elements we need, first multiply first index by 4 (matrix width) and then add second index. That's called *row-major order*, and this method of arrays and matrices representation is used in at least in C/C++, Python. *row-major order* term in plain English language means: "first, write elements of first row, then second row ... and finally elements of last row".

Another method of representation called *column-major order* (array indices used in reverse order) and it is used at least in FORTRAN, MATLAB, R. *column-major order* term in plain English language means: "first, write elements of first column, then second column ... and finally elements of last column".

Same thing about multidimensional arrays.

Let's see:

Listing 16.4: simple example

```
#include <stdio.h>

int a[10][20][30];

void insert(int x, int y, int z, int value)
{
    a[x][y][z]=value;
};
```

¹⁰However, it is possible in C99 standard [15, 6.7.5/2]: GCC is actually do this by allocating array dynamically on the stack (like `alloca()` (4.2.4))

16.5.1 x86

We got (MSVC 2010):

Listing 16.5: MSVC 2010

```

_DATA      SEGMENT
COMM       _a:DWORD:01770H
_DATA      ENDS
PUBLIC     _insert
_TEXT      SEGMENT
_x$ = 8          ; size = 4
_y$ = 12         ; size = 4
_z$ = 16         ; size = 4
_value$ = 20     ; size = 4
_insert     PROC
    push    ebp
    mov     ebp, esp
    mov     eax, DWORD PTR _x$[ebp]
    imul    eax, 2400          ; eax=600*4*x
    mov     ecx, DWORD PTR _y$[ebp]
    imul    ecx, 120           ; ecx=30*4*y
    lea     edx, DWORD PTR _a[eax+ecx] ; edx=a + 600*4*x + 30*4*y
    mov     eax, DWORD PTR _z$[ebp]
    mov     ecx, DWORD PTR _value$[ebp]
    mov     DWORD PTR [edx+eax*4], ecx ; *(edx+z*4)=value
    pop     ebp
    ret     0
_insert     ENDP
_TEXT      ENDS

```

Nothing special. For index calculation, three input arguments are multiplying by formula $address = 600 \cdot 4 \cdot x + 30 \cdot 4 \cdot y + 4z$ to represent array as multidimensional. Do not forget the *int* type is 32-bit (4 bytes), so all coefficients must be multiplied by 4.

Listing 16.6: GCC 4.4.1

```

insert      public insert
            proc near

x            = dword ptr 8
y            = dword ptr 0Ch
z            = dword ptr 10h
value       = dword ptr 14h

            push    ebp
            mov     ebp, esp
            push    ebx
            mov     ebx, [ebp+x]
            mov     eax, [ebp+y]
            mov     ecx, [ebp+z]
            lea     edx, [eax+eax]          ; edx=y*2
            mov     eax, edx                ; eax=y*2
            shl     eax, 4                  ; eax=(y*2)<<4 = y*2*16 = y*32
            sub     eax, edx                ; eax=y*32 - y*2=y*30
            imul    edx, ebx, 600           ; edx=x*600
            add     eax, edx                ; eax=eax+edx=y*30 + x*600
            lea     edx, [eax+ecx]          ; edx=y*30 + x*600 + z
            mov     eax, [ebp+value]
            mov     dword ptr ds:a[edx*4], eax ; *(a+edx*4)=value
            pop     ebx
            pop     ebp
            retn

insert      endp

```

GCC compiler does it differently. For one of operations calculating $(30y)$, GCC produced a code without multiplication instruction. This is how it done: $(y + y) \ll 4 - (y + y) = (2y) \ll 4 - 2y = 2 \cdot 16 \cdot y - 2y = 32y - 2y = 30y$. Thus, for $30y$ calculation, only one addition operation used, one bitwise shift operation and one subtraction operation. That works faster.

16.5.2 ARM + Non-optimizing Xcode (LLVM) + thumb mode

Listing 16.7: Non-optimizing Xcode (LLVM) + thumb mode

```
_insert
value      = -0x10
z          = -0xC
y          = -8
x          = -4

; allocate place in local stack for 4 values of int type
SUB        SP, SP, #0x10
MOV        R9, 0xFC2 ; a
ADD        R9, PC
LDR.W      R9, [R9]
STR        R0, [SP,#0x10+x]
STR        R1, [SP,#0x10+y]
STR        R2, [SP,#0x10+z]
STR        R3, [SP,#0x10+value]
LDR        R0, [SP,#0x10+value]
LDR        R1, [SP,#0x10+z]
LDR        R2, [SP,#0x10+y]
LDR        R3, [SP,#0x10+x]
MOV        R12, 2400
MUL.W      R3, R3, R12
ADD        R3, R9
MOV        R9, 120
MUL.W      R2, R2, R9
ADD        R2, R3
LSLS       R1, R1, #2 ; R1=R1<<2
ADD        R1, R2
STR        R0, [R1] ; R1 - address of array element
; deallocate place in local stack, allocated for 4 values of int type
ADD        SP, SP, #0x10
BX        LR
```

Non-optimizing LLVM saves all variables in local stack, however, it is redundant. Address of array element is calculated by formula we already figured out.

16.5.3 ARM + Optimizing Xcode (LLVM) + thumb mode

Listing 16.8: Optimizing Xcode (LLVM) + thumb mode

```
_insert
MOVW       R9, #0x10FC
MOV.W      R12, #2400
MOVT.W     R9, #0
RSB.W      R1, R1, R1, LSL#4 ; R1 - y. R1=y<<4 - y = y*16 - y = y*15
ADD        R9, PC ; R9 = pointer to a array
LDR.W      R9, [R9]
MLA.W      R0, R0, R12, R9 ; R0 - x, R12 - 2400, R9 - pointer to a. R0=x*2400 + ptr to a
ADD.W      R0, R0, R1, LSL#3 ; R0 = R0+R1<<3 = R0+R1*8 = x*2400 + ptr to a + y*15*8 =
; ptr to a + y*30*4 + x*600*4
STR.W      R3, [R0,R2,LSL#2] ; R2 - z, R3 - value. address=R0+z*4 =
; ptr to a + y*30*4 + x*600*4 + z*4
BX        LR
```

Here is used tricks for replacing multiplication by shift, addition and subtraction we already considered.

Here we also see new instruction for us: RSB (*Reverse Subtract*). It works just as SUB, but swapping operands with each other. Why? SUB, RSB, are those instructions, to the second operand of which shift coefficient may be applied: (LSL#4). But this coefficient may be applied only to second operand. That's fine for commutative operations like addition or multiplication, operands may be swapped there without result affecting. But subtraction is non-commutative operation, so, for these cases, RSB exist.

'LDR.W R9, [R9]' works like LEA (80.6.2) in x86, but here it does nothing, it is redundant. Apparently, compiler not optimized it.

Chapter 17

Bit fields

A lot of functions defining input flags in arguments using bit fields. Of course, it could be substituted by *bool*-typed variables set, but it is not frugally.

17.1 Specific bit checking

17.1.1 x86

Win32 API example:

```
HANDLE fh;

fh=CreateFile ("file", GENERIC_WRITE | GENERIC_READ, FILE_SHARE_READ, NULL, OPEN_ALWAYS,
FILE_ATTRIBUTE_NORMAL, NULL);
```

We got (MSVC 2010):

Listing 17.1: MSVC 2010

```
push    0
push    128                      ; 00000080H
push    4
push    0
push    1
push    -1073741824             ; c0000000H
push    OFFSET $SG78813
call    DWORD PTR __imp__CreateFileA@28
mov     DWORD PTR _fh$[ebp], eax
```

Let's take a look into WinNT.h:

Listing 17.2: WinNT.h

```
#define GENERIC_READ      (0x80000000L)
#define GENERIC_WRITE     (0x40000000L)
#define GENERIC_EXECUTE   (0x20000000L)
#define GENERIC_ALL       (0x10000000L)
```

Everything is clear, `GENERIC_READ | GENERIC_WRITE = 0x80000000 | 0x40000000 = 0xC0000000`, and that is value is used as the second argument for `CreateFile()`¹ function.

How `CreateFile()` will check flags?

Let's take a look into `KERNEL32.DLL` in Windows XP SP3 x86 and we'll find this fragment of code in the function `CreateFileW`:

Listing 17.3: `KERNEL32.DLL` (Windows XP SP3 x86)

```
.text:7C83D429      test    byte ptr [ebp+dwDesiredAccess+3], 40h
.text:7C83D42D      mov     [ebp+var_8], 1
.text:7C83D434      jz      short loc_7C83D417
.text:7C83D436      jmp     loc_7C810817
```

¹MSDN: [CreateFile function](#)

Here we see TEST instruction, it takes, however, not the whole second argument, but only most significant byte (ebp+dwDesiredAccess) and checks it for 0x40 flag (meaning GENERIC_WRITE flag here)

TEST is merely the same instruction as AND, but without result saving (recall the fact CMP instruction is merely the same as SUB, but without result saving (6.6.1)).

This fragment of code logic is as follows:

```
if ((dwDesiredAccess&0x40000000) == 0) goto loc_7C83D417
```

If AND instruction leaving this bit, ZF flag is to be cleared and JZ conditional jump will not be triggered. Conditional jump will be triggered only if 0x40000000 bit is absent in the dwDesiredAccess variable —then AND result will be 0, ZF flag will be set and conditional jump is to be triggered.

Let's try GCC 4.4.1 and Linux:

```
#include <stdio.h>
#include <fcntl.h>

void main()
{
    int handle;

    handle=open ("file", O_RDWR | O_CREAT);
};
```

We got:

Listing 17.4: GCC 4.4.1

```
main          public main
              proc near
var_20        = dword ptr -20h
var_1C        = dword ptr -1Ch
var_4         = dword ptr -4

              push    ebp
              mov     ebp, esp
              and     esp, 0FFFFFFF0h
              sub     esp, 20h
              mov     [esp+20h+var_1C], 42h
              mov     [esp+20h+var_20], offset aFile ; "file"
              call    _open
              mov     [esp+20h+var_4], eax
              leave
              retn
main          endp
```

Let's take a look into open() function in the libc.so.6 library, but there is only syscall calling:

Listing 17.5: open() (libc.so.6)

```
.text:000BE69B    mov     edx, [esp+4+mode] ; mode
.text:000BE69F    mov     ecx, [esp+4+flags] ; flags
.text:000BE6A3    mov     ebx, [esp+4+filename] ; filename
.text:000BE6A7    mov     eax, 5
.text:000BE6AC    int     80h                ; LINUX - sys_open
```

So, open() bit fields apparently checked somewhere in Linux kernel.

Of course, it is easily to download both Glibc and Linux kernel source code, but we are interesting to understand the matter without it.

So, as of Linux 2.6, when sys_open syscall is called, control eventually passed into do_sys_open kernel function. From there —to the do_filp_open() function (this function located in kernel source tree in the file fs/namei.c).

N.B. Aside from common passing arguments via stack, there is also a method of passing some of them via registers. This is also called fastcall (??). This works faster since CPU not needed to access a stack in memory to read argument values. GCC has option `regparm2`, and it is possible to set a number of arguments which might be passed via registers.

²<http://ohse.de/uwe/articles/gcc-attributes.html#func-regparm>

Linux 2.6 kernel compiled with `-mregparm=3` option ^{3 4}.

What it means to us, the first 3 arguments will be passed via EAX, EDX and ECX registers, the rest ones via stack. Of course, if arguments number is less than 3, only part of registers are to be used.

So, let's download Linux Kernel 2.6.31, compile it in Ubuntu: `make vmlinux`, open it in IDA, find the `do_filp_open()` function. At the beginning, we will see (comments are mine):

Listing 17.6: `do_filp_open()` (linux kernel 2.6.31)

```
do_filp_open    proc near
...
    push    ebp
    mov     ebp, esp
    push    edi
    push    esi
    push    ebx
    mov     ebx, ecx
    add     ebx, 1
    sub     esp, 98h
    mov     esi, [ebp+arg_4] ; acc_mode (5th arg)
    test    bl, 3
    mov     [ebp+var_80], eax ; dfd (1th arg)
    mov     [ebp+var_7C], edx ; pathname (2th arg)
    mov     [ebp+var_78], ecx ; open_flag (3th arg)
    jnz     short loc_C01EF684
    mov     ebx, ecx          ; ebx <- open_flag
```

GCC saves first 3 arguments values in local stack. Otherwise, if compiler would not touch these registers, it would be too tight environment for compiler's [register allocator](#).

Let's find this fragment of code:

Listing 17.7: `do_filp_open()` (linux kernel 2.6.31)

```
loc_C01EF6B4:    ; CODE XREF: do_filp_open+4F
                test    bl, 40h          ; O_CREAT
                jnz     loc_C01EF810
                mov     edi, ebx
                shr     edi, 11h
                xor     edi, 1
                and     edi, 1
                test    ebx, 10000h
                jz      short loc_C01EF6D3
                or      edi, 2
```

0x40—is what `O_CREAT` macro equals to. `open_flag` checked for 0x40 bit presence, and if this bit is 1, next `JNZ` instruction is triggered.

17.1.2 ARM

`O_CREAT` bit is checked differently in Linux kernel 3.8.0.

Listing 17.8: linux kernel 3.8.0

```
struct file *do_filp_open(int dfd, struct filename *pathname,
                          const struct open_flags *op)
{
...
    filp = path_openat(dfd, pathname, &nd, op, flags | LOOKUP_RCU);
...
}

static struct file *path_openat(int dfd, struct filename *pathname,
                                struct nameidata *nd, const struct open_flags *op, int flags)
```

³http://kernelnewbies.org/Linux_2_6_20#head-042c62f290834eb1fe0a1942bbf5bb9a4accbc8f

⁴See also `arch\x86\include\asm\calling.h` file in kernel tree

```

{
...
    error = do_last(nd, &path, file, op, &opened, pathname);
...
}

static int do_last(struct nameidata *nd, struct path *path,
                  struct file *file, const struct open_flags *op,
                  int *opened, struct filename *name)
{
...
    if (!(open_flag & O_CREAT)) {
...
        error = lookup_fast(nd, path, &inode);
...
    } else {
...
        error = complete_walk(nd);
...
    }
...
}

```

Here is how kernel compiled for ARM mode looks like in [IDA](#):

Listing 17.9: do_last() (vmlinux)

```

...
.text:C0169EA8      MOV            R9, R3    ; R3 - (4th argument) open_flag
...
.text:C0169ED4      LDR            R6, [R9] ; R6 - open_flag
...
.text:C0169F68      TST            R6, #0x40 ; jumptable C0169F00 default case
.text:C0169F6C      BNE            loc_C016A128
.text:C0169F70      LDR            R2, [R4, #0x10]
.text:C0169F74      ADD            R12, R4, #8
.text:C0169F78      LDR            R3, [R4, #0xC]
.text:C0169F7C      MOV            R0, R4
.text:C0169F80      STR            R12, [R11, #var_50]
.text:C0169F84      LDRB           R3, [R2, R3]
.text:C0169F88      MOV            R2, R8
.text:C0169F8C      CMP            R3, #0
.text:C0169F90      ORRNE          R1, R1, #3
.text:C0169F94      STRNE          R1, [R4, #0x24]
.text:C0169F98      ANDS           R3, R6, #0x200000
.text:C0169F9C      MOV            R1, R12
.text:C0169FA0      LDRNE          R3, [R4, #0x24]
.text:C0169FA4      ANDNE          R3, R3, #1
.text:C0169FA8      EORNE          R3, R3, #1
.text:C0169FAC      STR            R3, [R11, #var_54]
.text:C0169FB0      SUB            R3, R11, #-var_38
.text:C0169FB4      BL             lookup_fast
...
.text:C016A128      loc_C016A128                                ; CODE XREF: do_last.isra.14+DC
.text:C016A128      MOV            R0, R4
.text:C016A12C      BL             complete_walk
...

```

TST is analogical to a TEST instruction in x86.

We can “spot” visually this code fragment by the fact the `lookup_fast()` will be executed in one case and the `complete_walk()` in another case. This is corresponding to the `do_last()` function source code.

`O_CREAT` macro is equals to `0x40` here too.

17.2 Specific bit setting/clearing

For example:

```
#define IS_SET(flag, bit)      ((flag) & (bit))
#define SET_BIT(var, bit)     ((var) |= (bit))
#define REMOVE_BIT(var, bit)  ((var) &= ~(bit))

int f(int a)
{
    int rt=a;

    SET_BIT (rt, 0x4000);
    REMOVE_BIT (rt, 0x200);

    return rt;
};
```

17.2.1 x86

We got (MSVC 2010):

Listing 17.10: MSVC 2010

```
_rt$ = -4          ; size = 4
_a$ = 8            ; size = 4
_f PROC
    push    ebp
    mov     ebp, esp
    push    ecx
    mov     eax, DWORD PTR _a$[ebp]
    mov     DWORD PTR _rt$[ebp], eax
    mov     ecx, DWORD PTR _rt$[ebp]
    or      ecx, 16384          ; 00004000H
    mov     DWORD PTR _rt$[ebp], ecx
    mov     edx, DWORD PTR _rt$[ebp]
    and     edx, -513           ; ffffffffH
    mov     DWORD PTR _rt$[ebp], edx
    mov     eax, DWORD PTR _rt$[ebp]
    mov     esp, ebp
    pop     ebp
    ret     0
_f ENDP
```

OR instruction adds one more bit to value while ignoring the rest ones.

AND resetting one bit. It can be said, AND just copies all bits except one. Indeed, in the second AND operand only those bits are set, which are needed to be saved, except one bit we would not like to copy (which is 0 in bitmask). It is easier way to memorize the logic.

If we compile it in MSVC with optimization turned on (/Ox), the code will be even shorter:

Listing 17.11: Optimizing MSVC

```
_a$ = 8            ; size = 4
_f PROC
    mov     eax, DWORD PTR _a$[esp-4]
    and     eax, -513          ; ffffffffH
    or      eax, 16384          ; 00004000H
    ret     0
_f ENDP
```

Let's try GCC 4.4.1 without optimization:

Listing 17.12: Non-optimizing GCC

```

f          public f
          proc near

var_4      = dword ptr -4
arg_0      = dword ptr  8

          push    ebp
          mov     ebp, esp
          sub     esp, 10h
          mov     eax, [ebp+arg_0]
          mov     [ebp+var_4], eax
          or      [ebp+var_4], 4000h
          and     [ebp+var_4], 0FFFFFFDFFh
          mov     eax, [ebp+var_4]
          leave
          retn
f          endp

```

There is a redundant code present, however, it is shorter than MSVC version without optimization. Now let's try GCC with optimization turned on -O3:

Listing 17.13: Optimizing GCC

```

f          public f
          proc near

arg_0      = dword ptr  8

          push    ebp
          mov     ebp, esp
          mov     eax, [ebp+arg_0]
          pop     ebp
          or      ah, 40h
          and     ah, 0FDh
          retn
f          endp

```

That's shorter. It is worth noting the compiler works with the EAX register part via the AH register—that is the EAX register part from 8th to 15th bits inclusive.

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RAX ^{x64}							
				EAX			
						AX	
						AH	AL

N.B. 16-bit CPU 8086 accumulator was named AX and consisted of two 8-bit halves—AL (lower byte) and AH (higher byte). In 80386 almost all registers were extended to 32-bit, accumulator was named EAX, but for the sake of compatibility, its *older parts* may be still accessed as AX/AH/AL registers.

Since all x86 CPUs are 16-bit 8086 CPU successors, these *older* 16-bit opcodes are shorter than newer 32-bit opcodes. That's why 'or ah, 40h' instruction occupying only 3 bytes. It would be more logical way to emit here 'or eax, 04000h' but that is 5 bytes, or even 6 (in case if register in first operand is not EAX).

It would be even shorter if to turn on -O3 optimization flag and also set regparm=3.

Listing 17.14: Optimizing GCC

```

f          public f
          proc near
          push    ebp
          or      ah, 40h
          mov     ebp, esp
          and     ah, 0FDh
          pop     ebp
          retn

```

```
f                endp
```

Indeed —first argument is already loaded into EAX, so it is possible to work with it in-place. It is worth noting that both function prologue (‘push ebp / mov ebp, esp’) and epilogue (‘pop ebp’) can easily be omitted here, but GCC probably is not good enough for such code size optimizations. However, such short functions are better to be *inlined functions* (27).

17.2.2 ARM + Optimizing Keil + ARM mode

Listing 17.15: Optimizing Keil + ARM mode

```
02 0C C0 E3      BIC      R0, R0, #0x200
01 09 80 E3      ORR      R0, R0, #0x4000
1E FF 2F E1      BX       LR
```

BIC is “logical and”, analogical to AND in x86. ORR is “logical or”, analogical to OR in x86. So far, so easy.

17.2.3 ARM + Optimizing Keil + thumb mode

Listing 17.16: Optimizing Keil + thumb mode

```
01 21 89 03      MOVNS   R1, 0x4000
08 43            ORRS     R0, R1
49 11            ASRS     R1, R1, #5    ; generate 0x200 and place to R1
88 43            BICS     R0, R1
70 47            BX       LR
```

Apparently, Keil concludes the code in thumb mode, making 0x200 from 0x4000, will be more compact than code, writing 0x200 to arbitrary register.

So that is why, with the help of ASRS (arithmetic shift right), this value is calculating as $0x4000 \gg 5$.

17.2.4 ARM + Optimizing Xcode (LLVM) + ARM mode

Listing 17.17: Optimizing Xcode (LLVM) + ARM mode

```
42 0C C0 E3      BIC      R0, R0, #0x4200
01 09 80 E3      ORR      R0, R0, #0x4000
1E FF 2F E1      BX       LR
```

The code was generated by LLVM, in source code form, in fact, could be looks like:

```
REMOVE_BIT (rt, 0x4200);
SET_BIT (rt, 0x4000);
```

And it does exactly the same we need. But why 0x4200? Perhaps, that is the LLVM optimizer’s artifact⁵. Probably, compiler’s optimizer error, but generated code works correct anyway.

More about compiler’s anomalies, read here (63).

For thumb mode, Optimizing Xcode (LLVM) generates likewise code.

17.3 Shifts

Bit shifts in C/C++ are implemented via $\ll$ and $\gg$ operators.

Here is a simple example of function, calculating number of 1 bits in input variable:

```
#define IS_SET(flag, bit)      ((flag) & (bit))

int f(unsigned int a)
{
    int i;
    int rt=0;
```

⁵It was LLVM build 2410.2.00 bundled with Apple Xcode 4.6.3


```

for (i=0; i<32; i++)
    if (IS_SET (a, 1<<i))
        rt++;

return rt;
};

```

In this loop, iteration count value i counting from 0 to 31, $1 \ll i$ statement will be counting from 1 to $0x80000000$. Describing this operation in natural language, we would say *shift 1 by n bits left*. In other words, $1 \ll i$ statement will consequently produce all possible bit positions in 32-bit number. By the way, freed bit at right is always cleared. IS_SET macro is checking bit presence in the a .

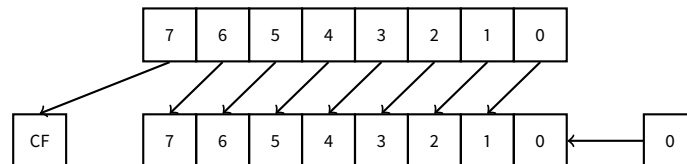

The IS_SET macro is in fact logical and operation (AND) and it returns 0 if specific bit is absent there, or bit mask, if the bit is present. *if()* operator triggered in C/C++ if expression in it is not a zero, it might be even 123456, that is why it always working correctly.

17.3.1 x86

Let's compile (MSVC 2010):

Listing 17.18: MSVC 2010

```

_rt$ = -8          ; size = 4
_i$ = -4           ; size = 4
_a$ = 8            ; size = 4
_f PROC
    push    ebp
    mov     ebp, esp
    sub     esp, 8
    mov     DWORD PTR _rt$[ebp], 0
    mov     DWORD PTR _i$[ebp], 0
    jmp     SHORT $LN40f
$LN30f:
    mov     eax, DWORD PTR _i$[ebp]    ; increment of 1
    add     eax, 1
    mov     DWORD PTR _i$[ebp], eax
$LN40f:
    cmp     DWORD PTR _i$[ebp], 32    ; 00000020H
    jge     SHORT $LN20f              ; loop finished?
    mov     edx, 1
    mov     ecx, DWORD PTR _i$[ebp]
    shl     edx, cl                    ; EDX=EDX<<CL
    and     edx, DWORD PTR _a$[ebp]
    je      SHORT $LN10f               ; result of AND instruction was 0?
                                           ; then skip next instructions
    mov     eax, DWORD PTR _rt$[ebp]   ; no, not zero
    add     eax, 1                     ; increment rt
    mov     DWORD PTR _rt$[ebp], eax
$LN10f:
    jmp     SHORT $LN30f
$LN20f:
    mov     eax, DWORD PTR _rt$[ebp]
    mov     esp, ebp
    pop     ebp
    ret     0
_f ENDP

```

That's how SHL (*Shift Left*) working.
Let's compile it in GCC 4.4.1:

Listing 17.19: GCC 4.4.1

```

f                public f
                proc near

rt              = dword ptr -0Ch
i              = dword ptr -8
arg_0          = dword ptr 8

                push    ebp
                mov     ebp, esp
                push    ebx
                sub     esp, 10h
                mov     [ebp+rt], 0
                mov     [ebp+i], 0
                jmp     short loc_80483EF

loc_80483D0:
                mov     eax, [ebp+i]
                mov     edx, 1
                mov     ebx, edx
                mov     ecx, eax
                shl     ebx, cl
                mov     eax, ebx
                and     eax, [ebp+arg_0]
                test    eax, eax
                jz      short loc_80483EB
                add     [ebp+rt], 1

loc_80483EB:
                add     [ebp+i], 1

loc_80483EF:
                cmp     [ebp+i], 1Fh
                jle     short loc_80483D0
                mov     eax, [ebp+rt]
                add     esp, 10h
                pop     ebx
                pop     ebp
                retn

f                endp

```

Shift instructions are often used in division and multiplications by power of two numbers (1, 2, 4, 8, etc).
For example:

```

unsigned int f(unsigned int a)
{
    return a/4;
};

```

We got (MSVC 2010):

Listing 17.20: MSVC 2010


```

_a$ = 8 ; size = 4
_f PROC
    mov     eax, DWORD PTR _a$[esp-4]
    shr     eax, 2
    ret     0
_f ENDP

```

SHR (*Shift Right*) instruction in this example is shifting a number by 2 bits right. Two freed bits at left (e.g., two most significant bits) are set to zero. Two least significant bits are dropped. In fact, these two dropped bits —division operation remainder.

SHR instruction works just like as SHL but in other direction.

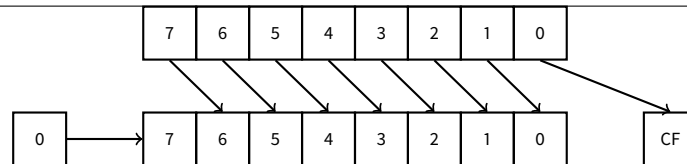

It can be easily understood if to imagine decimal numeral system and number 23. 23 can be easily divided by 10 just by dropping last digit (3 —is division remainder). 2 is leaving after operation as a **quotient**.

The same story about multiplication. Multiplication by 4 is just shifting the number to the left by 2 bits, while inserting 2 zero bits at right (as the last two bits). It is just like to multiply 3 by 100 —we need just to add two zeroes at the right.

17.3.2 ARM + Optimizing Xcode (LLVM) + ARM mode

Listing 17.21: Optimizing Xcode (LLVM) + ARM mode

	MOV	R1, R0
	MOV	R0, #0
	MOV	R2, #1
	MOV	R3, R0
loc_2E54	TST	R1, R2, LSL R3 ; set flags according to R1 & (R2<<R3)
	ADD	R3, R3, #1 ; R3++
	ADDNE	R0, R0, #1 ; if ZF flag is cleared by TST, R0++
	CMP	R3, #32
	BNE	loc_2E54
	BX	LR

TST is the same things as TEST in x86.

As I mentioned before (14.2.1), there are no separate shifting instructions in ARM mode. However, there are modifiers LSL (*Logical Shift Left*), LSR (*Logical Shift Right*), ASR (*Arithmetic Shift Right*), ROR (*Rotate Right*) and RRX (*Rotate Right with Extend*), which may be added to such instructions as MOV, TST, CMP, ADD, SUB, RSB⁶.

These modifiers are defines, how to shift second operand and by how many bits.

Thus “TST R1, R2, LSL R3” instruction works here as $R1 \wedge (R2 \ll R3)$.

17.3.3 ARM + Optimizing Xcode (LLVM) + thumb-2 mode

Almost the same, but here are two LSL.W/TST instructions are used instead of single TST, because, in thumb mode, it is not possible to define LSL modifier right in TST.

	MOV	R1, R0
	MOVS	R0, #0
	MOV.W	R9, #1
	MOVS	R3, #0
loc_2F7A	LSL.W	R2, R9, R3
	TST	R2, R1
	ADD.W	R3, R3, #1
	IT NE	
	ADDNE	R0, #1
	CMP	R3, #32
	BNE	loc_2F7A
	BX	LR

17.4 CRC32 calculation example

This is very popular table-based CRC32 hash calculation technique⁷.

⁶These instructions are also called “data processing instructions”

⁷Source code was taken here: <http://burtleburtle.net/bob/c/crc.c>

```

/* By Bob Jenkins, (c) 2006, Public Domain */

#include <stdio.h>
#include <stddef.h>
#include <string.h>

typedef unsigned long ub4;
typedef unsigned char ub1;

static const ub4 crctab[256] = {
    0x00000000, 0x77073096, 0xee0e612c, 0x990951ba, 0x076dc419, 0x706af48f,
    0xe963a535, 0x9e6495a3, 0x0edb8832, 0x79dcb8a4, 0xe0d5e91e, 0x97d2d988,
    0x09b64c2b, 0x7eb17cbd, 0xe7b82d07, 0x90bf1d91, 0x1db71064, 0x6ab020f2,
    0xf3b97148, 0x84be41de, 0x1adad47d, 0x6ddde4eb, 0xf4d4b551, 0x83d385c7,
    0x136c9856, 0x646ba8c0, 0xfd62f97a, 0x8a65c9ec, 0x14015c4f, 0x63066cd9,
    0xfa0f3d63, 0x8d080df5, 0x3b6e20c8, 0x4c69105e, 0xd56041e4, 0xa2677172,
    0x3c03e4d1, 0x4b04d447, 0xd20d85fd, 0xa50ab56b, 0x35b5a8fa, 0x42b2986c,
    0xdbbbc9d6, 0xacbcf940, 0x32d86ce3, 0x45df5c75, 0xdcd60dcf, 0xabd13d59,
    0x26d930ac, 0x51de003a, 0xc8d75180, 0xbfd06116, 0x21b4f4b5, 0x56b3c423,
    0xcfba9599, 0xb8bda50f, 0x2802b89e, 0x5f058808, 0xc60cd9b2, 0xb10be924,
    0x2f6f7c87, 0x58684c11, 0xc1611dab, 0xb6662d3d, 0x76dc4190, 0x01db7106,
    0x98d220bc, 0xefd5102a, 0x71b18589, 0x06b6b51f, 0x9fbfe4a5, 0xe8b8d433,
    0x7807c9a2, 0x0f00f934, 0x9609a88e, 0xe10e9818, 0x7f6a0dbb, 0x086d3d2d,
    0x91646c97, 0xe6635c01, 0xb6b6b51f, 0x1c6c6162, 0x856530d8, 0xf262004e,
    0x6c0695ed, 0x1b01a57b, 0x8208f4c1, 0xf50fc457, 0x65b0d9c6, 0x12b7e950,
    0x8bbeb8ea, 0xfcb9887c, 0x62dd1ddf, 0x15da2d49, 0x8cd37cf3, 0xfbd44c65,
    0x4db26158, 0x3ab551ce, 0xa3bc0074, 0xd4bb30e2, 0x4adfa541, 0x3dd895d7,
    0xa4d1c46d, 0xd3d6f4fb, 0x4369e96a, 0x346ed9fc, 0xad678846, 0xda60b8d0,
    0x44042d73, 0x33031de5, 0xaa0a4c5f, 0xdd0d7cc9, 0x5005713c, 0x270241aa,
    0xbe0b1010, 0xc90c2086, 0x5768b525, 0x206f85b3, 0xb966d409, 0xce61e49f,
    0x5edef90e, 0x29d9c998, 0xb0d09822, 0xc7d7a8b4, 0x59b33d17, 0x2eb40d81,
    0xb7bd5c3b, 0xc0ba6cad, 0xedb88320, 0x9abfb3b6, 0x03b6e20c, 0x74b1d29a,
    0xeada54739, 0x9dd277af, 0x04db2615, 0x73dc1683, 0xe3630b12, 0x94643b84,
    0x0d6d6a3e, 0x7a6a5aa8, 0xe40ecf0b, 0x9309ff9d, 0x0a00ae27, 0x7d079eb1,
    0xf00f9344, 0x8708a3d2, 0x1e01f268, 0x6906c2fe, 0xf762575d, 0x806567cb,
    0x196c3671, 0x6e6b60e7, 0xfed41b76, 0x89d332be, 0x10da7a5a, 0x67dd4acc,
    0xf9b9df6f, 0x8ebeeff9, 0x17b7be43, 0x60b08ed5, 0xd6d6a3e8, 0xa1d1937e,
    0x38d8c2c4, 0x4fdff252, 0xd1bb67f1, 0xa6bc5767, 0x3fb506dd, 0x48b2364b,
    0xd80d2bda, 0xaf0a1b4c, 0x36034af6, 0x41047a60, 0xdf60efc3, 0xa867df55,
    0x316e8eef, 0x46699be7, 0xcb61b38c, 0xbc66831a, 0x256fd2a0, 0x5268e236,
    0xcc0c7795, 0xbb0b4703, 0x220216b9, 0x5505262f, 0xc5ba3bbe, 0xb2bd0b28,
    0x2bb45a92, 0x5cb36a04, 0xc2d2ffa7, 0xb5d0cf31, 0x2cd99e8b, 0x5bdeae1d,
    0x9b64c2b0, 0xec63f226, 0x756aa39c, 0x026d930a, 0x9c0906a9, 0xeb0e363f,
    0x72076785, 0x05005713, 0x95bf4a82, 0xe2b87a14, 0x7bb12bae, 0x0cb61b38,
    0x92d28e9b, 0xe5d5be0d, 0x7cdcefb7, 0x0bdbdf21, 0x86d3d2d4, 0xf1d4e242,
    0x68ddb3f8, 0x1fda836e, 0x81be16cd, 0xf6b9265b, 0x6fb077e1, 0x18b74777,
    0x88085ae6, 0xff0f6a70, 0x66063bca, 0x11010b5c, 0x8f659eff, 0xf862ae69,
    0x616bffd3, 0x166ccf45, 0xa00ae278, 0xd70dd2ee, 0x4e048354, 0x3903b3c2,
    0xa7672661, 0xd06016f7, 0x4969474d, 0x3e6e77db, 0xaed16a4a, 0xd9d65adc,
    0x40df0b66, 0x37d83bf0, 0xa9bcae53, 0xdeb99ec5, 0x47b2cf7f, 0x30b5ffe9,
    0xbdbdf21c, 0xcabac28a, 0x53b39330, 0x24b4a3a6, 0xbad03605, 0xcdd70693,
    0x54de5729, 0x23d967bf, 0xb3667a2e, 0xc4614ab8, 0x5d681b02, 0x2a6f2b94,
    0xb40bbe37, 0xc30c8ea1, 0x5a05df1b, 0x2d02ef8d,
};

/* how to derive the values in crctab[] from polynomial 0xedb88320 */
void build_table()
{
    ub4 i, j;
    for (i=0; i<256; ++i) {

```

```

    j = i;
    j = (j>>1) ^ ((j&1) ? 0xedb88320 : 0);
    j = (j>>1) ^ ((j&1) ? 0xedb88320 : 0);
    j = (j>>1) ^ ((j&1) ? 0xedb88320 : 0);
    j = (j>>1) ^ ((j&1) ? 0xedb88320 : 0);
    j = (j>>1) ^ ((j&1) ? 0xedb88320 : 0);
    j = (j>>1) ^ ((j&1) ? 0xedb88320 : 0);
    j = (j>>1) ^ ((j&1) ? 0xedb88320 : 0);
    j = (j>>1) ^ ((j&1) ? 0xedb88320 : 0);
    printf("0x%.8lx, ", j);
    if (i%6 == 5) printf("\n");
}
}

/* the hash function */
ub4 crc(const void *key, ub4 len, ub4 hash)
{
    ub4 i;
    const ub1 *k = key;
    for (hash=len, i=0; i<len; ++i)
        hash = (hash >> 8) ^ crctab[(hash & 0xff) ^ k[i]];
    return hash;
}

/* To use, try "gcc -O crc.c -o crc; crc < crc.c" */
int main()
{
    char s[1000];
    while (gets(s)) printf("%.8lx\n", crc(s, strlen(s), 0));
    return 0;
}

```

We are interesting in the `crc()` function only. By the way, pay attention to two loop initializers in the `for()` statement: `hash=len, i=0`. C/C++ standard allows this, of course. Emitted code will contain two operations in loop initialization part instead of usual one.

Let's compile it in MSVC with optimization (`/Ox`). For the sake of brevity, only `crc()` function is listed here, with my comments.

```

_key$ = 8           ; size = 4
_len$ = 12          ; size = 4
_hash$ = 16         ; size = 4
_crc PROC
    mov     edx, DWORD PTR _len$[esp-4]
    xor     ecx, ecx ; i will be stored in ECX
    mov     eax, edx
    test    edx, edx
    jbe     SHORT $LN1@crc
    push    ebx
    push    esi
    mov     esi, DWORD PTR _key$[esp+4] ; ESI = key
    push    edi
$LL3@crc:
; work with bytes using only 32-bit registers. byte from address key+i we store into EDI

    movzx   edi, BYTE PTR [ecx+esi]
    mov     ebx, eax ; EBX = (hash = len)
    and     ebx, 255 ; EBX = hash & 0xff

; XOR EDI, EBX (EDI=EDI^EBX) - this operation uses all 32 bits of each register
; but other bits (8-31) are cleared all time, so it's OK

```

```

; these are cleared because, as for EDI, it was done by MOVZX instruction above
; high bits of EBX was cleared by AND EBX, 255 instruction above (255 = 0xff)

    xor     edi, ebx

; EAX=EAX>>8; bits 24-31 taken "from nowhere" will be cleared
    shr     eax, 8

; EAX=EAX^crctab[EDI*4] - choose EDI-th element from crctab[] table
    xor     eax, DWORD PTR _crctab[edi*4]
    inc     ecx           ; i++
    cmp     ecx, edx      ; i<len ?
    jb      SHORT $LL3@crc ; yes
    pop     edi
    pop     esi
    pop     ebx
$LN1@crc:
    ret     0
_crc      ENDP

```

Let's try the same in GCC 4.4.1 with -O3 option:

```

crc
    public crc
    proc near

key
    = dword ptr 8
hash
    = dword ptr 0Ch

    push    ebp
    xor     edx, edx
    mov     ebp, esp
    push    esi
    mov     esi, [ebp+key]
    push    ebx
    mov     ebx, [ebp+hash]
    test    ebx, ebx
    mov     eax, ebx
    jz      short loc_80484D3
    nop
    lea     esi, [esi+0] ; padding; ESI doesn't changing here

loc_80484B8:
    mov     ecx, eax ; save previous state of hash to ECX
    xor     al, [esi+edx] ; AL=*(key+i)
    add     edx, 1 ; i++
    shr     ecx, 8 ; ECX=hash>>8
    movzx   eax, al ; EAX=*(key+i)
    mov     eax, dword ptr ds:crctab[eax*4] ; EAX=crctab[EAX]
    xor     eax, ecx ; hash=EAX^ECX
    cmp     ebx, edx
    ja      short loc_80484B8

loc_80484D3:
    pop     ebx
    pop     esi
    pop     ebp
    retn

crc
    endp
\

```

GCC aligned loop start on a 8-byte boundary by adding NOP and lea esi, [esi+0] (that is the *idle operation* too). Read more about it in npad section (61).

Chapter 18

Structures

It can be defined the C/C++ structure, with some assumptions, just a set of variables, always stored in memory together, not necessary of the same type¹.

18.1 SYSTEMTIME example

Let's take SYSTEMTIME² win32 structure describing time.

That's how it is defined:

Listing 18.1: WinBase.h

```
typedef struct _SYSTEMTIME {
    WORD wYear;
    WORD wMonth;
    WORD wDayOfWeek;
    WORD wDay;
    WORD wHour;
    WORD wMinute;
    WORD wSecond;
    WORD wMilliseconds;
} SYSTEMTIME, *PSYSTEMTIME;
```

Let's write a C function to get current time:

```
#include <windows.h>
#include <stdio.h>

void main()
{
    SYSTEMTIME t;
    GetSystemTime (&t);

    printf ("%04d-%02d-%02d %02d:%02d:%02d\n",
        t.wYear, t.wMonth, t.wDay,
        t.wHour, t.wMinute, t.wSecond);

    return;
};
```

We got (MSVC 2010):

Listing 18.2: MSVC 2010

```
_t$ = -16          ; size = 16
_main             PROC
    push         ebp
    mov          ebp, esp
```

¹AKA “heterogeneous container”

²MSDN: SYSTEMTIME structure

```

sub     esp, 16      ; 00000010H
lea     eax, DWORD PTR _t$[ebp]
push    eax
call    DWORD PTR __imp__GetSystemTime@4
movzx   ecx, WORD PTR _t$[ebp+12] ; wSecond
push    ecx
movzx   edx, WORD PTR _t$[ebp+10] ; wMinute
push    edx
movzx   eax, WORD PTR _t$[ebp+8]  ; wHour
push    eax
movzx   ecx, WORD PTR _t$[ebp+6]  ; wDay
push    ecx
movzx   edx, WORD PTR _t$[ebp+2]  ; wMonth
push    edx
movzx   eax, WORD PTR _t$[ebp]    ; wYear
push    eax
push    OFFSET $SG78811 ; '%04d-%02d-%02d %02d:%02d:%02d', 0aH, 00H
call    _printf
add     esp, 28      ; 0000001cH
xor     eax, eax
mov     esp, ebp
pop     ebp
ret     0
_main   ENDP

```

16 bytes are allocated for this structure in local stack—that is exactly `sizeof(WORD)*8` (there are 8 WORD variables in the structure).

Pay attention to the fact the structure beginning with `wYear` field. It can be said, an pointer to `SYSTEMTIME` structure is passed to the `GetSystemTime()`³, but it is also can be said, pointer to the `wYear` field is passed, and that is the same! `GetSystemTime()` writes current year to the WORD pointer pointing to, then shifts 2 bytes ahead, then writes current month, etc, etc.

The fact the structure fields are just variables located side-by-side, I can demonstrate by the following technique. Keeping in mind `SYSTEMTIME` structure description, I can rewrite this simple example like this:

```

#include <windows.h>
#include <stdio.h>

void main()
{
    WORD array[8];
    GetSystemTime (array);

    printf ("%04d-%02d-%02d %02d:%02d:%02d\n",
        array[0] /* wYear */, array[1] /* wMonth */, array[3] /* wDay */,
        array[4] /* wHour */, array[5] /* wMinute */, array[6] /* wSecond */);

    return;
};

```

Compiler will grumble for a little:

```

systemtime2.c(7) : warning C4133: 'function' : incompatible types - from 'WORD [8]' to '
LPSYSTEMTIME'

```

But nevertheless, it will produce this code:

Listing 18.3: MSVC 2010

```

$SG78573 DB      '%04d-%02d-%02d %02d:%02d:%02d', 0aH, 00H

_array$ = -16                                ; size = 16
_main   PROC

```

³MSDN: [SYSTEMTIME structure](#)

```

    push    ebp
    mov     ebp, esp
    sub     esp, 16 ; 00000010H
    lea     eax, DWORD PTR _array$[ebp]
    push    eax
    call    DWORD PTR __imp__GetSystemTime@4
    movzx   ecx, WORD PTR _array$[ebp+12] ; wSecond
    push    ecx
    movzx   edx, WORD PTR _array$[ebp+10] ; wMinute
    push    edx
    movzx   eax, WORD PTR _array$[ebp+8] ; wHour
    push    eax
    movzx   ecx, WORD PTR _array$[ebp+6] ; wDay
    push    ecx
    movzx   edx, WORD PTR _array$[ebp+2] ; wMonth
    push    edx
    movzx   eax, WORD PTR _array$[ebp] ; wYear
    push    eax
    push    OFFSET $SG78573
    call    _printf
    add     esp, 28 ; 0000001cH
    xor     eax, eax
    mov     esp, ebp
    pop     ebp
    ret     0
_main     ENDP

```

And it works just as the same!

It is very interesting fact the result in assembly form cannot be distinguished from the result of previous compilation. So by looking at this code, one cannot say for sure, was there structure declared, or just pack of variables.

Nevertheless, no one will do it in sane state of mind. Since it is not convenient. Also structure fields may be changed by developers, swapped, etc.

18.2 Let's allocate space for structure using malloc()

However, sometimes it is simpler to place structures not in local stack, but in [heap](#):

```

#include <windows.h>
#include <stdio.h>

void main()
{
    SYSTEMTIME *t;

    t=(SYSTEMTIME *)malloc (sizeof (SYSTEMTIME));

    GetSystemTime (t);

    printf ("%04d-%02d-%02d %02d:%02d:%02d\n",
        t->wYear, t->wMonth, t->wDay,
        t->wHour, t->wMinute, t->wSecond);

    free (t);

    return;
};

```

Let's compile it now with optimization (/Ox) so to easily see what we need.

Listing 18.4: Optimizing MSVC

```
_main      PROC
```

```

push    esi
push    16                      ; 00000010H
call    _malloc
add     esp, 4
mov     esi, eax
push    esi
call    DWORD PTR __imp__GetSystemTime@4
movzx   eax, WORD PTR [esi+12] ; wSecond
movzx   ecx, WORD PTR [esi+10] ; wMinute
movzx   edx, WORD PTR [esi+8]  ; wHour
push    eax
movzx   eax, WORD PTR [esi+6]  ; wDay
push    ecx
movzx   ecx, WORD PTR [esi+2]  ; wMonth
push    edx
movzx   edx, WORD PTR [esi]    ; wYear
push    eax
push    ecx
push    edx
push    OFFSET $SG78833
call    _printf
push    esi
call    _free
add     esp, 32                ; 00000020H
xor     eax, eax
pop     esi
ret     0
_main   ENDP

```

So, `sizeof(SYSTEMTIME) = 16`, that is exact number of bytes to be allocated by `malloc()`. It returns the pointer to freshly allocated memory block in the EAX register, which is then moved into the ESI register. `GetSystemTime()` win32 function undertake to save value in the ESI, and that is why it is not saved here and continue to be used after `GetSystemTime()` call.

New instruction —`MOVZX` (*Move with Zero eXtent*). It may be used almost in those cases as `MOVSB` (13.1), but, it clears other bits to 0. That's because `printf()` requires 32-bit *int*, but we got WORD in structure—that is 16-bit unsigned type. That's why by copying value from WORD into *int*, bits from 16 to 31 must also be cleared, because there will be random noise otherwise, leaved there from previous operations on registers.

In this example, I can represent structure as array of WORD-s:

```

#include <windows.h>
#include <stdio.h>

void main()
{
    WORD *t;

    t=(WORD *)malloc (16);

    GetSystemTime (t);

    printf ("%04d-%02d-%02d %02d:%02d:%02d\n",
        t[0] /* wYear */, t[1] /* wMonth */, t[3] /* wDay */,
        t[4] /* wHour */, t[5] /* wMinute */, t[6] /* wSecond */);

    free (t);

    return;
};

```

We got:

```

$SG78594 DB      '%04d-%02d-%02d %02d:%02d:%02d', 0aH, 00H

_main PROC
    push    esi
    push    16                                ; 00000010H
    call    _malloc
    add     esp, 4
    mov     esi, eax
    push    esi
    call    DWORD PTR __imp__GetSystemTime@4
    movzx   eax, WORD PTR [esi+12]
    movzx   ecx, WORD PTR [esi+10]
    movzx   edx, WORD PTR [esi+8]
    push    eax
    movzx   eax, WORD PTR [esi+6]
    push    ecx
    movzx   ecx, WORD PTR [esi+2]
    push    edx
    movzx   edx, WORD PTR [esi]
    push    eax
    push    ecx
    push    edx
    push    OFFSET $SG78594
    call    _printf
    push    esi
    call    _free
    add     esp, 32                            ; 00000020H
    xor     eax, eax
    pop     esi
    ret     0
_main ENDP

```

Again, we got the code cannot be distinguished from the previous. And again I should note, one should not do this in practice.

18.3 struct tm

18.3.1 Linux

As of Linux, let's take tm structure from time.h for example:

```

#include <stdio.h>
#include <time.h>

void main()
{
    struct tm t;
    time_t unix_time;

    unix_time=time(NULL);

    localtime_r (&unix_time, &t);

    printf ("Year: %d\n", t.tm_year+1900);
    printf ("Month: %d\n", t.tm_mon);
    printf ("Day: %d\n", t.tm_mday);
    printf ("Hour: %d\n", t.tm_hour);
    printf ("Minutes: %d\n", t.tm_min);
    printf ("Seconds: %d\n", t.tm_sec);
};

```

Let's compile it in GCC 4.4.1:

Listing 18.6: GCC 4.4.1

```

main      proc near
           push    ebp
           mov     ebp, esp
           and     esp, 0FFFFFFF0h
           sub     esp, 40h
           mov     dword ptr [esp], 0 ; first argument for time()
           call    time
           mov     [esp+3Ch], eax
           lea     eax, [esp+3Ch] ; take pointer to what time() returned
           lea     edx, [esp+10h] ; at ESP+10h struct tm will begin
           mov     [esp+4], edx ; pass pointer to the structure begin
           mov     [esp], eax ; pass pointer to result of time()
           call    localtime_r
           mov     eax, [esp+24h] ; tm_year
           lea     edx, [eax+76Ch] ; edx=eax+1900
           mov     eax, offset format ; "Year: %d\n"
           mov     [esp+4], edx
           mov     [esp], eax
           call    printf
           mov     edx, [esp+20h] ; tm_mon
           mov     eax, offset aMonthD ; "Month: %d\n"
           mov     [esp+4], edx
           mov     [esp], eax
           call    printf
           mov     edx, [esp+1Ch] ; tm_mday
           mov     eax, offset aDayD ; "Day: %d\n"
           mov     [esp+4], edx
           mov     [esp], eax
           call    printf
           mov     edx, [esp+18h] ; tm_hour
           mov     eax, offset aHourD ; "Hour: %d\n"
           mov     [esp+4], edx
           mov     [esp], eax
           call    printf
           mov     edx, [esp+14h] ; tm_min
           mov     eax, offset aMinutesD ; "Minutes: %d\n"
           mov     [esp+4], edx
           mov     [esp], eax
           call    printf
           mov     edx, [esp+10h]
           mov     eax, offset aSecondsD ; "Seconds: %d\n"
           mov     [esp+4], edx ; tm_sec
           mov     [esp], eax
           call    printf
           leave
           retn
main      endp

```

Somehow, *IDA* did not create local variable names in local stack. But since we already experienced reverse engineers :-), we may do it without this information in this simple example.

Please also pay attention to the `lea edx, [eax+76Ch]` —this instruction just adds `0x76C` to the value in the `EAX`, but not modifies any flags. See also relevant section about `LEA` ([80.6.2](#)).

In order to illustrate the structure is just variables laying side-by-side in one place, let's rework example, while looking at the file *time.h*:

Listing 18.7: time.h

```

struct tm
{
    int    tm_sec;
    int    tm_min;

```

```

int    tm_hour;
int    tm_mday;
int    tm_mon;
int    tm_year;
int    tm_wday;
int    tm_yday;
int    tm_isdst;
};

```

```

#include <stdio.h>
#include <time.h>

void main()
{
    int tm_sec, tm_min, tm_hour, tm_mday, tm_mon, tm_year, tm_wday, tm_yday, tm_isdst;
    time_t unix_time;

    unix_time=time(NULL);

    localtime_r (&unix_time, &tm_sec);

    printf ("Year: %d\n", tm_year+1900);
    printf ("Month: %d\n", tm_mon);
    printf ("Day: %d\n", tm_mday);
    printf ("Hour: %d\n", tm_hour);
    printf ("Minutes: %d\n", tm_min);
    printf ("Seconds: %d\n", tm_sec);
};

```

N.B. The pointer to the exactly `tm_sec` field is passed into `localtime_r`, i.e., to the first “structure” element. Compiler will warn us:

Listing 18.8: GCC 4.7.3

```

GCC_tm2.c: In function 'main':
GCC_tm2.c:11:5: warning: passing argument 2 of 'localtime_r' from incompatible pointer type [
    enabled by default]
In file included from GCC_tm2.c:2:0:
/usr/include/time.h:59:12: note: expected 'struct tm *' but argument is of type 'int *'

```

But nevertheless, will generate this:

Listing 18.9: GCC 4.7.3

```

main                proc near

var_30              = dword ptr -30h
var_2C              = dword ptr -2Ch
unix_time           = dword ptr -1Ch
tm_sec              = dword ptr -18h
tm_min              = dword ptr -14h
tm_hour             = dword ptr -10h
tm_mday             = dword ptr -0Ch
tm_mon              = dword ptr -8
tm_year             = dword ptr -4

                    push    ebp
                    mov     ebp, esp
                    and     esp, 0FFFFFFF0h
                    sub     esp, 30h
                    call    __main
                    mov     [esp+30h+var_30], 0 ; arg 0
                    call    time

```

```

mov     [esp+30h+unix_time], eax
lea     eax, [esp+30h+tm_sec]
mov     [esp+30h+var_2C], eax
lea     eax, [esp+30h+unix_time]
mov     [esp+30h+var_30], eax
call    localtime_r
mov     eax, [esp+30h+tm_year]
add     eax, 1900
mov     [esp+30h+var_2C], eax
mov     [esp+30h+var_30], offset aYearD ; "Year: %d\n"
call    printf
mov     eax, [esp+30h+tm_mon]
mov     [esp+30h+var_2C], eax
mov     [esp+30h+var_30], offset aMonthD ; "Month: %d\n"
call    printf
mov     eax, [esp+30h+tm_mday]
mov     [esp+30h+var_2C], eax
mov     [esp+30h+var_30], offset aDayD ; "Day: %d\n"
call    printf
mov     eax, [esp+30h+tm_hour]
mov     [esp+30h+var_2C], eax
mov     [esp+30h+var_30], offset aHourD ; "Hour: %d\n"
call    printf
mov     eax, [esp+30h+tm_min]
mov     [esp+30h+var_2C], eax
mov     [esp+30h+var_30], offset aMinutesD ; "Minutes: %d\n"
call    printf
mov     eax, [esp+30h+tm_sec]
mov     [esp+30h+var_2C], eax
mov     [esp+30h+var_30], offset aSecondsD ; "Seconds: %d\n"
call    printf
leave
retn
main    endp

```

This code is identical to what we saw previously and it is not possible to say, was it structure in original source code or just pack of variables.

And this works. However, it is not recommended to do this in practice. Usually, compiler allocated variables in local stack in the same order as they were declared in function. Nevertheless, there is no any guarantee.

By the way, some other compiler may warn the `tm_year`, `tm_mon`, `tm_mday`, `tm_hour`, `tm_min` variables, but not `tm_sec` are used without being initialized. Indeed, compiler do not know these will be filled when calling to `localtime_r()`.

I chose exactly this example for illustration, since all structure fields has *int* type, and `SYSTEMTIME` structure fields —16-bit `WORD`, and if to declare them as a local variables, they will be aligned on a 32-bit border, and nothing will work (because `GetSystemTime()` will fill them incorrectly). Read more about it in next section: “Fields packing in structure”.

So, structure is just variables pack laying on one place, side-by-side. I could say the structure is a syntactic sugar, directing compiler to hold them in one place. However, I’m not programming languages expert, so, most likely, I’m wrong with this term. By the way, there were a times, in very early C versions (before 1972), in which there were no structures at all [29].

18.3.2 ARM + Optimizing Keil + thumb mode

Same example:

Listing 18.10: Optimizing Keil + thumb mode

```

var_38    = -0x38
var_34    = -0x34
var_30    = -0x30
var_2C    = -0x2C
var_28    = -0x28
var_24    = -0x24
timer     = -0xC

```

```

PUSH    {LR}
MOVS    R0, #0          ; timer
SUB     SP, SP, #0x34
BL      time
STR     R0, [SP,#0x38+timer]
MOV     R1, SP          ; tp
ADD     R0, SP, #0x38+timer ; timer
BL      localtime_r
LDR     R1, =0x76C
LDR     R0, [SP,#0x38+var_24]
ADDS    R1, R0, R1
ADR     R0, aYearD      ; "Year: %d\n"
BL      __2printf
LDR     R1, [SP,#0x38+var_28]
ADR     R0, aMonthD     ; "Month: %d\n"
BL      __2printf
LDR     R1, [SP,#0x38+var_2C]
ADR     R0, aDayD       ; "Day: %d\n"
BL      __2printf
LDR     R1, [SP,#0x38+var_30]
ADR     R0, aHourD      ; "Hour: %d\n"
BL      __2printf
LDR     R1, [SP,#0x38+var_34]
ADR     R0, aMinutesD   ; "Minutes: %d\n"
BL      __2printf
LDR     R1, [SP,#0x38+var_38]
ADR     R0, aSecondsD   ; "Seconds: %d\n"
BL      __2printf
ADD     SP, SP, #0x34
POP     {PC}

```

18.3.3 ARM + Optimizing Xcode (LLVM) + thumb-2 mode

IDA “get to know” tm structure (because IDA “knows” argument types of library functions like `localtime_r()`), so it shows here structure elements accesses and also names are assigned to them.

Listing 18.11: Optimizing Xcode (LLVM) + thumb-2 mode

```

var_38      = -0x38
var_34      = -0x34

PUSH        {R7,LR}
MOV         R7, SP
SUB         SP, SP, #0x30
MOVS        R0, #0 ; time_t *
BLX         _time
ADD         R1, SP, #0x38+var_34 ; struct tm *
STR         R0, [SP,#0x38+var_38]
MOV         R0, SP ; time_t *
BLX         _localtime_r
LDR         R1, [SP,#0x38+var_34.tm_year]
MOV         R0, 0xF44 ; "Year: %d\n"
ADD         R0, PC ; char *
ADDW        R1, R1, #0x76C
BLX         _printf
LDR         R1, [SP,#0x38+var_34.tm_mon]
MOV         R0, 0xF3A ; "Month: %d\n"
ADD         R0, PC ; char *
BLX         _printf
LDR         R1, [SP,#0x38+var_34.tm_mday]
MOV         R0, 0xF35 ; "Day: %d\n"

```

```

        ADD      R0, PC  ; char *
        BLX      _printf
        LDR      R1, [SP,#0x38+var_34.tm_hour]
        MOV      R0, 0xF2E ; "Hour: %d\n"
        ADD      R0, PC  ; char *
        BLX      _printf
        LDR      R1, [SP,#0x38+var_34.tm_min]
        MOV      R0, 0xF28 ; "Minutes: %d\n"
        ADD      R0, PC  ; char *
        BLX      _printf
        LDR      R1, [SP,#0x38+var_34]
        MOV      R0, 0xF25 ; "Seconds: %d\n"
        ADD      R0, PC  ; char *
        BLX      _printf
        ADD      SP, SP, #0x30
        POP      {R7,PC}

```

...

```

00000000 tm          struc ; (sizeof=0x2C, standard type)
00000000 tm_sec      DCD ?
00000004 tm_min      DCD ?
00000008 tm_hour     DCD ?
0000000C tm_mday     DCD ?
00000010 tm_mon      DCD ?
00000014 tm_year     DCD ?
00000018 tm_wday     DCD ?
0000001C tm_yday     DCD ?
00000020 tm_isdst    DCD ?
00000024 tm_gmtoff   DCD ?
00000028 tm_zone     DCD ? ; offset
0000002C tm          ends

```

18.4 Fields packing in structure

One important thing is fields packing in structures⁴.

Let's take a simple example:

```

#include <stdio.h>

struct s
{
    char a;
    int b;
    char c;
    int d;
};

void f(struct s s)
{
    printf ("a=%d; b=%d; c=%d; d=%d\n", s.a, s.b, s.c, s.d);
};

```

As we see, we have two *char* fields (each is exactly one byte) and two more — *int* (each - 4 bytes).

18.4.1 x86

That's all compiling into:

⁴See also: [Wikipedia: Data structure alignment](#)

```

_s$ = 8                ; size = 16
?f@@YAXUs@@@Z PROC    ; f
    push    ebp
    mov     ebp, esp
    mov     eax, DWORD PTR _s$[ebp+12]
    push    eax
    movsx   ecx, BYTE PTR _s$[ebp+8]
    push    ecx
    mov     edx, DWORD PTR _s$[ebp+4]
    push    edx
    movsx   eax, BYTE PTR _s$[ebp]
    push    eax
    push    OFFSET $SG3842
    call    _printf
    add     esp, 20      ; 00000014H
    pop     ebp
    ret     0
?f@@YAXUs@@@Z ENDP    ; f
_TEXT      ENDS

```

As we can see, each field's address is aligned on a 4-bytes border. That's why each *char* occupies 4 bytes here (like *int*). Why? Thus it is easier for CPU to access memory at aligned addresses and to cache data from it.

However, it is not very economical in size sense.

Let's try to compile it with option (/Zp1) (/Zp[n] pack structures on n-byte boundary).

Listing 18.12: MSVC /Zp1

```

_TEXT      SEGMENT
_s$ = 8                ; size = 10
?f@@YAXUs@@@Z PROC    ; f
    push    ebp
    mov     ebp, esp
    mov     eax, DWORD PTR _s$[ebp+6]
    push    eax
    movsx   ecx, BYTE PTR _s$[ebp+5]
    push    ecx
    mov     edx, DWORD PTR _s$[ebp+1]
    push    edx
    movsx   eax, BYTE PTR _s$[ebp]
    push    eax
    push    OFFSET $SG3842
    call    _printf
    add     esp, 20      ; 00000014H
    pop     ebp
    ret     0
?f@@YAXUs@@@Z ENDP    ; f

```

Now the structure takes only 10 bytes and each *char* value takes 1 byte. What it give to us? Size economy. And as drawback —CPU will access these fields without maximal performance it can.

As it can be easily guessed, if the structure is used in many source and object files, all these must be compiled with the same convention about structures packing.

Aside from MSVC /Zp option which set how to align each structure field, here is also `#pragma pack` compiler option, it can be defined right in source code. It is available in both MSVC⁵ and GCC⁶.

Let's back to the `SYSTEMTIME` structure consisting in 16-bit fields. How our compiler know to pack them on 1-byte alignment boundary?

`WinNT.h` file has this:

Listing 18.13: WinNT.h

```
#include "pshpack1.h"
```

⁵MSDN: Working with Packing Structures

⁶Structure-Packing Pragmas

And this:

Listing 18.14: WinNT.h

```
#include "pshpack4.h"           // 4 byte packing is the default
```

The file PshPack1.h looks like:

Listing 18.15: PshPack1.h

```
#if ! (defined(lint) || defined(RC_INVOKED))
#if ( _MSC_VER >= 800 && !defined(_M_I86)) || defined(_PUSHPOP_SUPPORTED)
#pragma warning(disable:4103)
#if !(defined( MIDL_PASS )) || defined( __midl )
#pragma pack(push,1)
#else
#pragma pack(1)
#endif
#else
#pragma pack(1)
#endif
#endif /* ! (defined(lint) || defined(RC_INVOKED)) */
```

That's how compiler will pack structures defined after `#pragma pack`.

18.4.2 ARM + Optimizing Keil + thumb mode

Listing 18.16: Optimizing Keil + thumb mode

```
.text:0000003E          exit                                ; CODE XREF: f+16
.text:0000003E 05 B0          ADD      SP, SP, #0x14
.text:00000040 00 BD          POP      {PC}

.text:00000280          f
.text:00000280
.text:00000280          var_18          = -0x18
.text:00000280          a              = -0x14
.text:00000280          b              = -0x10
.text:00000280          c              = -0xC
.text:00000280          d              = -8
.text:00000280
.text:00000280 0F B5          PUSH     {R0-R3,LR}
.text:00000282 81 B0          SUB      SP, SP, #4
.text:00000284 04 98          LDR      R0, [SP,#16]      ; d
.text:00000286 02 9A          LDR      R2, [SP,#8]      ; b
.text:00000288 00 90          STR      R0, [SP]
.text:0000028A 68 46          MOV      R0, SP
.text:0000028C 03 7B          LDRB     R3, [R0,#12]      ; c
.text:0000028E 01 79          LDRB     R1, [R0,#4]      ; a
.text:00000290 59 A0          ADR      R0, aADBDCDDD    ; "a=%d; b=%d; c=%d; d=%d\n"
.text:00000292 05 F0 AD FF          BL      __2printf
.text:00000296 D2 E6          B        exit
```

As we may recall, here a structure passed instead of pointer to structure, and since first 4 function arguments in ARM are passed via registers, so then structure fields are passed via R0–R3.

LDRB loads one byte from memory and extending it to 32-bit, taking into account its sign. This is akin to MOVSBX (13.1) instruction in x86. Here it is used for loading fields *a* and *c* from structure.

One more thing we spot easily, instead of function epilogue, here is jump to another function's epilogue! Indeed, that was quite different function, not related in any way to our function, however, it has exactly the same epilogue (probably because, it hold 5 local variables too ($5 * 4 = 0x14$)). Also it is located nearby (take a look on addresses). Indeed, there is no difference, which epilogue to execute, if it works just as we need. Apparently, Keil decides to reuse a part of another function by a reason of economy. Epilogue takes 4 bytes while jump —only 2.

18.4.3 ARM + Optimizing Xcode (LLVM) + thumb-2 mode

Listing 18.17: Optimizing Xcode (LLVM) + thumb-2 mode

```

var_C      = -0xC

        PUSH        {R7,LR}
        MOV         R7, SP
        SUB         SP, SP, #4
        MOV         R9, R1 ; b
        MOV         R1, R0 ; a
        MOVW        R0, #0xF10 ; "a=%d; b=%d; c=%d; d=%d\n"
        SXTB        R1, R1 ; prepare a
        MOVT.W      R0, #0
        STR         R3, [SP,#0xC+var_C] ; place d to stack for printf()
        ADD         R0, PC ; format-string
        SXTB        R3, R2 ; prepare c
        MOV         R2, R9 ; b
        BLX         _printf
        ADD         SP, SP, #4
        POP         {R7,PC}

```

SXTB (*Signed Extend Byte*) is analogous to MOVSBX (13.1) in x86 as well, but works not with memory, but with register. All the rest —just the same.

18.5 Nested structures

Now what about situations when one structure defines another structure inside?

```

#include <stdio.h>

struct inner_struct
{
    int a;
    int b;
};

struct outer_struct
{
    char a;
    int b;
    struct inner_struct c;
    char d;
    int e;
};

void f(struct outer_struct s)
{
    printf ("a=%d; b=%d; c.a=%d; c.b=%d; d=%d; e=%d\n",
           s.a, s.b, s.c.a, s.c.b, s.d, s.e);
};

```

...in this case, both inner_struct fields will be placed between a,b and d,e fields of outer_struct.
Let's compile (MSVC 2010):

Listing 18.18: MSVC 2010

```

_s$ = 8 ; size = 24
_f PROC
    push    ebp
    mov     ebp, esp
    mov     eax, DWORD PTR _s$[ebp+20] ; e
    push    eax

```

```

movsx ecx, BYTE PTR _s$[ebp+16] ; d
push  ecx
mov   edx, DWORD PTR _s$[ebp+12] ; c.b
push  edx
mov   eax, DWORD PTR _s$[ebp+8] ; c.a
push  eax
mov   ecx, DWORD PTR _s$[ebp+4] ; b
push  ecx
movsx edx, BYTE PTR _s$[ebp] ; a
push  edx
push  OFFSET $SG2466
call  _printf
add   esp, 28 ; 0000001cH
pop   ebp
ret   0
_f    ENDP

```

One curious point here is that by looking onto this assembly code, we do not even see that another structure was used inside of it! Thus, we would say, nested structures are finally unfolds into *linear* or *one-dimensional* structure.

Of course, if to replace `struct inner_struct c;` declaration to `struct inner_struct *c;` (thus making a pointer here) situation will be quite different.

18.6 Bit fields in structure

18.6.1 CPUID example

C/C++ language allow to define exact number of bits for each structure fields. It is very useful if one needs to save memory space. For example, one bit is enough for variable of *bool* type. But of course, it is not rational if speed is important.

Let's consider CPUID⁷ instruction example. This instruction returning information about current CPU and its features.

If the EAX is set to 1 before instruction execution, CPUID will return this information packed into the EAX register:

3:0	Stepping
7:4	Model
11:8	Family
13:12	Processor Type
19:16	Extended Model
27:20	Extended Family

Msvc 2010 has CPUID macro, but GCC 4.4.1 —has not. So let's make this function by yourself for GCC with the help of its built-in assembler⁸.

```

#include <stdio.h>

#ifdef __GNUC__
static inline void cpuid(int code, int *a, int *b, int *c, int *d) {
    asm volatile("cpuid":"=a"(*a), "=b"(*b), "=c"(*c), "=d"(*d) : "a"(code));
}
#endif

#ifdef _MSC_VER
#include <intrin.h>
#endif

struct CPUID_1_EAX
{
    unsigned int stepping:4;
    unsigned int model:4;
    unsigned int family_id:4;
    unsigned int processor_type:2;

```

⁷<http://en.wikipedia.org/wiki/CPUID>

⁸More about internal GCC assembler

```

    unsigned int reserved1:2;
    unsigned int extended_model_id:4;
    unsigned int extended_family_id:8;
    unsigned int reserved2:4;
};

int main()
{
    struct CPUID_1_EAX *tmp;
    int b[4];

#ifdef _MSC_VER
    __cpuid(b,1);
#endif

#ifdef __GNUC__
    cpuid (1, &b[0], &b[1], &b[2], &b[3]);
#endif

    tmp=(struct CPUID_1_EAX *)&b[0];

    printf ("stepping=%d\n", tmp->stepping);
    printf ("model=%d\n", tmp->model);
    printf ("family_id=%d\n", tmp->family_id);
    printf ("processor_type=%d\n", tmp->processor_type);
    printf ("extended_model_id=%d\n", tmp->extended_model_id);
    printf ("extended_family_id=%d\n", tmp->extended_family_id);

    return 0;
};

```

After CPUID will fill EAX/EBX/ECX/EDX, these registers will be reflected in the `b[]` array. Then, we have a pointer to the `CPUID_1_EAX` structure and we point it to the value in the EAX from `b[]` array.

In other words, we treat 32-bit *int* value as a structure.

Then we read from the structure.

Let's compile it in MSVC 2008 with `/Ox` option:

Listing 18.19: Optimizing MSVC 2008

```

_b$ = -16          ; size = 16
_main PROC
    sub     esp, 16          ; 00000010H
    push    ebx

    xor     ecx, ecx
    mov     eax, 1
    cpuid
    push    esi
    lea     esi, DWORD PTR _b$[esp+24]
    mov     DWORD PTR [esi], eax
    mov     DWORD PTR [esi+4], ebx
    mov     DWORD PTR [esi+8], ecx
    mov     DWORD PTR [esi+12], edx

    mov     esi, DWORD PTR _b$[esp+24]
    mov     eax, esi
    and     eax, 15          ; 0000000fH
    push    eax
    push    OFFSET $SG15435 ; 'stepping=%d', 0aH, 00H
    call    _printf

    mov     ecx, esi

```

```

shr     ecx, 4
and     ecx, 15                      ; 0000000fH
push    ecx
push    OFFSET $SG15436 ; 'model=%d', 0aH, 00H
call    _printf

mov     edx, esi
shr     edx, 8
and     edx, 15                      ; 0000000fH
push    edx
push    OFFSET $SG15437 ; 'family_id=%d', 0aH, 00H
call    _printf

mov     eax, esi
shr     eax, 12                     ; 0000000cH
and     eax, 3
push    eax
push    OFFSET $SG15438 ; 'processor_type=%d', 0aH, 00H
call    _printf

mov     ecx, esi
shr     ecx, 16                     ; 00000010H
and     ecx, 15                     ; 0000000fH
push    ecx
push    OFFSET $SG15439 ; 'extended_model_id=%d', 0aH, 00H
call    _printf

shr     esi, 20                     ; 00000014H
and     esi, 255                    ; 000000ffH
push    esi
push    OFFSET $SG15440 ; 'extended_family_id=%d', 0aH, 00H
call    _printf
add     esp, 48                     ; 00000030H
pop     esi

xor     eax, eax
pop     ebx

add     esp, 16                     ; 00000010H
ret     0
_main   ENDP

```

SHR instruction shifting value in the EAX register by number of bits must be *skipped*, e.g., we ignore a bits *at right*. AND instruction clears bits not needed *at left*, or, in other words, leaves only those bits in the EAX register we need now. Let's try GCC 4.4.1 with -O3 option.

Listing 18.20: Optimizing GCC 4.4.1

```

main      proc near                ; DATA XREF: _start+17
push      ebp
mov       ebp, esp
and       esp, 0FFFFFF0h
push      esi
mov       esi, 1
push      ebx
mov       eax, esi
sub       esp, 18h
cpuid
mov       esi, eax
and       eax, 0Fh
mov       [esp+8], eax
mov       dword ptr [esp+4], offset aSteppingD ; "stepping=%d\n"

```

```


mov     dword ptr [esp], 1
call    ___printf_chk
mov     eax, esi
shr     eax, 4
and     eax, 0Fh
mov     [esp+8], eax
mov     dword ptr [esp+4], offset aModelD ; "model=%d\n"
mov     dword ptr [esp], 1
call    ___printf_chk
mov     eax, esi
shr     eax, 8
and     eax, 0Fh
mov     [esp+8], eax
mov     dword ptr [esp+4], offset aFamily_idD ; "family_id=%d\n"
mov     dword ptr [esp], 1
call    ___printf_chk
mov     eax, esi
shr     eax, 0Ch
and     eax, 3
mov     [esp+8], eax
mov     dword ptr [esp+4], offset aProcessor_type ; "processor_type=%d\n"
mov     dword ptr [esp], 1
call    ___printf_chk
mov     eax, esi
shr     eax, 10h
shr     esi, 14h
and     eax, 0Fh
and     esi, 0FFh
mov     [esp+8], eax
mov     dword ptr [esp+4], offset aExtended_model ; "extended_model_id=%d\n"
mov     dword ptr [esp], 1
call    ___printf_chk
mov     [esp+8], esi
mov     dword ptr [esp+4], offset unk_80486D0
mov     dword ptr [esp], 1
call    ___printf_chk
add     esp, 18h
xor     eax, eax
pop     ebx
pop     esi
mov     esp, ebp
pop     ebp
ret     0
main     endp

```

Almost the same. The only thing worth noting is the GCC somehow united calculation of `extended_model_id` and `extended_family_id` into one block, instead of calculating them separately, before corresponding each `printf()` call.

18.6.2 Working with the float type as with a structure

As it was already noted in section about FPU (15), both *float* and *double* types consisted of sign, significand (or fraction) and exponent. But will we able to work with these fields directly? Let's try with *float*.



(S—sign)

```

#include <stdio.h>
#include <assert.h>

```

```

#include <stdlib.h>
#include <memory.h>

struct float_as_struct
{
    unsigned int fraction : 23; // fractional part
    unsigned int exponent : 8;  // exponent + 0x3FF
    unsigned int sign : 1;      // sign bit
};

float f(float _in)
{
    float f=_in;
    struct float_as_struct t;

    assert (sizeof (struct float_as_struct) == sizeof (float));

    memcpy (&t, &f, sizeof (float));

    t.sign=1; // set negative sign
    t.exponent=t.exponent+2; // multiple d by 2^n (n here is 2)

    memcpy (&f, &t, sizeof (float));

    return f;
};

int main()
{
    printf ("%f\n", f(1.234));
};

```

`float_as_struct` structure occupies as much space in memory as *float*, e.g., 4 bytes or 32 bits.

Now we setting negative sign in input value and also by adding 2 to exponent we thereby multiplying the whole number by 2^2 , e.g., by 4.

Let's compile in MSVC 2008 without optimization:

Listing 18.21: Non-optimizing MSVC 2008

```

_t$ = -8          ; size = 4
_f$ = -4          ; size = 4
__in$ = 8         ; size = 4
?f@@YAMM@Z PROC  ; f
    push    ebp
    mov     ebp, esp
    sub     esp, 8

    fld     DWORD PTR __in$[ebp]
    fstp    DWORD PTR _f$[ebp]

    push    4
    lea     eax, DWORD PTR _f$[ebp]
    push    eax
    lea     ecx, DWORD PTR _t$[ebp]
    push    ecx
    call    _memcpy
    add     esp, 12          ; 0000000cH

    mov     edx, DWORD PTR _t$[ebp]
    or      edx, -2147483648 ; 80000000H - set minus sign
    mov     DWORD PTR _t$[ebp], edx

```

```

mov     eax, DWORD PTR _t$[ebp]
shr     eax, 23          ; 00000017H - drop significand
and     eax, 255         ; 000000ffH - leave here only exponent
add     eax, 2           ; add 2 to it
and     eax, 255         ; 000000ffH
shl     eax, 23          ; 00000017H - shift result to place of bits 30:23
mov     ecx, DWORD PTR _t$[ebp]
and     ecx, -2139095041 ; 807fffffH - drop exponent
or      ecx, eax         ; add original value without exponent with new calculated exponent
mov     DWORD PTR _t$[ebp], ecx

push    4
lea     edx, DWORD PTR _t$[ebp]
push    edx
lea     eax, DWORD PTR _f$[ebp]
push    eax
call    _memcpy
add     esp, 12          ; 0000000cH

fld     DWORD PTR _f$[ebp]

mov     esp, ebp
pop     ebp
ret     0
?f@@YAMM@Z ENDP          ; f

```

Redundant for a bit. If it is compiled with /Ox flag there is no memcpy() call, f variable is used directly. But it is easier to understand it all considering unoptimized version.

What GCC 4.4.1 with -O3 will do?

Listing 18.22: Optimizing GCC 4.4.1

```

; f(float)
public _Z1ff
_Z1ff proc near

var_4 = dword ptr -4
arg_0 = dword ptr 8

push    ebp
mov     ebp, esp
sub     esp, 4
mov     eax, [ebp+arg_0]
or      eax, 80000000h ; set minus sign
mov     edx, eax
and     eax, 807FFFFFFh ; leave only significand and exponent in EAX
shr     edx, 23         ; prepare exponent
add     edx, 2          ; add 2
movzx   edx, dl         ; clear all bits except 7:0 in EAX
shl     edx, 23         ; shift new calculated exponent to its place
or      eax, edx        ; add new exponent and original value without exponent
mov     [ebp+var_4], eax
fld     [ebp+var_4]
leave
retn
_Z1ff endp

public main
main proc near
push    ebp
mov     ebp, esp
and     esp, 0FFFFFFF0h

```

```
    sub    esp, 10h
    fld    ds:dword_8048614 ; -4.936
    fstp   qword ptr [esp+8]
    mov    dword ptr [esp+4], offset asc_8048610 ; "%f\n"
    mov    dword ptr [esp], 1
    call   ___printf_chk
    xor    eax, eax
    leave
    retn
main     endp
```

The `f()` function is almost understandable. However, what is interesting, GCC was able to calculate `f(1.234)` result during compilation stage despite all this hodge-podge with structure fields and prepared this argument to the `printf()` as precalculated!

Chapter 19

Unions

19.1 Pseudo-random number generator example

If we need float random numbers from 0 to 1, the most simplest thing is to use PRNG¹ like Mersenne twister produces random 32-bit values in DWORD form, transform this value to *float* and then dividing it by RAND_MAX (0xFFFFFFFF in our case) —value we got will be in 0..1 interval.

But as we know, division operation is slow. Will it be possible to get rid of it, as in case of division by multiplication? (14)

Let's recall what float number consisted of: sign bit, significand bits and exponent bits. We need just to store random bits to all significand bits for getting random float number!

Exponent cannot be zero (number will be denormalized in this case), so we will store 01111111 to exponent —this means exponent will be 1. Then fill significand with random bits, set sign bit to 0 (which means positive number) and voilà. Generated numbers will be in 1 to 2 interval, so we also must subtract 1 from it.

Very simple linear congruential random numbers generator is used in my example², produces 32-bit numbers. The PRNG initializing by current time in UNIX-style.

Then, *float* type represented as *union* —it is the C/C++ construction enabling us to interpret piece of memory as differently typed. In our case, we are able to create a variable of *union* type and then access to it as it is *float* or as it is *uint32_t*. It can be said, it is just a hack. A dirty one.

```
#include <stdio.h>
#include <stdint.h>
#include <time.h>

union uint32_t_float
{
    uint32_t i;
    float f;
};

// from the Numerical Recipes book
const uint32_t RNG_a=1664525;
const uint32_t RNG_c=1013904223;

int main()
{
    uint32_t_float tmp;

    uint32_t RNG_state=time(NULL); // initial seed
    for (int i=0; i<100; i++)
    {
        RNG_state=RNG_state*RNG_a+RNG_c;
        tmp.i=RNG_state & 0x007fffff | 0x3f800000;
        float x=tmp.f-1;
        printf ("%f\n", x);
    }
    return 0;
}
```

¹Pseudorandom number generator

²idea was taken from: <http://xor0110.wordpress.com/2010/09/24/how-to-generate-floating-point-random-numbers-efficiently>

};

Listing 19.1: MSVC 2010 (/Ox)

```

$SG4232    DB    '%f', 0aH, 00H

__real@3ff0000000000000 DQ 03ff000000000000r    ; 1

tv140 = -4                ; size = 4
_tmp$ = -4                ; size = 4
_main      PROC
    push    ebp
    mov     ebp, esp
    and     esp, -64        ; ffffffff0H
    sub     esp, 56        ; 00000038H
    push    esi
    push    edi
    push    0
    call    __time64
    add     esp, 4
    mov     esi, eax
    mov     edi, 100        ; 00000064H
$LN3@main:

; let's generate random 32-bit number

    imul    esi, 1664525    ; 0019660dH
    add     esi, 1013904223 ; 3c6ef35fH
    mov     eax, esi

; leave bits for significand only

    and     eax, 8388607    ; 007fffffH

; set exponent to 1

    or      eax, 1065353216 ; 3f800000H

; store this value as int

    mov     DWORD PTR _tmp$[esp+64], eax
    sub     esp, 8

; load this value as float

    fld     DWORD PTR _tmp$[esp+72]

; subtract one from it

    fsub    QWORD PTR __real@3ff0000000000000
    fstp    DWORD PTR tv140[esp+72]
    fld     DWORD PTR tv140[esp+72]
    fstp    QWORD PTR [esp]
    push    OFFSET $SG4232
    call    _printf
    add     esp, 12        ; 0000000cH
    dec     edi
    jne     SHORT $LN3@main
    pop     edi
    xor     eax, eax

```

```
    pop     esi
    mov     esp, ebp
    pop     ebp
    ret     0
_main      ENDP
_TEXT      ENDS
END
```

GCC produces very similar code.

Chapter 20

Pointers to functions

Pointer to function, as any other pointer, is just an address of function beginning in its code segment.

It is often used in callbacks¹.

Well-known examples are:

- `qsort()`², `atexit()`³ from the standard C library;
- signals in *NIX OS⁴;
- thread starting: `CreateThread()` (win32), `pthread_create()` (POSIX);
- a lot of win32 functions, e.g. `EnumChildWindows()`⁵.

So, `qsort()` function is a C/C++ standard library quicksort implementation. The functions is able to sort anything, any types of data, if you have a function for two elements comparison and `qsort()` is able to call it.

The comparison function can be defined as:

```
int (*compare)(const void *, const void *)
```

Let's use slightly modified example I found [here](#):

```
/* ex3 Sorting ints with qsort */

#include <stdio.h>
#include <stdlib.h>

int comp(const void * _a, const void * _b)
{
    const int *a=(const int *)_a;
    const int *b=(const int *)_b;

    if (*a==*b)
        return 0;
    else
        if (*a < *b)
            return -1;
        else
            return 1;
}

int main(int argc, char* argv[])
{
    int numbers[10]={1892,45,200,-98,4087,5,-12345,1087,88,-100000};
    int i;
```

¹[http://en.wikipedia.org/wiki/Callback_\(computer_science\)](http://en.wikipedia.org/wiki/Callback_(computer_science))

²[http://en.wikipedia.org/wiki/Qsort_\(C_standard_library\)](http://en.wikipedia.org/wiki/Qsort_(C_standard_library))

³<http://www.opengroup.org/onlinepubs/009695399/functions/atexit.html>

⁴<http://en.wikipedia.org/wiki/Signal.h>

⁵[http://msdn.microsoft.com/en-us/library/ms633494\(VS.85\).aspx](http://msdn.microsoft.com/en-us/library/ms633494(VS.85).aspx)

```

/* Sort the array */
qsort(numbers,10,sizeof(int),comp) ;
for (i=0;i<9;i++)
    printf("Number = %d\n",numbers[ i ]) ;
return 0;
}

```

Let's compile it in MSVC 2010 (I omitted some parts for the sake of brevity) with /Ox option:

Listing 20.1: Optimizing MSVC 2010

```

__a$ = 8          ; size = 4
__b$ = 12         ; size = 4
_comp PROC
    mov     eax, DWORD PTR __a$[esp-4]
    mov     ecx, DWORD PTR __b$[esp-4]
    mov     eax, DWORD PTR [eax]
    mov     ecx, DWORD PTR [ecx]
    cmp     eax, ecx
    jne     SHORT $LN4@comp
    xor     eax, eax
    ret     0
$LN4@comp:
    xor     edx, edx
    cmp     eax, ecx
    setge   dl
    lea     eax, DWORD PTR [edx+edx-1]
    ret     0
_comp ENDP

...

_numbers$ = -44   ; size = 40
_i$ = -4          ; size = 4
_argc$ = 8        ; size = 4
_argv$ = 12       ; size = 4
_main PROC
    push    ebp
    mov     ebp, esp
    sub     esp, 44 ; 0000002cH
    mov     DWORD PTR _numbers$[ebp], 1892 ; 00000764H
    mov     DWORD PTR _numbers$[ebp+4], 45 ; 0000002dH
    mov     DWORD PTR _numbers$[ebp+8], 200 ; 000000c8H
    mov     DWORD PTR _numbers$[ebp+12], -98 ; ffffffff9eH
    mov     DWORD PTR _numbers$[ebp+16], 4087 ; 00000ff7H
    mov     DWORD PTR _numbers$[ebp+20], 5
    mov     DWORD PTR _numbers$[ebp+24], -12345 ; fffffcf7H
    mov     DWORD PTR _numbers$[ebp+28], 1087 ; 0000043fH
    mov     DWORD PTR _numbers$[ebp+32], 88 ; 00000058H
    mov     DWORD PTR _numbers$[ebp+36], -100000 ; fffe7960H
    push    OFFSET _comp
    push    4
    push    10 ; 0000000aH
    lea     eax, DWORD PTR _numbers$[ebp]
    push    eax
    call    _qsort
    add     esp, 16 ; 00000010H

...

```

Nothing surprising so far. As a fourth argument, an address of label `_comp` is passed, that is just a place where function `comp()` located.

How `qsort()` calling it?

Let's take a look into this function located in MSVCR80.DLL (a MSVC DLL module with C standard library functions):

Listing 20.2: MSVCR80.DLL

```
.text:7816CBF0 ; void __cdecl qsort(void *, unsigned int, unsigned int, int (__cdecl *)(const
    void *, const void *))
.text:7816CBF0          public _qsort
.text:7816CBF0          proc near
.text:7816CBF0
.text:7816CBF0 lo              = dword ptr -104h
.text:7816CBF0 hi              = dword ptr -100h
.text:7816CBF0 var_FC          = dword ptr -0FCh
.text:7816CBF0 stkptr          = dword ptr -0F8h
.text:7816CBF0 lostk           = dword ptr -0F4h
.text:7816CBF0 histk           = dword ptr -7Ch
.text:7816CBF0 base            = dword ptr 4
.text:7816CBF0 num             = dword ptr 8
.text:7816CBF0 width           = dword ptr 0Ch
.text:7816CBF0 comp            = dword ptr 10h
.text:7816CBF0
.text:7816CBF0          sub     esp, 100h

....

.text:7816CCE0 loc_7816CCE0:                                ; CODE XREF: _qsort+B1
.text:7816CCE0          shr     eax, 1
.text:7816CCE2          imul    eax, ebp
.text:7816CCE5          add     eax, ebx
.text:7816CCE7          mov     edi, eax
.text:7816CCE9          push    edi
.text:7816CCEA          push    ebx
.text:7816CCEB          call   [esp+118h+comp]
.text:7816CCF2          add     esp, 8
.text:7816CCF5          test   eax, eax
.text:7816CCF7          jle     short loc_7816CD04
```

comp —is fourth function argument. Here the control is just passed to the address in the comp argument. Before it, two arguments prepared for comp(). Its result is checked after its execution.

That's why it is dangerous to use pointers to functions. First of all, if you call qsort() with incorrect pointer to function, qsort() may pass control to incorrect point, a process may crash and this bug will be hard to find.

Second reason is the callback function types must comply strictly, calling wrong function with wrong arguments of wrong types may lead to serious problems, however, process crashing is not a big problem —big problem is to determine a reason of crashing —because compiler may be silent about potential trouble while compiling.

20.1 GCC

Not a big difference:

Listing 20.3: GCC

```
lea     eax, [esp+40h+var_28]
mov     [esp+40h+var_40], eax
mov     [esp+40h+var_28], 764h
mov     [esp+40h+var_24], 2Dh
mov     [esp+40h+var_20], 0C8h
mov     [esp+40h+var_1C], 0FFFFFFF9Eh
mov     [esp+40h+var_18], 0FF7h
mov     [esp+40h+var_14], 5
mov     [esp+40h+var_10], 0FFFCFC7h
mov     [esp+40h+var_C], 43Fh
mov     [esp+40h+var_8], 58h
mov     [esp+40h+var_4], 0FFFE7960h
```

```

mov    [esp+40h+var_34], offset comp
mov    [esp+40h+var_38], 4
mov    [esp+40h+var_3C], 0Ah
call   _qsort

```

comp() function:

```

comp      public comp
comp      proc near

arg_0     = dword ptr  8
arg_4     = dword ptr  0Ch

        push    ebp
        mov     ebp, esp
        mov     eax, [ebp+arg_4]
        mov     ecx, [ebp+arg_0]
        mov     edx, [eax]
        xor     eax, eax
        cmp     [ecx], edx
        jnz     short loc_8048458
        pop     ebp
        retn

loc_8048458:
        setnl   al
        movzx   eax, al
        lea     eax, [eax+eax-1]
        pop     ebp
        retn

comp      endp

```

qsort() implementation is located in the `libc.so.6` and it is in fact just a wrapper⁶ for `qsort_r()`. It will call then `quicksort()`, where our defined function will be called via passed pointer:

Listing 20.4: (File `libc.so.6`, glibc version —2.10.1)

```

.text:0002DDF6      mov     edx, [ebp+arg_10]
.text:0002DDF9      mov     [esp+4], esi
.text:0002DDFD      mov     [esp], edi
.text:0002DE00      mov     [esp+8], edx
.text:0002DE04      call    [ebp+arg_C]
...

```

⁶a concept like [thunk function](#)

Chapter 21

64-bit values in 32-bit environment

In the 32-bit environment [GPR](#)'s are 32-bit, so 64-bit values are passed as 32-bit value pairs ¹.

21.1 Arguments passing, addition, subtraction

```
#include <stdint.h>

uint64_t f1 (uint64_t a, uint64_t b)
{
    return a+b;
};

void f1_test ()
{
#ifdef __GNUC__
    printf ("%lld\n", f1(12345678901234, 23456789012345));
#else
    printf ("%I64d\n", f1(12345678901234, 23456789012345));
#endif
};

uint64_t f2 (uint64_t a, uint64_t b)
{
    return a-b;
};
```

Listing 21.1: MSVC 2012 /Ox /Ob1

```
_a$ = 8 ; size = 8
_b$ = 16 ; size = 8
_f1 PROC
    mov     eax, DWORD PTR _a$[esp-4]
    add     eax, DWORD PTR _b$[esp-4]
    mov     edx, DWORD PTR _a$[esp]
    adc     edx, DWORD PTR _b$[esp]
    ret     0
_f1 ENDP

_f1_test PROC
    push    5461 ; 00001555H
    push    1972608889 ; 75939f79H
    push    2874 ; 00000b3aH
    push    1942892530 ; 73ce2ff2H
    call    _f1
    push    edx
```

¹By the way, 32-bit values are passed as pairs in 16-bit environment just as the same

```

    push    eax
    push    OFFSET $SG1436 ; '%I64d', 0aH, 00H
    call    _printf
    add     esp, 28                ; 0000001cH
    ret     0
_f1_test ENDP

_f2 PROC
    mov     eax, DWORD PTR _a$[esp-4]
    sub     eax, DWORD PTR _b$[esp-4]
    mov     edx, DWORD PTR _a$[esp]
    sbb     edx, DWORD PTR _b$[esp]
    ret     0
_f2 ENDP

```

We may see in the `f1_test()` function as each 64-bit value is passed by two 32-bit values, high part first, then low part.

Addition and subtraction occurring by pairs as well.

While addition, low 32-bit part are added first. If carry was occurred while addition, CF flag is set. The next ADC instruction adds high parts of values, but also adding 1 if CF=1.

Subtraction is also occurred by pairs. The very first SUB may also turn CF flag on, which will be checked in the subsequent SBB instruction: if carry flag is on, then 1 will also be subtracted from the result.

In a 32-bit environment, 64-bit values are returned from a functions in EDX:EAX registers pair. It is easily can be seen how `f1()` function is then passed to `printf()`.

Listing 21.2: GCC 4.8.1 -O1 -fno-inline

```

_f1:
    mov     eax, DWORD PTR [esp+12]
    mov     edx, DWORD PTR [esp+16]
    add     eax, DWORD PTR [esp+4]
    adc     edx, DWORD PTR [esp+8]
    ret

_f1_test:
    sub     esp, 28
    mov     DWORD PTR [esp+8], 1972608889 ; 75939f79H
    mov     DWORD PTR [esp+12], 5461      ; 00001555H
    mov     DWORD PTR [esp], 1942892530   ; 73ce2ff2H
    mov     DWORD PTR [esp+4], 2874       ; 00000b3aH
    call    _f1
    mov     DWORD PTR [esp+4], eax
    mov     DWORD PTR [esp+8], edx
    mov     DWORD PTR [esp], OFFSET FLAT:LC0 ; "%lld\12\0"
    call    _printf
    add     esp, 28
    ret

_f2:
    mov     eax, DWORD PTR [esp+4]
    mov     edx, DWORD PTR [esp+8]
    sub     eax, DWORD PTR [esp+12]
    sbb     edx, DWORD PTR [esp+16]
    ret

```

GCC code is the same.

21.2 Multiplication, division

```
#include <stdint.h>

uint64_t f3 (uint64_t a, uint64_t b)
{
    return a*b;
};

uint64_t f4 (uint64_t a, uint64_t b)
{
    return a/b;
};

uint64_t f5 (uint64_t a, uint64_t b)
{
    return a % b;
};
```

Listing 21.3: MSVC 2012 /Ox /Ob1

```
_a$ = 8 ; size = 8
_b$ = 16 ; size = 8
_f3 PROC
    push    DWORD PTR _b$[esp]
    push    DWORD PTR _b$[esp]
    push    DWORD PTR _a$[esp+8]
    push    DWORD PTR _a$[esp+8]
    call    __allmul ; long long multiplication
    ret     0
_f3 ENDP

_a$ = 8 ; size = 8
_b$ = 16 ; size = 8
_f4 PROC
    push    DWORD PTR _b$[esp]
    push    DWORD PTR _b$[esp]
    push    DWORD PTR _a$[esp+8]
    push    DWORD PTR _a$[esp+8]
    call    __aulldiv ; unsigned long long division
    ret     0
_f4 ENDP

_a$ = 8 ; size = 8
_b$ = 16 ; size = 8
_f5 PROC
    push    DWORD PTR _b$[esp]
    push    DWORD PTR _b$[esp]
    push    DWORD PTR _a$[esp+8]
    push    DWORD PTR _a$[esp+8]
    call    __aullrem ; unsigned long long remainder
    ret     0
_f5 ENDP
```

Multiplication and division is more complex operation, so usually, the compiler embedds calls to the library functions doing that.

These functions meaning are here: [83](#).

Listing 21.4: GCC 4.8.1 -O3 -fno-inline

```
_f3:
    push    ebx
    mov     edx, DWORD PTR [esp+8]
```

```

    mov     eax, DWORD PTR [esp+16]
    mov     ebx, DWORD PTR [esp+12]
    mov     ecx, DWORD PTR [esp+20]
    imul    ebx, eax
    imul    ecx, edx
    mul     edx
    add     ecx, ebx
    add     edx, ecx
    pop     ebx
    ret

_f4:
    sub     esp, 28
    mov     eax, DWORD PTR [esp+40]
    mov     edx, DWORD PTR [esp+44]
    mov     DWORD PTR [esp+8], eax
    mov     eax, DWORD PTR [esp+32]
    mov     DWORD PTR [esp+12], edx
    mov     edx, DWORD PTR [esp+36]
    mov     DWORD PTR [esp], eax
    mov     DWORD PTR [esp+4], edx
    call    __udivdi3 ; unsigned division
    add     esp, 28
    ret

_f5:
    sub     esp, 28
    mov     eax, DWORD PTR [esp+40]
    mov     edx, DWORD PTR [esp+44]
    mov     DWORD PTR [esp+8], eax
    mov     eax, DWORD PTR [esp+32]
    mov     DWORD PTR [esp+12], edx
    mov     edx, DWORD PTR [esp+36]
    mov     DWORD PTR [esp], eax
    mov     DWORD PTR [esp+4], edx
    call    __umoddi3 ; unsigned modulo
    add     esp, 28
    ret

```

GCC doing almost the same, but multiplication code is inlined right in the function, thinking it could be more efficient. GCC has different library function names: [82](#).

21.3 Shifting right

```

#include <stdint.h>

uint64_t f6 (uint64_t a)
{
    return a>>7;
};

```

Listing 21.5: MSVC 2012 /Ox /Ob1

```

_a$ = 8 ; size = 8
_f6 PROC
    mov     eax, DWORD PTR _a$[esp-4]
    mov     edx, DWORD PTR _a$[esp]
    shrd    eax, edx, 7
    shr     edx, 7
    ret     0

```

```
_f6      ENDP
```

Listing 21.6: GCC 4.8.1 -O3 -fno-inline

```
_f6:
    mov     edx, DWORD PTR [esp+8]
    mov     eax, DWORD PTR [esp+4]
    shrd    eax, edx, 7
    shr     edx, 7
    ret
```

Shifting also occurring in two passes: first lower part is shifting, then higher part. But the lower part is shifting with the help of SHRD instruction, it shifting EDX value by 7 bits, but pulling new bits from EAX, i.e., from the higher part. Higher part is shifting using more popular SHR instruction: indeed, freed bits in the higher part should be just filled with zeroes.

21.4 Converting of 32-bit value into 64-bit one

```
#include <stdint.h>

int64_t f7 (int64_t a, int64_t b, int32_t c)
{
    return a*b*c;
};

int64_t f7_main ()
{
    return f7(12345678901234, 23456789012345, 12345);
};
```

Listing 21.7: MSVC 2012 /Ox /Ob1

```
_a$ = 8 ; size = 8
_b$ = 16 ; size = 8
_c$ = 24 ; size = 4
_f7 PROC
    push     esi
    push     DWORD PTR _b$[esp+4]
    push     DWORD PTR _b$[esp+4]
    push     DWORD PTR _a$[esp+12]
    push     DWORD PTR _a$[esp+12]
    call     __allmul ; long long multiplication
    mov     ecx, eax
    mov     eax, DWORD PTR _c$[esp]
    mov     esi, edx
    cdq     ; input: 32-bit value in EAX; output: 64-bit value in EDX:EAX
    add     eax, ecx
    adc     edx, esi
    pop     esi
    ret     0
_f7 ENDP

_f7_main PROC
    push     12345 ; 00003039H
    push     5461 ; 00001555H
    push     1972608889 ; 75939f79H
    push     2874 ; 00000b3aH
    push     1942892530 ; 73ce2ff2H
    call     _f7
    add     esp, 20 ; 00000014H
    ret     0
_f7_main ENDP
```

Here we also run into necessity to extend 32-bit signed value from *c* into 64-bit signed. Unsigned values are converted straightforwardly: all bits in higher part should be set to 0. But it is not appropriate for signed data types: sign should be copied into higher part of resulting number. An instruction CDQ doing that here, it takes input value in EAX, extending value to 64-bit and leaving it in the EDX:EAX registers pair. In other words, CDQ instruction getting number sign in EAX (by getting just most significant bit in EAX), and depending of it, setting all 32-bits in EDX to 0 or 1. Its operation is somewhat similar to the MOVSX (13.1) instruction.

Listing 21.8: GCC 4.8.1 -O3 -fno-inline

```

_f7:
    push    edi
    push    esi
    push    ebx
    mov     esi, DWORD PTR [esp+16]
    mov     edi, DWORD PTR [esp+24]
    mov     ebx, DWORD PTR [esp+20]
    mov     ecx, DWORD PTR [esp+28]
    mov     eax, esi
    mul     edi
    imul    ebx, edi
    imul    ecx, esi
    mov     esi, edx
    add     ecx, ebx
    mov     ebx, eax
    mov     eax, DWORD PTR [esp+32]
    add     esi, ecx
    cdq     ; input: 32-bit value in EAX; output: 64-bit value in EDX:EAX
    add     eax, ebx
    adc     edx, esi
    pop     ebx
    pop     esi
    pop     edi
    ret

_f7_main:
    sub     esp, 28
    mov     DWORD PTR [esp+16], 12345          ; 00003039H
    mov     DWORD PTR [esp+8], 1972608889     ; 75939f79H
    mov     DWORD PTR [esp+12], 5461          ; 00001555H
    mov     DWORD PTR [esp], 1942892530       ; 73ce2ff2H
    mov     DWORD PTR [esp+4], 2874           ; 00000b3aH
    call    _f7
    add     esp, 28
    ret

```

GCC generates just the same code as MSVC, but inlines multiplication code right in the function.
See also: 32-bit values in 16-bit environment: [30.4](#).

Chapter 22

SIMD

SIMD¹ is just acronym: *Single Instruction, Multiple Data*.

As it is said, it is multiple data processing using only one instruction.

Just as **FPU**, that **CPU** subsystem looks like separate processor inside x86.

SIMD began as MMX in x86. 8 new 64-bit registers appeared: MM0-MM7.

Each MMX register may hold 2 32-bit values, 4 16-bit values or 8 bytes. For example, it is possible to add 8 8-bit values (bytes) simultaneously by adding two values in MMX-registers.

One simple example is graphics editor, representing image as a two dimensional array. When user change image brightness, the editor must add a coefficient to each pixel value, or to subtract. For the sake of brevity, our image may be grayscale and each pixel defined by one 8-bit byte, then it is possible to change brightness of 8 pixels simultaneously.

When MMX appeared, these registers was actually located in FPU registers. It was possible to use either FPU or MMX at the same time. One might think, Intel saved on transistors, but in fact, the reason of such symbiosis is simpler —older **OS** may not aware of additional CPU registers would not save them at the context switching, but will save FPU registers. Thus, MMX-enabled CPU + old **OS** + process utilizing MMX features = that all will work together.

SSE—is extension of SIMD registers up to 128 bits, now separately from FPU.

AVX—another extension to 256 bits.

Now about practical usage.

Of course, memory copying (`memcpy`), memory comparing (`memcmp`) and so on.

One more example: we got DES encryption algorithm, it takes 64-bit block, 56-bit key, encrypt block and produce 64-bit result. DES algorithm may be considered as a very large electronic circuit, with wires and AND/OR/NOT gates.

Bitslice DES² —is an idea of processing group of blocks and keys simultaneously. Let's say, variable of type *unsigned int* on x86 may hold up to 32 bits, so, it is possible to store there intermediate results for 32 blocks-keys pairs simultaneously, using 64+56 variables of *unsigned int* type.

I wrote an utility to brute-force Oracle RDBMS passwords/hashes (ones based on DES), slightly modified bitslice DES algorithm for SSE2 and AVX —now it is possible to encrypt 128 or 256 block-keys pairs simultaneously.

http://conus.info/utils/ops_SIMD/

22.1 Vectorization

Vectorization³, for example, is when you have a loop taking couple of arrays at input and produces one array. Loop body takes values from input arrays, do something and put result into output array. It is important that there is only one single operation applied to each element. Vectorization —is to process several elements simultaneously.

Vectorization is not very fresh technology: author of this textbook saw it at least on Cray Y-MP supercomputer line from 1988 when played with its “lite” version Cray Y-MP EL⁴.

For example:

```
for (i = 0; i < 1024; i++)
{
    C[i] = A[i]*B[i];
}
```

This fragment of code takes elements from A and B, multiplies them and save result into C.

¹Single instruction, multiple data

²<http://www.darkside.com.au/bitslice/>

³Wikipedia: [vectorization](#)

⁴Remotely. It is installed in the museum of supercomputers: <http://www.cray-cyber.org>

If each array element we have is 32-bit *int*, then it is possible to load 4 elements from A into 128-bit XMM-register, from B to another XMM-registers, and by executing *PMULLD* (*Multiply Packed Signed Dword Integers and Store Low Result*) and *PMULHW* (*Multiply Packed Signed Integers and Store High Result*), it is possible to get 4 64-bit **products** at once.

Thus, loop body count is $1024/4$ instead of 1024, that is 4 times less and, of course, faster.

Some compilers can do vectorization automatically in a simple cases, e.g., Intel C++⁵.

I wrote tiny function:

```
int f (int sz, int *ar1, int *ar2, int *ar3)
{
    for (int i=0; i<sz; i++)
        ar3[i]=ar1[i]+ar2[i];

    return 0;
};
```

22.1.1 Intel C++

Let's compile it with Intel C++ 11.1.051 win32:

```
icl intel.cpp /QaxSSE2 /Faintel.asm /Ox
```

We got (in **IDA**):

```
; int __cdecl f(int, int *, int *, int *)
                public ?f@@YAHHPAH00@Z
?f@@YAHHPAH00@Z proc near

var_10          = dword ptr -10h
sz              = dword ptr  4
ar1             = dword ptr  8
ar2             = dword ptr 0Ch
ar3             = dword ptr 10h

                push    edi
                push    esi
                push    ebx
                push    esi
                mov     edx, [esp+10h+sz]
                test    edx, edx
                jle     loc_15B
                mov     eax, [esp+10h+ar3]
                cmp     edx, 6
                jle     loc_143
                cmp     eax, [esp+10h+ar2]
                jbe     short loc_36
                mov     esi, [esp+10h+ar2]
                sub     esi, eax
                lea     ecx, ds:0[edx*4]
                neg     esi
                cmp     ecx, esi
                jbe     short loc_55

loc_36:                                ; CODE XREF: f(int,int *,int *,int *)+21
                cmp     eax, [esp+10h+ar2]
                jnb     loc_143
                mov     esi, [esp+10h+ar2]
                sub     esi, eax
                lea     ecx, ds:0[edx*4]
                cmp     esi, ecx
                jb      loc_143
```

⁵More about Intel C++ automatic vectorization: [Excerpt: Effective Automatic Vectorization](#)

```

loc_55:                                ; CODE XREF: f(int,int *,int *,int *)+34
        cmp     eax, [esp+10h+ar1]
        jbe     short loc_67
        mov     esi, [esp+10h+ar1]
        sub     esi, eax
        neg     esi
        cmp     ecx, esi
        jbe     short loc_7F

loc_67:                                ; CODE XREF: f(int,int *,int *,int *)+59
        cmp     eax, [esp+10h+ar1]
        jnb     loc_143
        mov     esi, [esp+10h+ar1]
        sub     esi, eax
        cmp     esi, ecx
        jb      loc_143

loc_7F:                                ; CODE XREF: f(int,int *,int *,int *)+65
        mov     edi, eax                ; edi = ar1
        and     edi, 0Fh                ; is ar1 16-byte aligned?
        jz      short loc_9A            ; yes
        test    edi, 3
        jnz     loc_162
        neg     edi
        add     edi, 10h
        shr     edi, 2

loc_9A:                                ; CODE XREF: f(int,int *,int *,int *)+84
        lea     ecx, [edi+4]
        cmp     edx, ecx
        jl      loc_162
        mov     ecx, edx
        sub     ecx, edi
        and     ecx, 3
        neg     ecx
        add     ecx, edx
        test    edi, edi
        jbe     short loc_D6
        mov     ebx, [esp+10h+ar2]
        mov     [esp+10h+var_10], ecx
        mov     ecx, [esp+10h+ar1]
        xor     esi, esi

loc_C1:                                ; CODE XREF: f(int,int *,int *,int *)+CD
        mov     edx, [ecx+esi*4]
        add     edx, [ebx+esi*4]
        mov     [eax+esi*4], edx
        inc     esi
        cmp     esi, edi
        jb      short loc_C1
        mov     ecx, [esp+10h+var_10]
        mov     edx, [esp+10h+sz]

loc_D6:                                ; CODE XREF: f(int,int *,int *,int *)+B2
        mov     esi, [esp+10h+ar2]
        lea     esi, [esi+edi*4] ; is ar2+i*4 16-byte aligned?
        test    esi, 0Fh
        jz      short loc_109 ; yes!
        mov     ebx, [esp+10h+ar1]
        mov     esi, [esp+10h+ar2]

```

```

loc_ED:                                ; CODE XREF: f(int,int *,int *,int *)+105
    movdqu    xmm1, xmmword ptr [ebx+edi*4]
    movdqu    xmm0, xmmword ptr [esi+edi*4] ; ar2+i*4 is not 16-byte aligned, so load
    it to xmm0
    paddq     xmm1, xmm0
    movdqa    xmmword ptr [eax+edi*4], xmm1
    add       edi, 4
    cmp       edi, ecx
    jb        short loc_ED
    jmp       short loc_127
; -----

loc_109:                                ; CODE XREF: f(int,int *,int *,int *)+E3
    mov       ebx, [esp+10h+ar1]
    mov       esi, [esp+10h+ar2]

loc_111:                                ; CODE XREF: f(int,int *,int *,int *)+125
    movdqu    xmm0, xmmword ptr [ebx+edi*4]
    paddq     xmm0, xmmword ptr [esi+edi*4]
    movdqa    xmmword ptr [eax+edi*4], xmm0
    add       edi, 4
    cmp       edi, ecx
    jb        short loc_111

loc_127:                                ; CODE XREF: f(int,int *,int *,int *)+107
                                         ; f(int,int *,int *,int *)+164
    cmp       ecx, edx
    jnb       short loc_15B
    mov       esi, [esp+10h+ar1]
    mov       edi, [esp+10h+ar2]

loc_133:                                ; CODE XREF: f(int,int *,int *,int *)+13F
    mov       ebx, [esi+ecx*4]
    add       ebx, [edi+ecx*4]
    mov       [eax+ecx*4], ebx
    inc       ecx
    cmp       ecx, edx
    jb        short loc_133
    jmp       short loc_15B
; -----

loc_143:                                ; CODE XREF: f(int,int *,int *,int *)+17
                                         ; f(int,int *,int *,int *)+3A ...
    mov       esi, [esp+10h+ar1]
    mov       edi, [esp+10h+ar2]
    xor       ecx, ecx

loc_14D:                                ; CODE XREF: f(int,int *,int *,int *)+159
    mov       ebx, [esi+ecx*4]
    add       ebx, [edi+ecx*4]
    mov       [eax+ecx*4], ebx
    inc       ecx
    cmp       ecx, edx
    jb        short loc_14D

loc_15B:                                ; CODE XREF: f(int,int *,int *,int *)+A
                                         ; f(int,int *,int *,int *)+129 ...
    xor       eax, eax
    pop       ecx
    pop       ebx

```

```

        pop     esi
        pop     edi
        retn

; -----

loc_162:                                ; CODE XREF: f(int,int *,int *,int *)+8C
                                        ; f(int,int *,int *,int *)+9F
        xor     ecx, ecx
        jmp     short loc_127
?f@@YAHHPAH00@Z endp

```

SSE2-related instructions are:

- **MOVDQU** (*Move Unaligned Double Quadword*)—it just load 16 bytes from memory into a XMM-register.
- **PADD** (*Add Packed Integers*)—adding 4 pairs of 32-bit numbers and leaving result in first operand. By the way, no exception raised in case of overflow and no flags will be set, just low 32-bit of result will be stored. If one of PADD operands is address of value in memory, then address must be aligned on a 16-byte boundary. If it is not aligned, exception will be occurred ⁶.
- **MOVQA** (*Move Aligned Double Quadword*)—the same as MOVDQU, but requires address of value in memory to be aligned on a 16-bit border. If it is not aligned, exception will be raised. MOVQA works faster than MOVDQU, but requires aforesaid.

So, these SSE2-instructions will be executed only in case if there are more 4 pairs to work on plus pointer ar3 is aligned on a 16-byte boundary.

More than that, if ar2 is aligned on a 16-byte boundary as well, this fragment of code will be executed:

```

movdqu  xmm0, xmmword ptr [ebx+edi*4] ; ar1+i*4
padd    xmm0, xmmword ptr [esi+edi*4] ; ar2+i*4
movdqa  xmmword ptr [eax+edi*4], xmm0 ; ar3+i*4

```

Otherwise, value from ar2 will be loaded into XMM0 using MOVDQU, it does not require aligned pointer, but may work slower:

```

movdqu  xmm1, xmmword ptr [ebx+edi*4] ; ar1+i*4
movdqu  xmm0, xmmword ptr [esi+edi*4] ; ar2+i*4 is not 16-byte aligned, so load it to xmm0
padd    xmm1, xmm0
movdqa  xmmword ptr [eax+edi*4], xmm1 ; ar3+i*4

```

In all other cases, non-SSE2 code will be executed.

22.1.2 GCC

GCC may also vectorize in a simple cases⁷, if to use -O3 option and to turn on SSE2 support: -msse2.

What we got (GCC 4.4.1):

```

; f(int, int *, int *, int *)
        public _Z1fiPiS_S_
_Z1fiPiS_S_
        proc near

var_18      = dword ptr -18h
var_14      = dword ptr -14h
var_10      = dword ptr -10h
arg_0       = dword ptr  8
arg_4       = dword ptr  0Ch
arg_8       = dword ptr  10h
arg_C       = dword ptr  14h

        push    ebp
        mov     ebp, esp
        push    edi
        push    esi
        push    ebx

```

⁶More about data aligning: [Wikipedia: Data structure alignment](http://en.cppreference.com/w/cpp/string/basic/basic_string_view)

⁷More about GCC vectorization support: <http://gcc.gnu.org/projects/tree-ssa/vectorization.html>

```

    sub     esp, 0Ch
    mov     ecx, [ebp+arg_0]
    mov     esi, [ebp+arg_4]
    mov     edi, [ebp+arg_8]
    mov     ebx, [ebp+arg_C]
    test    ecx, ecx
    jle     short loc_80484D8
    cmp     ecx, 6
    lea     eax, [ebx+10h]
    ja      short loc_80484E8

loc_80484C1:                                ; CODE XREF: f(int,int *,int *,int *)+4B
                                           ; f(int,int *,int *,int *)+61 ...
    xor     eax, eax
    nop
    lea     esi, [esi+0]

loc_80484C8:                                ; CODE XREF: f(int,int *,int *,int *)+36
    mov     edx, [edi+eax*4]
    add     edx, [esi+eax*4]
    mov     [ebx+eax*4], edx
    add     eax, 1
    cmp     eax, ecx
    jnz     short loc_80484C8

loc_80484D8:                                ; CODE XREF: f(int,int *,int *,int *)+17
                                           ; f(int,int *,int *,int *)+A5
    add     esp, 0Ch
    xor     eax, eax
    pop     ebx
    pop     esi
    pop     edi
    pop     ebp
    retn

; -----
    align 8

loc_80484E8:                                ; CODE XREF: f(int,int *,int *,int *)+1F
    test    bl, 0Fh
    jnz     short loc_80484C1
    lea     edx, [esi+10h]
    cmp     ebx, edx
    jbe     loc_8048578

loc_80484F8:                                ; CODE XREF: f(int,int *,int *,int *)+E0
    lea     edx, [edi+10h]
    cmp     ebx, edx
    ja      short loc_8048503
    cmp     edi, eax
    jbe     short loc_80484C1

loc_8048503:                                ; CODE XREF: f(int,int *,int *,int *)+5D
    mov     eax, ecx
    shr     eax, 2
    mov     [ebp+var_14], eax
    shl     eax, 2
    test    eax, eax
    mov     [ebp+var_10], eax
    jz      short loc_8048547
    mov     [ebp+var_18], ecx
    mov     ecx, [ebp+var_14]

```

```

        xor     eax, eax
        xor     edx, edx
        nop

loc_8048520:                                ; CODE XREF: f(int,int *,int *,int *)+9B
        movdqu  xmm1, xmmword ptr [edi+eax]
        movdqu  xmm0, xmmword ptr [esi+eax]
        add     edx, 1
        paddb   xmm0, xmm1
        movdqa  xmmword ptr [ebx+eax], xmm0
        add     eax, 10h
        cmp     edx, ecx
        jnb     short loc_8048520
        mov     ecx, [ebp+var_18]
        mov     eax, [ebp+var_10]
        cmp     ecx, eax
        jnz     short loc_80484D8

loc_8048547:                                ; CODE XREF: f(int,int *,int *,int *)+73
        lea     edx, ds:0[eax*4]
        add     esi, edx
        add     edi, edx
        add     ebx, edx
        lea     esi, [esi+0]

loc_8048558:                                ; CODE XREF: f(int,int *,int *,int *)+CC
        mov     edx, [edi]
        add     eax, 1
        add     edi, 4
        add     edx, [esi]
        add     esi, 4
        mov     [ebx], edx
        add     ebx, 4
        cmp     ecx, eax
        jg      short loc_8048558
        add     esp, 0Ch
        xor     eax, eax
        pop     ebx
        pop     esi
        pop     edi
        pop     ebp
        retn

; -----

loc_8048578:                                ; CODE XREF: f(int,int *,int *,int *)+52
        cmp     eax, esi
        jnb     loc_80484C1
        jmp     loc_80484F8
_Z1fiPiS_S_    endp

```

Almost the same, however, not as meticulously as Intel C++ doing it.

22.2 SIMD strlen() implementation

It should be noted the SIMD-instructions may be inserted into C/C++ code via special macros⁸. As of MSVC, some of them are located in the `intrin.h` file.

It is possible to implement `strlen()` function⁹ using SIMD-instructions, working 2-2.5 times faster than common implementation. This function will load 16 characters into a XMM-register and check each against zero.

⁸MSDN: MMX, SSE, and SSE2 Intrinsics

⁹`strlen()` —standard C library function for calculating string length

```

size_t strlen_sse2(const char *str)
{
    register size_t len = 0;
    const char *s=str;
    bool str_is_aligned=((unsigned int)str)&0xFFFFFFFF == (unsigned int)str;

    if (str_is_aligned==false)
        return strlen (str);

    __m128i xmm0 = _mm_setzero_si128();
    __m128i xmm1;
    int mask = 0;

    for (;;)
    {
        xmm1 = _mm_load_si128((__m128i *)s);
        xmm1 = _mm_cmpeq_epi8(xmm1, xmm0);
        if ((mask = _mm_movemask_epi8(xmm1)) != 0)
        {
            unsigned long pos;
            _BitScanForward(&pos, mask);
            len += (size_t)pos;

            break;
        }
        s += sizeof(__m128i);
        len += sizeof(__m128i);
    };

    return len;
}

```

(the example is based on source code from [there](#)).

Let's compile in MSVC 2010 with /Ox option:

```

_pos$75552 = -4          ; size = 4
_str$ = 8                ; size = 4
?strlen_sse2@@YAIPBD@Z PROC ; strlen_sse2

    push    ebp
    mov     ebp, esp
    and     esp, -16      ; ffffffff0H
    mov     eax, DWORD PTR _str$[ebp]
    sub     esp, 12       ; 0000000cH
    push    esi
    mov     esi, eax
    and     esi, -16      ; ffffffff0H
    xor     edx, edx
    mov     ecx, eax
    cmp     esi, eax
    je      SHORT $LN4@strlen_sse
    lea     edx, DWORD PTR [eax+1]
    npad    3
$LL11@strlen_sse:
    mov     cl, BYTE PTR [eax]
    inc     eax
    test    cl, cl
    jne     SHORT $LL11@strlen_sse
    sub     eax, edx
    pop     esi
    mov     esp, ebp

```

```

    pop     ebp
    ret     0
$LN4@strlen_sse:
    movdqa  xmm1, XMMWORD PTR [eax]
    pxor     xmm0, xmm0
    pcmpeqb xmm1, xmm0
    pmovmskb eax, xmm1
    test     eax, eax
    jne      SHORT $LN9@strlen_sse
$LL3@strlen_sse:
    movdqa  xmm1, XMMWORD PTR [ecx+16]
    add     ecx, 16                ; 00000010H
    pcmpeqb xmm1, xmm0
    add     edx, 16                ; 00000010H
    pmovmskb eax, xmm1
    test     eax, eax
    je       SHORT $LL3@strlen_sse
$LN9@strlen_sse:
    bsf     eax, eax
    mov     ecx, eax
    mov     DWORD PTR _pos$75552[esp+16], eax
    lea     eax, DWORD PTR [ecx+edx]
    pop     esi
    mov     esp, ebp
    pop     ebp
    ret     0
?strlen_sse2@@YAIPBD@Z ENDP                ; strlen_sse2

```

First of all, we check `str` pointer, if it is aligned on a 16-byte boundary. If not, let's call generic `strlen()` implementation. Then, load next 16 bytes into the XMM1 register using `MOVDQA` instruction.

Observant reader might ask, why `MOVDQU` cannot be used here since it can load data from the memory regardless the fact if the pointer aligned or not.

Yes, it might be done in this way: if pointer is aligned, load data using `MOVDQA`, if not —use slower `MOVDQU`.

But here we are may stick into hard to notice caveat:

In [Windows NT](#) line of [OS](#) but not limited to it, memory allocated by pages of 4 KiB (4096 bytes). Each win32-process has ostensibly 4 GiB, but in fact, only some parts of address space are connected to real physical memory. If the process accessing to the absent memory block, exception will be raised. That's how virtual memory works¹⁰.

So, a function loading 16 bytes at once, may step over a border of allocated memory block. Let's consider, [OS](#) allocated 8192 (0x2000) bytes at the address 0x008c0000. Thus, the block is the bytes starting from address 0x008c0000 to 0x008c1fff inclusive.

After the block, that is, starting from address 0x008c2000 there is nothing at all, e.g., [OS](#) not allocated any memory there. Attempt to access a memory starting from the address will raise exception.

And let's consider, the program holding a string containing 5 characters almost at the end of block, and that is not a crime.

0x008c1ff8	'h'
0x008c1ff9	'e'
0x008c1ffa	'l'
0x008c1ffb	'l'
0x008c1ffc	'o'
0x008c1ffd	'\x00'
0x008c1ffe	random noise
0x008c1fff	random noise

So, in common conditions the program calling `strlen()` passing it a pointer to string 'hello' lying in memory at address 0x008c1ff8. `strlen()` will read one byte at a time until 0x008c1ffd, where zero-byte, and so here it will stop working.

Now if we implement our own `strlen()` reading 16 byte at once, starting at any address, will it be aligned or not, `MOVDQU` may attempt to load 16 bytes at once at address 0x008c1ff8 up to 0x008c2008, and then exception will be raised. That's the situation to be avoided, of course.

So then we'll work only with the addresses aligned on a 16 byte boundary, what in combination with a knowledge of [OS](#) page size is usually aligned on a 16-byte boundary too, give us some warranty our function will not read from unallocated memory.

¹⁰[http://en.wikipedia.org/wiki/Page_\(computer_memory\)](http://en.wikipedia.org/wiki/Page_(computer_memory))

Let's back to our function.

`_mm_setzero_si128()`—is a macro generating `pxor xmm0, xmm0`—instruction just clears the XMM0 register

`_mm_load_si128()`—is a macro for `MOVDQA`, it just loading 16 bytes from the address in the XMM1 register.

`_mm_cmpeq_epi8()`—is a macro for `PCMPEQB`, is an instruction comparing two XMM-registers byte-wise.

And if some byte equals to other, there will be `0xff` at this point in the result or 0 if otherwise.

For example.

```
XMM1: 11223344556677880000000000000000
```

```
XMM0: 11ab3444007877881111111111111111
```

After `pcmpeqb xmm1, xmm0` execution, the XMM1 register shall contain:

```
XMM1: ff0000ff0000ffff0000000000000000
```

In our case, this instruction comparing each 16-byte block with the block of 16 zero-bytes, was set in the XMM0 register by `pxor xmm0, xmm0`.

The next macro is `_mm_movemask_epi8()`—that is `PMOVMSKB` instruction.

It is very useful if to use it with `PCMPEQB`.

```
pmovmskb eax, xmm1
```

This instruction will set first EAX bit into 1 if most significant bit of the first byte in the XMM1 is 1. In other words, if first byte of the XMM1 register is `0xff`, first EAX bit will be set to 1 too.

If second byte in the XMM1 register is `0xff`, then second EAX bit will be set to 1 too. In other words, the instruction is answer to the question *which bytes in the XMM1 are 0xff?* And will prepare 16 bits in the EAX register. Other bits in the EAX register are to be cleared.

By the way, do not forget about this feature of our algorithm:

There might be 16 bytes on input like `hello\x00garbage\x00ab`

It is a 'hello' string, terminating zero, and also a random noise in memory.

If we load these 16 bytes into XMM1 and compare them with zeroed XMM0, we will get something like (I use here order from MSB¹¹ to LSB¹²):

```
XMM1: 0000ff00000000000000ff0000000000
```

This means, the instruction found two zero bytes, and that is not surprising.

`PMOVMSKB` in our case will prepare EAX like (in binary representation): `0010000000100000b`.

Obviously, our function must consider only first zero bit and ignore the rest ones.

The next instruction—`BSF (Bit Scan Forward)`. This instruction find first bit set to 1 and stores its position into first operand.

```
EAX=0010000000100000b
```

After `bsf eax, eax` instruction execution, EAX will contain 5, this means, 1 found at 5th bit position (starting from zero).

MSVC has a macro for this instruction: `_BitScanForward`.

Now it is simple. If zero byte found, its position added to what we already counted and now we have ready to return result. Almost all.

By the way, it is also should be noted, MSVC compiler emitted two loop bodies side by side, for optimization.

By the way, SSE 4.2 (appeared in Intel Core i7) offers more instructions where these string manipulations might be even easier: http://www.strchr.com/strcmp_and_strlen_using_sse_4.2

¹¹most significant bit

¹²least significant bit

Chapter 23

64 bits

23.1 x86-64

It is a 64-bit extension to x86-architecture.

From the reverse engineer's perspective, most important differences are:

- Almost all registers (except FPU and SIMD) are extended to 64 bits and got `r-` prefix. 8 additional registers added. Now [GPR](#)'s are: `RAX, RBX, RCX, RDX, RBP, RSP, RSI, RDI, R8, R9, R10, R11, R12, R13, R14, R15`.

It is still possible to access to *older* register parts as usual. For example, it is possible to access lower 32-bit part of the `RAX` register using `EAX`.

New `r8-r15` registers also has its *lower parts*: `r8d-r15d` (lower 32-bit parts), `r8w-r15w` (lower 16-bit parts), `r8b-r15b` (lower 8-bit parts).

SIMD-registers number are doubled: from 8 to 16: `XMM0-XMM15`.

- In Win64, function calling convention is slightly different, somewhat resembling fastcall ([??](#)). First 4 arguments stored in the `RCX, RDX, R8, R9` registers, others —in the stack. [Caller](#) function must also allocate 32 bytes so the [callee](#) may save there 4 first arguments and use these registers for own needs. Short functions may use arguments just from registers, but larger may save their values on the stack.

System V AMD64 ABI (Linux, *BSD, MacOSX) [\[21\]](#) also somewhat resembling fastcall, it uses 6 registers `RDI, RSI, RDX, RCX, R8, R9` for the first 6 arguments. All the rest are passed in the stack.

See also section about calling conventions ([??](#)).

- `C int` type is still 32-bit for compatibility.
- All pointers are 64-bit now.

This provokes irritation sometimes: now one need twice as much memory for storing pointers, including, cache memory, despite the fact x64 [CPU](#)s addresses only 48 bits of external [RAM](#).

Since now registers number are doubled, compilers has more space now for maneuvering calling [register allocation](#). What it meanings for us, emitted code will contain less local variables.

For example, function calculating first S-box of DES encryption algorithm, it processing 32/64/128/256 values at once (depending on `DES_type` type (`uint32`, `uint64`, `SSE2` or `AVX`)) using `bitslice` DES method (read more about this technique here [\(22\)](#)):

```
/*
 * Generated S-box files.
 *
 * This software may be modified, redistributed, and used for any purpose,
 * so long as its origin is acknowledged.
 *
 * Produced by Matthew Kwan - March 1998
 */

#ifdef _WIN64
#define DES_type unsigned __int64
#else
#define DES_type unsigned int
```

```

#endif

void
s1 (
    DES_type    a1,
    DES_type    a2,
    DES_type    a3,
    DES_type    a4,
    DES_type    a5,
    DES_type    a6,
    DES_type    *out1,
    DES_type    *out2,
    DES_type    *out3,
    DES_type    *out4
) {
    DES_type    x1, x2, x3, x4, x5, x6, x7, x8;
    DES_type    x9, x10, x11, x12, x13, x14, x15, x16;
    DES_type    x17, x18, x19, x20, x21, x22, x23, x24;
    DES_type    x25, x26, x27, x28, x29, x30, x31, x32;
    DES_type    x33, x34, x35, x36, x37, x38, x39, x40;
    DES_type    x41, x42, x43, x44, x45, x46, x47, x48;
    DES_type    x49, x50, x51, x52, x53, x54, x55, x56;

    x1 = a3 & ~a5;
    x2 = x1 ^ a4;
    x3 = a3 & ~a4;
    x4 = x3 | a5;
    x5 = a6 & x4;
    x6 = x2 ^ x5;
    x7 = a4 & ~a5;
    x8 = a3 ^ a4;
    x9 = a6 & ~x8;
    x10 = x7 ^ x9;
    x11 = a2 | x10;
    x12 = x6 ^ x11;
    x13 = a5 ^ x5;
    x14 = x13 & x8;
    x15 = a5 & ~a4;
    x16 = x3 ^ x14;
    x17 = a6 | x16;
    x18 = x15 ^ x17;
    x19 = a2 | x18;
    x20 = x14 ^ x19;
    x21 = a1 & x20;
    x22 = x12 ^ ~x21;
    *out2 ^= x22;
    x23 = x1 | x5;
    x24 = x23 ^ x8;
    x25 = x18 & ~x2;
    x26 = a2 & ~x25;
    x27 = x24 ^ x26;
    x28 = x6 | x7;
    x29 = x28 ^ x25;
    x30 = x9 ^ x24;
    x31 = x18 & ~x30;
    x32 = a2 & x31;
    x33 = x29 ^ x32;
    x34 = a1 & x33;
    x35 = x27 ^ x34;
    *out4 ^= x35;
    x36 = a3 & x28;

```

```

x37 = x18 & ~x36;
x38 = a2 | x3;
x39 = x37 ^ x38;
x40 = a3 | x31;
x41 = x24 & ~x37;
x42 = x41 | x3;
x43 = x42 & ~a2;
x44 = x40 ^ x43;
x45 = a1 & ~x44;
x46 = x39 ^ ~x45;
*out1 ^= x46;
x47 = x33 & ~x9;
x48 = x47 ^ x39;
x49 = x4 ^ x36;
x50 = x49 & ~x5;
x51 = x42 | x18;
x52 = x51 ^ a5;
x53 = a2 & ~x52;
x54 = x50 ^ x53;
x55 = a1 | x54;
x56 = x48 ^ ~x55;
*out3 ^= x56;
}

```

There is a lot of local variables. Of course, not all those will be in local stack. Let's compile it with MSVC 2008 with /Ox option:

Listing 23.1: Optimizing MSVC 2008

```

PUBLIC      _s1
; Function compile flags: /Ogtpy
_TEXT      SEGMENT
_x6$ = -20      ; size = 4
_x3$ = -16      ; size = 4
_x1$ = -12      ; size = 4
_x8$ = -8       ; size = 4
_x4$ = -4       ; size = 4
_a1$ = 8        ; size = 4
_a2$ = 12       ; size = 4
_a3$ = 16       ; size = 4
_x33$ = 20      ; size = 4
_x7$ = 20       ; size = 4
_a4$ = 20       ; size = 4
_a5$ = 24       ; size = 4
tv326 = 28      ; size = 4
_x36$ = 28      ; size = 4
_x28$ = 28      ; size = 4
_a6$ = 28       ; size = 4
_out1$ = 32     ; size = 4
_x24$ = 36      ; size = 4
_out2$ = 36     ; size = 4
_out3$ = 40     ; size = 4
_out4$ = 44     ; size = 4
_s1        PROC
    sub     esp, 20                ; 00000014H
    mov     edx, DWORD PTR _a5$[esp+16]
    push    ebx
    mov     ebx, DWORD PTR _a4$[esp+20]
    push    ebp
    push    esi
    mov     esi, DWORD PTR _a3$[esp+28]
    push    edi

```

```

mov     edi, ebx
not     edi
mov     ebp, edi
and     edi, DWORD PTR _a5$[esp+32]
mov     ecx, edx
not     ecx
and     ebp, esi
mov     eax, ecx
and     eax, esi
and     ecx, ebx
mov     DWORD PTR _x1$[esp+36], eax
xor     eax, ebx
mov     esi, ebp
or      esi, edx
mov     DWORD PTR _x4$[esp+36], esi
and     esi, DWORD PTR _a6$[esp+32]
mov     DWORD PTR _x7$[esp+32], ecx
mov     edx, esi
xor     edx, eax
mov     DWORD PTR _x6$[esp+36], edx
mov     edx, DWORD PTR _a3$[esp+32]
xor     edx, ebx
mov     ebx, esi
xor     ebx, DWORD PTR _a5$[esp+32]
mov     DWORD PTR _x8$[esp+36], edx
and     ebx, edx
mov     ecx, edx
mov     edx, ebx
xor     edx, ebp
or      edx, DWORD PTR _a6$[esp+32]
not     ecx
and     ecx, DWORD PTR _a6$[esp+32]
xor     edx, edi
mov     edi, edx
or      edi, DWORD PTR _a2$[esp+32]
mov     DWORD PTR _x3$[esp+36], ebp
mov     ebp, DWORD PTR _a2$[esp+32]
xor     edi, ebx
and     edi, DWORD PTR _a1$[esp+32]
mov     ebx, ecx
xor     ebx, DWORD PTR _x7$[esp+32]
not     edi
or      ebx, ebp
xor     edi, ebx
mov     ebx, edi
mov     edi, DWORD PTR _out2$[esp+32]
xor     ebx, DWORD PTR [edi]
not     eax
xor     ebx, DWORD PTR _x6$[esp+36]
and     eax, edx
mov     DWORD PTR [edi], ebx
mov     ebx, DWORD PTR _x7$[esp+32]
or      ebx, DWORD PTR _x6$[esp+36]
mov     edi, esi
or      edi, DWORD PTR _x1$[esp+36]
mov     DWORD PTR _x28$[esp+32], ebx
xor     edi, DWORD PTR _x8$[esp+36]
mov     DWORD PTR _x24$[esp+32], edi
xor     edi, ecx
not     edi
and     edi, edx

```

```

mov     ebx, edi
and     ebx, ebp
xor     ebx, DWORD PTR _x28$[esp+32]
xor     ebx, eax
not     eax
mov     DWORD PTR _x33$[esp+32], ebx
and     ebx, DWORD PTR _a1$[esp+32]
and     eax, ebp
xor     eax, ebx
mov     ebx, DWORD PTR _out4$[esp+32]
xor     eax, DWORD PTR [ebx]
xor     eax, DWORD PTR _x24$[esp+32]
mov     DWORD PTR [ebx], eax
mov     eax, DWORD PTR _x28$[esp+32]
and     eax, DWORD PTR _a3$[esp+32]
mov     ebx, DWORD PTR _x3$[esp+36]
or      edi, DWORD PTR _a3$[esp+32]
mov     DWORD PTR _x36$[esp+32], eax
not     eax
and     eax, edx
or      ebx, ebp
xor     ebx, eax
not     eax
and     eax, DWORD PTR _x24$[esp+32]
not     ebp
or      eax, DWORD PTR _x3$[esp+36]
not     esi
and     ebp, eax
or      eax, edx
xor     eax, DWORD PTR _a5$[esp+32]
mov     edx, DWORD PTR _x36$[esp+32]
xor     edx, DWORD PTR _x4$[esp+36]
xor     ebp, edi
mov     edi, DWORD PTR _out1$[esp+32]
not     eax
and     eax, DWORD PTR _a2$[esp+32]
not     ebp
and     ebp, DWORD PTR _a1$[esp+32]
and     edx, esi
xor     eax, edx
or      eax, DWORD PTR _a1$[esp+32]
not     ebp
xor     ebp, DWORD PTR [edi]
not     ecx
and     ecx, DWORD PTR _x33$[esp+32]
xor     ebp, ebx
not     eax
mov     DWORD PTR [edi], ebp
xor     eax, ecx
mov     ecx, DWORD PTR _out3$[esp+32]
xor     eax, DWORD PTR [ecx]
pop     edi
pop     esi
xor     eax, ebx
pop     ebp
mov     DWORD PTR [ecx], eax
pop     ebx
add     esp, 20                ; 00000014H
ret     0
_s1     ENDP

```

5 variables was allocated in local stack by compiler.

Now let's try the same thing in 64-bit version of MSVC 2008:

Listing 23.2: Optimizing MSVC 2008

```

a1$ = 56
a2$ = 64
a3$ = 72
a4$ = 80
x36$1$ = 88
a5$ = 88
a6$ = 96
out1$ = 104
out2$ = 112
out3$ = 120
out4$ = 128
s1    PROC
$LN3:
    mov     QWORD PTR [rsp+24], rbx
    mov     QWORD PTR [rsp+32], rbp
    mov     QWORD PTR [rsp+16], rdx
    mov     QWORD PTR [rsp+8], rcx
    push    rsi
    push    rdi
    push    r12
    push    r13
    push    r14
    push    r15
    mov     r15, QWORD PTR a5$[rsp]
    mov     rcx, QWORD PTR a6$[rsp]
    mov     rbp, r8
    mov     r10, r9
    mov     rax, r15
    mov     rdx, rbp
    not     rax
    xor     rdx, r9
    not     r10
    mov     r11, rax
    and     rax, r9
    mov     rsi, r10
    mov     QWORD PTR x36$1$[rsp], rax
    and     r11, r8
    and     rsi, r8
    and     r10, r15
    mov     r13, rdx
    mov     rbx, r11
    xor     rbx, r9
    mov     r9, QWORD PTR a2$[rsp]
    mov     r12, rsi
    or      r12, r15
    not     r13
    and     r13, rcx
    mov     r14, r12
    and     r14, rcx
    mov     rax, r14
    mov     r8, r14
    xor     r8, rbx
    xor     rax, r15
    not     rbx
    and     rax, rdx
    mov     rdi, rax
    xor     rdi, rsi

```

```

or      rdi, rcx
xor     rdi, r10
and     rbx, rdi
mov     rcx, rdi
or      rcx, r9
xor     rcx, rax
mov     rax, r13
xor     rax, QWORD PTR x36$1$(rsp)
and     rcx, QWORD PTR a1$(rsp)
or      rax, r9
not     rcx
xor     rcx, rax
mov     rax, QWORD PTR out2$(rsp)
xor     rcx, QWORD PTR [rax]
xor     rcx, r8
mov     QWORD PTR [rax], rcx
mov     rax, QWORD PTR x36$1$(rsp)
mov     rcx, r14
or      rax, r8
or      rcx, r11
mov     r11, r9
xor     rcx, rdx
mov     QWORD PTR x36$1$(rsp), rax
mov     r8, rsi
mov     rdx, rcx
xor     rdx, r13
not     rdx
and     rdx, rdi
mov     r10, rdx
and     r10, r9
xor     r10, rax
xor     r10, rbx
not     rbx
and     rbx, r9
mov     rax, r10
and     rax, QWORD PTR a1$(rsp)
xor     rbx, rax
mov     rax, QWORD PTR out4$(rsp)
xor     rbx, QWORD PTR [rax]
xor     rbx, rcx
mov     QWORD PTR [rax], rbx
mov     rbx, QWORD PTR x36$1$(rsp)
and     rbx, rbp
mov     r9, rbx
not     r9
and     r9, rdi
or      r8, r11
mov     rax, QWORD PTR out1$(rsp)
xor     r8, r9
not     r9
and     r9, rcx
or      rdx, rbp
mov     rbp, QWORD PTR [rsp+80]
or      r9, rsi
xor     rbx, r12
mov     rcx, r11
not     rcx
not     r14
not     r13
and     rcx, r9
or      r9, rdi

```

```

and    rbx, r14
xor     r9, r15
xor     rcx, rdx
mov     rdx, QWORD PTR a1$[rsp]
not     r9
not     rcx
and     r13, r10
and     r9, r11
and     rcx, rdx
xor     r9, rbx
mov     rbx, QWORD PTR [rsp+72]
not     rcx
xor     rcx, QWORD PTR [rax]
or      r9, rdx
not     r9
xor     rcx, r8
mov     QWORD PTR [rax], rcx
mov     rax, QWORD PTR out3$[rsp]
xor     r9, r13
xor     r9, QWORD PTR [rax]
xor     r9, r8
mov     QWORD PTR [rax], r9
pop     r15
pop     r14
pop     r13
pop     r12
pop     rdi
pop     rsi
ret     0
s1      ENDP

```

Nothing allocated in local stack by compiler, x36 is synonym for a5.

By the way, we can see here, the function saved RCX and RDX registers in allocated by [caller](#) space, but R8 and R9 are not saved but used from the beginning.

By the way, there are CPUs with much more [GPR](#)'s, e.g. Itanium (128 registers).

23.2 ARM

In ARM, 64-bit instructions are appeared in ARMv8.

23.3 Float point numbers

Read more [here](#) about how float point numbers are processed in x86-64.

Chapter 24

Working with float point numbers using SIMD in x64

Of course, [FPU](#) remained in x86-compatible processors, when x64 extension was added. But at the time, [SIMD](#)-extensions ([SSE¹](#), SSE2, etc) were already present, which can work with float point numbers as well. Number format remaining the same (IEEE 754).

So, x86-64 compilers are usually use [SIMD](#)-instructions. It can be said, it's a good news, because it's easier to work with them.

We will reuse here examples from the FPU section [15](#).

24.1 Simple example

```
double f (double a, double b)
{
    return a/3.14 + b*4.1;
};
```

Listing 24.1: MSVC 2012 x64 /Ox

```
__real@4010666666666666 DQ 0401066666666666r    ; 4.1
__real@40091eb851eb851f DQ 040091eb851eb851fr   ; 3.14

a$ = 8
b$ = 16
f      PROC
    divsd    xmm0, QWORD PTR __real@40091eb851eb851f
    mulsd    xmm1, QWORD PTR __real@4010666666666666
    addsd    xmm0, xmm1
    ret      0
f      ENDP
```

Input floating point values are passed in XMM0-XMM3 registers, all the rest—via stack ².

a is passed in XMM0, *b*—via XMM1. XMM-registers are 128-bit (as we know from the section about [SIMD22](#)), but *double* values—64 bit ones, so only lower register half is used.

DIVSD is SSE-instruction, meaning “Divide Scalar Double-Precision Floating-Point Values”, it just divides one value of *double* type by another, stored in the lower halves of operands.

Constants are encoded by compiler in IEEE 754 format.

MULSD and ADDSD works just as the same, but doing multiplication and addition.

The result of *double* type the function leaves in XMM0 register.

That is how non-optimizing MSVC works:

Listing 24.2: MSVC 2012 x64

¹Streaming SIMD Extensions

²[MSDN: Parameter Passing](#)

```

__real@4010666666666666 DQ 0401066666666666r    ; 4.1
__real@40091eb851eb851f DQ 040091eb851eb851fr    ; 3.14

a$ = 8
b$ = 16
f      PROC
    movsdx  QWORD PTR [rsp+16], xmm1
    movsdx  QWORD PTR [rsp+8], xmm0
    movsdx  xmm0, QWORD PTR a$[rsp]
    divsd   xmm0, QWORD PTR __real@40091eb851eb851f
    movsdx  xmm1, QWORD PTR b$[rsp]
    mulsd   xmm1, QWORD PTR __real@4010666666666666
    addsd   xmm0, xmm1
    ret     0
f      ENDP

```

Slightly redundant. Input arguments are saved in “shadow space” (7.2.1), but only lower register halves, i.e., only 64-bit values of *double* type.

GCC produces very same code.

24.2 Passing floating point number via arguments

```

#include <math.h>
#include <stdio.h>

int main ()
{
    printf ("32.01 ^ 1.54 = %lf\n", pow (32.01,1.54));

    return 0;
}

```

They are passed in lower halves of the XMM0-XMM3 registers.

Listing 24.3: MSVC 2012 x64 /Ox

```

$SG1354 DB      '32.01 ^ 1.54 = %lf', 0aH, 00H

__real@40400147ae147ae1 DQ 040400147ae147ae1r    ; 32.01
__real@3ff8a3d70a3d70a4 DQ 03ff8a3d70a3d70a4r    ; 1.54

main      PROC
    sub     rsp, 40                                ; 00000028H
    movsdx  xmm1, QWORD PTR __real@3ff8a3d70a3d70a4
    movsdx  xmm0, QWORD PTR __real@40400147ae147ae1
    call    pow
    lea     rcx, OFFSET FLAT:$SG1354
    movaps  xmm1, xmm0
    movd    rdx, xmm1
    call    printf
    xor     eax, eax
    add     rsp, 40                                ; 00000028H
    ret     0
main      ENDP

```

There are no MOVSDX instruction in Intel [14] and AMD [1] manuals, it is called there just MOVSD. So there are two instructions sharing the same name in x86 (about other: 80.6.2). Apparently, Microsoft developers wanted to get rid of mess, so they renamed it into MOVSDX. It just loads a value into lower half of XMM-register.

`pow()` takes arguments from XMM0 and XMM1, and returning result in XMM0. It is then moved into RDX for `printf()`. Why? Honestly speaking, I don't know, maybe because `printf()`—is a variable arguments function?

Listing 24.4: GCC 4.4.6 x64 -O3

```
.LC2:
    .string "32.01 ^ 1.54 = %lf\n"
main:
    sub     rsp, 8
    movsd   xmm1, QWORD PTR .LC0[rip]
    movsd   xmm0, QWORD PTR .LC1[rip]
    call    pow
    ; result is now in XMM0
    mov     edi, OFFSET FLAT:.LC2
    mov     eax, 1 ; number of vector registers passed
    call    printf
    xor     eax, eax
    add     rsp, 8
    ret

.LC0:
    .long    171798692
    .long    1073259479
.LC1:
    .long    2920577761
    .long    1077936455
```

GCC making more clear result. Value for `printf()` is passed in `XMM0`. By the way, here is a case when 1 is written into `EAX` for `printf()`—this mean that one argument will be passed in vector registers, just as the standard requires [21].

24.3 Comparison example

```
double d_max (double a, double b)
{
    if (a>b)
        return a;

    return b;
};
```

Listing 24.5: MSVC 2012 x64 /Ox

```
a$ = 8
b$ = 16
d_max PROC
    comisd   xmm0, xmm1
    ja      SHORT $LN2@d_max
    movaps   xmm0, xmm1
$LN2@d_max:
    fatret   0
d_max ENDP
```

Optimizing MSVC generates very easy code to understand.

COMISD is “Compare Scalar Ordered Double-Precision Floating-Point Values and Set EFLAGS”. Essentially, that is what it does.

Non-optimizing MSVC generates more redundant code, but it is still not hard to understand:

Listing 24.6: MSVC 2012 x64

```
a$ = 8
b$ = 16
d_max PROC
    movsdx   QWORD PTR [rsp+16], xmm1
    movsdx   QWORD PTR [rsp+8], xmm0
    movsdx   xmm0, QWORD PTR a$[rsp]
```

```

    comisd    xmm0, QWORD PTR b$[rsp]
    jbe       SHORT $LN1@d_max
    movsdx    xmm0, QWORD PTR a$[rsp]
    jmp       SHORT $LN2@d_max
$LN1@d_max:
    movsdx    xmm0, QWORD PTR b$[rsp]
$LN2@d_max:
    fatret    0
d_max       ENDP

```

However, GCC 4.4.6 did more optimizing and used the MAXSD (“Return Maximum Scalar Double-Precision Floating-Point Value”) instruction, which just choose maximal value!

Listing 24.7: GCC 4.4.6 x64 -O3

```

d_max:
    maxsd     xmm0, xmm1
    ret

```

24.4 Summary

Only lower half of XMM-registers are used in all examples here, a number in IEEE 754 format is stored there.

Essentially, all instructions prefixed by `-SD` (“Scalar Double-Precision”)—are instructions working with float point numbers in IEEE 754 format stored in the lower 64-bit half of XMM-register.

And it is easier than FPU, apparently because SIMD extensions were evolved not as chaotic as FPU in the past. Stack register model is not used.

If you would try to replace *double* to *float* in these examples, the same instructions will be used, but prefixed with `-SS` (“Scalar Single-Precision”), for example, `MOVSS`, `COMISS`, `ADDSS`, etc.

“Scalar” mean that SIMD-register will contain only one value instead of several. Instructions working with several values in a register simultaneously, has “Packed” in the name.

Chapter 25

Temperature converting

Another very popular example in programming books for beginners, is a small program converting Fahrenheit temperature to Celsius or back.

$$C = \frac{5 \cdot (F - 32)}{9}$$

I also added simple error handling: 1) we should check if user enters correct number; 2) we should check if Celsius temperature is not below -273 number (which is below absolute zero, as we may remember from school physics lessons).

`exit()` function terminates program instantly, without returning to the [caller](#) function.

25.1 Integer values

```
#include <stdio.h>
#include <stdlib.h>

int main()
{
    int celsius, fahr;
    printf ("Enter temperature in Fahrenheit:\n");
    if (scanf ("%d", &fahr)!=1)
    {
        printf ("Error while parsing your input\n");
        exit(0);
    };

    celsius = 5 * (fahr-32) / 9;

    if (celsius<=-273)
    {
        printf ("Error: incorrect temperature!\n");
        exit(0);
    };
    printf ("Celsius: %d\n", celsius);
};
```

25.1.1 MSVC 2012 x86 /Ox

Listing 25.1: MSVC 2012 x86 /Ox

\$SG4228 DB	'Enter temperature in Fahrenheit:', 0aH, 00H
\$SG4230 DB	'%d', 00H
\$SG4231 DB	'Error while parsing your input', 0aH, 00H
\$SG4233 DB	'Error: incorrect temperature!', 0aH, 00H
\$SG4234 DB	'Celsius: %d', 0aH, 00H

```

_fahr$ = -4 ; size = 4
_main PROC
    push    ecx
    push    esi
    mov     esi, DWORD PTR __imp__printf
    push    OFFSET $SG4228 ; 'Enter temperature in Fahrenheit:'
    call    esi ; call printf()
    lea     eax, DWORD PTR _fahr$[esp+12]
    push    eax
    push    OFFSET $SG4230 ; '%d'
    call    DWORD PTR __imp__scanf
    add     esp, 12 ; 0000000cH
    cmp     eax, 1
    je      SHORT $LN2@main
    push    OFFSET $SG4231 ; 'Error while parsing your input'
    call    esi ; call printf()
    add     esp, 4
    push    0
    call    DWORD PTR __imp__exit
$LN9@main:
$LN2@main:
    mov     eax, DWORD PTR _fahr$[esp+8]
    add     eax, -32 ; ffffffff0H
    lea     ecx, DWORD PTR [eax+eax*4]
    mov     eax, 954437177 ; 38e38e39H
    imul    ecx
    sar     edx, 1
    mov     eax, edx
    shr     eax, 31 ; 0000001fH
    add     eax, edx
    cmp     eax, -273 ; fffffeeffH
    jge     SHORT $LN1@main
    push    OFFSET $SG4233 ; 'Error: incorrect temperature!'
    call    esi ; call printf()
    add     esp, 4
    push    0
    call    DWORD PTR __imp__exit
$LN10@main:
$LN1@main:
    push    eax
    push    OFFSET $SG4234 ; 'Celsius: %d'
    call    esi ; call printf()
    add     esp, 8
    ; return 0 - at least by C99 standard
    xor     eax, eax
    pop     esi
    pop     ecx
    ret     0
$LN8@main:
_main ENDP

```

What we can say about it:

- Address of `printf()` is first loaded into ESI register, so the subsequent `printf()` calls are processed just by CALL ESI instruction. It's a very popular compiler technique, possible if several consequent calls to the same function are present in the code, and/or, if there are free register which can be used for this.
- We see ADD EAX, -32 instruction at the place where 32 should be subtracted from the value. $EAX = EAX + (-32)$ is equivalent to $EAX = EAX - 32$ and somehow, compiler decide to use ADD instead of SUB. Maybe it's worth it.
- LEA instruction is used when value should be multiplied by 5: `lea ecx, DWORD PTR [eax+eax*4]`. Yes, $i + i * 4$ is equivalent to $i * 5$ and LEA works faster then IMUL. By the way, SHL EAX, 2 / ADD EAX, EAX instructions pair could be also used here instead— some compilers do it in this way.

- Division by multiplication trick (14) is also used here.
- `main()` function returns 0 while we haven't return 0 at its end. C99 standard tells us [15, 5.1.2.2.3] that `main()` will return 0 in case of return statement absence. This rule works only for `main()` function. Though, MSVC doesn't support C99, but maybe partly it does?

25.1.2 MSVC 2012 x64 /Ox

The code is almost the same, but I've found `INT 3` instructions after each `exit()` call:

```
xor    ecx, ecx
call   QWORD PTR __imp_exit
int     3
```

`INT 3` is a debugger breakpoint.

It is known that `exit()` is one of functions which never can return ¹, so if it does, something really odd happens and it's time to load debugger.

25.2 Float point values

```
#include <stdio.h>
#include <stdlib.h>

int main()
{
    double celsius, fahr;
    printf ("Enter temperature in Fahrenheit:\n");
    if (scanf ("%lf", &fahr)!=1)
    {
        printf ("Error while parsing your input\n");
        exit(0);
    };

    celsius = 5 * (fahr-32) / 9;

    if (celsius<-273)
    {
        printf ("Error: incorrect temperature!\n");
        exit(0);
    };
    printf ("Celsius: %lf\n", celsius);
};
```

MSVC 2010 x86 use [FPU](#) instructions...

Listing 25.2: MSVC 2010 x86 /Ox

```
$SG4038 DB      'Enter temperature in Fahrenheit:', 0aH, 00H
$SG4040 DB      '%lf', 00H
$SG4041 DB      'Error while parsing your input', 0aH, 00H
$SG4043 DB      'Error: incorrect temperature!', 0aH, 00H
$SG4044 DB      'Celsius: %lf', 0aH, 00H

__real@c071100000000000 DQ  0c07110000000000r    ; -273
__real@4022000000000000 DQ  0402200000000000r    ; 9
__real@4014000000000000 DQ  0401400000000000r    ; 5
__real@4040000000000000 DQ  0404000000000000r    ; 32

_fahr$ = -8                                ; size = 8
_main  PROC
```

¹another popular one is `longjmp()`

```

    sub     esp, 8
    push    esi
    mov     esi, DWORD PTR __imp__printf
    push    OFFSET $SG4038      ; 'Enter temperature in Fahrenheit:'
    call    esi                 ; call printf
    lea     eax, DWORD PTR _fahr$[esp+16]
    push    eax
    push    OFFSET $SG4040      ; '%lf'
    call    DWORD PTR __imp__scanf
    add     esp, 12              ; 0000000cH
    cmp     eax, 1
    je      SHORT $LN2@main
    push    OFFSET $SG4041      ; 'Error while parsing your input'
    call    esi                 ; call printf
    add     esp, 4
    push    0
    call    DWORD PTR __imp__exit
$LN2@main:
    fld     QWORD PTR _fahr$[esp+12]
    fsub    QWORD PTR __real@4040000000000000 ; 32
    fmul    QWORD PTR __real@4014000000000000 ; 5
    fdiv    QWORD PTR __real@4022000000000000 ; 9
    fld     QWORD PTR __real@c071100000000000 ; -273
    fcomp   ST(1)
    fnstsw  ax
    test    ah, 65              ; 00000041H
    jne     SHORT $LN1@main
    push    OFFSET $SG4043      ; 'Error: incorrect temperature!'
    fstp    ST(0)
    call    esi                 ; call printf
    add     esp, 4
    push    0
    call    DWORD PTR __imp__exit
$LN1@main:
    sub     esp, 8
    fstp    QWORD PTR [esp]
    push    OFFSET $SG4044      ; 'Celsius: %lf'
    call    esi
    add     esp, 12              ; 0000000cH
    ; return 0
    xor     eax, eax
    pop     esi
    add     esp, 8
    ret     0
$LN10@main:
_main     ENDP

```

... but MSVC from year 2012 use [SIMD](#) instructions instead:

Listing 25.3: MSVC 2010 x86 /Ox

```

$SG4228 DB      'Enter temperature in Fahrenheit:', 0aH, 00H
$SG4230 DB      '%lf', 00H
$SG4231 DB      'Error while parsing your input', 0aH, 00H
$SG4233 DB      'Error: incorrect temperature!', 0aH, 00H
$SG4234 DB      'Celsius: %lf', 0aH, 00H
__real@c071100000000000 DQ 0c07110000000000r    ; -273
__real@4040000000000000 DQ 0404000000000000r    ; 32
__real@4022000000000000 DQ 0402200000000000r    ; 9
__real@4014000000000000 DQ 0401400000000000r    ; 5

_fahr$ = -8                                ; size = 8

```

```

_main  PROC
    sub     esp, 8
    push    esi
    mov     esi, DWORD PTR __imp__printf
    push    OFFSET $SG4228      ; 'Enter temperature in Fahrenheit:'
    call    esi                 ; call printf
    lea     eax, DWORD PTR _fahr$[esp+16]
    push    eax
    push    OFFSET $SG4230      ; '%lf'
    call    DWORD PTR __imp__scanf
    add     esp, 12              ; 0000000cH
    cmp     eax, 1
    je      SHORT $LN2@main
    push    OFFSET $SG4231      ; 'Error while parsing your input'
    call    esi                 ; call printf
    add     esp, 4
    push    0
    call    DWORD PTR __imp__exit
$LN9@main:
$LN2@main:
    movsd   xmm1, QWORD PTR _fahr$[esp+12]
    subsd   xmm1, QWORD PTR __real@4040000000000000 ; 32
    movsd   xmm0, QWORD PTR __real@c071100000000000 ; -273
    mulsd   xmm1, QWORD PTR __real@4014000000000000 ; 5
    divsd   xmm1, QWORD PTR __real@4022000000000000 ; 9
    comisd  xmm0, xmm1
    jbe     SHORT $LN1@main
    push    OFFSET $SG4233      ; 'Error: incorrect temperature!'
    call    esi                 ; call printf
    add     esp, 4
    push    0
    call    DWORD PTR __imp__exit
$LN10@main:
$LN1@main:
    sub     esp, 8
    movsd   QWORD PTR [esp], xmm1
    push    OFFSET $SG4234      ; 'Celsius: %lf'
    call    esi                 ; call printf
    add     esp, 12              ; 0000000cH
    ; return 0
    xor     eax, eax
    pop     esi
    add     esp, 8
    ret     0
$LN8@main:
_main  ENDP

```

Of course, [SIMD](#) instructions are available in x86 mode, including those working with floating point numbers. It's somewhat easier to use them for calculations, so the new Microsoft compiler use them.

We may also notice that -273 value is loaded into XMM0 register too early. And that's OK, because, compiler may emit instructions not in the order they are in source code.

Chapter 26

C99 restrict

Here is a reason why FORTRAN programs, in some cases, works faster than C/C++ ones.

```
void f1 (int* x, int* y, int* sum, int* product, int* sum_product, int* update_me, size_t s)
{
    for (int i=0; i<s; i++)
    {
        sum[i]=x[i]+y[i];
        product[i]=x[i]*y[i];
        update_me[i]=i*123; // some dummy value
        sum_product[i]=sum[i]+product[i];
    };
};
```

That's very simple example with one specific thing in it: pointer to `update_me` array could be a pointer to `sum` array, `product` array, or even `sum_product` array—since it is not a crime in it, right?

Compiler is fully aware about it, so it generates a code with four stages in loop body:

- calculate next `sum[i]`
- calculate next `product[i]`
- calculate next `update_me[i]`
- calculate next `sum_product[i]` —on this stage, we need to load from memory already calculated `sum[i]` and `product[i]`

Is it possible to optimize the last stage? Since already calculated `sum[i]` and `product[i]` are not necessary to load from memory again, because we already calculated them. Yes, but compiler is not sure that nothing was overwritten on 3rd stage! This is called “pointer aliasing”, a situation, when compiler cannot be sure that a memory to which a pointer is pointing, was not changed.

restrict in C99 standard [15, 6.7.3/1] is a promise, given by programmer to compiler the function arguments marked by this keyword will always be pointing to different memory locations and never be crossed.

If to be more precise and describe this formally, *restrict* shows that only this pointer is to be used to access an object, with which we are working via this pointer, and no other pointer will be used for it. It can be even said the object will be accessed only via one single pointer, if it is marked as *restrict*.

Let's add this keyword to each argument-pointer:

```
void f2 (int* restrict x, int* restrict y, int* restrict sum, int* restrict product, int*
    restrict sum_product,
    int* restrict update_me, size_t s)
{
    for (int i=0; i<s; i++)
    {
        sum[i]=x[i]+y[i];
        product[i]=x[i]*y[i];
        update_me[i]=i*123; // some dummy value
        sum_product[i]=sum[i]+product[i];
    };
};
```

Let's see results:

Listing 26.1: GCC x64: f1()

```

f1:
    push    r15 r14 r13 r12 rbp rdi rsi rbx
    mov     r13, QWORD PTR 120[rsi]
    mov     rbp, QWORD PTR 104[rsi]
    mov     r12, QWORD PTR 112[rsi]
    test    r13, r13
    je      .L1
    add     r13, 1
    xor     ebx, ebx
    mov     edi, 1
    xor     r11d, r11d
    jmp     .L4
.L6:
    mov     r11, rdi
    mov     rdi, rax
.L4:
    lea     rax, 0[0+r11*4]
    lea     r10, [rcx+rax]
    lea     r14, [rdx+rax]
    lea     rsi, [r8+rax]
    add     rax, r9
    mov     r15d, DWORD PTR [r10]
    add     r15d, DWORD PTR [r14]
    mov     DWORD PTR [rsi], r15d      ; store to sum[]
    mov     r10d, DWORD PTR [r10]
    imul    r10d, DWORD PTR [r14]
    mov     DWORD PTR [rax], r10d     ; store to product[]
    mov     DWORD PTR [r12+r11*4], ebx ; store to update_me[]
    add     ebx, 123
    mov     r10d, DWORD PTR [rsi]     ; reload sum[i]
    add     r10d, DWORD PTR [rax]     ; reload product[i]
    lea     rax, 1[rdi]
    cmp     rax, r13
    mov     DWORD PTR 0[rbp+r11*4], r10d ; store to sum_product[]
    jne     .L6
.L1:
    pop     rbx rsi rdi rbp r12 r13 r14 r15
    ret

```

Listing 26.2: GCC x64: f2()

```

f2:
    push    r13 r12 rbp rdi rsi rbx
    mov     r13, QWORD PTR 104[rsi]
    mov     rbp, QWORD PTR 88[rsi]
    mov     r12, QWORD PTR 96[rsi]
    test    r13, r13
    je      .L7
    add     r13, 1
    xor     r10d, r10d
    mov     edi, 1
    xor     eax, eax
    jmp     .L10
.L11:
    mov     rax, rdi
    mov     rdi, r11
.L10:
    mov     esi, DWORD PTR [rcx+rax*4]
    mov     r11d, DWORD PTR [rdx+rax*4]
    mov     DWORD PTR [r12+rax*4], r10d ; store to update_me[]

```

```

    add    r10d, 123
    lea    ebx, [rsi+r11]
    imul   r11d, esi
    mov    DWORD PTR [r8+rax*4], ebx    ; store to sum[]
    mov    DWORD PTR [r9+rax*4], r11d   ; store to product[]
    add    r11d, ebx
    mov    DWORD PTR 0[rbp+rax*4], r11d ; store to sum_product[]
    lea    r11, 1[rdi]
    cmp    r11, r13
    jne    .L11
.L7:
    pop    rbx rsi rdi rbp r12 r13
    ret

```

The difference between compiled `f1()` and `f2()` function is as follows: in `f1()`, `sum[i]` and `product[i]` are reloaded in the middle of loop, and in `f2()` there are no such thing, already calculated values are used, since we “promised” to compiler, that no one and nothing will change values in `sum[i]` and `product[i]` while execution of loop body, so it is “sure” the value from memory may not be loaded again. Obviously, second example will work faster.

But what if pointers in function arguments will be crossed somehow? This will be on programmer’s conscience, but results will be incorrect.

Let’s back to FORTRAN. Compilers from this programming language treats all pointers as such, so when it was not possible to set *restrict*, FORTRAN in these cases may generate faster code.

How practical is it? In the cases when function works with several big blocks in memory. E.g. there are a lot of such in linear algebra. A lot of linear algebra used on supercomputers/[HPC](#)¹, probably, that is why, traditionally, FORTRAN is still used there [19].

But when a number of iterations is not very big, certainly, speed boost will not be significant.

¹High-Performance Computing

Chapter 27

Inline functions

Inlined code is when compiler, instead of placing call instruction to small or tiny function, just placing its body right in-place.

Listing 27.1: Simple example

```
#include <stdio.h>

int celsius_to_fahrenheit (int celsius)
{
    return celsius * 9 / 5 + 32;
};

int main(int argc, char *argv[])
{
    int celsius=atol(argv[1]);
    printf ("%d\n", celsius_to_fahrenheit (celsius));
};
```

... is compiled in very predictable way, however, if to turn on GCC optimization (-O3), we'll see:

Listing 27.2: GCC 4.8.1 -O3

```
_main:
    push    ebp
    mov     ebp, esp
    and     esp, -16
    sub     esp, 16
    call    __main
    mov     eax, DWORD PTR [ebp+12]
    mov     eax, DWORD PTR [eax+4]
    mov     DWORD PTR [esp], eax
    call    _atol
    mov     edx, 1717986919
    mov     DWORD PTR [esp], OFFSET FLAT:LC2 ; "%d\12\0"
    lea     ecx, [eax+eax*8]
    mov     eax, ecx
    imul    edx
    sar     ecx, 31
    sar     edx
    sub     edx, ecx
    add     edx, 32
    mov     DWORD PTR [esp+4], edx
    call    _printf
    leave
    ret
```

(Here division is done by multiplication(14).)

Yes, our small function was just placed before `printf()` call. Why? It may be faster than executing this function's code plus calling/returning overhead.

In past, such function must be marked with “inline” keyword in function’s declaration, however, in modern times, these functions are chosen automatically by compiler.

Another very common automatic optimization is inlining of string functions like *strcpy()*, *strcmp()*, etc.

Listing 27.3: Another simple example

```
bool is_bool (char *s)
{
    if (strcmp (s, "true")==0)
        return true;
    if (strcmp (s, "false")==0)
        return false;

    assert(0);
};
```

Listing 27.4: GCC 4.8.1 -O3

```
_is_bool:
    push    edi
    mov     ecx, 5
    push    esi
    mov     edi, OFFSET FLAT:LC0 ; "true\0"
    sub     esp, 20
    mov     esi, DWORD PTR [esp+32]
    repz    cmpsb
    je      L3
    mov     esi, DWORD PTR [esp+32]
    mov     ecx, 6
    mov     edi, OFFSET FLAT:LC1 ; "false\0"
    repz    cmpsb
    seta    cl
    setb    dl
    xor     eax, eax
    cmp     cl, dl
    jne     L8
    add     esp, 20
    pop     esi
    pop     edi
    ret
```

Here is an example of very frequently seen piece of *strcmp()* code generated by MSVC:

Listing 27.5: MSVC

```
    mov     dl, [eax]
    cmp     dl, [ecx]
    jnz     short loc_10027FA0
    test    dl, dl
    jz      short loc_10027F9C
    mov     dl, [eax+1]
    cmp     dl, [ecx+1]
    jnz     short loc_10027FA0
    add     eax, 2
    add     ecx, 2
    test    dl, dl
    jnz     short loc_10027F80

loc_10027F9C:                                ; CODE XREF: f1+448
    xor     eax, eax
    jmp     short loc_10027FA5
; -----
loc_10027FA0:                                ; CODE XREF: f1+444
```

```
                                ; f1+450  
sbb    eax, eax  
sbb    eax, 0FFFFFFFFh
```

I wrote small [IDA](https://github.com/yurichev/IDA_scripts) script for searching and folding such very frequently seen pieces of inline code:
https://github.com/yurichev/IDA_scripts.

Chapter 28

Incorrectly disassembled code

Practicing reverse engineers often dealing with incorrectly disassembled code.

28.1 Disassembling started incorrectly (x86)

Unlike ARM and MIPS (where any instruction has length of 2 or 4 bytes), x86 instructions has variable size, so, any disassembler, starting at the middle of x86 instruction, may produce incorrect results.

As an example:

```

add    [ebp-31F7Bh], c1
dec    dword ptr [ecx-3277Bh]
dec    dword ptr [ebp-2CF7Bh]
inc    dword ptr [ebx-7A76F33Ch]
fdiiv  st(4), st
;-----
db 0FFh
;-----
dec    dword ptr [ecx-21F7Bh]
dec    dword ptr [ecx-22373h]
dec    dword ptr [ecx-2276Bh]
dec    dword ptr [ecx-22B63h]
dec    dword ptr [ecx-22F4Bh]
dec    dword ptr [ecx-23343h]
jmp    dword ptr [esi-74h]
;-----
xchg   eax, ebp
clc
std
;-----
db 0FFh
db 0FFh
;-----
mov     word ptr [ebp-214h], cs
mov     word ptr [ebp-238h], ds
mov     word ptr [ebp-23Ch], es
mov     word ptr [ebp-240h], fs
mov     word ptr [ebp-244h], gs
pushf
pop     dword ptr [ebp-210h]
mov     eax, [ebp+4]
mov     [ebp-218h], eax
lea     eax, [ebp+4]
mov     [ebp-20Ch], eax
mov     dword ptr [ebp-2D0h], 10001h
mov     eax, [eax-4]
mov     [ebp-21Ch], eax
mov     eax, [ebp+0Ch]
```

```

mov     [ebp-320h], eax
mov     eax, [ebp+10h]
mov     [ebp-31Ch], eax
mov     eax, [ebp+4]
mov     [ebp-314h], eax
call    ds:IsDebuggerPresent
mov     edi, eax
lea     eax, [ebp-328h]
push    eax
call    sub_407663
pop     ecx
test    eax, eax
jnz     short loc_402D7B

```

There are incorrectly disassembled instructions at the beginning, but eventually, disassembler finds right track.

28.2 How random noise looks disassembled?

Common properties which can be easily spotted are:

- Unusually big instruction dispersion. Most frequent x86 instructions are PUSH, MOV, CALL, but here we will see instructions from any instruction group: FPU instructions, IN/OUT instructions, rare and system instructions, everything messed up in one single place.
- Big and random values, offsets and immediates.
- Jumps having incorrect offsets often jumping into the middle of another instructions.

Listing 28.1: random noise (x86)

```

mov     bl, 0Ch
mov     ecx, 0D38558Dh
mov     eax, ds:2C869A86h
db      67h
mov     dl, 0CCh
insb
movsb
push    eax
xor     [edx-53h], ah
fcom    qword ptr [edi-45A0EF72h]
pop     esp
pop     ss
in      eax, dx
dec     ebx
push    esp
lds     esp, [esi-41h]
retf
rcl     dword ptr [eax], cl
mov     cl, 9Ch
mov     ch, 0DFh
push    cs
insb
mov     esi, 0D9C65E4Dh
imul    ebp, [ecx], 66h
pushf
sal     dword ptr [ebp-64h], cl
sub     eax, 0AC433D64h
out     8Ch, eax
pop     ss
sbb     [eax], ebx
aas
xchg    cl, [ebx+ebx*4+14B31Eh]

```

```

    jecxz    short near ptr loc_58+1
    xor      al, 0C6h
    inc      edx
    db       36h
    pusha
    stosb
    test     [ebx], ebx
    sub      al, 0D3h ; 'L'
    pop      eax
    stosb

loc_58:
    test     [esi], eax          ; CODE XREF: seg000:0000004A
    inc      ebp
    das
    db       64h
    pop      ecx
    das
    hlt

; -----
    pop      edx
    out      0B0h, al
    lodsb
    push     ebx
    cdq
    out      dx, al
    sub      al, 0Ah
    sti
    outsd
    add      dword ptr [edx], 96FCBE4Bh
    and      eax, 0E537EE4Fh
    inc      esp
    stosd
    cdq
    push     ecx
    in       al, 0CBh
    mov      ds:0D114C45Ch, al
    mov      esi, 659D1985h
    enter    6FE8h, 0D9h
    enter    6FE6h, 0D9h
    xchg     eax, esi
    sub      eax, 0A599866Eh
    retn

; -----
    pop      eax
    dec      eax
    adc      al, 21h ; '!'
    lahf
    inc      edi
    sub      eax, 9062EE5Bh
    bound    eax, [ebx]

loc_A2:
    wait
    iret

; -----
    jnb      short loc_D7
    cmpsd
    iret

; -----
    jnb      short loc_D7

```

```

    sub     ebx, [ecx]
    in      al, 0Ch
    add     esp, esp
    mov     bl, 8Fh
    xchg    eax, ecx
    int     67h          ; - LIM EMS
    pop     ds
    pop     ebx
    db      36h
    xor     esi, [ebp-4Ah]
    mov     ebx, 0EB4F980Ch
    repne   add bl, dh
    imul    ebx, [ebp+5616E7A5h], 67A4D1EEh
    xchg    eax, ebp
    scasb
    push    esp
    wait
    mov     dl, 11h
    mov     ah, 29h ; ')'
    fist    dword ptr [edx]

loc_D7:                                ; CODE XREF: seg000:000000A4
                                        ; seg000:000000A8 ...
    dec     dword ptr [ebp-5D0E0BA4h]
    call    near ptr 622FEE3Eh
    sbb     ax, 5A2Fh
    jmp     dword ptr cs:[ebx]
; -----
    xor     ch, [edx-5]
    inc     esp
    push    edi
    xor     esp, [ebx-6779D3B8h]
    pop     eax
    int     3             ; Trap to Debugger
    rcl     byte ptr [ebx-3Eh], cl
    xor     [edi], bl
    sbb     al, [edx+ecx*4]
    xor     ah, [ecx-1DA4E05Dh]
    push    edi
    xor     ah, cl
    popa
    cmp     dword ptr [edx-62h], 46h ; 'F'
    dec     eax
    in      al, 69h
    dec     ebx
    iret
; -----
    or      al, 6
    jns     short near ptr loc_D7+3
    shl     byte ptr [esi], 42h
    repne   adc [ebx+2Ch], eax
    icebp
    cmpsd
    leave
    push    esi
    jmp     short loc_A2
; -----
    and     eax, 0F2E41FE9h
    push    esi
    loop    loc_14F
    add     ah, fs:[edx]

```

```

loc_12D:                                     ; CODE XREF: seg000:00000169
        mov     dh, 0F7h
        add     [ebx+7B61D47Eh], esp
        mov     edi, 79F19525h
        rcl     byte ptr [eax+22015F55h], cl
        cli
        sub     al, 0D2h ; 'T'
        dec     eax
        mov     ds:0A81406F5h, eax
        sbb     eax, 0A7AA179Ah
        in      eax, dx

loc_14F:                                     ; CODE XREF: seg000:00000128
        and     [ebx-4CDFAC74h], ah
        pop     ecx
        push    esi
        mov     bl, 2Dh ; '-'
        in      eax, 2Ch
        stosd
        inc     edi
        push    esp

locret_15E:                                 ; CODE XREF: seg000:loc_1A0
        retn    0C432h
; -----
        and     al, 86h
        cwde
        and     al, 8Fh
        cmp     ebp, [ebp+7]
        jz      short loc_12D
        sub     bh, ch
        or      dword ptr [edi-7Bh], 8A16C0F7h
        db      65h
        insd
        mov     al, ds:0A3A5173Dh
        dec     ecx
        push    ds
        xor     al, cl
        jg      short loc_195
        push    6Eh ; 'n'
        out     0DDh, al
        inc     edi
        sub     eax, 6899BBF1h
        leave
        rcr     dword ptr [ecx-69h], cl
        sbb     ch, [edi+5EDDCB54h]

loc_195:                                     ; CODE XREF: seg000:0000017F
        push    es
        repne sub ah, [eax-105FF22Dh]
        cmc
        and     ch, al

loc_1A0:                                     ; CODE XREF: seg000:00000217
        jnp     short near ptr locret_15E+1
        or      ch, [eax-66h]
        add     [edi+edx-35h], esi
        out     dx, al
        db      2Eh
        call    far ptr 1AAh:6832F5DDh

```

```

        jz      short near ptr loc_1DA+1
        sbb     esp, [edi+2CB02CEFh]
        xchg    eax, edi
        xor     [ebx-766342ABh], edx

loc_1C1:                                ; CODE XREF: seg000:00000212
        cmp     eax, 1BE9080h
        add     [ecx], edi
        aad     0
        imul    esp, [edx-70h], 0A8990126h
        or      dword ptr [edx+10C33693h], 4Bh
        popf

loc_1DA:                                ; CODE XREF: seg000:000001B2
        mov     ecx, cs
        aaa
        mov     al, 39h ; '9'
        adc     byte ptr [eax-77F7F1C5h], 0C7h
        add     [ecx], bl
        retn    0DD42h

; -----
        db      3Eh
        mov     fs:[edi], edi
        and     [ebx-24h], esp
        db      64h
        xchg    eax, ebp
        push    cs
        adc     eax, [edi+36h]
        mov     bh, 0C7h
        sub     eax, 0A710CBE7h
        xchg    eax, ecx
        or      eax, 51836E42h
        xchg    eax, ebx
        inc     ecx
        jb      short near ptr loc_21E+3
        db      64h
        xchg    eax, esp
        and     dh, [eax-31h]
        mov     ch, 13h
        add     ebx, edx
        jnb     short loc_1C1
        db      65h
        adc     al, 0C5h
        js      short loc_1A0
        sbb     eax, 887F5BEEh

loc_21E:                                ; CODE XREF: seg000:00000207
        mov     eax, 888E1FD6h
        mov     bl, 90h
        cmp     [eax], ecx
        rep int 61h ; reserved for user interrupt
        and     edx, [esi-7EB5C9EAh]
        fisttp  qword ptr [eax+esi*4+38F9BA6h]
        jmp     short loc_27C

; -----
        fadd    st, st(2)
        db      3Eh
        mov     edx, 54C03172h
        retn

; -----
        db      64h

```

```

pop     ds
xchg    eax, esi
rcr     ebx, cl
cmp     [di+2Eh], ebx
repne   xor [di-19h], dh
insd
adc     dl, [eax-0C4579F7h]
push    ss
xor     [ecx+edx*4+65h], ecx
mov     cl, [ecx+ebx-32E8AC51h]
or      [ebx], ebp
cmpsb
lodsb
iret

```

Listing 28.2: random noise (x86-64)

```

lea     esi, [rax+rdx*4+43558D29h]

loc_AF3:                                ; CODE XREF: seg000:00000000000000B46
rcl     byte ptr [rsi+rax*8+29BB423Ah], 1
lea     ecx, cs:0FFFFFFFB2A6780Fh
mov     al, 96h
mov     ah, 0CEh
push    rsp
lods    byte ptr [esi]
; -----
db     2Fh ; /
; -----
pop     rsp
db     64h
retf    0E993h
; -----
cmp     ah, [rax+4Ah]
movzx   rsi, dword ptr [rbp-25h]
push    4Ah
movzx   rdi, dword ptr [rdi+rdx*8]
; -----
db     9Ah
; -----
rcr     byte ptr [rax+1Dh], cl
lodsd
xor     [rbp+6CF20173h], edx
xor     [rbp+66F8B593h], edx
push    rbx
sbb     ch, [rbx-0Fh]
stosd
int     87h                ; used by BASIC while in interpreter
db     46h, 4Ch
out     33h, rax
xchg    eax, ebp
test    ecx, ebp
movsd
leave
push    rsp
; -----
db     16h
; -----
xchg    eax, esi
pop     rdi

```

```

loc_B3D:                                     ; CODE XREF: seg000:0000000000000B5F
        mov     ds:93CA685DF98A90F9h, eax
        jnz     short near ptr loc_AF3+6
        out     dx, eax
        cwde
        mov     bh, 5Dh ; ']'
        movsb
        pop     rbp
; -----
        db     60h ; '
; -----
        movsxd  rbp, dword ptr [rbp-17h]
        pop     rbx
        out     7Dh, al
        add     eax, 0D79BE769h
; -----
        db     1Fh
; -----
        retf    0CAB9h
; -----
        jl      short near ptr loc_B3D+4
        sal     dword ptr [rbx+rbp+4Dh], 0D3h
        mov     cl, 41h ; 'A'
        imul    eax, [rbp-5B77E717h], 1DDE6E5h
        imul    ecx, ebx, 66359BCCh
        xlat
; -----
        db     60h ; '
; -----
        cmp     bl, [rax]
        and     ebp, [rcx-57h]
        stc
        sub     [rcx+1A533AB4h], al
        jmp     short loc_C05
; -----
        db     4Bh ; K
; -----
        int     3                               ; Trap to Debugger
        xchg    ebx, [rsp+rdx-5Bh]
; -----
        db     0D6h
; -----
        mov     esp, 0C5BA61F7h
        out     0A3h, al           ; Interrupt Controller #2, 8259A
        add     al, 0A6h
        pop     rbx
        cmp     bh, fs:[rsi]
        and     ch, cl
        cmp     al, 0F3h
; -----
        db     0Eh
; -----
        xchg    dh, [rbp+rax*4-4CE9621Ah]
        stosd
        xor     [rdi], ebx
        stosb
        xchg    eax, ecx
        push    rsi
        insd
        fdiv    word ptr [rcx]
        xchg    eax, ecx

```

```

        mov     dh, 0C0h ; 'L'
        xchg    eax, esp
        push    rsi
        mov     dh, [rdx+rbp+6918F1F3h]
        xchg    eax, ebp
        out     9Dh, al

loc_BC0:
                                ; CODE XREF: seg000:00000000000000C26
        or      [rcx-0Dh], ch
        int     67h              ; - LIM EMS
        push    rdx
        sub     al, 43h ; 'C'
        test    ecx, ebp
        test    [rdi+71F372A4h], cl
; -----
        db      7
; -----
        imul    ebx, [rsi-0Dh], 2BB30231h
        xor     ebx, [rbp-718B6E64h]
        jns     short near ptr loc_C56+1
        fcomp   dword ptr [rcx-1Ah]
        and     eax, 69BEECC7h
        mov     esi, 37DA40F6h
        imul    r13, [rbp+rdi*8+529F33CDh], 0FFFFFFFFF35CDD30h
        or      [rbx], edx
        imul    esi, [rbx-34h], 0CDA42B87h
; -----
        db      36h ; 6
        db      1Fh
; -----
loc_C05:
                                ; CODE XREF: seg000:00000000000000B86
        add     dh, [rcx]
        mov     edi, 0DD3E659h
        ror     byte ptr [rdx-33h], cl
        xlat
        db      48h
        sub     rsi, [rcx]
; -----
        db      1Fh
        db      6
; -----
        xor     [rdi+13F5F362h], bh
        cmpsb
        sub     esi, [rdx]
        pop     rbp
        sbb     al, 62h ; 'b'
        mov     dl, 33h ; '3'
; -----
        db      4Dh ; M
        db      17h
; -----
        jns     short loc_BC0
        push    0FFFFFFFFFFFFFFFF86h

loc_C2A:
                                ; CODE XREF: seg000:00000000000000C8F
        sub     [rdi-2Ah], eax
; -----
        db      0FEh
; -----
        cmpsb

```

```

        wait
        rcr     byte ptr [rax+5Fh], cl
        cmp     bl, al
        pushfq
        xchg    ch, cl
; -----
        db     4Eh ; N
        db     37h ; 7
; -----
        mov     ds:0E43F3CCD3D9AB295h, eax
        cmp     ebp, ecx
        jl      short loc_C87
        retn    8574h
; -----
        out     3, al                ; DMA controller, 8237A-5.
                                      ; channel 1 base address and word count
loc_C4C:                                     ; CODE XREF: seg000:00000000000000C7F
        cmp     al, 0A6h
        wait
        push    0FFFFFFFFFFFFFFBEh
; -----
        db     82h
; -----
        ficom   dword ptr [rbx+r10*8]
loc_C56:                                     ; CODE XREF: seg000:00000000000000BDE
        jnz     short loc_C76
        xchg    eax, edx
        db      26h
        wait
        iret
; -----
        push    rcx
; -----
        db     48h ; H
        db     9Bh
        db     64h ; d
        db     3Eh ; >
        db     2Fh ; /
; -----
        mov     al, ds:8A7490CA2E9AA728h
        stc
; -----
        db     60h ; '
; -----
        test    [rbx+rcx], ebp
        int     3                    ; Trap to Debugger
        xlat
loc_C72:                                     ; CODE XREF: seg000:00000000000000CC6
        mov     bh, 98h
; -----
        db     2Eh ; .
        db     0DFh
; -----
loc_C76:                                     ; CODE XREF: seg000:loc_C56
        jl      short loc_C91
        sub     ecx, 13A7CCF2h
        movsb

```

```

        jns     short near ptr loc_C4C+1
        cmpsd
        sub     ah, ah
        cdq
; -----
        db  6Bh ; k
        db  5Ah ; Z
; -----

loc_C87:                                ; CODE XREF: seg000:00000000000000C45
        or      ecx, [rbx+6Eh]
        rep in  eax, 0Eh                ; DMA controller, 8237A-5.
                                        ; Clear mask registers.
                                        ; Any OUT enables all 4 channels.
        cmpsb
        jnb     short loc_C2A

loc_C91:                                ; CODE XREF: seg000:loc_C76
        scasd
        add     dl, [rcx+5FEF30E6h]
        enter   0FFFFFFFFFC733h, 7Ch
        insd
        mov     ecx, gs
        in      al, dx
        out     2Dh, al
        mov     ds:6599E434E6D96814h, al
        cmpsb
        push    0FFFFFFFFFFFFD6h
        popfq
        xor     ecx, ebp
        db      48h
        insb
        test    al, cl
        xor     [rbp-7Bh], cl
        and     al, 9Bh
; -----
        db  9Ah
; -----
        push    rsp
        xor     al, 8Fh
        cmp     eax, 924E81B9h
        clc
        mov     bh, 0DEh
        jbe     short near ptr loc_C72+1
; -----
        db  1Eh
; -----
        retn    8FCAh
; -----
        db  0C4h ; -
; -----

loc_CCD:                                ; CODE XREF: seg000:00000000000000D22
        adc     eax, 7CABFBF8h
; -----
        db  38h ; 8
; -----
        mov     ebp, 9C3E66FCh
        push    rbp
        dec     byte ptr [rcx]
        sahf

```

```

        fidivr    word ptr [rdi+2Ch]
; -----
        db      1Fh
; -----
        db      3Eh
        xchg     eax, esi
loc_CE2:                                ; CODE XREF: seg000:00000000000000D5E
        mov      ebx, 0C7AFE30Bh
        clc
        in       eax, dx
        sbb      bh, bl
        xchg     eax, ebp
; -----
        db      3Fh ; ?
; -----
        cmp      edx, 3EC3E4D7h
        push     51h
        db      3Eh
        pushfq
        jl       short loc_D17
        test     [rax-4CFF0D49h], ebx
; -----
        db      2Fh ; /
; -----
        rdtsc
        jns      short near ptr loc_D40+4
        mov      ebp, 0B2BB03D8h
        in       eax, dx
; -----
        db      1Eh
; -----
        fsubr    dword ptr [rbx-0Bh]
        jns      short loc_D70
        scasd
        mov      ch, 0C1h ; '+'
        add      edi, [rbx-53h]
; -----
        db      0E7h
; -----
loc_D17:                                ; CODE XREF: seg000:00000000000000CF7
        jp       short near ptr unk_D79
        scasd
        cmc
        sbb      ebx, [rsi]
        fsubr    dword ptr [rbx+3Dh]
        retn
; -----
        db      3
; -----
        jnp      short near ptr loc_CCD+4
        db      36h
        adc      r14b, r13b
; -----
        db      1Fh
; -----
        retf
; -----
        test     [rdi+rdi*2], ebx
        cdq

```

```

    or     ebx, edi
    test   eax, 310B94BCh
    ffreep st(7)
    cwde
    sbb     esi, [rdx+53h]
    push    5372CBAAh

loc_D40:                                ; CODE XREF: seg000:0000000000000D02
    push    53728BAAh
    push    0FFFFFFFF85CF2FCh
; -----
    db      0Eh
; -----
    retn    9B9Bh
; -----
    movzx   r9, dword ptr [rdx]
    adc     [rcx+43h], ebp
    in      al, 31h
; -----
    db      37h ; 7
; -----
    jl      short loc_DC5
    icebp
    sub     esi, [rdi]
    clc
    pop     rdi
    jb      short near ptr loc_CE2+1
    or      al, 8Fh
    mov     ecx, 770EFF81h
    sub     al, ch
    sub     al, 73h ; 's'
    cmpsd
    adc     bl, al
    out     87h, eax                ; DMA page register 74LS612:
                                   ; Channel 0 (address bits 16-23)

loc_D70:                                ; CODE XREF: seg000:0000000000000D0E
    adc     edi, ebx
    db      49h
    outsb
    enter   33E5h, 97h
    xchg    eax, ebx
; -----
unk_D79    db      0FEh                ; CODE XREF: seg000:loc_D17
           db      0BEh
           db      0E1h
           db      82h
; -----

loc_D7D:                                ; CODE XREF: seg000:0000000000000DB3
    cwde
; -----
    db      7
    db      5Ch ; \
    db      10h
    db      73h ; s
    db      0A9h
    db      2Bh ; +
    db      9Fh
; -----

```

```

loc_D85:                                ; CODE XREF: seg000:000000000000DD1
        dec     dh
        jnz     short near ptr loc_DD3+3
        mov     ds:7C1758CB282EF9BFh, al
        sal     ch, 91h
        rol     dword ptr [rbx+7Fh], cl
        fstp    tbyte ptr [rcx+2]
        repne   mov al, ds:4BFAB3C3ECF2BE13h
        pushfq
        imul    edx, [rbx+rsi*8+3B484EE9h], 8EDC09C6h
        cmp     [rax], al
        jg      short loc_D7D
        xor     [rcx-638C1102h], edx
        test    eax, 14E3AD7h
        insd

; -----
        db      38h ; 8
        db      80h
        db      0C3h

; -----

loc_DC5:                                ; CODE XREF: seg000:000000000000DD7
                                           ; seg000:000000000000DD8
        cmp     ah, [rsi+rdi*2+527C01D3h]
        sbb     eax, 5FC631F0h
        jnb     short loc_D85

loc_DD3:                                ; CODE XREF: seg000:000000000000DD87
        call    near ptr 0FFFFFFFC03919C7h
        loope   near ptr loc_DC5+3
        sbb     al, 0C8h
        std

```

Listing 28.3: random noise (ARM in ARM mode)

```

BLNE    0xFE16A9D8
BGE     0x1634DOC
SVCCS   0x450685
STRNVT  R5, [PC], #-0x964
LDCGE   p6, c14, [R0], #0x168
STCCSL  p9, c9, [LR], #0x14C
CMNHIP  PC, R10, LSL#22
FLDMIADNV LR!, {D4}
MCR     p5, 2, R2, c15, c6, 4
BLGE    0x1139558
BLGT    0xFF9146E4
STRNEB  R5, [R4], #0xCA2
STMNEIB R5, {R0, R4, R6, R7, R9-SP, PC}
STMIA   R8, {R0, R2-R4, R7, R8, R10, SP, LR}~
STRB    SP, [R8], PC, ROR#18
LDCCS   p9, c13, [R6], #0x1BC
LDRGE   R8, [R9], #0x66E
STRNEB  R5, [R8], #-0x8C3
STCCSL  p15, c9, [R7], #-0x84
RSBLS   LR, R2, R11, ASR LR
SVCGT   0x9B0362
SVCGT   0xA73173
STMNEDB R11!, {R0, R1, R4-R6, R8, R10, R11, SP}
STR     R0, [R3], #-0xCE4
LDCGT   p15, c8, [R1], #0x2CC
LDRCCB  R1, [R11], -R7, ROR#30

```

```

BLLT    0xFED9D58C
BL      0x13E60F4
LDMVSIB R3!, {R1,R4-R7}~
USATNE  R10, #7, SP,LSL#11
LDRGEB  LR, [R1],#0xE56
STRPLT  R9, [LR],#0x567
LDRLT   R11, [R1],#-0x29B
SVCNV   0x12DB29
MVNNVS  R5, SP,LSL#25
LDCL    p8, c14, [R12,#-0x288]
STCNEL  p2, c6, [R6,#-0xBC]!
SVCNV   0x2E5A2F
BLX     0x1A8C97E
TEQGE   R3, #0x1100000
STMLSIA R6, {R3,R6,R10,R11,SP}
BICPLS  R12, R2, #0x5800
BNE     0x7CC408
TEQGE   R2, R4,LSL#20
SUBS    R1, R11, #0x28C
BICVS   R3, R12, R7,ASR R0
LDRMI   R7, [LR],R3,LSL#21
BLMI    0x1A79234
STMVCDB R6, {R0-R3,R6,R7,R10,R11}
EORMI   R12, R6, #0xC5
MCRRCS  p1, 0xF, R1,R3,c2

```

Listing 28.4: random noise (ARM in Thumb mode)

```

LSRS    R3, R6, #0x12
LDRH    R1, [R7,#0x2C]
SUBS    R0, #0x55 ; 'U'
ADR     R1, loc_3C
LDR     R2, [SP,#0x218]
CMP     R4, #0x86
SXTB    R7, R4
LDR     R4, [R1,#0x4C]
STR     R4, [R4,R2]
STR     R0, [R6,#0x20]
BGT     0xFFFFFFFF72
LDRH    R7, [R2,#0x34]
LDRSH   R0, [R2,R4]
LDRB    R2, [R7,R2]
; -----
DCB 0x17
DCB 0xED
; -----
STRB    R3, [R1,R1]
STR     R5, [R0,#0x6C]
LDMIA   R3, {R0-R5,R7}
ASRS    R3, R2, #3
LDR     R4, [SP,#0x2C4]
SVC     0xB5
LDR     R6, [R1,#0x40]
LDR     R5, =0xB2C5CA32
STMIA   R6, {R1-R4,R6}
LDR     R1, [R3,#0x3C]
STR     R1, [R5,#0x60]
BCC     0xFFFFFFFF70
LDR     R4, [SP,#0x1D4]
STR     R5, [R5,#0x40]
ORRS    R5, R7

```

```

loc_3C                                     ; DATA XREF: ROM:00000006
      B      0xFFFFFFFF98
; -----
      ASRS    R4, R1, #0x1E
      ADDS    R1, R3, R0
      STRH    R7, [R7,#0x30]
      LDR     R3, [SP,#0x230]
      CBZ     R6, loc_90
      MOVS    R4, R2
      LSRS    R3, R4, #0x17
      STMIA   R6!, {R2,R4,R5}
      ADDS    R6, #0x42 ; 'B'
      ADD     R2, SP, #0x180
      SUBS    R5, R0, R6
      BCC     loc_B0
      ADD     R2, SP, #0x160
      LSLS    R5, R0, #0x1A
      CMP     R7, #0x45
      LDR     R4, [R4,R5]
; -----
      DCB 0x2F ; /
      DCB 0xF4
; -----
      B      0xFFFFFD18
; -----
      ADD     R4, SP, #0x2C0
      LDR     R1, [SP,#0x14C]
      CMP     R4, #0xEE
; -----
      DCB 0xA
      DCB 0xFB
; -----
      STRH    R7, [R5,#0xA]
      LDR     R3, loc_78
; -----
      DCB 0xBE ; -
      DCB 0xFC
; -----
      MOVS    R5, #0x96
; -----
      DCB 0x4F ; 0
      DCB 0xEE
; -----
      B      0xFFFFFAE6
; -----
      ADD     R3, SP, #0x110

loc_78                                     ; DATA XREF: ROM:0000006C
      STR     R1, [R3,R6]
      LDMIA   R3!, {R2,R5-R7}
      LDRB    R2, [R4,R2]
      ASRS    R4, R0, #0x13
      BKPT    0xD1
      ADDS    R5, R0, R6
      STR     R5, [R3,#0x58]

```

Listing 28.5: random noise(MIPS little endian)

```

lw      $t9, 0xCB3($t5)
sb      $t5, 0x3855($t0)

```

```

    sltiu   $a2, $a0, -0x657A
    ldr     $t4, -0x4D99($a2)
    daddi   $s0, $s1, 0x50A4
    lw      $s7, -0x2353($s4)
    bgtzl   $a1, 0x17C5C
# -----
    .byte 0x17
    .byte 0xED
    .byte 0x4B # K
    .byte 0x54 # T
# -----
    lwc2    $31, 0x66C5($sp)
    lwu     $s1, 0x10D3($a1)
    ldr     $t6, -0x204B($zero)
    lwc1    $f30, 0x4DBE($s2)
    daddiu  $t1, $s1, 0x6BD9
    lwu     $s5, -0x2C64($v1)
    cop0    0x13D642D
    bne     $gp, $t4, 0xFFFF9EF0
    lh      $ra, 0x1819($s1)
    sdl     $fp, -0x6474($t8)
    jal     0x78C0050
    ori     $v0, $s2, 0xC634
    blez    $gp, 0xFFFEA9D4
    swl     $t8, -0x2CD4($s2)
    sltiu   $a1, $k0, 0x685
    sdc1    $f15, 0x5964($at)
    sw      $s0, -0x19A6($a1)
    sltiu   $t6, $a3, -0x66AD
    lb      $t7, -0x4F6($t3)
    sd      $fp, 0x4B02($a1)
# -----
    .byte 0x96
    .byte 0x25 # %
    .byte 0x4F # 0
    .byte 0xEE
# -----
    swl     $a0, -0x1AC9($k0)
    lwc2    $4, 0x5199($ra)
    bne     $a2, $a0, 0x17308
# -----
    .byte 0xD1
    .byte 0xBE
    .byte 0x85
    .byte 0x19
# -----
    swc2    $8, 0x659D($a2)
    swc1    $f8, -0x2691($s6)
    sltiu   $s6, $t4, -0x2691
    sh      $t9, -0x7992($t4)
    bne     $v0, $t0, 0x163A4
    sltiu   $a3, $t2, -0x60DF
    lbu     $v0, -0x11A5($v1)
    pref    0x1B, 0x362($gp)
    pref    7, 0x3173($sp)
    blez    $t1, 0xB678
    swc1    $f3, flt_CE4($zero)
    pref    0x11, -0x704D($t4)
    ori     $k1, $s2, 0x1F67
    swr     $s6, 0x7533($sp)
    swc2    $15, -0x67F4($k0)

```

```

ldl    $s3, 0xF2($t7)
bne    $s7, $a3, 0xFFFE973C
sh     $s1, -0x11AA($a2)
bnel   $a1, $t6, 0xFFFE566C
sdr    $s1, -0x4D65($zero)
sd     $s2, -0x24D7($t8)
scd    $s4, 0x5C8D($t7)

```

```

# -----
        .byte 0xA2
        .byte 0xE8
        .byte 0x5C # \
        .byte 0xED
# -----

```

```

bgtz   $t3, 0x189A0
sd     $t6, 0x5A2F($t9)
sdc2   $t0, 0x3223($k1)
sb     $s3, 0x5744($t9)
lwr    $a2, 0x2C48($a0)
beql   $fp, $s2, 0xFFFF3258

```

It is also important to keep in mind that cleverly constructed unpacking and decrypting code (including self-modifying) may look like noise as well, nevertheless, it executes correctly.

28.3 Information entropy of average code

ent utility results¹.

(Entropy of ideally compressed (or encrypted) file is 8 bits per byte; of zero file of arbitrary size is 0 bits per byte.)

Here we can see that a code for CPU with 4-byte instructions (ARM in ARM mode and MIPS) is least effective in this sense.

28.3.1 x86

.text section of ntoskrnl.exe file from Windows 2003:

```
Entropy = 6.662739 bits per byte.
```

```
Optimum compression would reduce the size
of this 593920 byte file by 16 percent.
...
```

.text section of ntoskrnl.exe from Windows 7 x64:

```
Entropy = 6.549586 bits per byte.
```

```
Optimum compression would reduce the size
of this 1685504 byte file by 18 percent.
...
```

28.3.2 ARM (Thumb)

AngryBirds Classic:

```
Entropy = 7.058766 bits per byte.
```

```
Optimum compression would reduce the size
of this 3336888 byte file by 11 percent.
...
```

¹<http://www.fourmilab.ch/random/>

28.3.3 ARM (ARM mode)

Linux Kernel 3.8.0:

```
Entropy = 6.036160 bits per byte.
```

```
Optimum compression would reduce the size  
of this 6946037 byte file by 24 percent.
```

```
...
```

28.3.4 MIPS (little endian)

.text section of user32.dll from Windows NT 4:

```
Entropy = 6.098227 bits per byte.
```

```
Optimum compression would reduce the size  
of this 433152 byte file by 23 percent.
```

```
....
```

Chapter 29

Obfuscation

Obfuscation is an attempt to hide the code (or its meaning) from reverse engineer.

29.1 Text strings

As I revealed in (39) text strings may be utterly helpful. Programmers who aware of this, may try to hide them resulting unablerness to find the string in [IDA](#) or any hex editor.

Here is the simplest method.

That is how the string may be constructed:

```
mov    byte ptr [ebx], 'h'
mov    byte ptr [ebx+1], 'e'
mov    byte ptr [ebx+2], 'l'
mov    byte ptr [ebx+3], 'l'
mov    byte ptr [ebx+4], 'o'
mov    byte ptr [ebx+5], ' '
mov    byte ptr [ebx+6], 'w'
mov    byte ptr [ebx+7], 'o'
mov    byte ptr [ebx+8], 'r'
mov    byte ptr [ebx+9], 'l'
mov    byte ptr [ebx+10], 'd'
```

The string is also can be compared with another like:

```
mov    ebx, offset username
cmp    byte ptr [ebx], 'j'
jnz    fail
cmp    byte ptr [ebx+1], 'o'
jnz    fail
cmp    byte ptr [ebx+2], 'h'
jnz    fail
cmp    byte ptr [ebx+3], 'n'
jnz    fail
jz     it_is_john
```

In both cases, it is impossible to find these strings straightforwardly in hex editor.

By the way, it is a chance to work with the strings when it is impossible to allocate it in data segment, for example, in [PIC](#) or in shellcode.

Another method I once saw is to use `sprintf()` for constructing:

```
sprintf(buf, "%s%c%s%c%s", "hel", 'l', "o w", 'o', "rld");
```

The code looks weird, but as a simplest anti-reversing measure it may be helpful.

Text strings may also be present in encrypted form, then all string usage will precede string decrypting routine.

29.2 Executable code

29.2.1 Inserting garbage

Executable code obfuscation mean inserting random garbage code between real one, which executes but not doing anything useful.

Simple example is:

```
add    eax, ebx
mul    ecx
```

Listing 29.1: obfuscated code

```
xor     esi, 011223344h ; garbage
add     esi, eax        ; garbage
add     eax, ebx
mov     edx, eax        ; garbage
shl     edx, 4          ; garbage
mul     ecx
xor     esi, ecx        ; garbage
```

Here garbage code uses registers which are not used in the real code (ESI and EDX). However, intermediate results produced by the real code may be used by garbage instructions for extra mess—why not?

29.2.2 Replacing instructions to bloated equivalents

- `MOV op1, op2` can be replaced by `PUSH op2 / POP op1` pair.
- `JMP label` can be replaced by `PUSH label / RET` pair. [IDA](#) will not show references to the label.
- `CALL label` can be replaced by `PUSH label_after_CALL_instruction / PUSH label / RET` triplet.
- `PUSH op` may also be replaced by `SUB ESP, 4 (or 8) / MOV [ESP], op` pair.

29.2.3 Always executed/never executed code

If the developer is sure that ESI at the point is always 0:

```
mov     esi, 1
...     ; some code not touching ESI
dec     esi
...     ; some code not touching ESI
cmp     esi, 0
jz      real_code
; fake luggage
real_code:
```

Reverse engineer need some time to get into it.

This is also called *opaque predicate*.

Another example (and again, developer is sure that ESI—is always zero):

```
add     eax, ebx        ; real code
mul     ecx             ; real code
add     eax, esi        ; opaque predicate. XOR, AND or SHL, etc, can be here instead of ADD.
```

29.2.4 Making a lot of mess

```
instruction 1
instruction 2
instruction 3
```

Can be replaced to:

```

begin:      jmp     ins1_label

ins2_label: instruction 2
            jmp     ins3_label

ins3_label: instruction 3
            jmp     exit:

ins1_label: instruction 1
            jmp     ins2_label

exit:

```

29.2.5 Using indirect pointers

```

dummy_data1 db 100h dup (0)
message1    db 'hello world',0

dummy_data2 db 200h dup (0)
message2    db 'another message',0

func        proc
...
mov         eax, offset dummy_data1 ; PE or ELF reloc here
add         eax, 100h
push        eax
call        dump_string
...
mov         eax, offset dummy_data2 ; PE or ELF reloc here
add         eax, 200h
push        eax
call        dump_string
...
func        endp

```

IDA will show references only to `dummy_data1` and `dummy_data2`, but not to the text strings. Global variables and even functions may be accessed like that.

29.3 Virtual machine / pseudo-code

Programmer may construct his/her own [PL](#) or [ISA](#) and interpreter for it. (Like pre-5.0 Visual Basic, .NET, Java machine). Reverse engineer will have to spend some time to understand meaning and details of all [ISA](#) instructions. Probably, he/she will also need to write a disassembler/decompiler of some sort.

29.4 Other thing to mention

My own (yet weak) attempt to patch Tiny C compiler to produce obfuscated code: <http://blog.yurichev.com/node/58>. Using MOV instruction for really complicated things: [8].

Chapter 30

Windows 16-bit

16-bit Windows program are rare nowadays, but in the sense of retrocomputing, or dongle hacking ([55](#)), I sometimes digging into these.

16-bit Windows versions were up to 3.11. 96/98/ME also support 16-bit code, as well as 32-bit versions of [Windows NT](#) line. 64-bit versions of [Windows NT](#) line are not support 16-bit executable code at all.

The code is resembling MS-DOS one.

Executable files has not MZ-type, nor PE-type, they are NE-type (so-called “new executable”).

All examples considered here were compiled by OpenWatcom 1.9 compiler, using these switches:

```
wcl.exe -i=C:/WATCOM/h/win/ -s -os -bt=windows -bcl=windows example.c
```

30.1 Example#1

```
#include <windows.h>

int PASCAL WinMain( HINSTANCE hInstance,
                   HINSTANCE hPrevInstance,
                   LPSTR lpCmdLine,
                   int nCmdShow )
{
    MessageBeep(MB_ICONEXCLAMATION);
    return 0;
};

WinMain          proc near
                push    bp
                mov     bp, sp
                mov     ax, 30h ; '0'    ; MB_ICONEXCLAMATION constant
                push    ax
                call    MESSAGEBEEP
                xor     ax, ax          ; return 0
                pop     bp
                retn    0Ah
WinMain          endp
```

Seems to be easy, so far.

30.2 Example #2

```
#include <windows.h>

int PASCAL WinMain( HINSTANCE hInstance,
                   HINSTANCE hPrevInstance,
                   LPSTR lpCmdLine,
                   int nCmdShow )
```

```
{
    MessageBox (NULL, "hello, world", "caption", MB_YESNOCANCEL);
    return 0;
};
```

```
WinMain      proc near
              push    bp
              mov     bp, sp
              xor     ax, ax          ; NULL
              push    ax
              push    ds
              mov     ax, offset aHelloWorld ; 0x18. "hello, world"
              push    ax
              push    ds
              mov     ax, offset aCaption ; 0x10. "caption"
              push    ax
              mov     ax, 3           ; MB_YESNOCANCEL
              push    ax
              call    MESSAGEBOX
              xor     ax, ax          ; return 0
              pop     bp
              retn    0Ah
WinMain      endp

dseg02:0010 aCaption      db 'caption',0
dseg02:0018 aHelloWorld  db 'hello, world',0
```

Couple important things here: PASCAL calling convention dictates passing the last argument first (MB_YESNOCANCEL), and the first argument—last (NULL). This convention also tells [callee](#) to restore [stack pointer](#): hence RETN instruction has 0Ah argument, meaning pointer should be shifted above by 10 bytes upon function exit.

Pointers are passed by pairs: a segment of data is first passed, then the pointer inside of segment. Here is only one segment in this example, so DS is always pointing to data segment of executable.

30.3 Example #3

```
#include <windows.h>

int PASCAL WinMain( HINSTANCE hInstance,
                   HINSTANCE hPrevInstance,
                   LPSTR lpCmdLine,
                   int nCmdShow )
{
    int result=MessageBox (NULL, "hello, world", "caption", MB_YESNOCANCEL);

    if (result==IDCANCEL)
        MessageBox (NULL, "you pressed cancel", "caption", MB_OK);
    else if (result==IDYES)
        MessageBox (NULL, "you pressed yes", "caption", MB_OK);
    else if (result==IDNO)
        MessageBox (NULL, "you pressed no", "caption", MB_OK);

    return 0;
};
```

```
WinMain      proc near
              push    bp
              mov     bp, sp
              xor     ax, ax          ; NULL
              push    ax
```

```

    push    ds
    mov     ax, offset aHelloWorld ; "hello, world"
    push    ax
    push    ds
    mov     ax, offset aCaption ; "caption"
    push    ax
    mov     ax, 3                ; MB_YESNOCANCEL
    push    ax
    call     MESSAGEBOX
    cmp     ax, 2                ; IDCANCEL
    jnz     short loc_2F
    xor     ax, ax
    push    ax
    push    ds
    mov     ax, offset aYouPressedCanc ; "you pressed cancel"
    jmp     short loc_49
; -----
loc_2F:
    cmp     ax, 6                ; IDYES
    jnz     short loc_3D
    xor     ax, ax
    push    ax
    push    ds
    mov     ax, offset aYouPressedYes ; "you pressed yes"
    jmp     short loc_49
; -----
loc_3D:
    cmp     ax, 7                ; IDNO
    jnz     short loc_57
    xor     ax, ax
    push    ax
    push    ds
    mov     ax, offset aYouPressedNo ; "you pressed no"
loc_49:
    push    ax
    push    ds
    mov     ax, offset aCaption ; "caption"
    push    ax
    xor     ax, ax
    push    ax
    call     MESSAGEBOX
loc_57:
    xor     ax, ax
    pop     bp
    retn    0Ah
WinMain    endp

```

Somewhat extended example from the previous section.

30.4 Example #4

```

#include <windows.h>

int PASCAL func1 (int a, int b, int c)
{
    return a*b+c;
};

long PASCAL func2 (long a, long b, long c)
{

```

```

        return a*b+c;
};

long PASCAL func3 (long a, long b, long c, int d)
{
    return a*b+c-d;
};

int PASCAL WinMain( HINSTANCE hInstance,
                    HINSTANCE hPrevInstance,
                    LPSTR lpCmdLine,
                    int nCmdShow )
{
    func1 (123, 456, 789);
    func2 (600000, 700000, 800000);
    func3 (600000, 700000, 800000, 123);
    return 0;
};

```

```

func1      proc near

c          = word ptr 4
b          = word ptr 6
a          = word ptr 8

        push    bp
        mov     bp, sp
        mov     ax, [bp+a]
        imul    [bp+b]
        add     ax, [bp+c]
        pop     bp
        retn    6
func1      endp

func2      proc near

arg_0      = word ptr 4
arg_2      = word ptr 6
arg_4      = word ptr 8
arg_6      = word ptr 0Ah
arg_8      = word ptr 0Ch
arg_A      = word ptr 0Eh

        push    bp
        mov     bp, sp
        mov     ax, [bp+arg_8]
        mov     dx, [bp+arg_A]
        mov     bx, [bp+arg_4]
        mov     cx, [bp+arg_6]
        call    sub_B2 ; long 32-bit multiplication
        add     ax, [bp+arg_0]
        adc     dx, [bp+arg_2]
        pop     bp
        retn    12
func2      endp

func3      proc near

arg_0      = word ptr 4
arg_2      = word ptr 6
arg_4      = word ptr 8

```

```

arg_6      = word ptr 0Ah
arg_8      = word ptr 0Ch
arg_A      = word ptr 0Eh
arg_C      = word ptr 10h

        push    bp
        mov     bp, sp
        mov     ax, [bp+arg_A]
        mov     dx, [bp+arg_C]
        mov     bx, [bp+arg_6]
        mov     cx, [bp+arg_8]
        call    sub_B2 ; long 32-bit multiplication
        mov     cx, [bp+arg_2]
        add     cx, ax
        mov     bx, [bp+arg_4]
        adc     bx, dx          ; BX=high part, CX=low part
        mov     ax, [bp+arg_0]
        cwd                     ; AX=low part d, DX=high part d
        sub     cx, ax
        mov     ax, cx
        sbb     bx, dx
        mov     dx, bx
        pop     bp
        retn    14
func3
endp

WinMain   proc near
        push    bp
        mov     bp, sp
        mov     ax, 123
        push    ax
        mov     ax, 456
        push    ax
        mov     ax, 789
        push    ax
        call    func1
        mov     ax, 9          ; high part of 600000
        push    ax
        mov     ax, 27C0h      ; low part of 600000
        push    ax
        mov     ax, 0Ah        ; high part of 700000
        push    ax
        mov     ax, 0AE60h     ; low part of 700000
        push    ax
        mov     ax, 0Ch        ; high part of 800000
        push    ax
        mov     ax, 3500h      ; low part of 800000
        push    ax
        call    func2
        mov     ax, 9          ; high part of 600000
        push    ax
        mov     ax, 27C0h      ; low part of 600000
        push    ax
        mov     ax, 0Ah        ; high part of 700000
        push    ax
        mov     ax, 0AE60h     ; low part of 700000
        push    ax
        mov     ax, 0Ch        ; high part of 800000
        push    ax
        mov     ax, 3500h      ; low part of 800000
        push    ax

```

```

        mov     ax, 7Bh      ; 123
        push    ax
        call    func3
        xor     ax, ax       ; return 0
        pop     bp
        retn    0Ah
WinMain endp

```

32-bit values (long data type mean 32-bit, while *int* is fixed on 16-bit data type) in 16-bit code (both MS-DOS and Win16) are passed by pairs. It is just like 64-bit values are used in 32-bit environment (21).

sub_B2 here is a library function written by compiler developers, doing “long multiplication”, i.e., multiplies two 32-bit values. Other compiler functions doing the same are listed here: 83, 82.

ADD/ADC instruction pair is used for addition of compound values: ADD may set/clear CF carry flag, ADC will use it. SUB/SBB instruction pair is used for subtraction: SUB may set/clear CF flag, SBB will use it.

32-bit values are returned from functions in DX:AX register pair.

Constant also passed by pairs in WinMain() here.

int-typed 123 constant is first converted respecting its sign into 32-bit value using CWD instruction.

30.5 Example #5

```

#include <windows.h>

int PASCAL string_compare (char *s1, char *s2)
{
    while (1)
    {
        if (*s1!=*s2)
            return 0;
        if (*s1==0 || *s2==0)
            return 1; // end of string
        s1++;
        s2++;
    };
};

int PASCAL string_compare_far (char far *s1, char far *s2)
{
    while (1)
    {
        if (*s1!=*s2)
            return 0;
        if (*s1==0 || *s2==0)
            return 1; // end of string
        s1++;
        s2++;
    };
};

void PASCAL remove_digits (char *s)
{
    while (*s)
    {
        if (*s>='0' && *s<='9')
            *s='-';
        s++;
    };
};

```

```

char str[]="hello 1234 world";

int PASCAL WinMain( HINSTANCE hInstance,
                   HINSTANCE hPrevInstance,
                   LPSTR lpCmdLine,
                   int nCmdShow )
{
    string_compare ("asd", "def");
    string_compare_far ("asd", "def");
    remove_digits (str);
    MessageBox (NULL, str, "caption", MB_YESNOCANCEL);
    return 0;
};

```

```

string_compare  proc near

arg_0           = word ptr  4
arg_2           = word ptr  6

                push     bp
                mov      bp, sp
                push     si
                mov      si, [bp+arg_0]
                mov      bx, [bp+arg_2]

loc_12:         ; CODE XREF: string_compare+21j
                mov      al, [bx]
                cmp      al, [si]
                jz       short loc_1C
                xor      ax, ax
                jmp      short loc_2B
; -----

loc_1C:         ; CODE XREF: string_compare+Ej
                test     al, al
                jz       short loc_22
                jnz      short loc_27

loc_22:         ; CODE XREF: string_compare+16j
                mov      ax, 1
                jmp      short loc_2B
; -----

loc_27:         ; CODE XREF: string_compare+18j
                inc      bx
                inc      si
                jmp      short loc_12
; -----

loc_2B:         ; CODE XREF: string_compare+12j
                ; string_compare+1Dj
                pop      si
                pop      bp
                retn     4
string_compare  endp

string_compare_far proc near ; CODE XREF: WinMain+18p

arg_0           = word ptr  4
arg_2           = word ptr  6
arg_4           = word ptr  8

```

```

arg_6          = word ptr  0Ah

                push    bp
                mov     bp, sp
                push    si
                mov     si, [bp+arg_0]
                mov     bx, [bp+arg_4]

loc_3A:
                mov     es, [bp+arg_6] ; CODE XREF: string_compare_far+35j
                mov     al, es:[bx]
                mov     es, [bp+arg_2]
                cmp     al, es:[si]
                jz      short loc_4C
                xor     ax, ax
                jmp     short loc_67

; -----

loc_4C:
                mov     es, [bp+arg_6] ; CODE XREF: string_compare_far+16j
                cmp     byte ptr es:[bx], 0
                jz      short loc_5E
                mov     es, [bp+arg_2]
                cmp     byte ptr es:[si], 0
                jnz     short loc_63

loc_5E:
                mov     ax, 1 ; CODE XREF: string_compare_far+23j
                jmp     short loc_67

; -----

loc_63:
                inc     bx ; CODE XREF: string_compare_far+2Cj
                inc     si
                jmp     short loc_3A

; -----

loc_67:
                ; CODE XREF: string_compare_far+1Aj
                ; string_compare_far+31j
                pop     si
                pop     bp
                retn    8
string_compare_far endp

remove_digits  proc near ; CODE XREF: WinMain+1Fp

arg_0          = word ptr  4

                push    bp
                mov     bp, sp
                mov     bx, [bp+arg_0]

loc_72:
                mov     al, [bx] ; CODE XREF: remove_digits+18j
                test    al, al
                jz      short loc_86
                cmp     al, 30h ; '0'
                jb      short loc_83
                cmp     al, 39h ; '9'
                ja      short loc_83
                mov     byte ptr [bx], 2Dh ; '-'

```

```

loc_83:                                ; CODE XREF: remove_digits+Ej
                                        ; remove_digits+12j
        inc     bx
        jmp     short loc_72
; -----
loc_86:                                ; CODE XREF: remove_digits+Aj
        pop     bp
        retn    2
remove_digits endp

WinMain    proc near                    ; CODE XREF: start+EDp
        push    bp
        mov     bp, sp
        mov     ax, offset aAsd ; "asd"
        push    ax
        mov     ax, offset aDef ; "def"
        push    ax
        call    string_compare
        push    ds
        mov     ax, offset aAsd ; "asd"
        push    ax
        push    ds
        mov     ax, offset aDef ; "def"
        push    ax
        call    string_compare_far
        mov     ax, offset aHello1234World ; "hello 1234 world"
        push    ax
        call    remove_digits
        xor     ax, ax
        push    ax
        push    ds
        mov     ax, offset aHello1234World ; "hello 1234 world"
        push    ax
        push    ds
        mov     ax, offset aCaption ; "caption"
        push    ax
        mov     ax, 3                ; MB_YESNOCANCEL
        push    ax
        call    MESSAGEBOX
        xor     ax, ax
        pop     bp
        retn    0Ah
WinMain    endp

```

Here we see a difference between so-called “near” pointers and “far” pointers: another weird artefact of segmented memory of 16-bit 8086.

Read more about it: [66](#).

“near” pointers are those which points within current data segment. Hence, `string_compare()` function takes only two 16-bit pointers, and accesses data as it is located in the segment DS pointing to `(mov al, [bx])` instruction actually works like `mov al, ds:[bx]`—DS is implicitly used here).

“far” pointers are those which may point to data in another segment memory. Hence `string_compare_far()` takes 16-bit pair as a pointer, loads high part of it to ES segment register and accessing data through it `(mov al, es:[bx])`. “far” pointers are also used in my `MessageBox()` win16 example: [30.2](#). Indeed, Windows kernel is not aware which data segment to use when accessing text strings, so it need more complete information.

The reason for this distinction is that compact program may use just one 64kb data segment, so it doesn’t need to pass high part of the address, which is always the same. Bigger program may use several 64kb data segments, so it needs to specify each time, in which segment data is located.

The same story for code segments. Compact program may have all executable code within one 64kb-segment, then all functions will be called in it using `CALL NEAR` instruction, and code flow will be returned using `RETN`. But if there are several

code segments, then the address of the function will be specified by pair, it will be called using CALL FAR instruction, and the code flow will be returned using RETF.

This is what to be set in compiler by specifying “memory model”.

Compilers targeting MS-DOS and Win16 has specific libraries for each memory model: they were differ by pointer types for code and data.

30.6 Example #6

```
#include <windows.h>
#include <time.h>
#include <stdio.h>

char strbuf[256];

int PASCAL WinMain( HINSTANCE hInstance,
                   HINSTANCE hPrevInstance,
                   LPSTR lpCmdLine,
                   int nCmdShow )
{
    struct tm *t;
    time_t unix_time;

    unix_time=time(NULL);

    t=localtime (&unix_time);

    sprintf (strbuf, "%04d-%02d-%02d %02d:%02d:%02d", t->tm_year+1900, t->tm_mon, t->tm_mday,
            t->tm_hour, t->tm_min, t->tm_sec);

    MessageBox (NULL, strbuf, "caption", MB_OK);
    return 0;
};
```

```
WinMain      proc near

var_4        = word ptr -4
var_2        = word ptr -2

    push     bp
    mov     bp, sp
    push     ax
    push     ax
    xor     ax, ax
    call    time_
    mov     [bp+var_4], ax    ; low part of UNIX time
    mov     [bp+var_2], dx    ; high part of UNIX time
    lea     ax, [bp+var_4]    ; take a pointer of high part
    call    localtime_
    mov     bx, ax            ; t
    push     word ptr [bx]    ; second
    push     word ptr [bx+2]  ; minute
    push     word ptr [bx+4]  ; hour
    push     word ptr [bx+6]  ; day
    push     word ptr [bx+8]  ; month
    mov     ax, [bx+0Ah]      ; year
    add     ax, 1900
    push     ax
    mov     ax, offset a04d02d02d02d02 ; "%04d-%02d-%02d %02d:%02d:%02d"
```

```

        push    ax
        mov     ax, offset strbuf
        push    ax
        call    sprintf_
        add     sp, 10h
        xor     ax, ax                ; NULL
        push    ax
        push    ds
        mov     ax, offset strbuf
        push    ax
        push    ds
        mov     ax, offset aCaption ; "caption"
        push    ax
        xor     ax, ax                ; MB_OK
        push    ax
        call    MESSAGEBOX
        xor     ax, ax
        mov     sp, bp
        pop     bp
        retn    0Ah
WinMain endp

```

UNIX time is 32-bit value, so it is returned in DX:AX register pair and stored into two local 16-bit variables. Then a pointer to the pair is passed to `localtime()` function. The `localtime()` function has `struct tm` allocated somewhere in guts of the C library, so only pointer to it is returned. By the way, this also means that the function cannot be called again until its results are used.

For the `time()` and `localtime()` functions, a Watcom calling convention is used here: first four arguments are passed in AX, DX, BX and CX, registers, all the rest arguments are via stack. Functions used this convention are also marked by underscore at the end of name.

`sprintf()` does not use PASCAL calling convention, nor Watcom one, so the arguments are passed in usual *cdecl* way (??).

30.6.1 Global variables

This is the same example, but now these variables are global:

```

#include <windows.h>
#include <time.h>
#include <stdio.h>

char strbuf[256];
struct tm *t;
time_t unix_time;

int PASCAL WinMain( HINSTANCE hInstance,
                   HINSTANCE hPrevInstance,
                   LPSTR lpCmdLine,
                   int nCmdShow )
{
    unix_time=time(NULL);

    t=localtime (&unix_time);

    sprintf (strbuf, "%04d-%02d-%02d %02d:%02d:%02d", t->tm_year+1900, t->tm_mon, t->tm_mday,
            t->tm_hour, t->tm_min, t->tm_sec);

    MessageBox (NULL, strbuf, "caption", MB_OK);
    return 0;
};

```

```

unix_time_low    dw 0
unix_time_high   dw 0
t                dw 0

WinMain          proc near
    push        bp
    mov         bp, sp
    xor         ax, ax
    call        time_
    mov         unix_time_low, ax
    mov         unix_time_high, dx
    mov         ax, offset unix_time_low
    call        localtime_
    mov         bx, ax
    mov         t, ax                ; will not be used in future...
    push        word ptr [bx]        ; seconds
    push        word ptr [bx+2]      ; minutes
    push        word ptr [bx+4]      ; hour
    push        word ptr [bx+6]      ; day
    push        word ptr [bx+8]      ; month
    mov         ax, [bx+0Ah]         ; year
    add         ax, 1900
    push        ax
    mov         ax, offset a04d02d02d02d02 ; "%04d-%02d-%02d %02d:%02d:%02d"
    push        ax
    mov         ax, offset strbuf
    push        ax
    call        sprintf_
    add         sp, 10h
    xor         ax, ax                ; NULL
    push        ax
    push        ds
    mov         ax, offset strbuf
    push        ax
    push        ds
    mov         ax, offset aCaption ; "caption"
    push        ax
    xor         ax, ax                ; MB_OK
    push        ax
    call        MESSAGEBOX
    xor         ax, ax                ; return 0
    pop         bp
    retn        0Ah
WinMain          endp

```

t will not be used, but compiler emitted the code which stores the value. Because it is not sure, maybe that value will be eventually used somewhere.

Part II

C++

Chapter 31

Classes

31.1 Simple example

Internally, C++ classes representation is almost the same as structures representation.

Let's try an example with two variables, two constructors and one method:

```
#include <stdio.h>

class c
{
private:
    int v1;
    int v2;
public:
    c() // default ctor
    {
        v1=667;
        v2=999;
    };

    c(int a, int b) // ctor
    {
        v1=a;
        v2=b;
    };

    void dump()
    {
        printf ("%d; %d\n", v1, v2);
    };
};

int main()
{
    class c c1;
    class c c2(5,6);

    c1.dump();
    c2.dump();

    return 0;
};
```

31.1.1 MSVC—x86

Here is how `main()` function looks like translated into assembly language:

Listing 31.1: MSVC

```

_c2$ = -16          ; size = 8
_c1$ = -8           ; size = 8
_main PROC
    push    ebp
    mov     ebp, esp
    sub     esp, 16          ; 00000010H
    lea     ecx, DWORD PTR _c1$[ebp]
    call    ??0c@@QAE@XZ      ; c::c
    push    6
    push    5
    lea     ecx, DWORD PTR _c2$[ebp]
    call    ??0c@@QAE@HH@Z    ; c::c
    lea     ecx, DWORD PTR _c1$[ebp]
    call    ?dump@c@@QAE@XXZ  ; c::dump
    lea     ecx, DWORD PTR _c2$[ebp]
    call    ?dump@c@@QAE@XXZ  ; c::dump
    xor     eax, eax
    mov     esp, ebp
    pop     ebp
    ret     0
_main ENDP

```

So what's going on. For each object (instance of class *c*) 8 bytes allocated, that is exactly size of 2 variables storage.

For *c1* a default argumentless constructor `??0c@@QAE@XZ` is called. For *c2* another constructor `??0c@@QAE@HH@Z` is called and two numbers are passed as arguments.

A pointer to object (*this* in C++ terminology) is passed in the ECX register. This is called thiscall (31.1.1) —a pointer to object passing method.

MSVC doing it using the ECX register. Needless to say, it is not a standardized method, other compilers could do it differently, e.g., via first function argument (like GCC).

Why these functions has so odd names? That's [name mangling](#).

C++ class may contain several methods sharing the same name but having different arguments —that is polymorphism. And of course, different classes may own methods sharing the same name.

Name mangling enable us to encode class name + method name + all method argument types in one ASCII-string, which is to be used as internal function name. That's all because neither linker, nor DLL OS loader (mangled names may be among DLL exports as well) knows nothing about C++ or OOP¹.

`dump()` function called two times after.

Now let's see constructors' code:

Listing 31.2: MSVC

```

_this$ = -4          ; size = 4
??0c@@QAE@XZ PROC   ; c::c, COMDAT
; _this$ = ecx
    push    ebp
    mov     ebp, esp
    push    ecx
    mov     DWORD PTR _this$[ebp], ecx
    mov     eax, DWORD PTR _this$[ebp]
    mov     DWORD PTR [eax], 667      ; 0000029bH
    mov     ecx, DWORD PTR _this$[ebp]
    mov     DWORD PTR [ecx+4], 999    ; 000003e7H
    mov     eax, DWORD PTR _this$[ebp]
    mov     esp, ebp
    pop     ebp
    ret     0
??0c@@QAE@XZ ENDP    ; c::c

_this$ = -4          ; size = 4
_a$ = 8              ; size = 4

```

¹Object-Oriented Programming

```

_b$ = 12 ; size = 4
??0c@@QAE@HH@Z PROC ; c::c, COMDAT
; _this$ = ecx
    push    ebp
    mov     ebp, esp
    push    ecx
    mov     DWORD PTR _this$[ebp], ecx
    mov     eax, DWORD PTR _this$[ebp]
    mov     ecx, DWORD PTR _a$[ebp]
    mov     DWORD PTR [eax], ecx
    mov     edx, DWORD PTR _this$[ebp]
    mov     eax, DWORD PTR _b$[ebp]
    mov     DWORD PTR [edx+4], eax
    mov     eax, DWORD PTR _this$[ebp]
    mov     esp, ebp
    pop     ebp
    ret     8
??0c@@QAE@HH@Z ENDP ; c::c

```

Constructors are just functions, they use pointer to structure in the ECX, moving the pointer into own local variable, however, it is not necessary.

From the C++ standard [16, 12.1] we know that constructors should not return any values. In fact, internally, constructors are returns pointer to the newly created object, i.e., *this*.

Now dump() method:

Listing 31.3: MSVC

```

_this$ = -4 ; size = 4
?dump@c@@QAE@XXZ PROC ; c::dump, COMDAT
; _this$ = ecx
    push    ebp
    mov     ebp, esp
    push    ecx
    mov     DWORD PTR _this$[ebp], ecx
    mov     eax, DWORD PTR _this$[ebp]
    mov     ecx, DWORD PTR [eax+4]
    push    ecx
    mov     edx, DWORD PTR _this$[ebp]
    mov     eax, DWORD PTR [edx]
    push    eax
    push    OFFSET ??_C@_07NJBDCIEC@?$CFd?$DL?5?$CFd?6?$AA@
    call    _printf
    add     esp, 12 ; 0000000cH
    mov     esp, ebp
    pop     ebp
    ret     0
?dump@c@@QAE@XXZ ENDP ; c::dump

```

Simple enough: dump() taking pointer to the structure containing two *int*'s in the ECX, takes two values from it and passing it into printf().

The code is much shorter if compiled with optimization (/Ox):

Listing 31.4: MSVC

```

??0c@@QAE@XZ PROC ; c::c, COMDAT
; _this$ = ecx
    mov     eax, ecx
    mov     DWORD PTR [eax], 667 ; 0000029bH
    mov     DWORD PTR [eax+4], 999 ; 000003e7H
    ret     0
??0c@@QAE@XZ ENDP ; c::c

_a$ = 8 ; size = 4
_b$ = 12 ; size = 4

```

```

??0c@@QAE@HH@Z PROC                ; c::c, COMDAT
; _this$ = ecx
    mov     edx, DWORD PTR _b$[esp-4]
    mov     eax, ecx
    mov     ecx, DWORD PTR _a$[esp-4]
    mov     DWORD PTR [eax], ecx
    mov     DWORD PTR [eax+4], edx
    ret     8
??0c@@QAE@HH@Z ENDP                  ; c::c

?dump@c@@QAEXXZ PROC                 ; c::dump, COMDAT
; _this$ = ecx
    mov     eax, DWORD PTR [ecx+4]
    mov     ecx, DWORD PTR [ecx]
    push    eax
    push    ecx
    push    OFFSET ??_C@_07NJBDCIEC@?$CFd?$DL?5?$CFd?6?$AA@
    call    _printf
    add     esp, 12                    ; 0000000cH
    ret     0
?dump@c@@QAEXXZ ENDP                 ; c::dump

```

That's all. One more thing to say is the [stack pointer](#) was not corrected with `add esp, X` after constructor called. Withal, constructor has `ret 8` instead of the `RET` at the end.

This is all because here used `thiscall` (31.1.1) calling convention, the method of passing values through the stack, which is, together with `stdcall` (??) method, offers to correct stack to [callee](#) rather than to [caller](#). `ret x` instruction adding `X` to the value in the ESP, then passes control to the [caller](#) function.

See also section about calling conventions (??).

It is also should be noted the compiler deciding when to call constructor and destructor—but that is we already know from C++ language basics.

31.1.2 MSVC—x86-64

As we already know, first 4 function arguments in x86-64 are passed in RCX, RDX, R8, R9 registers, all the rest—via stack. Nevertheless, *this* pointer to the object is passed in RCX, first method argument—in EDX, etc. We can see this in the `c(int a, int b)` method internals:

Listing 31.5: MSVC 2012 x64 /Ox

```

; void dump()

?dump@c@@QEAXXZ PROC                 ; c::dump
    mov     r8d, DWORD PTR [rcx+4]
    mov     edx, DWORD PTR [rcx]
    lea     rcx, OFFSET FLAT:??_C@_07NJBDCIEC@?$CFd?$DL?5?$CFd?6?$AA@ ; '%d; %d'
    jmp     printf
?dump@c@@QEAXXZ ENDP                 ; c::dump

; c(int a, int b)

??0c@@QEAA@HH@Z PROC                 ; c::c
    mov     DWORD PTR [rcx], edx      ; 1st argument: a
    mov     DWORD PTR [rcx+4], r8d    ; 2nd argument: b
    mov     rax, rcx
    ret     0
??0c@@QEAA@HH@Z ENDP                 ; c::c

; default ctor

??0c@@QEAA@XZ PROC                   ; c::c
    mov     DWORD PTR [rcx], 667      ; 0000029bH
    mov     DWORD PTR [rcx+4], 999    ; 000003e7H

```

```

        mov     rax, rcx
        ret     0
??0c@@QEAA@XZ ENDP                                ; c::c

```

int data type is still 32-bit in x64², so that is why 32-bit register's parts are used here.

We also see `JMP printf` instead of `RET` in the `dump()` method, that *hack* we already saw earlier: 11.1.1.

31.1.3 GCC—x86

It is almost the same situation in GCC 4.4.1, with a few exceptions.

Listing 31.6: GCC 4.4.1

```

main          public main
              proc near          ; DATA XREF: _start+17

var_20        = dword ptr -20h
var_1C        = dword ptr -1Ch
var_18        = dword ptr -18h
var_10        = dword ptr -10h
var_8         = dword ptr -8

              push    ebp
              mov     ebp, esp
              and     esp, 0FFFFFFF0h
              sub     esp, 20h
              lea     eax, [esp+20h+var_8]
              mov     [esp+20h+var_20], eax
              call    _ZN1cC1Ev
              mov     [esp+20h+var_18], 6
              mov     [esp+20h+var_1C], 5
              lea     eax, [esp+20h+var_10]
              mov     [esp+20h+var_20], eax
              call    _ZN1cC1Eii
              lea     eax, [esp+20h+var_8]
              mov     [esp+20h+var_20], eax
              call    _ZN1c4dumpEv
              lea     eax, [esp+20h+var_10]
              mov     [esp+20h+var_20], eax
              call    _ZN1c4dumpEv
              mov     eax, 0
              leave
              retn
main          endp

```

Here we see another *name mangling* style, specific to GNU³ It is also can be noted the pointer to object is passed as first function argument—transparently from programmer, of course.

First constructor:

```

_ZN1cC1Ev     public _ZN1cC1Ev ; weak
              proc near          ; CODE XREF: main+10

arg_0         = dword ptr 8

              push    ebp
              mov     ebp, esp
              mov     eax, [ebp+arg_0]
              mov     dword ptr [eax], 667
              mov     eax, [ebp+arg_0]
              mov     dword ptr [eax+4], 999
              pop     ebp

```

²Apparently, for easier porting of C/C++ 32-bit code to x64

³One more document about different compilers name mangling types: [12] standards.

```

_ZN1cC1Ev      retn
               endp

```

What it does is just writes two numbers using pointer passed in first (and single) argument.
Second constructor:

```

_ZN1cC1Eii      public _ZN1cC1Eii
               proc near
arg_0           = dword ptr 8
arg_4           = dword ptr 0Ch
arg_8           = dword ptr 10h

               push    ebp
               mov     ebp, esp
               mov     eax, [ebp+arg_0]
               mov     edx, [ebp+arg_4]
               mov     [eax], edx
               mov     eax, [ebp+arg_0]
               mov     edx, [ebp+arg_8]
               mov     [eax+4], edx
               pop     ebp
               retn
_ZN1cC1Eii      endp

```

This is a function, analog of which could be looks like:

```

void ZN1cC1Eii (int *obj, int a, int b)
{
    *obj=a;
    *(obj+1)=b;
};

```

...and that is completely predictable.

Now dump() function:

```

_ZN1c4dumpEv     public _ZN1c4dumpEv
               proc near
var_18           = dword ptr -18h
var_14           = dword ptr -14h
var_10           = dword ptr -10h
arg_0           = dword ptr 8

               push    ebp
               mov     ebp, esp
               sub     esp, 18h
               mov     eax, [ebp+arg_0]
               mov     edx, [eax+4]
               mov     eax, [ebp+arg_0]
               mov     eax, [eax]
               mov     [esp+18h+var_10], edx
               mov     [esp+18h+var_14], eax
               mov     [esp+18h+var_18], offset aDD ; "%d; %d\n"
               call    _printf
               leave
               retn
_ZN1c4dumpEv     endp

```

This function in its *internal representation* has sole argument, used as pointer to the object (*this*).

Thus, if to base our judgment on these simple examples, the difference between MSVC and GCC is style of function names encoding (*name mangling*) and passing pointer to object (via the ECX register or via the first argument).

31.1.4 GCC—x86-64

The first 6 arguments, as we already know, are passed in the RDI, RSI, RDX, RCX, R8, R9 [21] registers, and the pointer to *this* via first one (RDI) and that is what we see here. *int* data type is also 32-bit here. *JMP* instead of *RET hack* is also used here.

Listing 31.7: GCC 4.4.6 x64

```
; default ctor

_ZN1cC2Ev:
    mov     DWORD PTR [rdi], 667
    mov     DWORD PTR [rdi+4], 999
    ret

; c(int a, int b)

_ZN1cC2Eii:
    mov     DWORD PTR [rdi], esi
    mov     DWORD PTR [rdi+4], edx
    ret

; dump()

_ZN1c4dumpEv:
    mov     edx, DWORD PTR [rdi+4]
    mov     esi, DWORD PTR [rdi]
    xor     eax, eax
    mov     edi, OFFSET FLAT:.LC0 ; "%d; %d\n"
    jmp     printf
```

31.2 Class inheritance

It can be said about inherited classes that it is simple structure we already considered, but extending in inherited classes.

Let's take simple example:

```
#include <stdio.h>

class object
{
public:
    int color;
    object() { };
    object (int color) { this->color=color; };
    void print_color() { printf ("color=%d\n", color); };
};

class box : public object
{
private:
    int width, height, depth;
public:
    box(int color, int width, int height, int depth)
    {
        this->color=color;
        this->width=width;
        this->height=height;
        this->depth=depth;
    };
    void dump()
    {
        printf ("this is box. color=%d, width=%d, height=%d, depth=%d\n", color, width,
height, depth);
    }
};
```

```

    };
};

class sphere : public object
{
private:
    int radius;
public:
    sphere(int color, int radius)
    {
        this->color=color;
        this->radius=radius;
    };
    void dump()
    {
        printf ("this is sphere. color=%d, radius=%d\n", color, radius);
    };
};

int main()
{
    box b(1, 10, 20, 30);
    sphere s(2, 40);

    b.print_color();
    s.print_color();

    b.dump();
    s.dump();

    return 0;
};

```

Let's investigate generated code of the dump() functions/methods and also object::print_color(), let's see memory layout for structures-objects (as of 32-bit code).

So, dump() methods for several classes, generated by MSVC 2008 with /Ox and /Ob0 options ⁴

Listing 31.8: Optimizing MSVC 2008 /Ob0

```

??_C@_09GCEDOLPA@color?$DN?$CFd?6?$AA@ DB 'color=%d', 0aH, 00H ; 'string'
?print_color@object@@QAEXXZ PROC                                ; object::print_color, COMDAT
; _this$ = ecx
    mov     eax, DWORD PTR [ecx]
    push    eax

; 'color=%d', 0aH, 00H
    push    OFFSET ??_C@_09GCEDOLPA@color?$DN?$CFd?6?$AA@
    call    _printf
    add     esp, 8
    ret     0
?print_color@object@@QAEXXZ ENDP                                ; object::print_color

```

Listing 31.9: Optimizing MSVC 2008 /Ob0

```

?dump@box@@QAEXXZ PROC                                          ; box::dump, COMDAT
; _this$ = ecx
    mov     eax, DWORD PTR [ecx+12]
    mov     edx, DWORD PTR [ecx+8]
    push    eax
    mov     eax, DWORD PTR [ecx+4]
    mov     ecx, DWORD PTR [ecx]

```

⁴ /Ob0 options means inline expansion disabling since function inlining right into the code where the function is called will make our experiment harder

```

    push    edx
    push    eax
    push    ecx

; 'this is box. color=%d, width=%d, height=%d, depth=%d', 0aH, 00H ; 'string'
    push    OFFSET ??_C@_ODG@NCNGAADL@this?5is?5box?4?5color?$DN?$CFd?0?5width?$DN?$CFd?0@
    call    _printf
    add     esp, 20                      ; 00000014H
    ret     0
?dump@box@@QAEXXZ ENDP                  ; box::dump

```

Listing 31.10: Optimizing MSVC 2008 /Ob0

```

?dump@sphere@@QAEXXZ PROC                ; sphere::dump, COMDAT
; _this$ = ecx
    mov     eax, DWORD PTR [ecx+4]
    mov     ecx, DWORD PTR [ecx]
    push    eax
    push    ecx

; 'this is sphere. color=%d, radius=%d', 0aH, 00H
    push    OFFSET ??_C@_OCF@EFEDJLDC@this?5is?5sphere?4?5color?$DN?$CFd?0?5radius@
    call    _printf
    add     esp, 12                      ; 0000000cH
    ret     0
?dump@sphere@@QAEXXZ ENDP                ; sphere::dump

```

So, here is memory layout:
(base class *object*)

offset	description
+0x0	int color

(inherited classes)
box:

offset	description
+0x0	int color
+0x4	int width
+0x8	int height
+0xC	int depth

sphere:

offset	description
+0x0	int color
+0x4	int radius

Let's see `main()` function body:

Listing 31.11: Optimizing MSVC 2008 /Ob0

```

PUBLIC _main
_TEXT SEGMENT
_s$ = -24                      ; size = 8
_b$ = -16                      ; size = 16
_main PROC
    sub     esp, 24              ; 00000018H
    push    30                  ; 0000001eH
    push    20                  ; 00000014H
    push    10                  ; 0000000aH
    push    1
    lea     ecx, DWORD PTR _b$[esp+40]
    call    ??0box@@QAEE@HHHH@Z ; box::box

```

```

    push    40                      ; 00000028H
    push    2
    lea     ecx, DWORD PTR _s$[esp+32]
    call    ??0sphere@@QAE@HH@Z    ; sphere::sphere
    lea     ecx, DWORD PTR _b$[esp+24]
    call    ?print_color@object@@QAEXXZ ; object::print_color
    lea     ecx, DWORD PTR _s$[esp+24]
    call    ?print_color@object@@QAEXXZ ; object::print_color
    lea     ecx, DWORD PTR _b$[esp+24]
    call    ?dump@box@@QAEXXZ        ; box::dump
    lea     ecx, DWORD PTR _s$[esp+24]
    call    ?dump@sphere@@QAEXXZ     ; sphere::dump
    xor     eax, eax
    add     esp, 24                  ; 00000018H
    ret     0
_main     ENDP

```

Inherited classes must always add their fields after base classes' fields, so to make possible for base class methods to work with their fields.

When `object::print_color()` method is called, a pointers to both *box* object and *sphere* object are passed as *this*, it can work with these objects easily since *color* field in these objects is always at the pinned address (at `+0x0` offset).

It can be said, `object::print_color()` method is agnostic in relation to input object type as long as fields will be *pinned* at the same addresses, and this condition is always true.

And if you create inherited class of the e.g. *box* class, compiler will add new fields after *depth* field, leaving *box* class fields at the pinned addresses.

Thus, `box::dump()` method will work fine accessing *color/width/height/depths* fields always pinned on known addresses.

GCC-generated code is almost likewise, with the sole exception of *this* pointer passing (as it was described above, it passing as first argument instead of the ECX registers).

31.3 Encapsulation

Encapsulation is data hiding in the *private* sections of class, e.g. to allow access to them only from this class methods, but no more than.

However, are there any marks in code about the fact that some field is private and some other —not?

No, there are no such marks.

Let's try simple example:

```

#include <stdio.h>

class box
{
private:
    int color, width, height, depth;
public:
    box(int color, int width, int height, int depth)
    {
        this->color=color;
        this->width=width;
        this->height=height;
        this->depth=depth;
    };
    void dump()
    {
        printf ("this is box. color=%d, width=%d, height=%d, depth=%d\n", color, width,
height, depth);
    };
};

```

Let's compile it again in MSVC 2008 with `/Ox` and `/Ob0` options and let's see `box::dump()` method code:

```

?dump@box@@QAEXXZ PROC                ; box::dump, COMDAT
; _this$ = ecx

```

```

    mov     eax, DWORD PTR [ecx+12]
    mov     edx, DWORD PTR [ecx+8]
    push    eax
    mov     eax, DWORD PTR [ecx+4]
    mov     ecx, DWORD PTR [ecx]
    push    edx
    push    eax
    push    ecx
; 'this is box. color=%d, width=%d, height=%d, depth=%d', 0aH, 00H
    push    OFFSET ??_C@_ODG@NCNGAADL@this?5is?5box?4?5color?$DN?$CFd?0?5width?$DN?$CFd?0@
    call    _printf
    add     esp, 20                      ; 00000014H
    ret     0
?dump@box@@QAEXXZ ENDP                ; box::dump

```

Here is a memory layout of the class:

offset	description
+0x0	int color
+0x4	int width
+0x8	int height
+0xC	int depth

All fields are private and not allowed to access from any other functions, but, knowing this layout, can we create a code modifying these fields?

So I added `hack_oop_encapsulation()` function, which, if has the body as follows, will not compile:

```

void hack_oop_encapsulation(class box * o)
{
    o->width=1; // that code can't be compiled: "error C2248: 'box::width' : cannot access
    private member declared in class 'box'"
};

```

Nevertheless, if to cast `box` type to *pointer to int array*, and if to modify array of the *int*-s we got, then we have success.

```

void hack_oop_encapsulation(class box * o)
{
    unsigned int *ptr_to_object=reinterpret_cast<unsigned int*>(o);
    ptr_to_object[1]=123;
};

```

This functions' code is very simple —it can be said, the function taking pointer to array of the *int*-s on input and writing 123 to the second *int*:

```

?hack_oop_encapsulation@@YAXPAVbox@@@Z PROC                ; hack_oop_encapsulation
    mov     eax, DWORD PTR _o$[esp-4]
    mov     DWORD PTR [eax+4], 123                          ; 0000007bH
    ret     0
?hack_oop_encapsulation@@YAXPAVbox@@@Z ENDP                ; hack_oop_encapsulation

```

Let's check, how it works:

```

int main()
{
    box b(1, 10, 20, 30);

    b.dump();

    hack_oop_encapsulation(&b);

    b.dump();

    return 0;
};

```

Let's run:

```
this is box. color=1, width=10, height=20, depth=30
this is box. color=1, width=123, height=20, depth=30
```

We see, encapsulation is just class fields protection only on compiling stage. C++ compiler will not allow to generate a code modifying protected fields straightforwardly, nevertheless, it is possible with the help of *dirty hacks*.

31.4 Multiple inheritance

Multiple inheritance is a class creation which inherits fields and methods from two or more classes.

Let's write simple example again:

```
#include <stdio.h>

class box
{
    public:
        int width, height, depth;
        box() { };
        box(int width, int height, int depth)
        {
            this->width=width;
            this->height=height;
            this->depth=depth;
        };
        void dump()
        {
            printf ("this is box. width=%d, height=%d, depth=%d\n", width, height, depth);
        };
        int get_volume()
        {
            return width * height * depth;
        };
};

class solid_object
{
    public:
        int density;
        solid_object() { };
        solid_object(int density)
        {
            this->density=density;
        };
        int get_density()
        {
            return density;
        };
        void dump()
        {
            printf ("this is solid_object. density=%d\n", density);
        };
};

class solid_box: box, solid_object
{
    public:
        solid_box (int width, int height, int depth, int density)
        {
            this->width=width;
```

```

        this->height=height;
        this->depth=depth;
        this->density=density;
    };
    void dump()
    {
        printf ("this is solid_box. width=%d, height=%d, depth=%d, density=%d\n", width,
height, depth, density);
    };
    int get_weight() { return get_volume() * get_density(); };
};

int main()
{
    box b(10, 20, 30);
    solid_object so(100);
    solid_box sb(10, 20, 30, 3);

    b.dump();
    so.dump();
    sb.dump();
    printf ("%d\n", sb.get_weight());

    return 0;
};

```

Let's compile it in MSVC 2008 with /Ox and /Ob0 options and let's see box::dump(), solid_object::dump() and solid_box::dump methods code:

Listing 31.12: Optimizing MSVC 2008 /Ob0

```

?dump@box@@QAEXXZ PROC                                ; box::dump, COMDAT
; _this$ = ecx
    mov     eax, DWORD PTR [ecx+8]
    mov     edx, DWORD PTR [ecx+4]
    push    eax
    mov     eax, DWORD PTR [ecx]
    push    edx
    push    eax
; 'this is box. width=%d, height=%d, depth=%d', 0aH, 00H
    push    OFFSET ??_C@_OCM@DIKPHDFI@this?5is?5box?4?5width?$DN?$CFd?0?5height?$DN?$CFd@
    call    _printf
    add     esp, 16                                     ; 00000010H
    ret     0
?dump@box@@QAEXXZ ENDP                                ; box::dump

```

Listing 31.13: Optimizing MSVC 2008 /Ob0

```

?dump@solid_object@@QAEXXZ PROC                        ; solid_object::dump, COMDAT
; _this$ = ecx
    mov     eax, DWORD PTR [ecx]
    push    eax
; 'this is solid_object. density=%d', 0aH
    push    OFFSET ??_C@_OCC@KICFJINL@this?5is?5solid_object?4?5density?$DN?$CFd@
    call    _printf
    add     esp, 8
    ret     0
?dump@solid_object@@QAEXXZ ENDP                        ; solid_object::dump

```

Listing 31.14: Optimizing MSVC 2008 /Ob0

```

?dump@solid_box@@QAEXXZ PROC                          ; solid_box::dump, COMDAT
; _this$ = ecx

```

```

    mov     eax, DWORD PTR [ecx+12]
    mov     edx, DWORD PTR [ecx+8]
    push    eax
    mov     eax, DWORD PTR [ecx+4]
    mov     ecx, DWORD PTR [ecx]
    push    edx
    push    eax
    push    ecx
; 'this is solid_box. width=%d, height=%d, depth=%d, density=%d', 0aH
    push    OFFSET ??_C@_ODO@HNCNIHNN@this?5is?5solid_box?4?5width?$DN?$CFd?0?5hei@
    call    _printf
    add     esp, 20                                ; 00000014H
    ret     0
?dump@solid_box@@QAEXXZ ENDP                        ; solid_box::dump

```

So, the memory layout for all three classes is:
box class:

offset	description
+0x0	width
+0x4	height
+0x8	depth

solid_object class:

offset	description
+0x0	density

It can be said, *solid_box* class memory layout will be *united*:
solid_box class:

offset	description
+0x0	width
+0x4	height
+0x8	depth
+0xC	density

The code of the *box::get_volume()* and *solid_object::get_density()* methods is trivial:

Listing 31.15: Optimizing MSVC 2008 /Ob0

```

?get_volume@box@@QAEXXZ PROC                        ; box::get_volume, COMDAT
; _this$ = ecx
    mov     eax, DWORD PTR [ecx+8]
    imul    eax, DWORD PTR [ecx+4]
    imul    eax, DWORD PTR [ecx]
    ret     0
?get_volume@box@@QAEXXZ ENDP                        ; box::get_volume

```

Listing 31.16: Optimizing MSVC 2008 /Ob0

```

?get_density@solid_object@@QAEXXZ PROC              ; solid_object::get_density, COMDAT
; _this$ = ecx
    mov     eax, DWORD PTR [ecx]
    ret     0
?get_density@solid_object@@QAEXXZ ENDP              ; solid_object::get_density

```

But the code of the *solid_box::get_weight()* method is much more interesting:

Listing 31.17: Optimizing MSVC 2008 /Ob0

```

?get_weight@solid_box@@QAEXXZ PROC                  ; solid_box::get_weight, COMDAT
; _this$ = ecx
    push    esi
    mov     esi, ecx

```

```

    push    edi
    lea     ecx, DWORD PTR [esi+12]
    call    ?get_density@solid_object@@QAEHXZ      ; solid_object::get_density
    mov     ecx, esi
    mov     edi, eax
    call    ?get_volume@box@@QAEHXZ                ; box::get_volume
    imul    eax, edi
    pop     edi
    pop     esi
    ret     0
?get_weight@solid_box@@QAEHXZ ENDP                ; solid_box::get_weight

```

`get_weight()` just calling two methods, but for `get_volume()` it just passing pointer to `this`, and for `get_density()` it passing pointer to `this` shifted by 12 (or 0xC) bytes, and there, in the `solid_box` class memory layout, fields of the `solid_object` class are beginning.

Thus, `solid_object::get_density()` method will believe it is dealing with usual `solid_object` class, and `box::get_volume()` method will work with its three fields, believing this is usual object of the `box` class.

Thus, we can say, an object of a class, inheriting from several other classes, representing in memory *united* class, containing all inherited fields. And each inherited method called with a pointer to corresponding structure's part passed.

31.5 Virtual methods

Yet another simple example:

```

#include <stdio.h>

class object
{
public:
    int color;
    object() { };
    object (int color) { this->color=color; };
    virtual void dump()
    {
        printf ("color=%d\n", color);
    };
};

class box : public object
{
private:
    int width, height, depth;
public:
    box(int color, int width, int height, int depth)
    {
        this->color=color;
        this->width=width;
        this->height=height;
        this->depth=depth;
    };
    void dump()
    {
        printf ("this is box. color=%d, width=%d, height=%d, depth=%d\n", color, width,
height, depth);
    };
};

class sphere : public object
{
private:
    int radius;

```

```

public:
    sphere(int color, int radius)
    {
        this->color=color;
        this->radius=radius;
    };
    void dump()
    {
        printf ("this is sphere. color=%d, radius=%d\n", color, radius);
    };
};

int main()
{
    box b(1, 10, 20, 30);
    sphere s(2, 40);

    object *o1=&b;
    object *o2=&s;

    o1->dump();
    o2->dump();
    return 0;
};

```

Class *object* has virtual method *dump()*, being replaced in the *box* and *sphere* class-inheritors.

If in an environment, where it is not known what type has object, as in the *main()* function in example, a virtual method *dump()* is called, somewhere, the information about its type must be stored, so to call relevant virtual method.

Let's compile it in MSVC 2008 with */Ox* and */Ob0* options and let's see *main()* function code:

```

_s$ = -32 ; size = 12
_b$ = -20 ; size = 20
_main PROC
    sub     esp, 32 ; 00000020H
    push    30 ; 0000001eH
    push    20 ; 00000014H
    push    10 ; 0000000aH
    push    1
    lea     ecx, DWORD PTR _b$[esp+48]
    call    ??0box@@QAE@HHHH@Z ; box::box
    push    40 ; 00000028H
    push    2
    lea     ecx, DWORD PTR _s$[esp+40]
    call    ??0sphere@@QAE@HH@Z ; sphere::sphere
    mov     eax, DWORD PTR _b$[esp+32]
    mov     edx, DWORD PTR [eax]
    lea     ecx, DWORD PTR _b$[esp+32]
    call    edx
    mov     eax, DWORD PTR _s$[esp+32]
    mov     edx, DWORD PTR [eax]
    lea     ecx, DWORD PTR _s$[esp+32]
    call    edx
    xor     eax, eax
    add     esp, 32 ; 00000020H
    ret     0
_main ENDP

```

Pointer to the *dump()* function is taken somewhere from object. Where the address of new method would be written there? Only somewhere in constructors: there is no other place since nothing more is called in the *main()* function.⁵

Let's see *box* class constructor's code:

⁵About pointers to functions, read more in relevant section:(20)

```

??_R0?AVbox@@@8 DD FLAT:??_7type_info@@6B@           ; box 'RTTI Type Descriptor'
                DD      00H
                DB      '.?AVbox@@', 00H

??_R1A@?0A@EA@box@@8 DD FLAT:??_R0?AVbox@@@8         ; box::'RTTI Base Class Descriptor at
(0,-1,0,64)'
                DD      01H
                DD      00H
                DD      0fffffffH
                DD      00H
                DD      040H
                DD      FLAT:??_R3box@@8

??_R2box@@8 DD FLAT:??_R1A@?0A@EA@box@@8             ; box::'RTTI Base Class Array'
                DD      FLAT:??_R1A@?0A@EA@object@@8

??_R3box@@8 DD 00H                                     ; box::'RTTI Class Hierarchy Descriptor'
                DD      00H
                DD      02H
                DD      FLAT:??_R2box@@8

??_R4box@@6B@ DD 00H                                   ; box::'RTTI Complete Object Locator'
                DD      00H
                DD      00H
                DD      FLAT:??_R0?AVbox@@@8
                DD      FLAT:??_R3box@@8

??_7box@@6B@ DD FLAT:??_R4box@@6B@                   ; box::'vftable'
                DD      FLAT:?dump@box@@UAEXXZ

_color$ = 8                                           ; size = 4
_width$ = 12                                         ; size = 4
_height$ = 16                                       ; size = 4
_depth$ = 20                                        ; size = 4
??0box@@QAE@HHHH@Z PROC                             ; box::box, COMDAT
; _this$ = ecx
    push     esi
    mov      esi, ecx
    call     ??0object@@QAE@XZ                       ; object::object
    mov      eax, DWORD PTR _color$[esp]
    mov      ecx, DWORD PTR _width$[esp]
    mov      edx, DWORD PTR _height$[esp]
    mov      DWORD PTR [esi+4], eax
    mov      eax, DWORD PTR _depth$[esp]
    mov      DWORD PTR [esi+16], eax
    mov      DWORD PTR [esi], OFFSET ??_7box@@6B@
    mov      DWORD PTR [esi+8], ecx
    mov      DWORD PTR [esi+12], edx
    mov      eax, esi
    pop      esi
    ret      16                                       ; 00000010H
??0box@@QAE@HHHH@Z ENDP                             ; box::box

```

Here we see slightly different memory layout: the first field is a pointer to some table `box::'vftable'` (name was set by MSVC compiler).

In this table we see a link to the table named `box::'RTTI Complete Object Locator'` and also a link to the `box::dump()` method. So this is named virtual methods table and [RTTI](#)⁶. Table of virtual methods contain addresses of methods and [RTTI](#) table contain information about types. By the way, [RTTI](#)-tables are the tables enumerated while calling to *dynamic_cast* and *typeid* in C++. You can also see here class name as plain text string. Thus, a method of base *object* class may call vir-

⁶Run-time type information

tual method *object::dump()*, which in turn, will call a method of inherited class since that information is present right in the object's structure.

Some additional CPU time needed for enumerating these tables and finding right virtual method address, thus virtual methods are widely considered as slightly slower than common methods.

In GCC-generated code [RTTI](#)-tables constructed slightly differently.

Chapter 32

ostream

Let's start again with a "hello world" example, but now will use ostream:

```
#include <iostream>

int main()
{
    std::cout << "Hello, world!\n";
}
```

Almost any C++ textbook tells that $\ll$ operation can be replaced (overloaded) for other types. That is what is done in ostream. We see that operator $\ll$ is called for ostream:

Listing 32.1: MSVC 2012 (reduced listing)

```
$SG37112 DB      'Hello, world!', 0aH, 00H

_main  PROC
    push    OFFSET $SG37112
    push    OFFSET ?cout@std@@3V?$basic_ostream@DU?$char_traits@D@std@@@10A ; std::cout
    call    ???$?6U?$char_traits@D@std@@@std@@YAAAV?$basic_ostream@DU?
           $char_traits@D@std@@@0AAV10@PBD0Z ; std::operator<<<std::char_traits<char> >
    add     esp, 8
    xor     eax, eax
    ret     0
_main  ENDP
```

Let's modify the example:

```
#include <iostream>

int main()
{
    std::cout << "Hello, " << "world!\n";
}
```

And again, from many C++ textbooks we know that the result of each operator $\ll$ in ostream is forwarded to the next one. Indeed:

Listing 32.2: MSVC 2012

```
$SG37112 DB      'world!', 0aH, 00H
$SG37113 DB      'Hello, ', 00H

_main  PROC
    push    OFFSET $SG37113 ; 'Hello, '
    push    OFFSET ?cout@std@@3V?$basic_ostream@DU?$char_traits@D@std@@@10A ; std::cout
    call    ???$?6U?$char_traits@D@std@@@std@@YAAAV?$basic_ostream@DU?
           $char_traits@D@std@@@0AAV10@PBD0Z ; std::operator<<<std::char_traits<char> >
    add     esp, 8
```

```

    push    OFFSET $SG37112 ; 'world!'
    push    eax              ; result of previous function
    call    ???$?6U?$char_traits@D@std@@std@@YAAAV?$basic_ostream@DU?
$char_traits@D@std@@@0@AAV10@PBD@Z ; std::operator<<<std::char_traits<char> >
    add     esp, 8

    xor     eax, eax
    ret     0
_main     ENDP

```

If to replace operator« by f(), that code can be rewritten as:

```
f(f(std::cout, "Hello, "), "world!")
```

GCC generates almost the same code as MSVC.

Chapter 33

References

In C++, references are pointers (9) as well, but they are called *safe*, because it is harder to make a mistake while dealing with them [16, 8.3.2]. For example, reference must always be pointing to the object of corresponding type and cannot be NULL [6, 8.6]. Even more than that, reference cannot be changed, it is impossible to point it to another object (reseat) [6, 8.5].

If we will try to change the pointers example (9) to use references instead of pointers:

```
void f2 (int x, int y, int & sum, int & product)
{
    sum=x+y;
    product=x*y;
};
```

Then we'll figure out the compiled code is just the same as in pointers example (9):

Listing 33.1: Optimizing MSVC 2010

```
_x$ = 8 ; size = 4
_y$ = 12 ; size = 4
_sum$ = 16 ; size = 4
_product$ = 20 ; size = 4
?f2@@YAXHHAAHO@Z PROC ; f2
    mov     ecx, DWORD PTR _y$[esp-4]
    mov     eax, DWORD PTR _x$[esp-4]
    lea     edx, DWORD PTR [eax+ecx]
    imul    eax, ecx
    mov     ecx, DWORD PTR _product$[esp-4]
    push    esi
    mov     esi, DWORD PTR _sum$[esp]
    mov     DWORD PTR [esi], edx
    mov     DWORD PTR [ecx], eax
    pop     esi
    ret     0
?f2@@YAXHHAAHO@Z ENDP ; f2
```

(A reason why C++ functions has such strange names, is described here: [31.1.1.](#))

Chapter 34

STL

N.B.: all examples here were checked only in 32-bit environment. x64 wasn't checked.

34.1 std::string

34.1.1 Internals

Many string libraries ([37, 2.2]) implements structure containing pointer to the buffer containing string, a variable always containing current string length (that is very convenient for many functions: [37, 2.2.1]) and a variable containing current buffer size. A string in buffer is usually terminated with zero: in order to be able to pass a pointer to a buffer into the functions taking usual C ASCII-string.

It is not specified in the C++ standard ([16]) how std::string should be implemented, however, it is usually implemented as described above.

By standard, std::string is not a class (as QString in Qt, for instance) but template, this is done in order to support various character types: at least char and wchar_t.

There are no assembly listings, because std::string internals in MSVC and GCC can be illustrated without them.

MSVC

MSVC implementation may store buffer in place instead of pointer to buffer (if the string is shorter than 16 symbols).

This mean that short string will occupy at least $16 + 4 + 4 = 24$ bytes in 32-bit environment or at least $16 + 8 + 8 = 32$ bytes in 64-bit, and if the string is longer than 16 characters, add also length of the string itself.

Listing 34.1: example for MSVC

```
#include <string>
#include <stdio.h>

struct std_string
{
    union
    {
        char buf[16];
        char* ptr;
    } u;
    size_t size;      // AKA 'Mysize' in MSVC
    size_t capacity; // AKA 'Myres' in MSVC
};

void dump_std_string(std::string s)
{
    struct std_string *p=(struct std_string*)&s;
    printf ("%s] size:%d capacity:%d\n", p->size>16 ? p->u.ptr : p->u.buf, p->size, p->
    capacity);
};

int main()
{
```

```

std::string s1="short string";
std::string s2="string longer than 16 bytes";

dump_std_string(s1);
dump_std_string(s2);

// that works without using c_str()
printf ("%s\n", &s1);
printf ("%s\n", s2);
};

```

Almost everything is clear from the source code.

Couple notes:

If the string is shorter than 16 symbols, a buffer for the string will not be allocated in the [heap](#). This is convenient because in practice, large amount of strings are short indeed. Apparently, Microsoft developers chose 16 characters as a good balance.

Very important thing here is in the end of `main()` functions: I'm not using `c_str()` method, nevertheless, if to compile the code and run, both strings will be appeared in the console!

This is why it works.

The string is shorter than 16 characters and buffer with the string is located in the beginning of `std::string` object (it can be treated just as structure). `printf()` treats pointer as a pointer to the null-terminated array of characters, hence it works.

Second string (longer than 16 characters) printing is even more dangerous: it is typical programmer's mistake (or typo) to forget to write `c_str()`. This works because at the moment a pointer to buffer is located at the start of structure. This may left unnoticed for a long span of time: until a longer string will appear there, then a process will crash.

GCC

GCC implementation of a structure has one more variable—reference count.

One interesting fact is that a pointer to `std::string` instance of class points not to beginning of the structure, but to the pointer to buffer. In `libstdc++-v3/include/bits/basic_string.h` we may read that it was made for convenient debugging:

```

* The reason you want _M_data pointing to the character %array and
* not the _Rep is so that the debugger can see the string
* contents. (Probably we should add a non-inline member to get
* the _Rep for the debugger to use, so users can check the actual
* string length.)

```

[basic_string.h source code](#)

I considering this in my example:

Listing 34.2: example for GCC

```

#include <string>
#include <stdio.h>

struct std_string
{
    size_t length;
    size_t capacity;
    size_t refcount;
};

void dump_std_string(std::string s)
{
    char *p1=(char*)&s; // GCC type checking workaround
    struct std_string *p2=(struct std_string*)(p1-sizeof(struct std_string));
    printf ("[%s] size:%d capacity:%d\n", p1, p2->length, p2->capacity);
};

int main()
{
    std::string s1="short string";
    std::string s2="string longer than 16 bytes";
}

```

```

    dump_std_string(s1);
    dump_std_string(s2);

    // GCC type checking workaround:
    printf ("%s\n", *(char**)&s1);
    printf ("%s\n", *(char**)&s2);
};

```

A trickery should be also used to imitate mistake I already wrote above because GCC has stronger type checking, nevertheless, `printf()` works here without `c_str()` as well.

34.1.2 More complex example

```

#include <string>
#include <stdio.h>

int main()
{
    std::string s1="Hello, ";
    std::string s2="world!\n";
    std::string s3=s1+s2;

    printf ("%s\n", s3.c_str());
}

```

Listing 34.3: MSVC 2012

```

$SG39512 DB      'Hello, ', 00H
$SG39514 DB      'world!', 0aH, 00H
$SG39581 DB      '%s', 0aH, 00H

_s2$ = -72                ; size = 24
_s3$ = -48                ; size = 24
_s1$ = -24                ; size = 24
_main PROC

    sub     esp, 72                ; 00000048H

    push    7
    push    OFFSET $SG39512
    lea     ecx, DWORD PTR _s1$[esp+80]
    mov     DWORD PTR _s1$[esp+100], 15        ; 0000000fH
    mov     DWORD PTR _s1$[esp+96], 0
    mov     BYTE PTR _s1$[esp+80], 0
    call    ?assign@?$basic_string@DU?$char_traits@D@std@@V?
$allocator@D@2@@std@@QAEAAV12@PBDI@Z ; std::basic_string<char,std::char_traits<char>,std::
allocator<char> >::assign

    push    7
    push    OFFSET $SG39514
    lea     ecx, DWORD PTR _s2$[esp+80]
    mov     DWORD PTR _s2$[esp+100], 15        ; 0000000fH
    mov     DWORD PTR _s2$[esp+96], 0
    mov     BYTE PTR _s2$[esp+80], 0
    call    ?assign@?$basic_string@DU?$char_traits@D@std@@V?
$allocator@D@2@@std@@QAEAAV12@PBDI@Z ; std::basic_string<char,std::char_traits<char>,std::
allocator<char> >::assign

    lea     eax, DWORD PTR _s2$[esp+72]
    push    eax
    lea     eax, DWORD PTR _s1$[esp+76]

```

```

    push    eax
    lea     eax, DWORD PTR _s3$[esp+80]
    push    eax
    call    ???$?H DU?$char_traits@D@std@@V?$allocator@D@1@@std@@YA?AV?$basic_string@DU?$char_traits@D@std@@V?$allocator@D@2@@0@ABV10@@0Z ; std::operator+<char,std::char_traits<char>,std::allocator<char>> >

    ; inlined c_str() method:
    cmp     DWORD PTR _s3$[esp+104], 16                ; 00000010H
    lea     eax, DWORD PTR _s3$[esp+84]
    cmovae  eax, DWORD PTR _s3$[esp+84]

    push    eax
    push    OFFSET $SG39581
    call    _printf
    add     esp, 20                                ; 00000014H

    cmp     DWORD PTR _s3$[esp+92], 16                ; 00000010H
    jb      SHORT $LN119@main
    push    DWORD PTR _s3$[esp+72]
    call    ???3@YAXPAX@Z                          ; operator delete
    add     esp, 4

$LN119@main:
    cmp     DWORD PTR _s2$[esp+92], 16                ; 00000010H
    mov     DWORD PTR _s3$[esp+92], 15                ; 0000000fH
    mov     DWORD PTR _s3$[esp+88], 0
    mov     BYTE PTR _s3$[esp+72], 0
    jb      SHORT $LN151@main
    push    DWORD PTR _s2$[esp+72]
    call    ???3@YAXPAX@Z                          ; operator delete
    add     esp, 4

$LN151@main:
    cmp     DWORD PTR _s1$[esp+92], 16                ; 00000010H
    mov     DWORD PTR _s2$[esp+92], 15                ; 0000000fH
    mov     DWORD PTR _s2$[esp+88], 0
    mov     BYTE PTR _s2$[esp+72], 0
    jb      SHORT $LN195@main
    push    DWORD PTR _s1$[esp+72]
    call    ???3@YAXPAX@Z                          ; operator delete
    add     esp, 4

$LN195@main:
    xor     eax, eax
    add     esp, 72                                ; 00000048H
    ret     0

_main     ENDP

```

Compiler not constructing strings statically: how it is possible anyway if buffer should be located in the [heap](#)? Usual [ASCII](#) strings are stored in the data segment instead, and later, at the moment of execution, with the help of “assign” method, s1 and s2 strings are constructed. With the help of operator+, s3 string is constructed.

Please note that there are no call to c_str() method, because, its code is tiny enough so compiler inlined it right here: if the string is shorter than 16 characters, a pointer to buffer is leaved in EAX register, and an address of the string buffer located in the [heap](#) is fetched otherwise.

Next, we see calls to the 3 destructors, and they are called if string is longer than 16 characters: then a buffers in the [heap](#) should be freed. Otherwise, since all three std::string objects are stored in the stack, they are freed automatically, upon function finish.

As a consequence, short strings processing is faster because of lesser [heap](#) accesses.

GCC code is even simpler (because GCC way, as I mentioned above, is not to store shorter string right in the structure):

Listing 34.4: GCC 4.8.1

```

.LC0:
    .string "Hello, "

```

```

.LC1:
    .string "world!\n"
main:
    push    ebp
    mov     ebp, esp
    push    edi
    push    esi
    push    ebx
    and     esp, -16
    sub     esp, 32
    lea     ebx, [esp+28]
    lea     edi, [esp+20]
    mov     DWORD PTR [esp+8], ebx
    lea     esi, [esp+24]
    mov     DWORD PTR [esp+4], OFFSET FLAT:.LC0
    mov     DWORD PTR [esp], edi

    call    _ZNSsC1EPKcRKSAIcE

    mov     DWORD PTR [esp+8], ebx
    mov     DWORD PTR [esp+4], OFFSET FLAT:.LC1
    mov     DWORD PTR [esp], esi

    call    _ZNSsC1EPKcRKSAIcE

    mov     DWORD PTR [esp+4], edi
    mov     DWORD PTR [esp], ebx

    call    _ZNSsC1ERKSS

    mov     DWORD PTR [esp+4], esi
    mov     DWORD PTR [esp], ebx

    call    _ZNSs6appendERKSS

; inlined c_str():
    mov     eax, DWORD PTR [esp+28]
    mov     DWORD PTR [esp], eax

    call    puts

    mov     eax, DWORD PTR [esp+28]
    lea     ebx, [esp+19]
    mov     DWORD PTR [esp+4], ebx
    sub     eax, 12
    mov     DWORD PTR [esp], eax
    call    _ZNSs4_Rep10_M_disposeERKSAIcE
    mov     eax, DWORD PTR [esp+24]
    mov     DWORD PTR [esp+4], ebx
    sub     eax, 12
    mov     DWORD PTR [esp], eax
    call    _ZNSs4_Rep10_M_disposeERKSAIcE
    mov     eax, DWORD PTR [esp+20]
    mov     DWORD PTR [esp+4], ebx
    sub     eax, 12
    mov     DWORD PTR [esp], eax
    call    _ZNSs4_Rep10_M_disposeERKSAIcE
    lea     esp, [ebp-12]
    xor     eax, eax
    pop     ebx
    pop     esi

```

```

    pop    edi
    pop    ebp
    ret

```

It can be seen that not a pointer to object is passed to destructors, but rather a place 12 bytes (or 3 words) before, i.e., pointer to the real start of the structure.

34.1.3 `std::string` as a global variable

Experienced C++ programmers may argue: a global variables of [STL](#)¹ types are in fact can be defined.

Yes, indeed:

```

#include <stdio.h>
#include <string>

std::string s="a string";

int main()
{
    printf ("%s\n", s.c_str());
};

```

Listing 34.5: MSVC 2012

```

$SG39512 DB      'a string', 00H
$SG39519 DB      '%s', 0aH, 00H

_main  PROC
    cmp     DWORD PTR ?s@@3V?$basic_string@DU?$char_traits@D@std@@V?$allocator@D@2@@std@@A
+20, 16 ; 00000010H
    mov     eax, OFFSET ?s@@3V?$basic_string@DU?$char_traits@D@std@@V?$allocator@D@2@@std@@A
; s
    cmovae  eax, DWORD PTR ?s@@3V?$basic_string@DU?$char_traits@D@std@@V?
$allocator@D@2@@std@@A
    push    eax
    push    OFFSET $SG39519
    call    _printf
    add     esp, 8
    xor     eax, eax
    ret     0
_main  ENDP

??_Es@@YAXXZ PROC                                ; 'dynamic initializer for 's'', COMDAT
    push    8
    push    OFFSET $SG39512
    mov     ecx, OFFSET ?s@@3V?$basic_string@DU?$char_traits@D@std@@V?$allocator@D@2@@std@@A
; s
    call    ?assign@?$basic_string@DU?$char_traits@D@std@@V?
$allocator@D@2@@std@@QAEAAV12@PBDI@Z ; std::basic_string<char,std::char_traits<char>,std::
allocator<char> >::assign
    push    OFFSET ??_Fs@@YAXXZ                    ; 'dynamic atexit destructor for 's''
    call    _atexit
    pop     ecx
    ret     0
??_Es@@YAXXZ ENDP                                ; 'dynamic initializer for 's''

??_Fs@@YAXXZ PROC                                ; 'dynamic atexit destructor for 's'',
COMDAT
    push    ecx
    cmp     DWORD PTR ?s@@3V?$basic_string@DU?$char_traits@D@std@@V?$allocator@D@2@@std@@A
+20, 16 ; 00000010H

```

¹(C++) Standard Template Library: [34](#)

```

    jb     SHORT $LN23@dynamic
    push   esi
    mov    esi, DWORD PTR ?s@@3V?$basic_string@DU?$char_traits@D@std@@V?
$allocator@D@2@@std@@@A
    lea    ecx, DWORD PTR $T2[esp+8]
    call   ??0?$_Wrap_alloc@V?$allocator@D@std@@@std@@QAE@XZ ; std::_Wrap_alloc<std::
allocator<char> >::_Wrap_alloc<std::allocator<char> >
    push   OFFSET ?s@@3V?$basic_string@DU?$char_traits@D@std@@V?$allocator@D@2@@std@@@A ; s
    lea    ecx, DWORD PTR $T2[esp+12]
    call   ??3$destroy@PAD@?$_Wrap_alloc@V?$allocator@D@std@@@std@@QAE@XPAPAD@Z ; std::
_Wrap_alloc<std::allocator<char> >::destroy<char *>
    lea    ecx, DWORD PTR $T1[esp+8]
    call   ??0?$_Wrap_alloc@V?$allocator@D@std@@@std@@QAE@XZ ; std::_Wrap_alloc<std::
allocator<char> >::_Wrap_alloc<std::allocator<char> >
    push   esi
    call   ??3@YAXPAX@Z ; operator delete
    add    esp, 4
    pop    esi
$LN23@dynamic:
    mov    DWORD PTR ?s@@3V?$basic_string@DU?$char_traits@D@std@@V?$allocator@D@2@@std@@@A
+20, 15 ; 0000000fH
    mov    DWORD PTR ?s@@3V?$basic_string@DU?$char_traits@D@std@@V?$allocator@D@2@@std@@@A
+16, 0
    mov    BYTE PTR ?s@@3V?$basic_string@DU?$char_traits@D@std@@V?$allocator@D@2@@std@@@A, 0
    pop    ecx
    ret    0
??_Fs@@YAXXZ ENDP ; 'dynamic atexit destructor for 's''

```

In fact, a special function with all constructors of global variables is called from [CRT](#), before `main()`. More than that: with the help of `atexit()` another function is registered: which contain all destructors of such variables.

GCC works likewise:

Listing 34.6: GCC 4.8.1

```

main:
    push   ebp
    mov    ebp, esp
    and    esp, -16
    sub    esp, 16
    mov    eax, DWORD PTR s
    mov    DWORD PTR [esp], eax
    call   puts
    xor    eax, eax
    leave
    ret

.LC0:
    .string "a string"
_GLOBAL__sub_I_s:
    sub    esp, 44
    lea    eax, [esp+31]
    mov    DWORD PTR [esp+8], eax
    mov    DWORD PTR [esp+4], OFFSET FLAT:.LC0
    mov    DWORD PTR [esp], OFFSET FLAT:s
    call   _ZNSSC1EPKcRKSaIcE
    mov    DWORD PTR [esp+8], OFFSET FLAT:__dso_handle
    mov    DWORD PTR [esp+4], OFFSET FLAT:s
    mov    DWORD PTR [esp], OFFSET FLAT:_ZNSSD1Ev
    call   __cxa_atexit
    add    esp, 44
    ret

.LFE645:
    .size  _GLOBAL__sub_I_s, .-_GLOBAL__sub_I_s

```

```

        .section      .init_array,"aw"
        .align 4
        .long  _GLOBAL__sub_I_s
        .globl  s
        .bss
        .align 4
        .type   s, @object
        .size   s, 4
s:
        .zero    4
        .hidden  __dso_handle

```

It even not creates separated functions for this, each destructor is passed to `atexit()`, one by one.

34.2 `std::list`

This is a well-known doubly-linked list: each element has two pointers, to the previous and the next elements.

This mean that a memory footprint is enlarged by 2 words for each element (8 bytes in 32-bit environment or 16 bytes in 64-bit).

This is also a circular list, meaning that the last element has a pointer to the first and vice versa.

C++ STL just append “next” and “previous” pointers to your existing structure you wish to unite into a list.

Let’s work out an example with a simple 2-variable structure we want to store in the list.

Although standard C++ standard [16] does not offer how to implement it, MSVC and GCC implementations are straightforward and similar to each other, so here is only one source code for both:

```

#include <stdio.h>
#include <list>
#include <iostream>

struct a
{
    int x;
    int y;
};

struct List_node
{
    struct List_node* _Next;
    struct List_node* _Prev;
    int x;
    int y;
};

void dump_List_node (struct List_node *n)
{
    printf ("ptr=0x%p _Next=0x%p _Prev=0x%p x=%d y=%d\n",
           n, n->_Next, n->_Prev, n->x, n->y);
};

void dump_List_vals (struct List_node* n)
{
    struct List_node* current=n;

    for (;;)
    {
        dump_List_node (current);
        current=current->_Next;
        if (current==n) // end
            break;
    };
};

```

```

void dump_List_val (unsigned int *a)
{
#ifdef _MSC_VER
    // GCC implementation doesn't have "size" field
    printf ("_Myhead=0x%p, _Mysize=%d\n", a[0], a[1]);
#endif
    dump_List_vals ((struct List_node*)a[0]);
};

int main()
{
    std::list<struct a> l;

    printf ("* empty list:\n");
    dump_List_val((unsigned int*)(void*)&l);

    struct a t1;
    t1.x=1;
    t1.y=2;
    l.push_front (t1);
    t1.x=3;
    t1.y=4;
    l.push_front (t1);
    t1.x=5;
    t1.y=6;
    l.push_back (t1);

    printf ("* 3-elements list:\n");
    dump_List_val((unsigned int*)(void*)&l);

    std::list<struct a>::iterator tmp;
    printf ("node at .begin:\n");
    tmp=l.begin();
    dump_List_node ((struct List_node *)*(void**)&tmp);
    printf ("node at .end:\n");
    tmp=l.end();
    dump_List_node ((struct List_node *)*(void**)&tmp);

    printf ("* let's count from the begin:\n");
    std::list<struct a>::iterator it=l.begin();
    printf ("1st element: %d %d\n", (*it).x, (*it).y);
    it++;
    printf ("2nd element: %d %d\n", (*it).x, (*it).y);
    it++;
    printf ("3rd element: %d %d\n", (*it).x, (*it).y);
    it++;
    printf ("element at .end(): %d %d\n", (*it).x, (*it).y);

    printf ("* let's count from the end:\n");
    std::list<struct a>::iterator it2=l.end();
    printf ("element at .end(): %d %d\n", (*it2).x, (*it2).y);
    it2--;
    printf ("3rd element: %d %d\n", (*it2).x, (*it2).y);
    it2--;
    printf ("2nd element: %d %d\n", (*it2).x, (*it2).y);
    it2--;
    printf ("1st element: %d %d\n", (*it2).x, (*it2).y);

    printf ("removing last element...\n");
    l.pop_back();
}

```

```
dump_List_val((unsigned int*)(void*)&l);
};
```


34.2.1 GCC

Let's start with GCC.

When we run the example, we'll see a long dump, let's work with it part by part.

```
* empty list:
ptr=0x0028fe90 _Next=0x0028fe90 _Prev=0x0028fe90 x=3 y=0
```

Here we see an empty list. Despite the fact it is empty, it has one element with garbage in *x* and *y* variables. Both “next” and “prev” pointers are pointing to the self node:

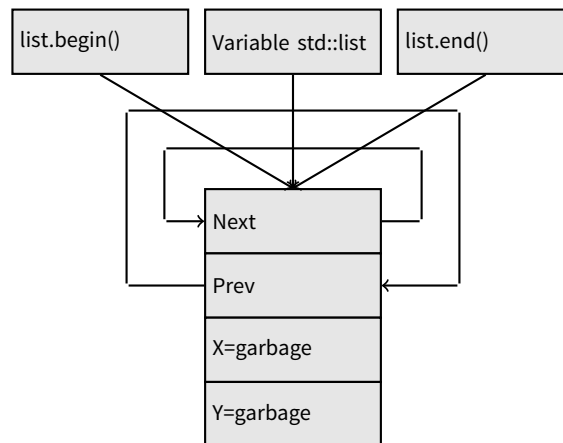


That's is the moment when `.begin` and `.end` iterators are equal to each other.

Let's push 3 elements, and the list internally will be:

```
* 3-elements list:
ptr=0x000349a0 _Next=0x00034988 _Prev=0x0028fe90 x=3 y=4
ptr=0x00034988 _Next=0x00034b40 _Prev=0x000349a0 x=1 y=2
ptr=0x00034b40 _Next=0x0028fe90 _Prev=0x00034988 x=5 y=6
ptr=0x0028fe90 _Next=0x000349a0 _Prev=0x00034b40 x=5 y=6
```

The last element is still at 0x0028fe90, it will not be moved until list disposal. It still contain random garbage in *x* and *y* fields (5 and 6). By occasion, these values are the same as in the last element, but it doesn't mean they are meaningful.

Here is how 3 elements will be stored in memory:

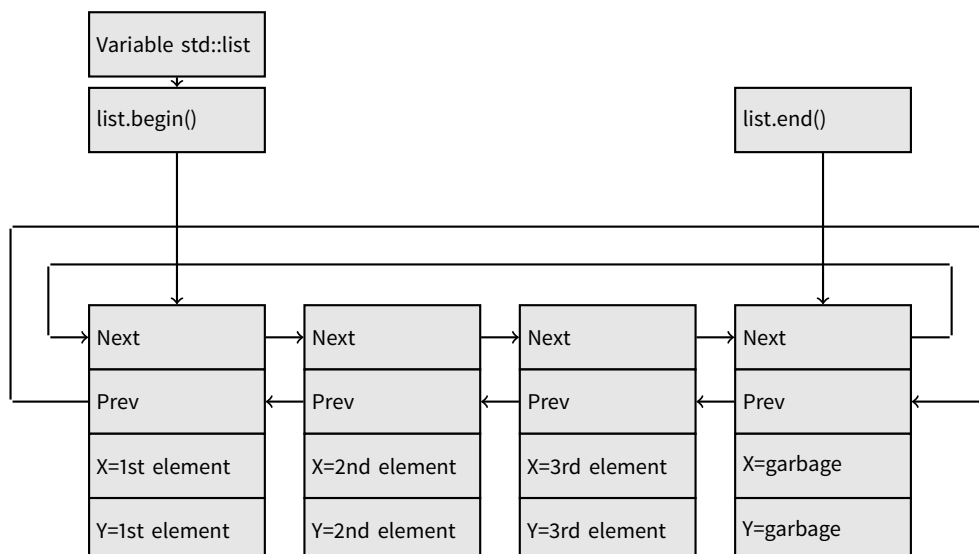

The variable *l* is always points to the first node.

.begin() and .end() iterators are not pointing to anything and not present in memory at all, but the pointers to these nodes will be returned when corresponding method is called.

Having a “garbage” element is a very popular practice in implementing doubly-linked lists. Without it, a lot of operations may become slightly more complex and, hence, slower.

Iterator in fact is just a pointer to a node. list.begin() and list.end() are just returning pointers.

```
node at .begin:
ptr=0x000349a0 _Next=0x00034988 _Prev=0x0028fe90 x=3 y=4
node at .end:
ptr=0x0028fe90 _Next=0x000349a0 _Prev=0x00034b40 x=5 y=6
```

The fact the list is circular is very helpful here: having a pointer to the first list element, i.e., that is in the *l* variable, it is easy to get a pointer to the last one quickly, without need to traverse whole list. Inserting element at the list end is also quick, thanks to this feature.

operator- and operator++ are just set current iterator value to the current_node->prev or current_node->next values. Reverse iterators (.rbegin, .rend) works just as the same, but in inverse way.

operator* of iterator just returns pointer to the point in the node structure, where user's structure is beginning, i.e., pointer to the very first structure element (*x*).

List insertion and deletion is trivial: just allocate new node (or deallocate) and fix all pointers to be valid.

That's why iterator may become invalid after element deletion: it may still point to the node already deallocated. And of course, the information from the freed node, to which iterator still points, cannot be used anymore.

The GCC implementation (as of 4.8.1) doesn't store current list size: this resulting in slow .size() method: it should traverse the whole list counting elements, because it doesn't have any other way to get the information. This mean this operation is $O(n)$, i.e., it is as slow, as how many elements present in the list.

Listing 34.7: GCC 4.8.1 -O3 -fno-inline-small-functions

```
main      proc near
          push    ebp
          mov     ebp, esp
          push    esi
          push    ebx
          and     esp, 0FFFFFFF0h
          sub     esp, 20h
          lea     ebx, [esp+10h]
          mov     dword ptr [esp], offset s ; "* empty list:"
          mov     [esp+10h], ebx
          mov     [esp+14h], ebx
          call    puts
          mov     [esp], ebx
          call    _Z13dump_List_valPj ; dump_List_val(uint *)
          lea     esi, [esp+18h]
          mov     [esp+4], esi
          mov     [esp], ebx
          mov     dword ptr [esp+18h], 1 ; X for new element
          mov     dword ptr [esp+1Ch], 2 ; Y for new element
          call    _ZNSt4listI1aSaISO_EE10push_frontERKSO_ ; std::list<a,std::allocator<a
>>::push_front(a const&)
          mov     [esp+4], esi
          mov     [esp], ebx
          mov     dword ptr [esp+18h], 3 ; X for new element
          mov     dword ptr [esp+1Ch], 4 ; Y for new element
          call    _ZNSt4listI1aSaISO_EE10push_frontERKSO_ ; std::list<a,std::allocator<a
>>::push_front(a const&)
          mov     dword ptr [esp], 10h
          mov     dword ptr [esp+18h], 5 ; X for new element
          mov     dword ptr [esp+1Ch], 6 ; Y for new element
          call    _Znwj ; operator new(uint)
          cmp     eax, 0FFFFFFF8h
          jz      short loc_80002A6
          mov     ecx, [esp+1Ch]
          mov     edx, [esp+18h]
          mov     [eax+0Ch], ecx
```

```

mov     [eax+8], edx

loc_80002A6:                                ; CODE XREF: main+86
mov     [esp+4], ebx
mov     [esp], eax
call    _ZNSt8__detail15_List_node_base7_M_hookEPS0_ ; std::__detail::
_List_node_base::M_hook(std::__detail::_List_node_base*)
mov     dword ptr [esp], offset a3ElementsList ; "* 3-elements list:"
call    puts
mov     [esp], ebx
call    _Z13dump_List_valPj ; dump_List_val(uint *)
mov     dword ptr [esp], offset aNodeAt_begin ; "node at .begin:"
call    puts
mov     eax, [esp+10h]
mov     [esp], eax
call    _Z14dump_List_nodeP9List_node ; dump_List_node(List_node *)
mov     dword ptr [esp], offset aNodeAt_end ; "node at .end:"
call    puts
mov     [esp], ebx
call    _Z14dump_List_nodeP9List_node ; dump_List_node(List_node *)
mov     dword ptr [esp], offset aLetSCountFromT ; "* let's count from the begin:"
call    puts
mov     esi, [esp+10h]
mov     eax, [esi+0Ch]
mov     [esp+0Ch], eax
mov     eax, [esi+8]
mov     dword ptr [esp+4], offset a1stElementDD ; "1st element: %d %d\n"
mov     dword ptr [esp], 1
mov     [esp+8], eax
call    __printf_chk
mov     esi, [esi] ; operator++: get ->next pointer
mov     eax, [esi+0Ch]
mov     [esp+0Ch], eax
mov     eax, [esi+8]
mov     dword ptr [esp+4], offset a2ndElementDD ; "2nd element: %d %d\n"
mov     dword ptr [esp], 1
mov     [esp+8], eax
call    __printf_chk
mov     esi, [esi] ; operator++: get ->next pointer
mov     eax, [esi+0Ch]
mov     [esp+0Ch], eax
mov     eax, [esi+8]
mov     dword ptr [esp+4], offset a3rdElementDD ; "3rd element: %d %d\n"
mov     dword ptr [esp], 1
mov     [esp+8], eax
call    __printf_chk
mov     eax, [esi] ; operator++: get ->next pointer
mov     edx, [eax+0Ch]
mov     [esp+0Ch], edx
mov     eax, [eax+8]
mov     dword ptr [esp+4], offset aElementAt_endD ; "element at .end(): %d %d\n"
mov     dword ptr [esp], 1
mov     [esp+8], eax
call    __printf_chk
mov     dword ptr [esp], offset aLetSCountFro_0 ; "* let's count from the end:"
call    puts
mov     eax, [esp+1Ch]
mov     dword ptr [esp+4], offset aElementAt_endD ; "element at .end(): %d %d\n"
mov     dword ptr [esp], 1
mov     [esp+0Ch], eax
mov     eax, [esp+18h]

```

```

mov     [esp+8], eax
call    __printf_chk
mov     esi, [esp+14h]
mov     eax, [esi+0Ch]
mov     [esp+0Ch], eax
mov     eax, [esi+8]
mov     dword ptr [esp+4], offset a3rdElementDD ; "3rd element: %d %d\n"
mov     dword ptr [esp], 1
mov     [esp+8], eax
call    __printf_chk
mov     esi, [esi+4] ; operator--: get ->prev pointer
mov     eax, [esi+0Ch]
mov     [esp+0Ch], eax
mov     eax, [esi+8]
mov     dword ptr [esp+4], offset a2ndElementDD ; "2nd element: %d %d\n"
mov     dword ptr [esp], 1
mov     [esp+8], eax
call    __printf_chk
mov     eax, [esi+4] ; operator--: get ->prev pointer
mov     edx, [eax+0Ch]
mov     [esp+0Ch], edx
mov     eax, [eax+8]
mov     dword ptr [esp+4], offset a1stElementDD ; "1st element: %d %d\n"
mov     dword ptr [esp], 1
mov     [esp+8], eax
call    __printf_chk
mov     dword ptr [esp], offset aRemovingLastEl ; "removing last element..."
call    puts
mov     esi, [esp+14h]
mov     [esp], esi
call    _ZNSt8__detail15_List_node_base9_M_unhookEv ; std::__detail::
_List_node_base::_M_unhook(void)
mov     [esp], esi      ; void *
call    _ZdlPv          ; operator delete(void *)
mov     [esp], ebx
call    _Z13dump_List_valPj ; dump_List_val(uint *)
mov     [esp], ebx
call    _ZNSt10_List_baseI1aSaIS0_EE8_M_clearEv ; std::_List_base<a,std::
allocator<a>::_M_clear(void)
lea     esp, [ebp-8]
xor     eax, eax
pop     ebx
pop     esi
pop     ebp
retn
main    endp

```

Listing 34.8: The whole output

```

* empty list:
ptr=0x0028fe90 _Next=0x0028fe90 _Prev=0x0028fe90 x=3 y=0
* 3-elements list:
ptr=0x000349a0 _Next=0x00034988 _Prev=0x0028fe90 x=3 y=4
ptr=0x00034988 _Next=0x00034b40 _Prev=0x000349a0 x=1 y=2
ptr=0x00034b40 _Next=0x0028fe90 _Prev=0x00034988 x=5 y=6
ptr=0x0028fe90 _Next=0x000349a0 _Prev=0x00034b40 x=5 y=6
node at .begin:
ptr=0x000349a0 _Next=0x00034988 _Prev=0x0028fe90 x=3 y=4
node at .end:
ptr=0x0028fe90 _Next=0x000349a0 _Prev=0x00034b40 x=5 y=6
* let's count from the begin:

```

```


1st element: 3 4
2nd element: 1 2
3rd element: 5 6
element at .end(): 5 6
* let's count from the end:
element at .end(): 5 6
3rd element: 5 6
2nd element: 1 2
1st element: 3 4
removing last element...
ptr=0x000349a0 _Next=0x00034988 _Prev=0x0028fe90 x=3 y=4
ptr=0x00034988 _Next=0x0028fe90 _Prev=0x000349a0 x=1 y=2
ptr=0x0028fe90 _Next=0x000349a0 _Prev=0x00034988 x=5 y=6

```

34.2.2 MSVC

MSVC implementation (2012) is just the same, but it also stores current list size. This mean, `.size()` method is very fast ($O(1)$): just read one value from memory. On the other way, size variable must be corrected at each insertion/deletion.

MSVC implementation is also slightly different in a way it arrange nodes:

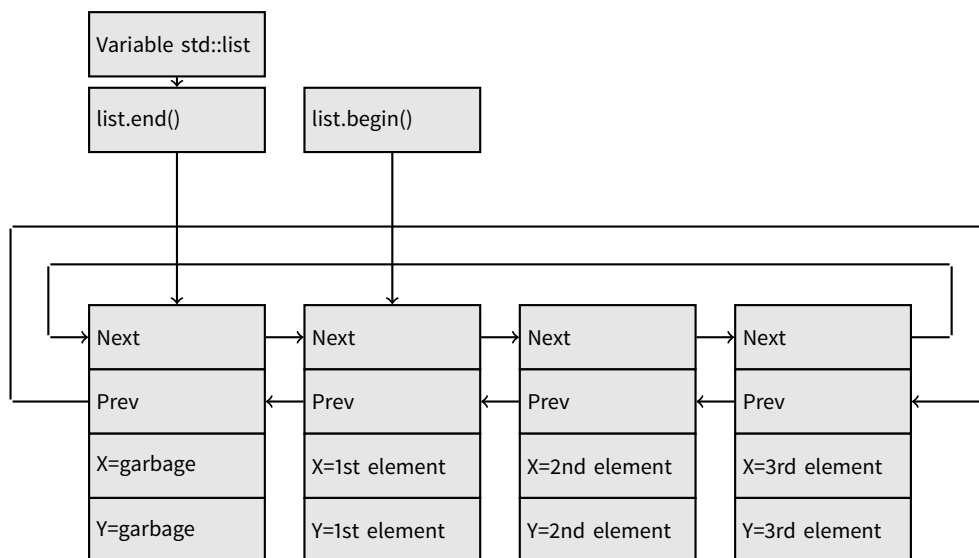

GCC has its “garbage” element at the end of the list, while MSVC at the beginning of it.

Listing 34.9: MSVC 2012 /Fa2.asm /Ox /GS- /Ob1

```

_l$ = -16 ; size = 8
_t1$ = -8 ; size = 8
_main PROC
    sub     esp, 16 ; 00000010H
    push    ebx
    push    esi
    push    edi
    push    0
    push    0
    lea     ecx, DWORD PTR _l$[esp+36]
    mov     DWORD PTR _l$[esp+40], 0
    ; allocate first "garbage" element
    call    ?_Buynode0@@$_List_alloc@$_List_base_types@Ua@@V?
$allocator@Ua@@@std@@@std@@@std@@@QAEPAU?$_List_node@Ua@@PAX@2@PAU32@0@Z ; std::_List_alloc<0,
std::_List_base_types<a,std::allocator<a> >::_Buynode0
    mov     edi, DWORD PTR __imp__printf
    mov     ebx, eax
    push    OFFSET $SG40685 ; '* empty list:'
    mov     DWORD PTR _l$[esp+32], ebx

```

```

    call    edi ; printf
    lea     eax, DWORD PTR _l1$[esp+32]
    push    eax
    call    ?dump_List_val@@YAXPAI@Z ; dump_List_val
    mov     esi, DWORD PTR [ebx]
    add     esp, 8
    lea     eax, DWORD PTR _t1$[esp+28]
    push    eax
    push    DWORD PTR [esi+4]
    lea     ecx, DWORD PTR _l1$[esp+36]
    push    esi
    mov     DWORD PTR _t1$[esp+40], 1 ; data for a new node
    mov     DWORD PTR _t1$[esp+44], 2 ; data for a new node
    ; allocate new node
    call    ???_Buynode@ABUa@@@?$_List_buy@Ua@@V?$allocator@Ua@@@std@@std@@QAEPAU?
$_List_node@Ua@@PAX@1@PAU21@0ABUa@@@Z ; std::_List_buy<a,std::allocator<a> >::_Buynode<a
const &>
    mov     DWORD PTR [esi+4], eax
    mov     ecx, DWORD PTR [eax+4]
    mov     DWORD PTR _t1$[esp+28], 3 ; data for a new node
    mov     DWORD PTR [ecx], eax
    mov     esi, DWORD PTR [ebx]
    lea     eax, DWORD PTR _t1$[esp+28]
    push    eax
    push    DWORD PTR [esi+4]
    lea     ecx, DWORD PTR _l1$[esp+36]
    push    esi
    mov     DWORD PTR _t1$[esp+44], 4 ; data for a new node
    ; allocate new node
    call    ???_Buynode@ABUa@@@?$_List_buy@Ua@@V?$allocator@Ua@@@std@@std@@QAEPAU?
$_List_node@Ua@@PAX@1@PAU21@0ABUa@@@Z ; std::_List_buy<a,std::allocator<a> >::_Buynode<a
const &>
    mov     DWORD PTR [esi+4], eax
    mov     ecx, DWORD PTR [eax+4]
    mov     DWORD PTR _t1$[esp+28], 5 ; data for a new node
    mov     DWORD PTR [ecx], eax
    lea     eax, DWORD PTR _t1$[esp+28]
    push    eax
    push    DWORD PTR [ebx+4]
    lea     ecx, DWORD PTR _l1$[esp+36]
    push    ebx
    mov     DWORD PTR _t1$[esp+44], 6 ; data for a new node
    ; allocate new node
    call    ???_Buynode@ABUa@@@?$_List_buy@Ua@@V?$allocator@Ua@@@std@@std@@QAEPAU?
$_List_node@Ua@@PAX@1@PAU21@0ABUa@@@Z ; std::_List_buy<a,std::allocator<a> >::_Buynode<a
const &>
    mov     DWORD PTR [ebx+4], eax
    mov     ecx, DWORD PTR [eax+4]
    push    OFFSET $SG40689 ; '* 3-elements list:'
    mov     DWORD PTR _l1$[esp+36], 3
    mov     DWORD PTR [ecx], eax
    call    edi ; printf
    lea     eax, DWORD PTR _l1$[esp+32]
    push    eax
    call    ?dump_List_val@@YAXPAI@Z ; dump_List_val
    push    OFFSET $SG40831 ; 'node at .begin:'
    call    edi ; printf
    push    DWORD PTR [ebx] ; get next field of node $l$ variable points to
    call    ?dump_List_node@@YAXPAUList_node@@@Z ; dump_List_node
    push    OFFSET $SG40835 ; 'node at .end:'
    call    edi ; printf

```

```

push    ebx ; pointer to the node $l$ variable points to!
call    ?dump_List_node@@YAXPAUList_node@@@Z ; dump_List_node
push    OFFSET $SG40839 ; '* let''s count from the begin:'
call    edi ; printf
mov     esi, DWORD PTR [ebx] ; operator++: get ->next pointer
push    DWORD PTR [esi+12]
push    DWORD PTR [esi+8]
push    OFFSET $SG40846 ; '1st element: %d %d'
call    edi ; printf
mov     esi, DWORD PTR [esi] ; operator++: get ->next pointer
push    DWORD PTR [esi+12]
push    DWORD PTR [esi+8]
push    OFFSET $SG40848 ; '2nd element: %d %d'
call    edi ; printf
mov     esi, DWORD PTR [esi] ; operator++: get ->next pointer
push    DWORD PTR [esi+12]
push    DWORD PTR [esi+8]
push    OFFSET $SG40850 ; '3rd element: %d %d'
call    edi ; printf
mov     eax, DWORD PTR [esi] ; operator++: get ->next pointer
add     esp, 64 ; 00000040H
push    DWORD PTR [eax+12]
push    DWORD PTR [eax+8]
push    OFFSET $SG40852 ; 'element at .end(): %d %d'
call    edi ; printf
push    OFFSET $SG40853 ; '* let''s count from the end:'
call    edi ; printf
push    DWORD PTR [ebx+12] ; use x and y fields from the node $l$ variable points to
push    DWORD PTR [ebx+8]
push    OFFSET $SG40860 ; 'element at .end(): %d %d'
call    edi ; printf
mov     esi, DWORD PTR [ebx+4] ; operator--: get ->prev pointer
push    DWORD PTR [esi+12]
push    DWORD PTR [esi+8]
push    OFFSET $SG40862 ; '3rd element: %d %d'
call    edi ; printf
mov     esi, DWORD PTR [esi+4] ; operator--: get ->prev pointer
push    DWORD PTR [esi+12]
push    DWORD PTR [esi+8]
push    OFFSET $SG40864 ; '2nd element: %d %d'
call    edi ; printf
mov     eax, DWORD PTR [esi+4] ; operator--: get ->prev pointer
push    DWORD PTR [eax+12]
push    DWORD PTR [eax+8]
push    OFFSET $SG40866 ; '1st element: %d %d'
call    edi ; printf
add     esp, 64 ; 00000040H
push    OFFSET $SG40867 ; 'removing last element...'
call    edi ; printf
mov     edx, DWORD PTR [ebx+4]
add     esp, 4

; prev=next?
; it is the only element, "garbage one"?
; if yes, do not delete it!
cmp     edx, ebx
je      SHORT $LN349@main
mov     ecx, DWORD PTR [edx+4]
mov     eax, DWORD PTR [edx]
mov     DWORD PTR [ecx], eax
mov     ecx, DWORD PTR [edx]

```

```

    mov     eax, DWORD PTR [edx+4]
    push    edx
    mov     DWORD PTR [ecx+4], eax
    call    ???@YAXPAX@Z                ; operator delete
    add     esp, 4
    mov     DWORD PTR _l1$[esp+32], 2
$LN349@main:
    lea     eax, DWORD PTR _l1$[esp+28]
    push    eax
    call    ?dump_List_val@@YAXPAI@Z    ; dump_List_val
    mov     eax, DWORD PTR [ebx]
    add     esp, 4
    mov     DWORD PTR [ebx], ebx
    mov     DWORD PTR [ebx+4], ebx
    cmp     eax, ebx
    je      SHORT $LL414@main
$LL414@main:
    mov     esi, DWORD PTR [eax]
    push    eax
    call    ???@YAXPAX@Z                ; operator delete
    add     esp, 4
    mov     eax, esi
    cmp     esi, ebx
    jne     SHORT $LL414@main
$LN412@main:
    push    ebx
    call    ???@YAXPAX@Z                ; operator delete
    add     esp, 4
    xor     eax, eax
    pop     edi
    pop     esi
    pop     ebx
    add     esp, 16                      ; 00000010H
    ret     0
_main     ENDP

```

Unlike GCC, MSVC code allocates “garbage” element at the function start with “Buynode” function, it is also used for the rest nodes allocations (GCC code allocates the very first element in the local stack).

Listing 34.10: The whole output

```

* empty list:
_Myhead=0x003CC258, _Mysize=0
ptr=0x003CC258 _Next=0x003CC258 _Prev=0x003CC258 x=6226002 y=4522072
* 3-elements list:
_Myhead=0x003CC258, _Mysize=3
ptr=0x003CC258 _Next=0x003CC288 _Prev=0x003CC2A0 x=6226002 y=4522072
ptr=0x003CC288 _Next=0x003CC270 _Prev=0x003CC258 x=3 y=4
ptr=0x003CC270 _Next=0x003CC2A0 _Prev=0x003CC288 x=1 y=2
ptr=0x003CC2A0 _Next=0x003CC258 _Prev=0x003CC270 x=5 y=6
node at .begin:
ptr=0x003CC288 _Next=0x003CC270 _Prev=0x003CC258 x=3 y=4
node at .end:
ptr=0x003CC258 _Next=0x003CC288 _Prev=0x003CC2A0 x=6226002 y=4522072
* let's count from the begin:
1st element: 3 4
2nd element: 1 2
3rd element: 5 6
element at .end(): 6226002 4522072
* let's count from the end:
element at .end(): 6226002 4522072
3rd element: 5 6

```

```

2nd element: 1 2
1st element: 3 4
removing last element...
_Myhead=0x003CC258, _Mysize=2
ptr=0x003CC258 _Next=0x003CC288 _Prev=0x003CC270 x=6226002 y=4522072
ptr=0x003CC288 _Next=0x003CC270 _Prev=0x003CC258 x=3 y=4
ptr=0x003CC270 _Next=0x003CC258 _Prev=0x003CC288 x=1 y=2

```

34.2.3 C++11 `std::forward_list`

The same thing as `std::list`, but singly-linked one, i.e., having only “next” field at each node. It requires smaller memory footprint, but also doesn’t offer a feature to traverse list back.

34.3 `std::vector`

I would call `std::vector` “safe wrapper” of `POD`² C array. Internally, it is somewhat similar to `std::string` (34.1): it has a pointer to buffer, pointer to the end of array, and a pointer to the end of buffer.

Array elements lie in memory adjacently to each other, just like in usual array (16). In C++11 there are new methods `.data()` appeared, returning a pointer to the buffer, akin to `.c_str()` in `std::string`.

Allocated buffer in [heap](#) may be larger than array itself.

Both MSVC and GCC implementations are similar, just structure field names are slightly different³, so here is one source code working for both compilers. Here is again a C-like code for dumping `std::vector` structure:

```

#include <stdio.h>
#include <vector>
#include <algorithm>
#include <functional>

struct vector_of_ints
{
    // MSVC names:
    int *Myfirst;
    int *Mylast;
    int *Myend;

    // GCC structure is the same, names are: _M_start, _M_finish, _M_end_of_storage
};

void dump(struct vector_of_ints *in)
{
    printf ("_Myfirst=%p, _Mylast=%p, _Myend=%p\n", in->Myfirst, in->Mylast, in->Myend);
    size_t size=(in->Mylast-in->Myfirst);
    size_t capacity=(in->Myend-in->Myfirst);
    printf ("size=%d, capacity=%d\n", size, capacity);
    for (size_t i=0; i<size; i++)
        printf ("element %d: %d\n", i, in->Myfirst[i]);
};

int main()
{
    std::vector<int> c;
    dump ((struct vector_of_ints*)(void*)&c);
    c.push_back(1);
    dump ((struct vector_of_ints*)(void*)&c);
    c.push_back(2);
    dump ((struct vector_of_ints*)(void*)&c);
    c.push_back(3);
}

```

²(C++) Plain Old Data Type

³GCC internals: <http://gcc.gnu.org/onlinedocs/libstdc++/libstdc++-html-USERS-4.4/a01371.html>

```

    dump ((struct vector_of_ints*)(void*)&c);
    c.push_back(4);
    dump ((struct vector_of_ints*)(void*)&c);
    c.reserve (6);
    dump ((struct vector_of_ints*)(void*)&c);
    c.push_back(5);
    dump ((struct vector_of_ints*)(void*)&c);
    c.push_back(6);
    dump ((struct vector_of_ints*)(void*)&c);
    printf ("%d\n", c.at(5)); // bounds checking
    printf ("%d\n", c[8]); // operator[], no bounds checking
};

```

Here is a sample output if compiled in MSVC:

```

_Myfirst=00000000, _Mylast=00000000, _Myend=00000000
size=0, capacity=0
_Myfirst=0051CF48, _Mylast=0051CF4C, _Myend=0051CF4C
size=1, capacity=1
element 0: 1
_Myfirst=0051CF58, _Mylast=0051CF60, _Myend=0051CF60
size=2, capacity=2
element 0: 1
element 1: 2
_Myfirst=0051C278, _Mylast=0051C284, _Myend=0051C284
size=3, capacity=3
element 0: 1
element 1: 2
element 2: 3
_Myfirst=0051C290, _Mylast=0051C2A0, _Myend=0051C2A0
size=4, capacity=4
element 0: 1
element 1: 2
element 2: 3
element 3: 4
_Myfirst=0051B180, _Mylast=0051B190, _Myend=0051B198
size=4, capacity=6
element 0: 1
element 1: 2
element 2: 3
element 3: 4
_Myfirst=0051B180, _Mylast=0051B194, _Myend=0051B198
size=5, capacity=6
element 0: 1
element 1: 2
element 2: 3
element 3: 4
element 4: 5
_Myfirst=0051B180, _Mylast=0051B198, _Myend=0051B198
size=6, capacity=6
element 0: 1
element 1: 2
element 2: 3
element 3: 4
element 4: 5
element 5: 6
6
6619158

```

As it can be seen, there is no allocated buffer at the `main()` function start yet. After first `push_back()` call buffer is allocated. And then, after each `push_back()` call, both array size and buffer size (*capacity*) are increased. But buffer address is changed as well, because `push_back()` function reallocates the buffer in the [heap](#) each time. It is costly operation, that's

why it is very important to predict future array size and reserve a space for it with `.reserve()` method. The very last number is a garbage: there are no array elements at this point, so random number is printed. This is illustration to the fact that operator `[]` of `std::vector` is not checking if the index in the array bounds. `.at()` method, however, does checking and throw `std::out_of_range` exception in case of error.

Let's see the code:

Listing 34.11: MSVC 2012 /GS- /Ob1

```
$SG52650 DB      '%d', 0aH, 00H
$SG52651 DB      '%d', 0aH, 00H

_this$ = -4                ; size = 4
__Pos$ = 8                 ; size = 4
?at@?$vector@HV?$allocator@H@std@@@std@@QAEAAHI@Z PROC ; std::vector<int,std::allocator<int> >::
    at, COMDAT
; _this$ = ecx
    push    ebp
    mov     ebp, esp
    push    ecx
    mov     DWORD PTR _this$[ebp], ecx
    mov     eax, DWORD PTR _this$[ebp]
    mov     ecx, DWORD PTR _this$[ebp]
    mov     edx, DWORD PTR [eax+4]
    sub     edx, DWORD PTR [ecx]
    sar     edx, 2
    cmp     edx, DWORD PTR __Pos$[ebp]
    ja      SHORT $LN1@at
    push    OFFSET ??_C@_OBM@NMJKDPP0@invalid?5vector?$DMT?$D0?5subscript?$AA@
    call    DWORD PTR __imp?_Xout_of_range@std@@YAXPBD@Z
$LN1@at:
    mov     eax, DWORD PTR _this$[ebp]
    mov     ecx, DWORD PTR [eax]
    mov     edx, DWORD PTR __Pos$[ebp]
    lea     eax, DWORD PTR [ecx+edx*4]
$LN3@at:
    mov     esp, ebp
    pop     ebp
    ret     4
?at@?$vector@HV?$allocator@H@std@@@std@@QAEAAHI@Z ENDP ; std::vector<int,std::allocator<int> >::
    at

_c$ = -36                  ; size = 12
$T1 = -24                  ; size = 4
$T2 = -20                  ; size = 4
$T3 = -16                  ; size = 4
$T4 = -12                  ; size = 4
$T5 = -8                   ; size = 4
$T6 = -4                   ; size = 4
_main PROC
    push    ebp
    mov     ebp, esp
    sub     esp, 36                ; 00000024H
    mov     DWORD PTR _c$[ebp], 0    ; Myfirst
    mov     DWORD PTR _c$[ebp+4], 0  ; Mylast
    mov     DWORD PTR _c$[ebp+8], 0  ; Myend
    lea     eax, DWORD PTR _c$[ebp]
    push    eax
    call    ?dump@@YAXPAUvector_of_ints@@@Z ; dump
    add     esp, 4
    mov     DWORD PTR $T6[ebp], 1
    lea     ecx, DWORD PTR $T6[ebp]
    push    ecx
```

```

    lea    ecx, DWORD PTR _c$[ebp]
    call   ?push_back@?$vector@HV?$allocator@H@std@@@std@@QAEX$$QAH@Z ; std::vector<int,std
::allocator<int> >::push_back
    lea    edx, DWORD PTR _c$[ebp]
    push   edx
    call   ?dump@@YAXPAUvector_of_ints@@@Z ; dump
    add    esp, 4
    mov    DWORD PTR $T5[ebp], 2
    lea    eax, DWORD PTR $T5[ebp]
    push   eax
    lea    ecx, DWORD PTR _c$[ebp]
    call   ?push_back@?$vector@HV?$allocator@H@std@@@std@@QAEX$$QAH@Z ; std::vector<int,std
::allocator<int> >::push_back
    lea    ecx, DWORD PTR _c$[ebp]
    push   ecx
    call   ?dump@@YAXPAUvector_of_ints@@@Z ; dump
    add    esp, 4
    mov    DWORD PTR $T4[ebp], 3
    lea    edx, DWORD PTR $T4[ebp]
    push   edx
    lea    ecx, DWORD PTR _c$[ebp]
    call   ?push_back@?$vector@HV?$allocator@H@std@@@std@@QAEX$$QAH@Z ; std::vector<int,std
::allocator<int> >::push_back
    lea    eax, DWORD PTR _c$[ebp]
    push   eax
    call   ?dump@@YAXPAUvector_of_ints@@@Z ; dump
    add    esp, 4
    mov    DWORD PTR $T3[ebp], 4
    lea    ecx, DWORD PTR $T3[ebp]
    push   ecx
    lea    ecx, DWORD PTR _c$[ebp]
    call   ?push_back@?$vector@HV?$allocator@H@std@@@std@@QAEX$$QAH@Z ; std::vector<int,std
::allocator<int> >::push_back
    lea    edx, DWORD PTR _c$[ebp]
    push   edx
    call   ?dump@@YAXPAUvector_of_ints@@@Z ; dump
    add    esp, 4
    push   6
    lea    ecx, DWORD PTR _c$[ebp]
    call   ?reserve@?$vector@HV?$allocator@H@std@@@std@@QAEXI@Z ; std::vector<int,std::
allocator<int> >::reserve
    lea    eax, DWORD PTR _c$[ebp]
    push   eax
    call   ?dump@@YAXPAUvector_of_ints@@@Z ; dump
    add    esp, 4
    mov    DWORD PTR $T2[ebp], 5
    lea    ecx, DWORD PTR $T2[ebp]
    push   ecx
    lea    ecx, DWORD PTR _c$[ebp]
    call   ?push_back@?$vector@HV?$allocator@H@std@@@std@@QAEX$$QAH@Z ; std::vector<int,std
::allocator<int> >::push_back
    lea    edx, DWORD PTR _c$[ebp]
    push   edx
    call   ?dump@@YAXPAUvector_of_ints@@@Z ; dump
    add    esp, 4
    mov    DWORD PTR $T1[ebp], 6
    lea    eax, DWORD PTR $T1[ebp]
    push   eax
    lea    ecx, DWORD PTR _c$[ebp]
    call   ?push_back@?$vector@HV?$allocator@H@std@@@std@@QAEX$$QAH@Z ; std::vector<int,std
::allocator<int> >::push_back

```

```

    lea    ecx, DWORD PTR _c$[ebp]
    push   ecx
    call   ?dump@@YAXPAUvector_of_ints@@@Z      ; dump
    add    esp, 4
    push   5
    lea    ecx, DWORD PTR _c$[ebp]
    call   ?at@?$vector@HV?$allocator@H@std@@std@@QAEAAHI@Z ; std::vector<int,std::
allocator<int> >::at
    mov    edx, DWORD PTR [eax]
    push   edx
    push   OFFSET $SG52650 ; '%d'
    call   DWORD PTR __imp__printf
    add    esp, 8
    mov    eax, 8
    shl    eax, 2
    mov    ecx, DWORD PTR _c$[ebp]
    mov    edx, DWORD PTR [ecx+eax]
    push   edx
    push   OFFSET $SG52651 ; '%d'
    call   DWORD PTR __imp__printf
    add    esp, 8
    lea    ecx, DWORD PTR _c$[ebp]
    call   ?_Tidy@?$vector@HV?$allocator@H@std@@std@@IAEXXZ ; std::vector<int,std::
allocator<int> >::_Tidy
    xor    eax, eax
    mov    esp, ebp
    pop    ebp
    ret    0
_main    ENDP

```

We see how `.at()` method check bounds and throw exception in case of error. The number of the last `printf()` call is just to be taken from a memory, without any checks.

One may ask, why not to use variables like “size” and “capacity”, like it was done in `std::string`. I suppose, that was done for the faster bounds checking. But I’m not sure.

The code GCC generates is almost the same on the whole, but `.at()` method is inlined:

Listing 34.12: GCC 4.8.1 -fno-inline-small-functions -O1

```

main      proc near
    push   ebp
    mov    ebp, esp
    push   edi
    push   esi
    push   ebx
    and    esp, 0FFFFFFF0h
    sub    esp, 20h
    mov    dword ptr [esp+14h], 0
    mov    dword ptr [esp+18h], 0
    mov    dword ptr [esp+1Ch], 0
    lea    eax, [esp+14h]
    mov    [esp], eax
    call   _Z4dumpP14vector_of_ints ; dump(vector_of_ints *)
    mov    dword ptr [esp+10h], 1
    lea    eax, [esp+10h]
    mov    [esp+4], eax
    lea    eax, [esp+14h]
    mov    [esp], eax
    call   _ZNSt6vectorIiSaIiEE9push_backERKi ; std::vector<int,std::allocator<int
>>::push_back(int const&)
    lea    eax, [esp+14h]
    mov    [esp], eax
    call   _Z4dumpP14vector_of_ints ; dump(vector_of_ints *)

```

```

        mov     dword ptr [esp+10h], 2
        lea     eax, [esp+10h]
        mov     [esp+4], eax
        lea     eax, [esp+14h]
        mov     [esp], eax
        call    _ZNSt6vectorIiSaIiEE9push_backERKi ; std::vector<int,std::allocator<int
>>::push_back(int const&)
        lea     eax, [esp+14h]
        mov     [esp], eax
        call    _Z4dumpP14vector_of_ints ; dump(vector_of_ints *)
        mov     dword ptr [esp+10h], 3
        lea     eax, [esp+10h]
        mov     [esp+4], eax
        lea     eax, [esp+14h]
        mov     [esp], eax
        call    _ZNSt6vectorIiSaIiEE9push_backERKi ; std::vector<int,std::allocator<int
>>::push_back(int const&)
        lea     eax, [esp+14h]
        mov     [esp], eax
        call    _Z4dumpP14vector_of_ints ; dump(vector_of_ints *)
        mov     dword ptr [esp+10h], 4
        lea     eax, [esp+10h]
        mov     [esp+4], eax
        lea     eax, [esp+14h]
        mov     [esp], eax
        call    _ZNSt6vectorIiSaIiEE9push_backERKi ; std::vector<int,std::allocator<int
>>::push_back(int const&)
        lea     eax, [esp+14h]
        mov     [esp], eax
        call    _Z4dumpP14vector_of_ints ; dump(vector_of_ints *)
        mov     ebx, [esp+14h]
        mov     eax, [esp+1Ch]
        sub     eax, ebx
        cmp     eax, 17h
        ja      short loc_80001CF
        mov     edi, [esp+18h]
        sub     edi, ebx
        sar     edi, 2
        mov     dword ptr [esp], 18h
        call    _Znwj ; operator new(uint)
        mov     esi, eax
        test    edi, edi
        jz      short loc_80001AD
        lea     eax, ds:0[edi*4]
        mov     [esp+8], eax ; n
        mov     [esp+4], ebx ; src
        mov     [esp], esi ; dest
        call    memmove

loc_80001AD: ; CODE XREF: main+F8
        mov     eax, [esp+14h]
        test    eax, eax
        jz      short loc_80001BD
        mov     [esp], eax ; void *
        call    _ZdlPv ; operator delete(void *)

loc_80001BD: ; CODE XREF: main+117
        mov     [esp+14h], esi
        lea     eax, [esi+edi*4]
        mov     [esp+18h], eax
        add     esi, 18h

```

```

mov     [esp+1Ch], esi

loc_80001CF:                                ; CODE XREF: main+DD
lea     eax, [esp+14h]
mov     [esp], eax
call    _Z4dumpP14vector_of_ints ; dump(vector_of_ints *)
mov     dword ptr [esp+10h], 5
lea     eax, [esp+10h]
mov     [esp+4], eax
lea     eax, [esp+14h]
mov     [esp], eax
call    _ZNSt6vectorIiSaIiEE9push_backERKi ; std::vector<int,std::allocator<int
>>::push_back(int const&)
lea     eax, [esp+14h]
mov     [esp], eax
call    _Z4dumpP14vector_of_ints ; dump(vector_of_ints *)
mov     dword ptr [esp+10h], 6
lea     eax, [esp+10h]
mov     [esp+4], eax
lea     eax, [esp+14h]
mov     [esp], eax
call    _ZNSt6vectorIiSaIiEE9push_backERKi ; std::vector<int,std::allocator<int
>>::push_back(int const&)
lea     eax, [esp+14h]
mov     [esp], eax
call    _Z4dumpP14vector_of_ints ; dump(vector_of_ints *)
mov     eax, [esp+14h]
mov     edx, [esp+18h]
sub     edx, eax
cmp     edx, 17h
ja      short loc_8000246
mov     dword ptr [esp], offset aVector_m_range ; "vector::_M_range_check"
call    _ZSt20__throw_out_of_rangePKc ; std::__throw_out_of_range(char const*)

loc_8000246:                                ; CODE XREF: main+19C
mov     eax, [eax+14h]
mov     [esp+8], eax
mov     dword ptr [esp+4], offset aD ; "%d\n"
mov     dword ptr [esp], 1
call    __printf_chk
mov     eax, [esp+14h]
mov     eax, [eax+20h]
mov     [esp+8], eax
mov     dword ptr [esp+4], offset aD ; "%d\n"
mov     dword ptr [esp], 1
call    __printf_chk
mov     eax, [esp+14h]
test    eax, eax
jz      short loc_80002AC
mov     [esp], eax ; void *
call    _ZdlPv ; operator delete(void *)
jmp     short loc_80002AC

; -----
mov     ebx, eax
mov     edx, [esp+14h]
test    edx, edx
jz      short loc_80002A4
mov     [esp], edx ; void *
call    _ZdlPv ; operator delete(void *)

loc_80002A4:                                ; CODE XREF: main+1FE

```

```

        mov     [esp], ebx
        call    _Unwind_Resume
; -----
loc_80002AC:                ; CODE XREF: main+1EA
                            ; main+1F4
        mov     eax, 0
        lea     esp, [ebp-0Ch]
        pop     ebx
        pop     esi
        pop     edi
        pop     ebp

locret_80002B8:             ; DATA XREF: .eh_frame:08000510
                            ; .eh_frame:080005BC
        retn

main      endp

```

.reserve() method is inlined as well. It calls new() if buffer is too small for new size, call memmove() to copy buffer contents, and call delete() to free old buffer.

Let's also see what the compiled program outputs if compiled by GCC:

```

_Myfirst=0x(nil), _Mylast=0x(nil), _Myend=0x(nil)
size=0, capacity=0
_Myfirst=0x8257008, _Mylast=0x825700c, _Myend=0x825700c
size=1, capacity=1
element 0: 1
_Myfirst=0x8257018, _Mylast=0x8257020, _Myend=0x8257020
size=2, capacity=2
element 0: 1
element 1: 2
_Myfirst=0x8257028, _Mylast=0x8257034, _Myend=0x8257038
size=3, capacity=4
element 0: 1
element 1: 2
element 2: 3
_Myfirst=0x8257028, _Mylast=0x8257038, _Myend=0x8257038
size=4, capacity=4
element 0: 1
element 1: 2
element 2: 3
element 3: 4
_Myfirst=0x8257040, _Mylast=0x8257050, _Myend=0x8257058
size=4, capacity=6
element 0: 1
element 1: 2
element 2: 3
element 3: 4
_Myfirst=0x8257040, _Mylast=0x8257054, _Myend=0x8257058
size=5, capacity=6
element 0: 1
element 1: 2
element 2: 3
element 3: 4
element 4: 5
_Myfirst=0x8257040, _Mylast=0x8257058, _Myend=0x8257058
size=6, capacity=6
element 0: 1
element 1: 2
element 2: 3
element 3: 4
element 4: 5

```

```

element 5: 6
6
0

```

We can spot that buffer size grows in different way that in MSVC.

Simple experimentation shows that MSVC implementation buffer grows by ~50% each time it needs to be enlarged, while GCC code enlarges it by 100% each time, i.e., doubles it each time.


34.4 `std::map` and `std::set`

Binary tree is another fundamental data structure. As it states, this is a tree, but each node has at most 2 links to other nodes. Each node have key and/or value.

Binary trees are usually the structure used in “dictionaries” of key-values (AKA “associative arrays”) implementations. There are at least three important properties binary trees has:

- All keys are stored in always sorted form.
- Keys of any types can be stored easily. Binary tree algorithms are unaware of key type, only key comparison function is required.
- Finding needed key is relatively fast in comparison with lists and arrays.

Here is a very simple example: let’s store these numbers in binary tree: 0, 1, 2, 3, 5, 6, 9, 10, 11, 12, 20, 99, 100, 101, 107, 1001, 1010.

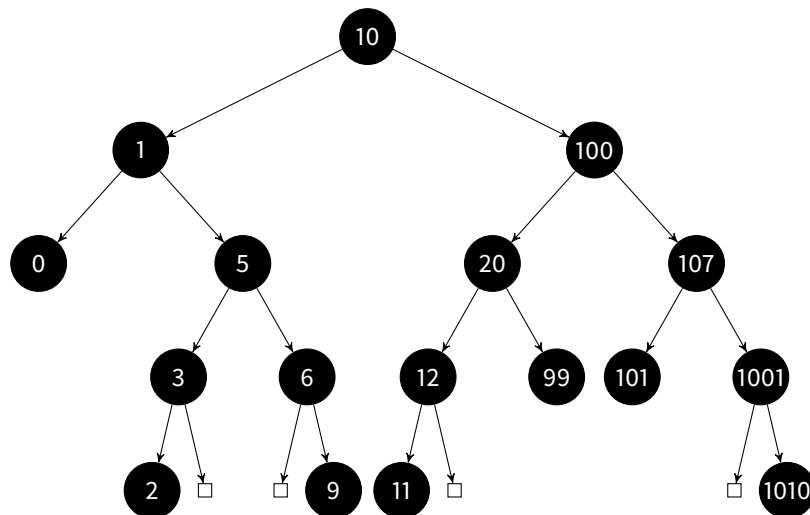

All keys lesser than node key value is stored on the left side. All keys greater than node key value is stored on the right side.

Hence, finding algorithm is straightforward: if the value you looking for is lesser than current node’s key value: move left, if it is greater: move right, stop if the value required is equals to the node’s key value. That is why searching algorithm may search for numbers, text strings, etc, using only key comparison function.

All keys has unique values.

Having that, one need $\approx \log_2 n$ steps in order to find a key in the balanced binary tree of n keys. It is ≈ 10 steps for ≈ 1000 keys, or ≈ 13 steps for ≈ 10000 keys. Not bad, but tree should always be balanced for this: i.e., keys should be distributed evenly on all tiers. Insertion and removal operations do some maintenance to keep tree in balanced state.

There are several popular balancing algorithms available, including AVL tree and red-black tree. The latter extends a node by a “color” value for simplifying balancing process, hence, each node may be “red” or “black”.

Both GCC and MSVC `std::map` and `std::set` template implementations use red-black trees.

`std::set` contain only keys. `std::map` is “extended” version of `set`: it also has a value at each node.

34.4.1 MSVC

```

#include <map>
#include <set>
#include <string>
#include <iostream>

```

```
// struct is not packed!
struct tree_node
{
    struct tree_node *Left;
    struct tree_node *Parent;
    struct tree_node *Right;
    char Color; // 0 - Red, 1 - Black
    char Isnil;
    //std::pair Myval;
    unsigned int first; // called Myval in std::set
    const char *second; // not present in std::set
};

struct tree_struct
{
    struct tree_node *Myhead;
    size_t Mysize;
};

void dump_tree_node (struct tree_node *n, bool is_set, bool traverse)
{
    printf ("ptr=0x%p Left=0x%p Parent=0x%p Right=0x%p Color=%d Isnil=%d\n",
            n, n->Left, n->Parent, n->Right, n->Color, n->Isnil);
    if (n->Isnil==0)
    {
        if (is_set)
            printf ("first=%d\n", n->first);
        else
            printf ("first=%d second=[%s]\n", n->first, n->second);
    }

    if (traverse)
    {
        if (n->Isnil==1)
            dump_tree_node (n->Parent, is_set, true);
        else
        {
            if (n->Left->Isnil==0)
                dump_tree_node (n->Left, is_set, true);
            if (n->Right->Isnil==0)
                dump_tree_node (n->Right, is_set, true);
        };
    };
};

const char* ALOT_OF_TABS="\t\t\t\t\t\t\t\t\t\t\t\t";

void dump_as_tree (int tabs, struct tree_node *n, bool is_set)
{
    if (is_set)
        printf ("%d\n", n->first);
    else
        printf ("%d [%s]\n", n->first, n->second);
    if (n->Left->Isnil==0)
    {
        printf (".*sL-----", tabs, ALOT_OF_TABS);
        dump_as_tree (tabs+1, n->Left, is_set);
    };
    if (n->Right->Isnil==0)
    {
```

```

        printf ("%.*sR-----", tabs, ALOT_OF_TABS);
        dump_as_tree (tabs+1, n->Right, is_set);
    };
};

void dump_map_and_set(struct tree_struct *m, bool is_set)
{
    printf ("ptr=0x%p, Myhead=0x%p, Mysize=%d\n", m, m->Myhead, m->Mysize);
    dump_tree_node (m->Myhead, is_set, true);
    printf ("As a tree:\n");
    printf ("root----");
    dump_as_tree (1, m->Myhead->Parent, is_set);
};

int main()
{
    // map

    std::map<int, const char*> m;

    m[10]="ten";
    m[20]="twenty";
    m[3]="three";
    m[101]="one hundred one";
    m[100]="one hundred";
    m[12]="twelve";
    m[107]="one hundred seven";
    m[0]="zero";
    m[1]="one";
    m[6]="six";
    m[99]="ninety-nine";
    m[5]="five";
    m[11]="eleven";
    m[1001]="one thousand one";
    m[1010]="one thousand ten";
    m[2]="two";
    m[9]="nine";
    printf ("dumping m as map:\n");
    dump_map_and_set ((struct tree_struct *) (void*)&m, false);

    std::map<int, const char*>::iterator it1=m.begin();
    printf ("m.begin():\n");
    dump_tree_node ((struct tree_node *) (void*)&it1, false, false);
    it1=m.end();
    printf ("m.end():\n");
    dump_tree_node ((struct tree_node *) (void*)&it1, false, false);

    // set

    std::set<int> s;
    s.insert(123);
    s.insert(456);
    s.insert(11);
    s.insert(12);
    s.insert(100);
    s.insert(1001);
    printf ("dumping s as set:\n");
    dump_map_and_set ((struct tree_struct *) (void*)&s, true);
    std::set<int>::iterator it2=s.begin();
    printf ("s.begin():\n");
    dump_tree_node ((struct tree_node *) (void*)&it2, true, false);
}

```

```

        it2=s.end();
        printf ("s.end():\n");
        dump_tree_node ((struct tree_node *)*(void*)&it2, true, false);
};

```

Listing 34.13: MSVC 2012

```

dumping m as map:
ptr=0x0020FE04, Myhead=0x005BB3A0, Mysize=17
ptr=0x005BB3A0 Left=0x005BB4A0 Parent=0x005BB3C0 Right=0x005BB580 Color=1 Isn1l=1
ptr=0x005BB3C0 Left=0x005BB4C0 Parent=0x005BB3A0 Right=0x005BB440 Color=1 Isn1l=0
first=10 second=[ten]
ptr=0x005BB4C0 Left=0x005BB4A0 Parent=0x005BB3C0 Right=0x005BB520 Color=1 Isn1l=0
first=1 second=[one]
ptr=0x005BB4A0 Left=0x005BB3A0 Parent=0x005BB4C0 Right=0x005BB3A0 Color=1 Isn1l=0
first=0 second=[zero]
ptr=0x005BB520 Left=0x005BB400 Parent=0x005BB4C0 Right=0x005BB4E0 Color=0 Isn1l=0
first=5 second=[five]
ptr=0x005BB400 Left=0x005BB5A0 Parent=0x005BB520 Right=0x005BB3A0 Color=1 Isn1l=0
first=3 second=[three]
ptr=0x005BB5A0 Left=0x005BB3A0 Parent=0x005BB400 Right=0x005BB3A0 Color=0 Isn1l=0
first=2 second=[two]
ptr=0x005BB4E0 Left=0x005BB3A0 Parent=0x005BB520 Right=0x005BB5C0 Color=1 Isn1l=0
first=6 second=[six]
ptr=0x005BB5C0 Left=0x005BB3A0 Parent=0x005BB4E0 Right=0x005BB3A0 Color=0 Isn1l=0
first=9 second=[nine]
ptr=0x005BB440 Left=0x005BB3E0 Parent=0x005BB3C0 Right=0x005BB480 Color=1 Isn1l=0
first=100 second=[one hundred]
ptr=0x005BB3E0 Left=0x005BB460 Parent=0x005BB440 Right=0x005BB500 Color=0 Isn1l=0
first=20 second=[twenty]
ptr=0x005BB460 Left=0x005BB540 Parent=0x005BB3E0 Right=0x005BB3A0 Color=1 Isn1l=0
first=12 second=[twelve]
ptr=0x005BB540 Left=0x005BB3A0 Parent=0x005BB460 Right=0x005BB3A0 Color=0 Isn1l=0
first=11 second=[eleven]
ptr=0x005BB500 Left=0x005BB3A0 Parent=0x005BB3E0 Right=0x005BB3A0 Color=1 Isn1l=0
first=99 second=[ninety-nine]
ptr=0x005BB480 Left=0x005BB420 Parent=0x005BB440 Right=0x005BB560 Color=0 Isn1l=0
first=107 second=[one hundred seven]
ptr=0x005BB420 Left=0x005BB3A0 Parent=0x005BB480 Right=0x005BB3A0 Color=1 Isn1l=0
first=101 second=[one hundred one]
ptr=0x005BB560 Left=0x005BB3A0 Parent=0x005BB480 Right=0x005BB580 Color=1 Isn1l=0
first=1001 second=[one thousand one]
ptr=0x005BB580 Left=0x005BB3A0 Parent=0x005BB560 Right=0x005BB3A0 Color=0 Isn1l=0
first=1010 second=[one thousand ten]
As a tree:
root----10 [ten]
    L-----1 [one]
        L-----0 [zero]
        R-----5 [five]
            L-----3 [three]
                L-----2 [two]
                R-----6 [six]
                    R-----9 [nine]
            R-----100 [one hundred]
                L-----20 [twenty]
                    L-----12 [twelve]
                        L-----11 [eleven]
                            R-----99 [ninety-nine]
                R-----107 [one hundred seven]
                    L-----101 [one hundred one]
                        R-----1001 [one thousand one]

```

```

R-----1010 [one thousand ten]
m.begin():
ptr=0x005BB4A0 Left=0x005BB3A0 Parent=0x005BB4C0 Right=0x005BB3A0 Color=1 Isn1l=0
first=0 second=[zero]
m.end():
ptr=0x005BB3A0 Left=0x005BB4A0 Parent=0x005BB3C0 Right=0x005BB580 Color=1 Isn1l=1

dumping s as set:
ptr=0x0020FDFC, Myhead=0x005BB5E0, Mysize=6
ptr=0x005BB5E0 Left=0x005BB640 Parent=0x005BB600 Right=0x005BB6A0 Color=1 Isn1l=1
ptr=0x005BB600 Left=0x005BB660 Parent=0x005BB5E0 Right=0x005BB620 Color=1 Isn1l=0
first=123
ptr=0x005BB660 Left=0x005BB640 Parent=0x005BB600 Right=0x005BB680 Color=1 Isn1l=0
first=12
ptr=0x005BB640 Left=0x005BB5E0 Parent=0x005BB660 Right=0x005BB5E0 Color=0 Isn1l=0
first=11
ptr=0x005BB680 Left=0x005BB5E0 Parent=0x005BB660 Right=0x005BB5E0 Color=0 Isn1l=0
first=100
ptr=0x005BB620 Left=0x005BB5E0 Parent=0x005BB600 Right=0x005BB6A0 Color=1 Isn1l=0
first=456
ptr=0x005BB6A0 Left=0x005BB5E0 Parent=0x005BB620 Right=0x005BB5E0 Color=0 Isn1l=0
first=1001
As a tree:
root----123
    L-----12
        L-----11
            R-----100
        R-----456
            R-----1001
s.begin():
ptr=0x005BB640 Left=0x005BB5E0 Parent=0x005BB660 Right=0x005BB5E0 Color=0 Isn1l=0
first=11
s.end():
ptr=0x005BB5E0 Left=0x005BB640 Parent=0x005BB600 Right=0x005BB6A0 Color=1 Isn1l=1

```

Structure is not packed, so both *char* type values occupy 4 bytes each.

As for `std::map`, `first` and `second` can be viewed as a single value of `std::pair` type. `std::set` has only one value at this point in the structure instead.

Current size of tree is always present, as in case of `std::list` MSVC implementation (34.2.2).

As in case of `std::list`, iterators are just pointers to the nodes. `.begin()` iterator pointing to the minimal key. That pointer is not stored somewhere (as in lists), minimal key of tree is to be found each time. `operator-` and `operator++` moves pointer to the current node to predecessor and successor respectively, i.e., nodes which has previous and next key. The algorithms for all these operations are described in [7].

`.end()` iterator pointing to the root node, it has 1 in `Isn1l`, meaning, the node has no key and/or value. So it can be viewed as a “landing zone” in HDD⁴.

34.4.2 GCC

```

#include <stdio.h>
#include <map>
#include <set>
#include <string>
#include <iostream>

struct map_pair
{
    int key;
    const char *value;
};

```

⁴Hard disk drive

```
struct tree_node
{
    int M_color; // 0 - Red, 1 - Black
    struct tree_node *M_parent;
    struct tree_node *M_left;
    struct tree_node *M_right;
};

struct tree_struct
{
    int M_key_compare;
    struct tree_node M_header;
    size_t M_node_count;
};

void dump_tree_node (struct tree_node *n, bool is_set, bool traverse, bool dump_keys_and_values)
{
    printf ("ptr=0x%p M_left=0x%p M_parent=0x%p M_right=0x%p M_color=%d\n",
            n, n->M_left, n->M_parent, n->M_right, n->M_color);

    void *point_after_struct=((char*)n)+sizeof(struct tree_node);

    if (dump_keys_and_values)
    {
        if (is_set)
            printf ("key=%d\n", *(int*)point_after_struct);
        else
        {
            struct map_pair *p=(struct map_pair *)point_after_struct;
            printf ("key=%d value=[%s]\n", p->key, p->value);
        }
    };

    if (traverse==false)
        return;

    if (n->M_left)
        dump_tree_node (n->M_left, is_set, traverse, dump_keys_and_values);
    if (n->M_right)
        dump_tree_node (n->M_right, is_set, traverse, dump_keys_and_values);
};

const char* ALOT_OF_TABS="\t\t\t\t\t\t\t\t\t\t\t";

void dump_as_tree (int tabs, struct tree_node *n, bool is_set)
{
    void *point_after_struct=((char*)n)+sizeof(struct tree_node);

    if (is_set)
        printf ("%d\n", *(int*)point_after_struct);
    else
    {
        struct map_pair *p=(struct map_pair *)point_after_struct;
        printf ("%d [%s]\n", p->key, p->value);
    }

    if (n->M_left)
    {
        printf (".*sL-----", tabs, ALOT_OF_TABS);
        dump_as_tree (tabs+1, n->M_left, is_set);
    }
}
```

```

    };
    if (n->M_right)
    {
        printf ("%.*sR-----", tabs, ALOT_OF_TABS);
        dump_as_tree (tabs+1, n->M_right, is_set);
    };
};

void dump_map_and_set(struct tree_struct *m, bool is_set)
{
    printf ("ptr=0x%p, M_key_compare=0x%x, M_header=0x%p, M_node_count=%d\n",
           m, m->M_key_compare, &m->M_header, m->M_node_count);
    dump_tree_node (m->M_header.M_parent, is_set, true, true);
    printf ("As a tree:\n");
    printf ("root----");
    dump_as_tree (1, m->M_header.M_parent, is_set);
};

int main()
{
    // map

    std::map<int, const char*> m;

    m[10]="ten";
    m[20]="twenty";
    m[3]="three";
    m[101]="one hundred one";
    m[100]="one hundred";
    m[12]="twelve";
    m[107]="one hundred seven";
    m[0]="zero";
    m[1]="one";
    m[6]="six";
    m[99]="ninety-nine";
    m[5]="five";
    m[11]="eleven";
    m[1001]="one thousand one";
    m[1010]="one thousand ten";
    m[2]="two";
    m[9]="nine";

    printf ("dumping m as map:\n");
    dump_map_and_set ((struct tree_struct *) (void*)&m, false);

    std::map<int, const char*>::iterator it1=m.begin();
    printf ("m.begin():\n");
    dump_tree_node ((struct tree_node *) (void*)&it1, false, false, true);
    it1=m.end();
    printf ("m.end():\n");
    dump_tree_node ((struct tree_node *) (void*)&it1, false, false, false);

    // set

    std::set<int> s;
    s.insert(123);
    s.insert(456);
    s.insert(11);
    s.insert(12);
    s.insert(100);
    s.insert(1001);

```

```

    printf ("dumping s as set:\n");
    dump_map_and_set ((struct tree_struct *) (void*)&s, true);
    std::set<int>::iterator it2=s.begin();
    printf ("s.begin():\n");
    dump_tree_node ((struct tree_node *) (void*)&it2, true, false, true);
    it2=s.end();
    printf ("s.end():\n");
    dump_tree_node ((struct tree_node *) (void*)&it2, true, false, false);
};

```

Listing 34.14: GCC 4.8.1

```

dumping m as map:
ptr=0x0028FE3C, M_key_compare=0x402b70, M_header=0x0028FE40, M_node_count=17
ptr=0x007A4988 M_left=0x007A4C00 M_parent=0x0028FE40 M_right=0x007A4B80 M_color=1
key=10 value=[ten]
ptr=0x007A4C00 M_left=0x007A4BE0 M_parent=0x007A4988 M_right=0x007A4C60 M_color=1
key=1 value=[one]
ptr=0x007A4BE0 M_left=0x00000000 M_parent=0x007A4C00 M_right=0x00000000 M_color=1
key=0 value=[zero]
ptr=0x007A4C60 M_left=0x007A4B40 M_parent=0x007A4C00 M_right=0x007A4C20 M_color=0
key=5 value=[five]
ptr=0x007A4B40 M_left=0x007A4CE0 M_parent=0x007A4C60 M_right=0x00000000 M_color=1
key=3 value=[three]
ptr=0x007A4CE0 M_left=0x00000000 M_parent=0x007A4B40 M_right=0x00000000 M_color=0
key=2 value=[two]
ptr=0x007A4C20 M_left=0x00000000 M_parent=0x007A4C60 M_right=0x007A4D00 M_color=1
key=6 value=[six]
ptr=0x007A4D00 M_left=0x00000000 M_parent=0x007A4C20 M_right=0x00000000 M_color=0
key=9 value=[nine]
ptr=0x007A4B80 M_left=0x007A49A8 M_parent=0x007A4988 M_right=0x007A4BC0 M_color=1
key=100 value=[one hundred]
ptr=0x007A49A8 M_left=0x007A4BA0 M_parent=0x007A4B80 M_right=0x007A4C40 M_color=0
key=20 value=[twenty]
ptr=0x007A4BA0 M_left=0x007A4C80 M_parent=0x007A49A8 M_right=0x00000000 M_color=1
key=12 value=[twelve]
ptr=0x007A4C80 M_left=0x00000000 M_parent=0x007A4BA0 M_right=0x00000000 M_color=0
key=11 value=[eleven]
ptr=0x007A4C40 M_left=0x00000000 M_parent=0x007A49A8 M_right=0x00000000 M_color=1
key=99 value=[ninety-nine]
ptr=0x007A4BC0 M_left=0x007A4B60 M_parent=0x007A4B80 M_right=0x007A4CA0 M_color=0
key=107 value=[one hundred seven]
ptr=0x007A4B60 M_left=0x00000000 M_parent=0x007A4BC0 M_right=0x00000000 M_color=1
key=101 value=[one hundred one]
ptr=0x007A4CA0 M_left=0x00000000 M_parent=0x007A4BC0 M_right=0x007A4CC0 M_color=1
key=1001 value=[one thousand one]
ptr=0x007A4CC0 M_left=0x00000000 M_parent=0x007A4CA0 M_right=0x00000000 M_color=0
key=1010 value=[one thousand ten]
As a tree:
root----10 [ten]
    L-----1 [one]
        L-----0 [zero]
        R-----5 [five]
            L-----3 [three]
                L-----2 [two]
                R-----6 [six]
                    R-----9 [nine]
R-----100 [one hundred]
    L-----20 [twenty]
        L-----12 [twelve]
            L-----11 [eleven]

```

```

                R-----99 [ninety-nine]
            R-----107 [one hundred seven]
                L-----101 [one hundred one]
                R-----1001 [one thousand one]
                    R-----1010 [one thousand ten]

m.begin():
ptr=0x007A4BE0 M_left=0x00000000 M_parent=0x007A4C00 M_right=0x00000000 M_color=1
key=0 value=[zero]
m.end():
ptr=0x0028FE40 M_left=0x007A4BE0 M_parent=0x007A4988 M_right=0x007A4CC0 M_color=0

dumping s as set:
ptr=0x0028FE20, M_key_compare=0x8, M_header=0x0028FE24, M_node_count=6
ptr=0x007A1E80 M_left=0x01D5D890 M_parent=0x0028FE24 M_right=0x01D5D850 M_color=1
key=123
ptr=0x01D5D890 M_left=0x01D5D870 M_parent=0x007A1E80 M_right=0x01D5D8B0 M_color=1
key=12
ptr=0x01D5D870 M_left=0x00000000 M_parent=0x01D5D890 M_right=0x00000000 M_color=0
key=11
ptr=0x01D5D8B0 M_left=0x00000000 M_parent=0x01D5D890 M_right=0x00000000 M_color=0
key=100
ptr=0x01D5D850 M_left=0x00000000 M_parent=0x007A1E80 M_right=0x01D5D8D0 M_color=1
key=456
ptr=0x01D5D8D0 M_left=0x00000000 M_parent=0x01D5D850 M_right=0x00000000 M_color=0
key=1001
As a tree:
root----123
    L-----12
        L-----11
            R-----100
        R-----456
            R-----1001

s.begin():
ptr=0x01D5D870 M_left=0x00000000 M_parent=0x01D5D890 M_right=0x00000000 M_color=0
key=11
s.end():
ptr=0x0028FE24 M_left=0x01D5D870 M_parent=0x007A1E80 M_right=0x01D5D8D0 M_color=0

```

GCC implementation is very similar⁵. The only difference is absence of `Isn1l` field, so the structure occupy slightly less space in memory than as it is implemented in MSVC. Root node is also used as a place `.end()` iterator pointing to and also has no key and/or value.

34.4.3 Rebalancing demo (GCC)

Here is also a demo showing us how tree is rebalanced after insertions.

Listing 34.15: GCC

```

#include <stdio.h>
#include <map>
#include <set>
#include <string>
#include <iostream>

struct map_pair
{
    int key;
    const char *value;
};

struct tree_node

```

⁵http://gcc.gnu.org/onlinedocs/libstdc++/libstdc++-html-USERS-4.1/stl__tree_8h-source.html

```

{
    int M_color; // 0 - Red, 1 - Black
    struct tree_node *M_parent;
    struct tree_node *M_left;
    struct tree_node *M_right;
};

struct tree_struct
{
    int M_key_compare;
    struct tree_node M_header;
    size_t M_node_count;
};

const char* ALOT_OF_TABS="\t\t\t\t\t\t\t\t\t\t\t\t";

void dump_as_tree (int tabs, struct tree_node *n)
{
    void *point_after_struct=((char*)n)+sizeof(struct tree_node);

    printf ("%d\n", *(int*)point_after_struct);

    if (n->M_left)
    {
        printf ("%.*sL-----", tabs, ALOT_OF_TABS);
        dump_as_tree (tabs+1, n->M_left);
    };
    if (n->M_right)
    {
        printf ("%.*sR-----", tabs, ALOT_OF_TABS);
        dump_as_tree (tabs+1, n->M_right);
    };
};

void dump_map_and_set(struct tree_struct *m)
{
    printf ("root----");
    dump_as_tree (1, m->M_header.M_parent);
};

int main()
{
    std::set<int> s;
    s.insert(123);
    s.insert(456);
    printf ("123, 456 are inserted\n");
    dump_map_and_set ((struct tree_struct *) (void*)&s);
    s.insert(11);
    s.insert(12);
    printf ("\n");
    printf ("11, 12 are inserted\n");
    dump_map_and_set ((struct tree_struct *) (void*)&s);
    s.insert(100);
    s.insert(1001);
    printf ("\n");
    printf ("100, 1001 are inserted\n");
    dump_map_and_set ((struct tree_struct *) (void*)&s);
    s.insert(667);
    s.insert(1);
    s.insert(4);
    s.insert(7);
}

```

```

    printf ("\n");
    printf ("667, 1, 4, 7 are inserted\n");
    dump_map_and_set ((struct tree_struct *) (void*)&s);
    printf ("\n");
};

```

Listing 34.16: GCC 4.8.1

```

123, 456 are inserted
root----123
      R-----456

11, 12 are inserted
root----123
      L-----11
            R-----12
      R-----456

100, 1001 are inserted
root----123
      L-----12
            L-----11
            R-----100
      R-----456
            R-----1001

667, 1, 4, 7 are inserted
root----12
      L-----4
            L-----1
            R-----11
                  L-----7
      R-----123
            L-----100
            R-----667
                  L-----456
                  R-----1001

```

Part III

Important fundamentals

Chapter 35

Signed number representations

There are several methods of representing signed numbers¹, but in x86 architecture used “two’s complement”.

binary	hexadecimal	unsigned	signed (2’s complement)
01111111	0x7f	127	127
01111110	0x7e	126	126
...			
00000010	0x2	2	2
00000001	0x1	1	1
00000000	0x0	0	0
11111111	0xff	255	-1
11111110	0xfe	254	-2
...			
10000010	0x82	130	-126
10000001	0x81	129	-127
10000000	0x80	128	-128

The difference between signed and unsigned numbers is that if we represent 0xFFFFFFFF and 0x00000002 as unsigned, then first number (4294967294) is bigger than second (2). If to represent them both as signed, first will be -2 , and it is lesser than second (2). That is the reason why conditional jumps (10) are present both for signed (e.g. JG, JL) and unsigned (JA, JBE) operations.

For the sake of simplicity, that is what one need to know:

- Number can be signed or unsigned.
- C/C++ signed types: *int* (-2147483646..2147483647 or 0x80000000..0x7FFFFFFF), *char* (-127..128 or 0x7F..0x80). Unsigned: *unsigned int* (0..4294967295 or 0..0xFFFFFFFF), *unsigned char* (0..255 or 0..0xFF), *size_t*.
- Signed types has sign in the most significant bit: 1 mean “minus”, 0 mean “plus”.
- Addition and subtraction operations are working well for both signed and unsigned values. But for multiplication and division operations, x86 has different instructions: IDIV/IMUL for signed and DIV/MUL for unsigned.
- More instructions working with signed numbers: CBW/CWD/CWDE/CDQ/CDQE (80.6.3), MOVSX (13.1), SAR (80.6.3).

35.1 Integer overflow

It is worth noting that incorrect representation of number can lead integer overflow vulnerability.

For example, we have a network service, it receives network packets. In the packets there is also a field where subpacket length is coded. It is 32-bit value. After network packet received, service checking the field, and if it is larger than, e.g. some `MAX_PACKET_SIZE` (let’s say, 10 kilobytes), the packet is rejected as incorrect. Comparison is signed. Intruder set this value to the 0xFFFFFFFF. While comparison, this number is considered as signed -1 and it is lesser than 10 kilobytes. No error here. Service would like to copy the subpacket to another place in memory and call `memcpy (dst, src, 0xFFFFFFFF)` function: this operation, rapidly garbling a lot of inside of process memory.

More about it: [3].

¹http://en.wikipedia.org/wiki/Signed_number_representations

Chapter 36

Endianness

Endianness is a way of representing values in memory.

36.1 Big-endian

A 0x12345678 value will be represented in memory as:

address in memory	byte value
+0	0x12
+1	0x34
+2	0x56
+3	0x78

Big-endian CPUs are including Motorola 68k, IBM POWER.

36.2 Little-endian

A 0x12345678 value will be represented in memory as:

address in memory	byte value
+0	0x78
+1	0x56
+2	0x34
+3	0x12

Little-endian CPUs are including Intel x86.

36.3 Bi-endian

CPUs which may switch between endianness are ARM, PowerPC, SPARC, MIPS, [IA64¹](#), etc.

36.4 Converting data

TCP/IP network data packets are used big-endian conventions, so that is why a program working on little-endian architecture should convert values using `htonl()` and `htons()` functions.

Big-endian convention in the TCP/IP environment is also called “network byte order”, while little-endian—“host byte order”.

BSWAP instruction is also can be used for the conversion.

¹Intel Architecture 64 (Itanium): [65](#)

Part IV

Finding important/interesting stuff in the code

Minimalism it is not a significant feature of modern software.

But not because programmers are writing a lot, but in a reason that all libraries are commonly linked statically to executable files. If all external libraries were shifted into external DLL files, the world would be different. (Another reason for C++ —STL and other template libraries.)

Thus, it is very important to determine origin of a function, if it is from standard library or well-known library (like Boost², libpng³), and which one —is related to what we are trying to find in the code.

It is just absurdly to rewrite all code to C/C++ to find what we looking for.

One of the primary reverse engineer's task is to find quickly in the code what is needed.

IDA disassembler allow us search among text strings, byte sequences, constants. It is even possible to export the code into .lst or .asm text file and then use `grep`, `awk`, etc.

When you try to understand what a code is doing, this easily could be some open-source library like libpng. So when you see some constants or text strings looks familiar, it is always worth to *google* it. And if you find the opensource project where it is used, then it will be enough just to compare the functions. It may solve some part of problem.

For example, if program use a XML files, the first step may be determining, which XML-library is used for processing, since standard (or well-known) library is usually used instead of self-made one.

For example, once upon a time I tried to understand how SAP 6.0 network packets compression/decompression is working. It is a huge software, but a detailed .PDB with debugging information is present, and that is cozily. I finally came to idea that one of the functions doing decompressing of network packet called `CsDecomprLZC()`. Immediately I tried to google its name and I quickly found the function named as the same is used in MaxDB (it is open-source SAP project)⁴.

<http://www.google.com/search?q=CsDecomprLZC>

Astoundingly, MaxDB and SAP 6.0 software shared likewise code for network packets compression/decompression.

²<http://www.boost.org/>

³<http://www.libpng.org/pub/png/libpng.html>

⁴More about it in relevant section (57.1)

Chapter 37

Identification of executable files

37.1 Microsoft Visual C++

MSVC versions and DLLs which may be imported:

Marketing version	Internal version	CL.EXE version	DLLs may be imported	Release date
6	6.0	12.00	msvcrt.dll, msvcp60.dll	June 1998
.NET (2002)	7.0	13.00	msvcr70.dll, msvcp70.dll	February 13, 2002
.NET 2003	7.1	13.10	msvcr71.dll, msvcp71.dll	April 24, 2003
2005	8.0	14.00	msvcr80.dll, msvcp80.dll	November 7, 2005
2008	9.0	15.00	msvcr90.dll, msvcp90.dll	November 19, 2007
2010	10.0	16.00	msvcr100.dll, msvcp100.dll	April 12, 2010
2012	11.0	17.00	msvcr110.dll, msvcp110.dll	September 12, 2012
2013	12.0	18.00	msvcr120.dll, msvcp120.dll	October 17, 2013

msvcp*.dll contain C++-related functions, so, if it is imported, this is probably C++ program.

37.1.1 Name mangling

Names are usually started with ? symbol.

Read more about MSVC [name mangling](#) here: [31.1.1](#).

37.2 GCC

Aside from *NIX targets, GCC is also present in win32 environment: in form of Cygwin and MinGW.

37.2.1 Name mangling

Names are usually started with _Z symbols.

Read more about GCC [name mangling](#) here: [31.1.1](#).

37.2.2 Cygwin

cygwin1.dll is often imported.

37.2.3 MinGW

msvcrt.dll may be imported.

37.3 Intel FORTRAN

libifcoremd.dll, libifportmd.dll and libiomp5md.dll (OpenMP support) may be imported.

libifcoremd.dll has a lot of functions prefixed with `for_`, meaning FORTRAN.

37.4 Watcom, OpenWatcom

37.4.1 Name mangling

Names are usually started with W symbol.

For example, that is how method named “method” of the class “class” not having arguments and returning *void* is encoded to:

```
W?method$_class$n__v
```

37.5 Borland

Here is an example of Borland Delphi and C++Builder [name mangling](#):

```
@TApplication@IdleAction$qv
@TApplication@ProcessMDIAccels$qp6tagMSG
@TModule@$bctr$qp1cpvt1
@TModule@$bdtr$qv
@TModule@ValidWindow$qp14TWindowsObject
@TrueColorTo8BitN$qpviit1iiiii
@TrueColorTo16BitN$qpviit1iiiii
@DIB24BitTo8BitBitmap$qpviit1iiiii
@TrueBitmap@$bctr$qp1
@TrueBitmap@$bctr$qp1
@TrueBitmap@$bctr$qi1111
```

Names are always started with @ symbol, then class name came, method name, and encoded method argument types. These names can be in .exe imports, .dll exports, debug data, etc.

Borland Visual Component Libraries (VCL) are stored in .bpl files instead of .dll ones, for example, vcl50.dll, rtl60.dll.

Other DLL might be imported: BORLNDMM.DLL.

37.5.1 Delphi

Almost all Delphi executables has “Boolean” text string at the very beginning of code segment, along with other type names.

This is a very typical beginning of .text segment of a Delphi program, this block came right after win32 PE file header:

```
00000400 04 10 40 00 03 07 42 6f 6f 6c 65 61 6e 01 00 00 |..@...Boolean...|
00000410 00 00 01 00 00 00 00 10 40 00 05 46 61 6c 73 65 |.....@..False|
00000420 04 54 72 75 65 8d 40 00 2c 10 40 00 09 08 57 69 |.True.@.,.@...Wi|
00000430 64 65 43 68 61 72 03 00 00 00 00 ff ff 00 00 90 |deChar.....|
00000440 44 10 40 00 02 04 43 68 61 72 01 00 00 00 00 ff |D.@...Char.....|
00000450 00 00 00 90 58 10 40 00 01 08 53 6d 61 6c 6c 69 |...X.@...Smalli|
00000460 6e 74 02 00 80 ff ff ff 7f 00 00 90 70 10 40 00 |nt.....p.@.|
00000470 01 07 49 6e 74 65 67 65 72 04 00 00 00 80 ff ff |..Integer.....|
00000480 ff 7f 8b c0 88 10 40 00 01 04 42 79 74 65 01 00 |.....@...Byte..|
00000490 00 00 00 ff 00 00 00 90 9c 10 40 00 01 04 57 6f |.....@...Wo|
000004a0 72 64 03 00 00 00 00 ff ff 00 00 90 b0 10 40 00 |rd.....@.|
000004b0 01 08 43 61 72 64 69 6e 61 6c 05 00 00 00 00 ff |..Cardinal.....|
000004c0 ff ff ff 90 c8 10 40 00 10 05 49 6e 74 36 34 00 |.....@...Int64.|
000004d0 00 00 00 00 00 00 80 ff ff ff ff ff ff 7f 90 |.....|
000004e0 e4 10 40 00 04 08 45 78 74 65 6e 64 65 64 02 90 |..@...Extended..|
000004f0 f4 10 40 00 04 06 44 6f 75 62 6c 65 01 8d 40 00 |..@...Double..@.|
00000500 04 11 40 00 04 08 43 75 72 72 65 6e 63 79 04 90 |..@...Currency..|
00000510 14 11 40 00 0a 06 73 74 72 69 6e 67 20 11 40 00 |..@...string .@.|
00000520 0b 0a 57 69 64 65 53 74 72 69 6e 67 30 11 40 00 |..WideString0.@.|
00000530 0c 07 56 61 72 69 61 6e 74 8d 40 00 40 11 40 00 |..Variant.@.@.@.|
00000540 0c 0a 4f 6c 65 56 61 72 69 61 6e 74 98 11 40 00 |..OleVariant..@.|
00000550 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 |.....|
00000560 00 00 00 00 00 00 00 00 00 00 00 00 98 11 40 00 |.....@.|
00000570 04 00 00 00 00 00 00 00 18 4d 40 00 24 4d 40 00 |.....M@.$M@.|
00000580 28 4d 40 00 2c 4d 40 00 20 4d 40 00 68 4a 40 00 |(M@.,M@. M@.hJ@.|
```

00000590	84 4a 40 00 c0 4a 40 00 07 54 4f 62 6a 65 63 74	.J@..J@..TObject
000005a0	a4 11 40 00 07 07 54 4f 62 6a 65 63 74 98 11 40	..@...TObject..@
000005b0	00 00 00 00 00 00 00 06 53 79 73 74 65 6d 00 00	System..
000005c0	c4 11 40 00 0f 0a 49 49 6e 74 65 72 66 61 63 65	..@...IInterface
000005d0	00 00 00 00 01 00 00 00 00 00 00 00 c0 00 00	
000005e0	00 00 00 00 46 06 53 79 73 74 65 6d 03 00 ff ff	...F.System....
000005f0	f4 11 40 00 0f 09 49 44 69 73 70 61 74 63 68 c0	..@...IDispatch.
00000600	11 40 00 01 00 04 02 00 00 00 00 00 c0 00 00 00	.@.....
00000610	00 00 00 46 06 53 79 73 74 65 6d 04 00 ff ff 90	...F.System....
00000620	cc 83 44 24 04 f8 e9 51 6c 00 00 83 44 24 04 f8	..D\$...Ql...D\$..
00000630	e9 6f 6c 00 00 83 44 24 04 f8 e9 79 6c 00 00 cc	.ol...D\$...yl...
00000640	cc 21 12 40 00 2b 12 40 00 35 12 40 00 01 00 00	!.@.+.@.5.@....
00000650	00 00 00 00 00 00 00 00 00 c0 00 00 00 00 00 00	
00000660	46 41 12 40 00 08 00 00 00 00 00 00 8d 40 00	FA.@.....@.
00000670	bc 12 40 00 4d 12 40 00 00 00 00 00 00 00 00 00	..@.M.@.....
00000680	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	
00000690	bc 12 40 00 0c 00 00 00 4c 11 40 00 18 4d 40 00	..@....L.@..M@.
000006a0	50 7e 40 00 5c 7e 40 00 2c 4d 40 00 20 4d 40 00	P~@.\~@.,M@. M@.
000006b0	6c 7e 40 00 84 4a 40 00 c0 4a 40 00 11 54 49 6e	l~@..J@..J@..TIn
000006c0	74 65 72 66 61 63 65 64 4f 62 6a 65 63 74 8b c0	terfacedObject..
000006d0	d4 12 40 00 07 11 54 49 6e 74 65 72 66 61 63 65	..@...TInterface
000006e0	64 4f 62 6a 65 63 74 bc 12 40 00 a0 11 40 00 00	dObject..@...@..
000006f0	00 06 53 79 73 74 65 6d 00 00 8b c0 00 13 40 00	..System.....@.
00000700	11 0b 54 42 6f 75 6e 64 41 72 72 61 79 04 00 00	..TBoundArray...
00000710	00 00 00 00 00 03 00 00 00 6c 10 40 00 06 53 79	l.@..Sy
00000720	73 74 65 6d 28 13 40 00 04 09 54 44 61 74 65 54	stem(.@...TDateT
00000730	69 6d 65 01 ff 25 48 e0 c4 00 8b c0 ff 25 44 e0	ime.>%H.....%D.

37.6 Other known DLLs

- `vcomp*.dll`—Microsoft implementation of OpenMP.

Chapter 38

Communication with the outer world (win32)

Files and registry access: for the very basic analysis, Process Monitor¹ utility from SysInternals may help.
For the basic analysis of network accesses, Wireshark² may help.
But then you will need to look inside anyway.

First what to look on is which functions from OS API³ and standard libraries are used.

If the program is divided into main executable file and a group of DLL-files, sometimes, these function's names may be helpful.

If we are interesting, what exactly may lead to the `MessageBox()` call with specific text, first what we can try to do: find this text in data segment, find references to it and find the points from which a control may be passed to the `MessageBox()` call we're interesting in.

If we are talking about a video game and we're interesting, which events are more or less random in it, we may try to find `rand()` function or its replacement (like Mersenne twister algorithm) and find a places from which this function called and most important: how the results are used.

But if it is not a game, but `rand()` is used, it is also interesting, why. There are cases of unexpected `rand()` usage in data compression algorithm (for encryption imitation): <http://blog.yurichev.com/node/44>.

38.1 Often used functions in Windows API

These functions may be among imported. It is worth to note that not every function might be used by the code written by author. A lot of functions might be called from library functions and CRT code.

- Registry access (advapi32.dll): `RegEnumKeyEx`^{4 5}, `RegEnumValue`^{6 5}, `RegGetValue`^{7 5}, `RegOpenKeyEx`^{8 5}, `RegQueryValueEx`^{9 5}.
- Access to text .ini-files (kernel32.dll): `GetPrivateProfileString`^{10 5}.
- Dialog boxes (user32.dll): `MessageBox`^{11 5}, `MessageBoxEx`^{12 5}, `SetDlgItemText`^{13 5}, `GetDlgItemText`^{14 5}.
- Resources access(50.2.8): (user32.dll): `LoadMenu`^{15 5}.
- TCP/IP-network (ws2_32.dll): `WSARecv`¹⁶, `WSASend`¹⁷.

¹<http://technet.microsoft.com/en-us/sysinternals/bb896645.aspx>

²<http://www.wireshark.org/>

³Application programming interface

⁴[http://msdn.microsoft.com/en-us/library/windows/desktop/ms724862\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms724862(v=vs.85).aspx)

⁵May have -A suffix for ASCII-version and -W for Unicode-version

⁶[http://msdn.microsoft.com/en-us/library/windows/desktop/ms724865\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms724865(v=vs.85).aspx)

⁷[http://msdn.microsoft.com/en-us/library/windows/desktop/ms724868\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms724868(v=vs.85).aspx)

⁸[http://msdn.microsoft.com/en-us/library/windows/desktop/ms724897\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms724897(v=vs.85).aspx)

⁹[http://msdn.microsoft.com/en-us/library/windows/desktop/ms724911\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms724911(v=vs.85).aspx)

¹⁰[http://msdn.microsoft.com/en-us/library/windows/desktop/ms724353\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms724353(v=vs.85).aspx)

¹¹[http://msdn.microsoft.com/en-us/library/ms645505\(VS.85\).aspx](http://msdn.microsoft.com/en-us/library/ms645505(VS.85).aspx)

¹²[http://msdn.microsoft.com/en-us/library/ms645507\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/ms645507(v=vs.85).aspx)

¹³[http://msdn.microsoft.com/en-us/library/ms645521\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/ms645521(v=vs.85).aspx)

¹⁴[http://msdn.microsoft.com/en-us/library/ms645489\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/ms645489(v=vs.85).aspx)

¹⁵[http://msdn.microsoft.com/en-us/library/ms647990\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/ms647990(v=vs.85).aspx)

¹⁶[http://msdn.microsoft.com/en-us/library/windows/desktop/ms741688\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms741688(v=vs.85).aspx)

¹⁷[http://msdn.microsoft.com/en-us/library/windows/desktop/ms742203\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms742203(v=vs.85).aspx)

- File access (kernel32.dll): CreateFile ¹⁸ 5, ReadFile ¹⁹, ReadFileEx ²⁰, WriteFile ²¹, WriteFileEx ²².
- High-level access to the Internet (wininet.dll): WinHttpOpen ²³.
- Check digital signature of a executable file (wintrust.dll): WinVerifyTrust ²⁴.
- Standard MSVC library (in case of dynamic linking) (msvcr*.dll): assert, itoa, ltoa, open, printf, read, strcmp, atol, atoi, fopen, fread, fwrite, memcmp, rand, strlen, strstr, strchr.

38.2 tracer: Intercepting all functions in specific module

There is INT3-breakpoints in [tracer](#), triggering only once, however, they can be set to all functions in specific DLL.

```
--one-time-INT3-bp:somedll.dll!.*
```

Or, let's set INT3-breakpoints to all functions with xml prefix in name:

```
--one-time-INT3-bp:somedll.dll!xml.*
```

On the other side of coin, such breakpoints are triggered only once.

Tracer will show calling of a function, if it happens, but only once. Another drawback —it is impossible to see function's arguments.

Nevertheless, this feature is very useful when you know the program uses a DLL, but do not know which functions in it. And there are a lot of functions.

For example, let's see, what uptime cygwin-utility uses:

```
tracer -l:uptime.exe --one-time-INT3-bp:cygwin1.dll!.*
```

Thus we may see all cygwin1.dll library functions which were called at least once, and where from:

```
One-time INT3 breakpoint: cygwin1.dll!__main (called from uptime.exe!OEP+0x6d (0x40106d))
One-time INT3 breakpoint: cygwin1.dll!_geteuid32 (called from uptime.exe!OEP+0xba3 (0x401ba3))
One-time INT3 breakpoint: cygwin1.dll!_getuid32 (called from uptime.exe!OEP+0xbaa (0x401baa))
One-time INT3 breakpoint: cygwin1.dll!_getegid32 (called from uptime.exe!OEP+0xcb7 (0x401cb7))
One-time INT3 breakpoint: cygwin1.dll!_getgid32 (called from uptime.exe!OEP+0xcbe (0x401cbe))
One-time INT3 breakpoint: cygwin1.dll!sysconf (called from uptime.exe!OEP+0x735 (0x401735))
One-time INT3 breakpoint: cygwin1.dll!setlocale (called from uptime.exe!OEP+0x7b2 (0x4017b2))
One-time INT3 breakpoint: cygwin1.dll!_open64 (called from uptime.exe!OEP+0x994 (0x401994))
One-time INT3 breakpoint: cygwin1.dll!_lseek64 (called from uptime.exe!OEP+0x7ea (0x4017ea))
One-time INT3 breakpoint: cygwin1.dll!read (called from uptime.exe!OEP+0x809 (0x401809))
One-time INT3 breakpoint: cygwin1.dll!sscanf (called from uptime.exe!OEP+0x839 (0x401839))
One-time INT3 breakpoint: cygwin1.dll!uname (called from uptime.exe!OEP+0x139 (0x401139))
One-time INT3 breakpoint: cygwin1.dll!time (called from uptime.exe!OEP+0x22e (0x40122e))
One-time INT3 breakpoint: cygwin1.dll!localtime (called from uptime.exe!OEP+0x236 (0x401236))
One-time INT3 breakpoint: cygwin1.dll!sprintf (called from uptime.exe!OEP+0x25a (0x40125a))
One-time INT3 breakpoint: cygwin1.dll!setutent (called from uptime.exe!OEP+0x3b1 (0x4013b1))
One-time INT3 breakpoint: cygwin1.dll!getutent (called from uptime.exe!OEP+0x3c5 (0x4013c5))
One-time INT3 breakpoint: cygwin1.dll!endutent (called from uptime.exe!OEP+0x3e6 (0x4013e6))
One-time INT3 breakpoint: cygwin1.dll!puts (called from uptime.exe!OEP+0x4c3 (0x4014c3))
```

¹⁸[http://msdn.microsoft.com/en-us/library/windows/desktop/aa363858\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/aa363858(v=vs.85).aspx)

¹⁹[http://msdn.microsoft.com/en-us/library/windows/desktop/aa365467\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/aa365467(v=vs.85).aspx)

²⁰[http://msdn.microsoft.com/en-us/library/windows/desktop/aa365468\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/aa365468(v=vs.85).aspx)

²¹[http://msdn.microsoft.com/en-us/library/windows/desktop/aa365747\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/aa365747(v=vs.85).aspx)

²²[http://msdn.microsoft.com/en-us/library/windows/desktop/aa365748\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/aa365748(v=vs.85).aspx)

²³[http://msdn.microsoft.com/en-us/library/windows/desktop/aa384098\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/aa384098(v=vs.85).aspx)

²⁴<http://msdn.microsoft.com/library/windows/desktop/aa388208.aspx>

Chapter 39

Strings

39.1 Text strings

Usual C-strings are zero-terminated ([ASCIIZ](#)-strings).

The reason why C string format is as it is (zero-terminating) is apparently hisorical. In [\[27\]](#) we can read:

A minor difference was that the unit of I/O was the word, not the byte, because the PDP-7 was a word-addressed machine. In practice this meant merely that all programs dealing with character streams ignored null characters, because null was used to pad a file to an even number of characters.

In Hiew or FAR Manager these strings looks like as it is:

```
int main()
{
    printf ("Hello, world!\n");
};
```

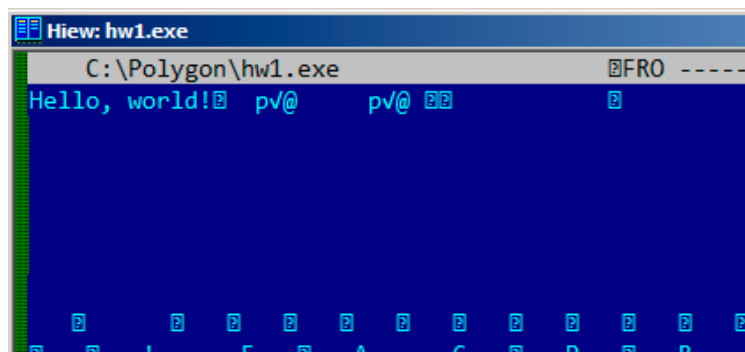


Figure 39.1: Hiew

The string is preceeded by 8-bit or 32-bit string length value.
For example:

Listing 39.1: Delphi

```
CODE:00518AC8          dd 19h
CODE:00518ACC aLoading___Plea db 'Loading... , please wait.',0
...

CODE:00518AFC          dd 10h
CODE:00518B00 aPreparingRun__ db 'Preparing run...',0
```

39.1.1 Unicode

Often, what is called by Unicode is a methods of strings encoding when each character occupies 2 bytes or 16 bits. This is common terminological mistake. Unicode is a standard assigning a number to each character of many writing systems of the world, but not describing encoding method.

Most popular encoding methods are: UTF-8 (often used in Internet and *NIX systems) and UTF-16LE (used in Windows).

UTF-8

UTF-8 is one of the most successful methods of character encoding. All Latin symbols are encoded just like in an ASCII-encoding, and symbols beyond ASCII-table are encoded by several bytes. 0 is encoded as it was before, so all standard C string functions works with UTF-8-strings just like any other string.

Let's see how symbols in various languages are encoded in UTF-8 and how it looks like in FAR in 437 codepage¹:

```
How much? 100€?

(English) I can eat glass and it doesn't hurt me.
(Greek) Μπορώ να φάω σπασμένα γυαλιά χωρίς να πάθω τίποτα.
(Hungarian) Meg tudom enni az üveget, nem lesz tőle bajom.
(Icelandic) Ég get etið gler án þess að meiða mig.
(Polish) Mogę jeść szkło i mi nie szkodzi.
(Russian) Я могу есть стекло, оно мне не вредит.
(Arabic): أنا قادر على أكل الزجاج و هذا لا يؤلمني.
(Hebrew): אני יכול לאכול זכוכית וזה לא מזיק לי.
(Chinese) 我能吞下玻璃而不伤身体。
(Japanese) 私はガラスを食べられます。それは私を傷つけません。
(Hindi) मैं काँच खा सकता हूँ और मुझे उससे कोई चोट नहीं पहुंचती.
```

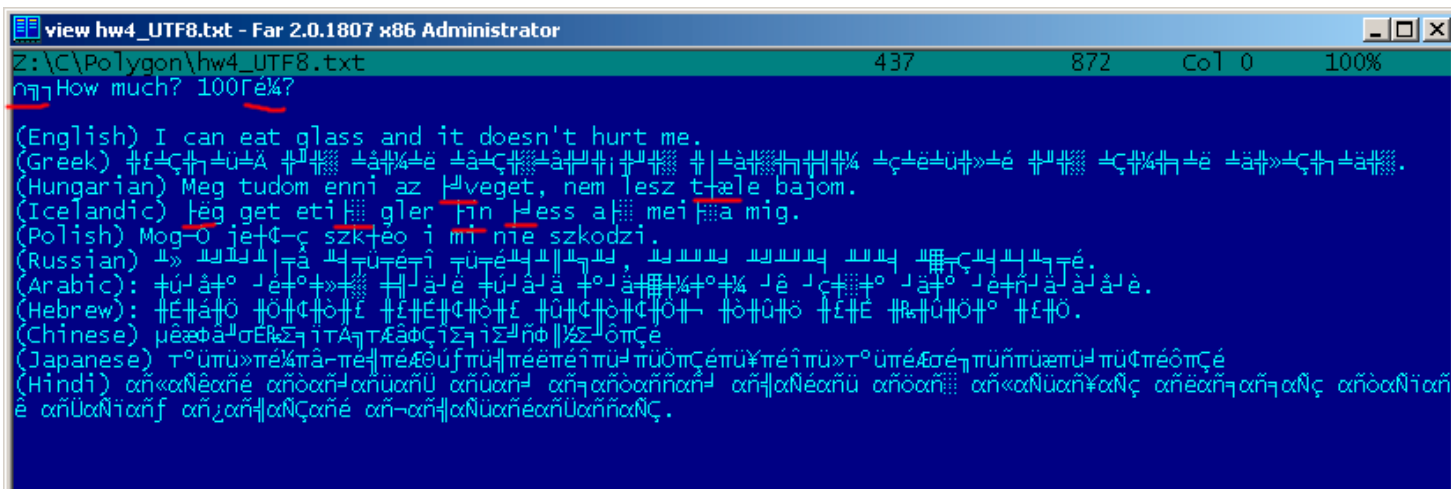


Figure 39.2: FAR: UTF-8

As it seems, English language string looks like as it is in ASCII-encoding. Hungarian language uses Latin symbols plus symbols with diacritic marks. These symbols are encoded by several bytes, I underscored them by red. The same story with Icelandic and Polish languages. I also used “Euro” currency symbol at the begin, which is encoded by 3 bytes. All the rest writing systems here have no connection with Latin. At least about Russian, Arabic, Hebrew and Hindi we could see recurring bytes, and that is not surprise: all symbols from the writing system is usually located in the same Unicode table, so their code begins with the same numbers.

At the very beginning, before “How much?” string we see 3 bytes, which is BOM² in fact. BOM defines encoding system to be used now.

UTF-16LE

Many win32 functions in Windows has a suffix -A and -W. The first functions works with usual strings, the next with UTF-16LE-strings (*wide*). As in the second case, each symbol is usually stored in 16-bit value of *short* type.

¹I've got example and translations from there: <http://www.columbia.edu/~fdc/utf8/>

²Byte order mark

Latin symbols in UTF-16 strings looks in Hiew or FAR as interleaved with zero byte:

```
int wmain()
{
    wprintf (L"Hello, world!\n");
};
```

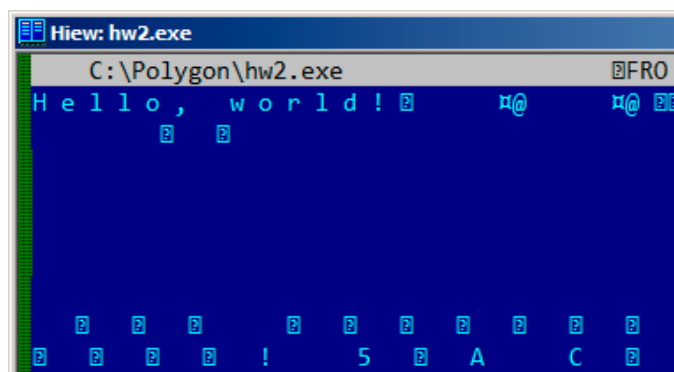


Figure 39.3: Hiew

We may often see this in [Windows NT](#) system files:

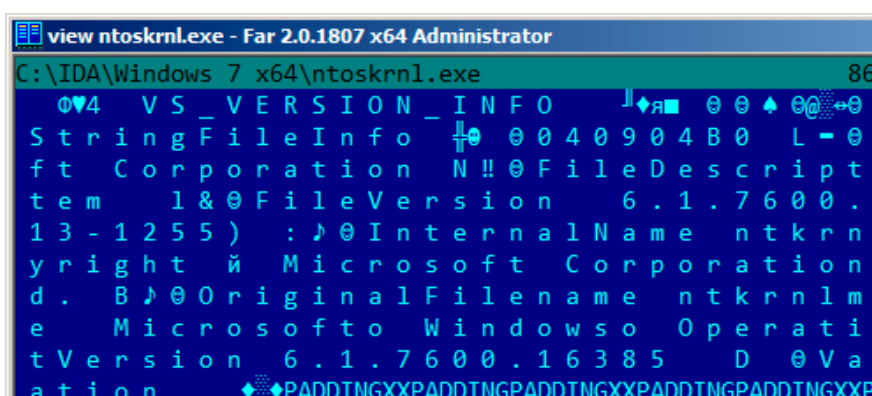


Figure 39.4: Hiew

String with characters occupying exactly 2 bytes are called by “Unicode” in IDA:

```
.data:0040E000 aHelloWorld:
.data:0040E000          unicode 0, <Hello, world!>
.data:0040E000          dw 0Ah, 0
```

Here is how Russian language string encoded in UTF-16LE may look like:

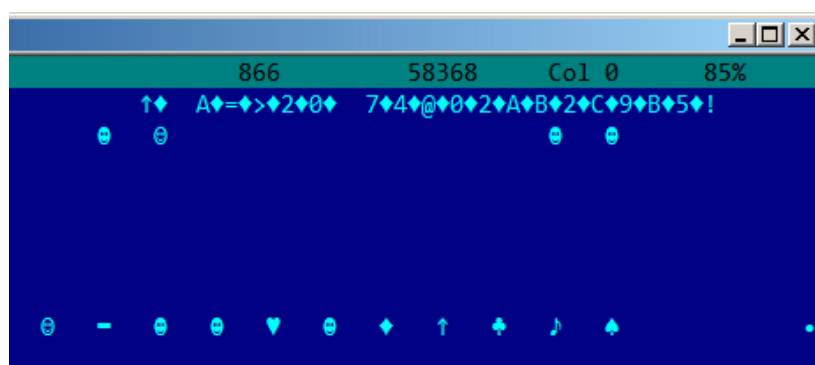


Figure 39.5: Hiew: UTF-16LE

What we can easily spot—is that symbols are interleaved by diamond character (which has code of 4). Indeed, Cyrillic symbols are located in the fourth Unicode plane³. Hence, all Cyrillic symbols in UTF-16LE are located in 0x400–0x4FF range.

Let's back to the example with the string written in multiple languages. Here we can see it in UTF-16LE encoding.

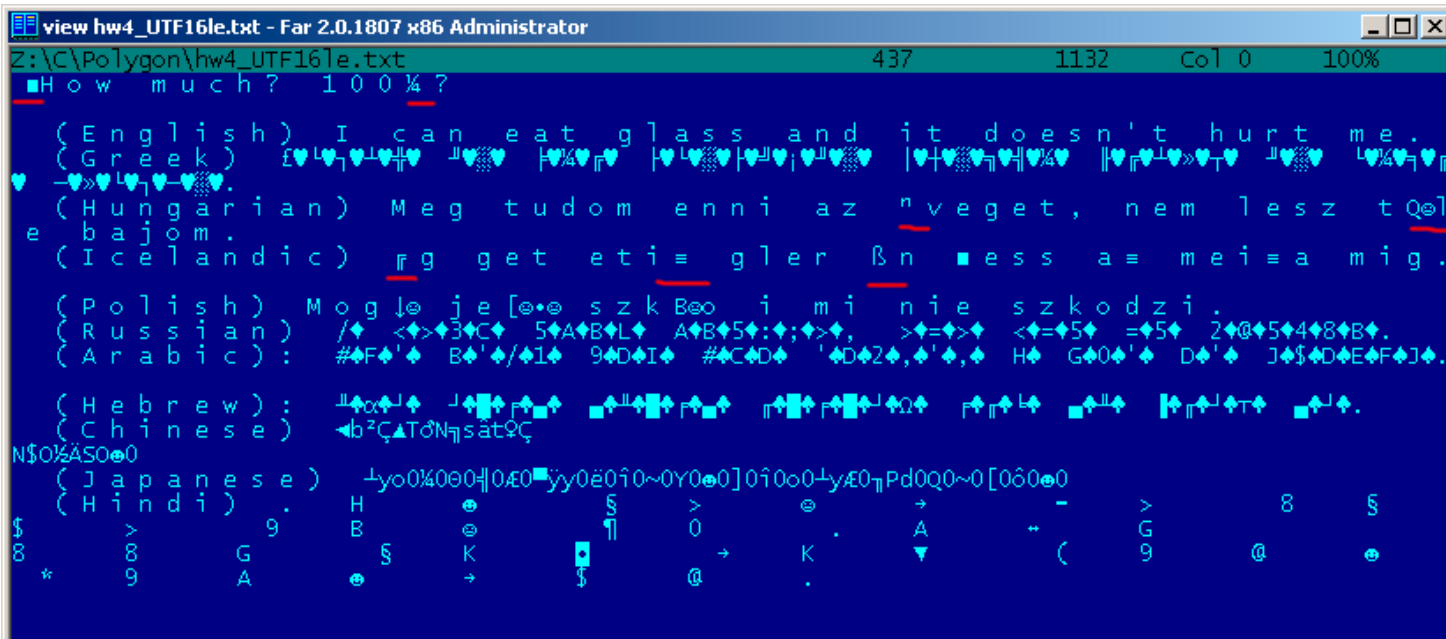


Figure 39.6: FAR: UTF-16LE

Here we can also see BOM in the very beginning. All Latin characters are interleaved with zero byte. I also underscored by red some characters with diacritic marks (Hungarian and Icelandic languages).

39.2 Error/debug messages

Debugging messages are often very helpful if present. In some sense, debugging messages are reporting about what's going on in program right now. Often these are `printf()`-like functions, which writes to log-files, and sometimes, not writing anything but calls are still present since this build is not a debug build but *release* one. If local or global variables are dumped in debugging messages, it might be helpful as well since it is possible to get variable names at least. For example, one of such functions in Oracle RDBMS is `ksdwrt()`.

Meaningful text strings are often helpful. IDA disassembler may show from which function and from which point this specific string is used. Funny cases [sometimes happen](#).

Error messages may help us as well. In Oracle RDBMS, errors are reporting using group of functions. [More about it](#).

It is possible to find very quickly, which functions reporting about errors and in which conditions. By the way, it is often a reason why copy-protection systems has inarticulate cryptic error messages or just error numbers. No one happy when software cracker quickly understand why copy-protection is triggered just by error message.

One example of encrypted error messages is here: [55.2](#).

³[https://en.wikipedia.org/wiki/Cyrillic_\(Unicode_block\)](https://en.wikipedia.org/wiki/Cyrillic_(Unicode_block))

Chapter 40

Calls to assert()

Sometimes `assert()` macro presence is useful too: commonly this macro leaves source file name, line number and condition in code.

Most useful information is contained in `assert-condition`, we can deduce variable names, or structure field names from it. Another useful piece of information is file names—we can try to deduce what type of code is here. Also by file names it is possible to recognize a well-known open-source libraries.

Listing 40.1: Example of informative `assert()` calls

```
.text:107D4B29      mov     dx, [ecx+42h]
.text:107D4B2D      cmp     edx, 1
.text:107D4B30      jz      short loc_107D4B4A
.text:107D4B32      push    1ECh
.text:107D4B37      push    offset aWrite_c ; "write.c"
.text:107D4B3C      push    offset aTdTd_planarcon ; "td->td_planarconfig ==
    PLANARCONFIG_CON"...
.text:107D4B41      call    ds:_assert
...

.text:107D52CA      mov     edx, [ebp-4]
.text:107D52CD      and     edx, 3
.text:107D52D0      test    edx, edx
.text:107D52D2      jz      short loc_107D52E9
.text:107D52D4      push    58h
.text:107D52D6      push    offset aDumpmode_c ; "dumpmode.c"
.text:107D52DB      push    offset aN30      ; "(n & 3) == 0"
.text:107D52E0      call    ds:_assert
...

.text:107D6759      mov     cx, [eax+6]
.text:107D675D      cmp     ecx, 0Ch
.text:107D6760      jle     short loc_107D677A
.text:107D6762      push    2D8h
.text:107D6767      push    offset aLzw_c      ; "lzw.c"
.text:107D676C      push    offset aSpLzw_nbitsBit ; "sp->lzw_nbits <= BITS_MAX"
.text:107D6771      call    ds:_assert
```

It is advisable to “google” both conditions and file names, that may lead us to open-source library. For example, if to “google” “`sp->lzw_nbits <= BITS_MAX`”, this predictably give us some open-source code, something related to LZW-compression.

Chapter 41

Constants

Some algorithms, especially cryptographical, use distinct constants, which is easy to find in code using [IDA](#).

For example, MD5¹ algorithm initializes its own internal variables like:

```
var int h0 := 0x67452301
var int h1 := 0xEFCDAB89
var int h2 := 0x98BADCFE
var int h3 := 0x10325476
```

If you find these four constants usage in the code in a row —it is very high probability this function is related to MD5.

Another example is CRC16/CRC32 algorithms, often, calculation algorithms use precomputed tables like:

Listing 41.1: linux/lib/crc16.c

```
/** CRC table for the CRC-16. The poly is 0x8005 (x^16 + x^15 + x^2 + 1) */
u16 const crc16_table[256] = {
    0x0000, 0xC0C1, 0xC181, 0x0140, 0xC301, 0x03C0, 0x0280, 0xC241,
    0xC601, 0x06C0, 0x0780, 0xC741, 0x0500, 0xC5C1, 0xC481, 0x0440,
    0xCC01, 0x0CC0, 0x0D80, 0xCD41, 0x0F00, 0xCFC1, 0xCE81, 0x0E40,
    ...
}
```

See also precomputed table for CRC32: [17.4](#).

41.1 Magic numbers

A lot of file formats defining a standard file header where *magic number*² is used.

For example, all Win32 and MS-DOS executables are started with two characters “MZ”³.

At the MIDI-file beginning “MThd” signature must be present. If we have a program which uses MIDI-files for something, very likely, it must check MIDI-files for validity by checking at least first 4 bytes.

This could be done like:

(*buf* pointing to the beginning of loaded file into memory)

```
cmp [buf], 0x6468544D ; "MThd"
jnz _error_not_a_MIDI_file
```

...or by calling function for comparing memory blocks `memcmp()` or any other equivalent code up to a `CMP` instruction (80.6.3).

When you find such point you already may say where MIDI-file loading is starting, also, we could see a location of MIDI-file contents buffer and what is used from the buffer, and how.

¹<http://en.wikipedia.org/wiki/MD5>

²[http://en.wikipedia.org/wiki/Magic_number_\(programming\)](http://en.wikipedia.org/wiki/Magic_number_(programming))

³http://en.wikipedia.org/wiki/DOS_MZ_executable

41.1.1 DHCP

This applies to network protocols as well. For example, DHCP protocol network packets contains so-called *magic cookie*: 0x63538263. Any code generating DHCP protocol packets somewhere and somehow must embed this constant into packet. If we find it in the code we may find where it happen and not only this. *Something* received DHCP packet must check *magic cookie*, comparing it with the constant.

For example, let's take dhcpcore.dll file from Windows 7 x64 and search for the constant. And we found it, two times: it seems, the constant is used in two functions eloquently named as DhcpExtractOptionsForValidation() and DhcpExtractFullOptionsForValidation().

Listing 41.2: dhcpcore.dll (Windows 7 x64)

```
.rdata:000007FF6483CBE8 dword_7FF6483CBE8 dd 63538263h          ; DATA XREF:
    DhcpExtractOptionsForValidation+79
.rdata:000007FF6483CBEC dword_7FF6483CBEC dd 63538263h          ; DATA XREF:
    DhcpExtractFullOptions+97
```

And the places where these constants accessed:

Listing 41.3: dhcpcore.dll (Windows 7 x64)

```
.text:000007FF6480875F      mov     eax, [rsi]
.text:000007FF64808761      cmp     eax, cs:dword_7FF6483CBE8
.text:000007FF64808767      jnz     loc_7FF64817179
```

And:

Listing 41.4: dhcpcore.dll (Windows 7 x64)

```
.text:000007FF648082C7      mov     eax, [r12]
.text:000007FF648082CB      cmp     eax, cs:dword_7FF6483CBEC
.text:000007FF648082D1      jnz     loc_7FF648173AF
```

41.2 Constant searching

It is easy in [IDA](#): Alt-B or Alt-I. And for searching for constant in big pile of files, or for searching it in non-executable files, I wrote small utility *binary grep*⁴.

⁴<https://github.com/yurichev/bgrep>

Chapter 42

Finding the right instructions

If the program is utilizing FPU instructions and there are very few of them in a code, one can try to check each one manually by debugger.

For example, we may be interesting, how Microsoft Excel calculating formulae entered by user. For example, division operation.

If to load excel.exe (from Office 2010) version 14.0.4756.1000 into [IDA](#), then make a full listing and to find each FDIV instructions (except ones which use constants as a second operand —obviously, it is not suits us):

```
cat EXCEL.lst | grep fdiv | grep -v dbl_ > EXCEL.fdiv
```

...then we realizing they are just 144.

We can enter string like $= (1/3)$ in Excel and check each instruction.

Checking each instruction in debugger or [tracer](#) (one may check 4 instruction at a time), it seems, we are lucky here and sought-for instruction is just 14th:

```
.text:3011E919 DC 33                                fdiv    qword ptr [ebx]
```

```
PID=13944|TID=28744|(0) 0x2f64e919 (Excel.exe!BASE+0x11e919)
EAX=0x02088006 EBX=0x02088018 ECX=0x00000001 EDX=0x00000001
ESI=0x02088000 EDI=0x00544804 EBP=0x0274FA3C ESP=0x0274F9F8
EIP=0x2F64E919
FLAGS=PF IF
FPU ControlWord=IC RC=NEAR PC=64bits PM UM OM ZM DM IM
FPU StatusWord=
FPU ST(0): 1.000000
```

ST(0) holding first argument (1) and second one is in [EBX].

Next instruction after FDIV writes result into memory:

```
.text:3011E91B DD 1E                                fstp    qword ptr [esi]
```

If to set breakpoint on it, we may see result:

```
PID=32852|TID=36488|(0) 0x2f40e91b (Excel.exe!BASE+0x11e91b)
EAX=0x00598006 EBX=0x00598018 ECX=0x00000001 EDX=0x00000001
ESI=0x00598000 EDI=0x00294804 EBP=0x026CF93C ESP=0x026CF8F8
EIP=0x2F40E91B
FLAGS=PF IF
FPU ControlWord=IC RC=NEAR PC=64bits PM UM OM ZM DM IM
FPU StatusWord=C1 P
FPU ST(0): 0.333333
```

Also as a practical joke, we can modify it on-fly:

```
tracer -l:excel.exe bpx=excel.exe!BASE+0x11E91B,set(st0,666)
```

```
PID=36540|TID=24056|(0) 0x2f40e91b (Excel.exe!BASE+0x11e91b)
EAX=0x00680006 EBX=0x00680018 ECX=0x00000001 EDX=0x00000001
ESI=0x00680000 EDI=0x00395404 EBP=0x0290FD9C ESP=0x0290FD58
EIP=0x2F40E91B
FLAGS=PF IF
FPU ControlWord=IC RC=NEAR PC=64bits PM UM OM ZM DM IM
FPU StatusWord=C1 P
FPU ST(0): 0.333333
Set ST0 register to 666.000000
```

Excel showing 666 in the cell what finally convincing us we find the right point.

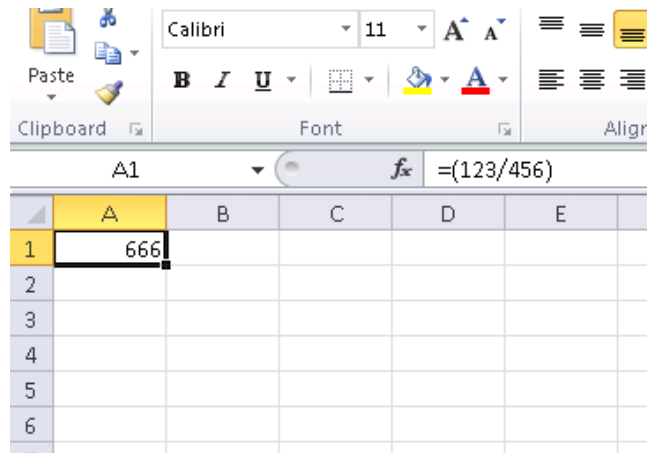


Figure 42.1: Practical joke worked

If to try the same Excel version, but x64, we will find only 12 FDIV instructions there, and the one we looking for —third.

```
tracer.exe -l:excel.exe bpx=excel.exe!BASE+0x1B7FCC,set(st0,666)
```

It seems, a lot of division operations of *float* and *double* types, compiler replaced by SSE-instructions like DIVSD (DIVSD present here 268 in total).

Chapter 43

Suspicious code patterns

43.1 XOR instructions

instructions like `XOR op, op` (for example, `XOR EAX, EAX`) are usually used for setting register value to zero, but if operands are different, *exclusive or* operation is executed. This operation is rare in common programming, but used often in cryptography, including amateur. Especially suspicious case if the second operand is big number. This may points to encrypting/decrypting, checksum computing, etc.

One exception to this observation worth to note is “canary” (16.3) generation and checking is often done using XOR instruction.

This AWK script can be used for processing IDA listing (.lst) files:

```
gawk -e '$2=="xor" { tmp=substr($3, 0, length($3)-1); if (tmp!=$4) if ($4!="esp") if ($4!="ebp") {
  print $1, $2, tmp, ",", $4 } }' filename.lst
```

It is also worth to note that such script may also capture incorrectly disassembled code (28).

43.2 Hand-written assembly code

Modern compilers do not emit `LOOP` and `RCL` instructions. On the other hand, these instructions are well-known to coders who like to code in straight assembly language. If you spot these, it can be said, with a high probability, this fragment of code is hand-written. Such instructions are marked as (M) in the instructions list in appendix: 80.6.

Also function prologue/epilogue is not commonly present in hand-written assembly copy.

Commonly there is no fixed system in passing arguments into functions in the hand-written code.

Example from Windows 2003 kernel (ntoskrnl.exe file):

```
MultiplyTest    proc near                ; CODE XREF: Get386Stepping
                xor     cx, cx
loc_620555:      ; CODE XREF: MultiplyTest+E
                push    cx
                call     Multiply
                pop      cx
                jnb     short locret_620563
                loop     loc_620555
                clc
locret_620563:  ; CODE XREF: MultiplyTest+C
                retn
MultiplyTest    endp

Multiply        proc near                ; CODE XREF: MultiplyTest+5
                mov     ecx, 81h
                mov     eax, 417A000h
                mul     ecx
                cmp     edx, 2
```

```
        stc
        jnz     short locret_62057F
        cmp     eax, 0FE7A000h
        stc
        jnz     short locret_62057F
        clc
locret_62057F:                ; CODE XREF: Multiply+10
                             ; Multiply+18
        retn
Multiply    endp
```

Indeed, if we look into [WRK¹](#) v1.2 source code, this code can be found easily in the file *WRK-v1.2\base\ntos\ke\i386\cpu.asm*.

¹Windows Research Kernel

Chapter 44

Using magic numbers while tracing

Often, main goal is to get to know, how a value was read from file, or received via network, being used. Often, manual tracing of a value is very labouring task. One of the simplest techniques (although not 100% reliable) is to use your own *magic number*.

This resembling X-ray computed tomography is some sense: radiocontrast agent is often injected into patient's blood, which is used for improving visibility of internal structures in X-rays. For example, it is well known how blood of healthy man/woman percolates in kidneys and if agent is in blood, it will be easily seen on tomography, how good and normal blood was percolating, are there any stones or tumors.

We can take a 32-bit number like 0x0badf00d, or someone's birth date like 0x11101979 and to write this, 4 byte holding number, to some point in file used by the program we investigate.

Then, while tracing this program, with [tracer](#) in the *code coverage* mode, and then, with the help of *grep* or just by searching in the text file (of tracing results), we can easily see, where the value was used and how.

Example of *grepable tracer* results in the *cc* mode:

```
0x150bf66 (_kziaia+0x14), e=      1 [MOV EBX, [EBP+8]] [EBP+8]=0xf59c934
0x150bf69 (_kziaia+0x17), e=      1 [MOV EDX, [69AEB08h]] [69AEB08h]=0
0x150bf6f (_kziaia+0x1d), e=      1 [FS: MOV EAX, [2Ch]]
0x150bf75 (_kziaia+0x23), e=      1 [MOV ECX, [EAX+EDX*4]] [EAX+EDX*4]=0xf1ac360
0x150bf78 (_kziaia+0x26), e=      1 [MOV [EBP-4], ECX] ECX=0xf1ac360
```

This can be used for network packets as well. It is important to be unique for *magic number* and not to be present in the program's code.

Aside of [tracer](#), DosBox (MS-DOS emulator) in heavydebug mode, is able to write information about all register's states for each executed instruction of program to plain text file¹, so this technique may be useful for DOS programs as well.

¹See also my blog post about this DosBox feature: <http://blog.yurichev.com/node/55>

Chapter 45

Other things

[RTTI \(31.5\)](#)-data may be also useful for C++ classes identification.

Chapter 46

Old-school techniques, nevertheless, interesting to know

46.1 Memory “snapshots” comparing

The technique of straightforward two memory snapshots comparing in order to see changes, was often used to hack 8-bit computer games and hacking “high score” files.

For example, if you got a loaded game on 8-bit computer (it is not much memory on these, but game is usually consumes even less memory) and you know that you have now, let’s say, 100 bullets, you can do a “snapshot” of all memory and back it up to some place. Then shoot somewhere, bullet count now 99, do second “snapshot” and then compare both: somewhere must be a byte which was 100 in the beginning and now it is 99. Considering a fact these 8-bit games were often written in assembly language and such variables were global, it can be said for sure, which address in memory holding bullets count. If to search all references to the address in disassembled game code, it is not very hard to find a piece of code **decrementing** bullets count, write **NOP** instruction there, or couple of **NOP**-s, we’ll have a game with e.g 100 bullets forever. Games on these 8-bit computers was commonly loaded on the same address, also, there were no much different versions of each game (commonly just one version was popular for a long span of time), enthusiastic gamers knew, which byte must be written (using BASIC instruction **POKE**) to which address in order to hack it. This led to “cheat” lists containing of **POKE** instructions published in magazines related to 8-bit games. See also: http://en.wikipedia.org/wiki/PEEK_and_POKE.

Likewise, it is easy to modify “high score” files, this may work not only with 8-bit games. Let’s notice your score count and back the file up somewhere. When “high score” count will be different, just compare two files, it can be even done with DOS-utility **FC**¹ (“high score” files are often in binary form). There will be a point where couple of bytes will be different and it will be easy to see which ones are holding score number. However, game developers are aware of such tricks and may protect against it.

¹MS-DOS utility for binary files comparing

Part V

OS-specific

Chapter 47

Thread Local Storage

It is a data area, specific to each thread. Every thread can store there what it needs. One famous example is C standard global variable *errno*. Multiple threads may simultaneously call a functions which returns error code in the *errno*, so global variable will not work correctly here, for multi-thread programs, *errno* must be stored in the [TLS](#).

In the C++11 standard, a new *thread_local* modifier was added, showing that each thread will have its own version of the variable, it can be initialized, and it is located in the [TLS](#)¹:

Listing 47.1: C++11

```
#include <iostream>
#include <thread>

thread_local int tmp=3;

int main()
{
    std::cout << tmp << std::endl;
};
```

²

If to say about PE-files, in the resulting executable file, the *tmp* variable will be stored in the section devoted to [TLS](#).

¹ C11 also has thread support, optional though

² Compiled in MinGW GCC 4.8.1, but not in MSVC 2012

Chapter 48

System calls (syscall-s)

As we know, all running processes inside [OS](#) are divided into two categories: those having all access to the hardware (“kernel space”) and those have not (“user space”).

There are [OS](#) kernel and usually drivers in the first category.

All applications are usually in the second category.

This separation is crucial for [OS](#) safety: it is very important not to give to any process possibility to screw up something in other processes or even in [OS](#) kernel. On the other hand, failing driver or error inside [OS](#) kernel usually lead to kernel panic or [BSOD](#)¹.

x86-processor protection allows to separate everything into 4 levels of protection (rings), but both in Linux and in Windows only two are used: ring0 (“kernel space”) and ring3 (“user space”).

System calls (syscall-s) is a point where these two areas are connected. It can be said, this is the most principal [API](#) providing to application software.

As in [Windows NT](#), syscalls table reside in [SSDT](#)².

Usage of syscalls is very popular among shellcode and computer viruses authors, because it is hard to determine the addresses of needed functions in the system libraries, while it is easier to use syscalls, however, much more code should be written due to lower level of abstraction of the [API](#). It is also worth noting that the numbers of syscalls e.g. in Windows, may be different from version to version.

48.1 Linux

In Linux, syscall is usually called via `int 0x80`. Call number is passed in the EAX register, and any other parameters—in the other registers.

Listing 48.1: Simple example of two syscalls usage

```
section .text
global _start

_start:
    mov     edx,len ; buf len
    mov     ecx,msg ; buf
    mov     ebx,1   ; file descriptor. stdout is 1
    mov     eax,4   ; syscall number. sys_write is 4
    int     0x80

    mov     eax,1   ; syscall number. sys_exit is 4
    int     0x80

section .data

msg     db  'Hello, world! ',0xa
len     equ $ - msg
```

Compilation:

¹Black Screen of Death

²System Service Dispatch Table

```
nasm -f elf32 1.s  
ld 1.o
```

The full list of syscalls in Linux: <http://syscalls.kernelgrok.com/>.
For system calls intercepting and tracing in Linux, `strace`(53) can be used.

48.2 Windows

They are called by `int 0x2e` or using special x86 instruction `SYSENTER`.

The full list of syscalls in Windows: <http://j00ru.vexillium.org/ntapi/>.

Further reading:

“Windows Syscall Shellcode” by Piotr Bania.

Chapter 49

Linux

49.1 Position-independent code

While analyzing Linux shared (.so) libraries, one may frequently spot such code pattern:

Listing 49.1: libc-2.17.so x86

```
.text:0012D5E3 __x86_get_pc_thunk_bx proc near          ; CODE XREF: sub_17350+3
.text:0012D5E3                                     ; sub_173CC+4 ...
.text:0012D5E3             mov     ebx, [esp+0]
.text:0012D5E6             retn
.text:0012D5E6 __x86_get_pc_thunk_bx endp

...

.text:000576C0 sub_576C0      proc near              ; CODE XREF: tmpfile+73
...

.text:000576C0             push    ebp
.text:000576C1             mov     ecx, large gs:0
.text:000576C8             push    edi
.text:000576C9             push    esi
.text:000576CA             push    ebx
.text:000576CB             call   __x86_get_pc_thunk_bx
.text:000576D0             add     ebx, 157930h
.text:000576D6             sub     esp, 9Ch
...

.text:000579F0             lea     eax, (a__gen_tempname - 1AF000h)[ebx] ; "__gen_tempname"
.text:000579F6             mov     [esp+0ACh+var_A0], eax
.text:000579FA             lea     eax, (a__SysdepsPosix - 1AF000h)[ebx] ; "../sysdeps/posix/
    tempname.c"
.text:00057A00             mov     [esp+0ACh+var_A8], eax
.text:00057A04             lea     eax, (aInvalidKindIn_ - 1AF000h)[ebx] ; "! \"invalid KIND
    in __gen_tempname\"
.text:00057A0A             mov     [esp+0ACh+var_A4], 14Ah
.text:00057A12             mov     [esp+0ACh+var_AC], eax
.text:00057A15             call   __assert_fail
```

All pointers to strings are corrected by a constant and by value in the EBX, which calculated at the beginning of each function. This is so-called **PIC**, it is intended to execute placed at any random point of memory, that is why it cannot contain any absolute memory addresses.

PIC was crucial in early computer systems and crucial now in embedded systems without virtual memory support (where processes are all placed in single continuous memory block). It is also still used in *NIX systems for shared libraries since shared libraries are shared across many processes while loaded in memory only once. But all these processes may map the same shared library on different addresses, so that is why shared library should be working correctly without fixing on any absolute

address.

Let's do a simple experiment:

```
#include <stdio.h>

int global_variable=123;

int f1(int var)
{
    int rt=global_variable+var;
    printf ("returning %d\n", rt);
    return rt;
};
```

Let's compile it in GCC 4.7.3 and see resulting .so file in [IDA](#):

```
gcc -fPIC -shared -O3 -o 1.so 1.c
```

Listing 49.2: GCC 4.7.3

```
.text:00000440          public __x86_get_pc_thunk_bx
.text:00000440 __x86_get_pc_thunk_bx proc near          ; CODE XREF: _init_proc+4
.text:00000440                                          ; deregister_tm_clones+4 ...
.text:00000440          mov     ebx, [esp+0]
.text:00000443          retn
.text:00000443 __x86_get_pc_thunk_bx endp

.text:00000570          public f1
.text:00000570 f1          proc near
.text:00000570
.text:00000570 var_1C          = dword ptr -1Ch
.text:00000570 var_18          = dword ptr -18h
.text:00000570 var_14          = dword ptr -14h
.text:00000570 var_8           = dword ptr -8
.text:00000570 var_4           = dword ptr -4
.text:00000570 arg_0          = dword ptr 4
.text:00000570
.text:00000570          sub     esp, 1Ch
.text:00000573          mov     [esp+1Ch+var_8], ebx
.text:00000577          call   __x86_get_pc_thunk_bx
.text:0000057C          add     ebx, 1A84h
.text:00000582          mov     [esp+1Ch+var_4], esi
.text:00000586          mov     eax, ds:(global_variable_ptr - 2000h)[ebx]
.text:0000058C          mov     esi, [eax]
.text:0000058E          lea     eax, (aReturningD - 2000h)[ebx] ; "returning %d\n"
.text:00000594          add     esi, [esp+1Ch+arg_0]
.text:00000598          mov     [esp+1Ch+var_18], eax
.text:0000059C          mov     [esp+1Ch+var_1C], 1
.text:000005A3          mov     [esp+1Ch+var_14], esi
.text:000005A7          call   ___printf_chk
.text:000005AC          mov     eax, esi
.text:000005AE          mov     ebx, [esp+1Ch+var_8]
.text:000005B2          mov     esi, [esp+1Ch+var_4]
.text:000005B6          add     esp, 1Ch
.text:000005B9          retn
.text:000005B9 f1          endp
```

That's it: pointers to «*returning %d\n*» string and *global_variable* are to be corrected at each function execution. The *__x86_get_pc_thunk_bx()* function return address of the point after call to itself (0x57C here) in the EBX. That's the simple way to get value of program counter (EIP) at some point. The 0x1A84 constant is related to the difference between this function begin and so-called *Global Offset Table Procedure Linkage Table* (GOT PLT), the section right after *Global Offset Table* (GOT), where pointer to *global_variable* is. [IDA](#) shows these offset processed, so to understand them easily, but in fact the code is:

```
.text:00000577      call    __x86_get_pc_thunk_bx
.text:0000057C      add     ebx, 1A84h
.text:00000582      mov     [esp+1Ch+var_4], esi
.text:00000586      mov     eax, [ebx-0Ch]
.text:0000058C      mov     esi, [eax]
.text:0000058E      lea     eax, [ebx-1A30h]
```

So, EBX pointing to the GOT PLT section and to calculate pointer to *global_variable* which stored in the GOT, 0xC must be subtracted. To calculate pointer to the «*returning %d\n*» string, 0x1A30 must be subtracted.

By the way, that is the reason why AMD64 instruction set supports RIP¹-relative addressing, just to simplify PIC-code.

Let's compile the same C code in the same GCC version, but for x64.

IDA would simplify output code but suppressing RIP-relative addressing details, so I will run *objdump* instead to see the details:

```
00000000000000720 <f1>:
720:  48 8b 05 b9 08 20 00      mov     rax,QWORD PTR [rip+0x2008b9]          # 200fe0 <_DYNAMIC+0x1d0>
727:  53                        push    rbx
728:  89 fb                      mov     ebx,edi
72a:  48 8d 35 20 00 00 00      lea     rsi,[rip+0x20]          # 751 <_fini+0x9>
731:  bf 01 00 00 00           mov     edi,0x1
736:  03 18                      add     ebx,DWORD PTR [rax]
738:  31 c0                      xor     eax,eax
73a:  89 da                      mov     edx,ebx
73c:  e8 df fe ff ff          call    620 <__printf_chk@plt>
741:  89 d8                      mov     eax,ebx
743:  5b                        pop     rbx
744:  c3                        ret
```

0x2008b9 is the difference between address of instruction at 0x720 and *global_variable* and 0x20 is the difference between the address of the instruction at 0x72A and the «*returning %d\n*» string.

As you might see, the need to recalculate addresses frequently makes execution slower (it is better in x64, though). So it is probably better to link statically if you aware of performance ([1]).

49.1.1 Windows

The PIC mechanism is not used in Windows DLLs. If Windows loader needs to load DLL on another base address, it “patches” DLL in memory (at the *FIXUP* places) in order to correct all addresses. This means, several Windows processes cannot share once loaded DLL on different addresses in different process’ memory blocks —since each loaded into memory DLL instance *fixed* to be work only at these addresses..

49.2 LD_PRELOAD hack in Linux

This allows us to load our own dynamic libraries before others, even before system ones, like libc.so.6.

What, in turn, allows to “substitute” our written functions before original ones in system libraries. For example, it is easy to intercept all calls to the *time()*, *read()*, *write()*, etc.

Let's see, if we are able to fool *uptime* utility. As we know, it tells how long the computer is working. With the help of *strace*(53), it is possible to see that this information the utility takes from the */proc/uptime* file:

```
$ strace uptime
...
open("/proc/uptime", O_RDONLY)      = 3
lseek(3, 0, SEEK_SET)              = 0
read(3, "416166.86 414629.38\n", 2047) = 20
...
```

It is not a real file on disk, it is a virtual one, its contents is generated on fly in Linux kernel. There are just two numbers:

¹program counter in AMD64

```
$ cat /proc/uptime
416690.91 415152.03
```

What we can learn from wikipedia:

The first number is the total number of seconds the system has been up. The second number is how much of that time the machine has spent idle, in seconds.

²

Let's try to write our own dynamic library with the `open()`, `read()`, `close()` functions working as we need.

At first, our `open()` will compare name of file to be opened with what we need and if it is so, it will write down the descriptor of the file opened. At second, `read()`, if it will be called for this file descriptor, will substitute output, and in other cases, will call original `read()` from `libc.so.6`. And also `close()`, will note, if the file we are currently follow is to be closed.

We will use the `dlopen()` and `dlsym()` functions to determine original addresses of functions in `libc.so.6`.

We need them because we must pass control to "real" functions.

On the other hand, if we could intercept e.g. `strcmp()`, and follow each string comparisons in program, then `strcmp()` could be implemented easily on one's own, while not using original function ³.

```
#include <stdio.h>
#include <stdarg.h>
#include <stdlib.h>
#include <stdbool.h>
#include <unistd.h>
#include <dlfcn.h>
#include <string.h>

void *libc_handle = NULL;
int (*open_ptr)(const char *, int) = NULL;
int (*close_ptr)(int) = NULL;
ssize_t (*read_ptr)(int, void*, size_t) = NULL;

bool initied = false;

_Noreturn void die (const char * fmt, ...)
{
    va_list va;
    va_start (va, fmt);

    vprintf (fmt, va);
    exit(0);
};

static void find_original_functions ()
{
    if (initied)
        return;

    libc_handle = dlopen ("libc.so.6", RTLD_LAZY);
    if (libc_handle==NULL)
        die ("can't open libc.so.6\n");

    open_ptr = dlsym (libc_handle, "open");
    if (open_ptr==NULL)
        die ("can't find open()\n");

    close_ptr = dlsym (libc_handle, "close");
```

²<https://en.wikipedia.org/wiki/Uptime>

³For example, here is how simple `strcmp()` interception is works in [article](#) from Yong Huang

```

    if (close_ptr==NULL)
        die ("can't find close()\n");

    read_ptr = dlsym (libc_handle, "read");
    if (read_ptr==NULL)
        die ("can't find read()\n");

    initied = true;
}

static int opened_fd=0;

int open(const char *pathname, int flags)
{
    find_original_functions();

    int fd=(*open_ptr)(pathname, flags);
    if (strcmp(pathname, "/proc/uptime")==0)
        opened_fd=fd; // that's our file! record its file descriptor
    else
        opened_fd=0;
    return fd;
};

int close(int fd)
{
    find_original_functions();

    if (fd==opened_fd)
        opened_fd=0; // the file is not opened anymore
    return (*close_ptr)(fd);
};

ssize_t read(int fd, void *buf, size_t count)
{
    find_original_functions();

    if (opened_fd!=0 && fd==opened_fd)
    {
        // that's our file!
        return snprintf (buf, count, "%d %d", 0x7fffffff, 0x7fffffff)+1;
    };
    // not our file, go to real read() function
    return (*read_ptr)(fd, buf, count);
};

```

Let's compile it as common dynamic library:

```
gcc -fpic -shared -Wall -o fool_uptime.so fool_uptime.c -ldl
```

Let's run *uptime* while loading our library before others:

```
LD_PRELOAD='pwd'/fool_uptime.so uptime
```

And we see:

```
01:23:02 up 24855 days,  3:14,  3 users,  load average: 0.00, 0.01, 0.05
```

If the *LD_PRELOAD* environment variable will always points to filename and path of our library, it will be loaded for all starting programs.

More examples:

- Very simple interception of the *strcmp()* (Yong Huang) http://yurichev.com/mirrors/LD_PRELOAD/Yong%20Huang%20LD_PRELOAD.txt

- Kevin Pulo — Fun with LD_PRELOAD. A lot of examples and ideas. http://yurichev.com/mirrors/LD_PRELOAD/lca2009.pdf
- File functions interception for compression/decompression files on fly (zlibc). <ftp://metalab.unc.edu/pub/Linux/libs/compression>

Chapter 50

Windows NT

50.1 CRT (win32)

Does program execution starts right at the `main()` function? No, it is not. If to open any executable file in [IDA](#) or [HIEW](#), we will see [OEP](#)¹ pointing to another code. This is a code doing some maintenance and preparations before passing control flow to our code. It is called startup-code or CRT-code (C RunTime).

`main()` function takes an array of arguments passed in the command line, and also environment variables. But in fact, a generic string is passed to the program, CRT-code will find spaces in it and cut by parts. CRT-code is also prepares environment variables array `envp`. As of [GUI](#)² win32 applications, `WinMain` is used instead of `main()`, having their own arguments:

```
int CALLBACK WinMain(
    _In_   HINSTANCE hInstance,
    _In_   HINSTANCE hPrevInstance,
    _In_   LPSTR lpCmdLine,
    _In_   int nCmdShow
);
```

CRT-code prepares them as well.

Also, the number returned by `main()` function is an exit code. It may be passed in CRT to the `ExitProcess()` function, taking exit code as argument.

Usually, each compiler has its own CRT-code.

Here is a typical CRT-code for MSVC 2008.

```
__tmainCRTStartup proc near

var_24          = dword ptr -24h
var_20          = dword ptr -20h
var_1C          = dword ptr -1Ch
ms_exc          = CPPEH_RECORD ptr -18h

                push    14h
                push    offset stru_4092D0
                call     __SEH_prolog4
                mov     eax, 5A4Dh
                cmp     ds:400000h, ax
                jnz     short loc_401096
                mov     eax, ds:40003Ch
                cmp     dword ptr [eax+400000h], 4550h
                jnz     short loc_401096
                mov     ecx, 10Bh
                cmp     [eax+400018h], cx
                jnz     short loc_401096
                cmp     dword ptr [eax+400074h], 0Eh
```

¹Original Entry Point

²Graphical user interface

```

        jbe     short loc_401096
        xor     ecx, ecx
        cmp     [eax+4000E8h], ecx
        setnz   cl
        mov     [ebp+var_1C], ecx
        jmp     short loc_40109A
; -----
loc_401096:                                ; CODE XREF: ___tmainCRTStartup+18
                                           ; ___tmainCRTStartup+29 ...
        and     [ebp+var_1C], 0
loc_40109A:                                ; CODE XREF: ___tmainCRTStartup+50
        push    1
        call    __heap_init
        pop     ecx
        test    eax, eax
        jnz     short loc_4010AE
        push    1Ch
        call    _fast_error_exit
; -----
        pop     ecx
loc_4010AE:                                ; CODE XREF: ___tmainCRTStartup+60
        call    __mtinit
        test    eax, eax
        jnz     short loc_4010BF
        push    10h
        call    _fast_error_exit
; -----
        pop     ecx
loc_4010BF:                                ; CODE XREF: ___tmainCRTStartup+71
        call    sub_401F2B
        and     [ebp+ms_exc.disabled], 0
        call    __ioinit
        test    eax, eax
        jge     short loc_4010D9
        push    1Bh
        call    __amsg_exit
        pop     ecx
loc_4010D9:                                ; CODE XREF: ___tmainCRTStartup+8B
        call    ds:GetCommandLineA
        mov     dword_40B7F8, eax
        call    ___crtGetEnvironmentStringsA
        mov     dword_40AC60, eax
        call    __setargv
        test    eax, eax
        jge     short loc_4010FF
        push    8
        call    __amsg_exit
        pop     ecx
loc_4010FF:                                ; CODE XREF: ___tmainCRTStartup+B1
        call    __setenvp
        test    eax, eax
        jge     short loc_401110
        push    9
        call    __amsg_exit
        pop     ecx

```

```

loc_401110:                                ; CODE XREF: ___tmainCRTStartup+C2
        push    1
        call    __cinit
        pop     ecx
        test    eax, eax
        jz      short loc_401123
        push    eax
        call    __amsg_exit
        pop     ecx

loc_401123:                                ; CODE XREF: ___tmainCRTStartup+D6
        mov     eax, envp
        mov     dword_40AC80, eax
        push    eax                ; envp
        push    argv               ; argv
        push    argc               ; argc
        call    _main
        add     esp, 0Ch
        mov     [ebp+var_20], eax
        cmp     [ebp+var_1C], 0
        jnz     short $LN28
        push    eax                ; uExitCode
        call    $LN32

$LN28:                                ; CODE XREF: ___tmainCRTStartup+105
        call    __cexit
        jmp     short loc_401186
; -----

$LN27:                                ; DATA XREF: .rdata:stru_4092D0
        mov     eax, [ebp+ms_exc.exc_ptr] ; Exception filter 0 for function 401044
        mov     ecx, [eax]
        mov     ecx, [ecx]
        mov     [ebp+var_24], ecx
        push    eax
        push    ecx
        call    __XcptFilter
        pop     ecx
        pop     ecx

$LN24:
        retn
; -----

$LN14:                                ; DATA XREF: .rdata:stru_4092D0
        mov     esp, [ebp+ms_exc.old_esp] ; Exception handler 0 for function 401044
        mov     eax, [ebp+var_24]
        mov     [ebp+var_20], eax
        cmp     [ebp+var_1C], 0
        jnz     short $LN29
        push    eax                ; int
        call    __exit
; -----

$LN29:                                ; CODE XREF: ___tmainCRTStartup+135
        call    __c_exit

loc_401186:                                ; CODE XREF: ___tmainCRTStartup+112
        mov     [ebp+ms_exc.disabled], 0FFFFFFFh
        mov     eax, [ebp+var_20]

```

```
call    __SEH_epilog4
retn
```

Here we may see calls to `GetCommandLineA()`, then to `setargv()` and `setenvp()`, which are, apparently, fills global variables `argc`, `argv`, `envp`.

Finally, `main()` is called with these arguments.

There are also calls to the functions having self-describing names like `heap_init()`, `ioinit()`.

Heap is indeed initialized in **CRT**: if you will try to use `malloc()`, the program exiting abnormally with the error:

```
runtime error R6030
- CRT not initialized
```

Global objects initializations in C++ is also occurred in the **CRT** before `main()`: [34.1.3](#).

A variable `main()` returns is passed to `cexit()`, or to `_LN32`, which in turn calling `doexit()`.

Is it possible to get rid of **CRT**? Yes, if you know what you do.

MSVC linker has `/ENTRY` option for setting entry point.

```
#include <windows.h>

int main()
{
    MessageBox (NULL, "hello, world", "caption", MB_OK);
};
```

Let's compile it in MSVC 2008.

```
cl no_crt.c user32.lib /link /entry:main
```

We will get a runnable .exe with size 2560 bytes, there are PE-header inside, instructions calling `MessageBox`, two strings in the data segment, `MessageBox` function imported from `user32.dll` and nothing else.

This works, but you will not be able to write `WinMain` with its 4 arguments instead of `main()`. To be correct, you will be able to write so, but arguments will not be prepared at the moment of execution.

By the way, it is possible to make .exe even shorter by doing **PE**³-section aligning less than default 4096 bytes.

```
cl no_crt.c user32.lib /link /entry:main /align:16
```

Linker will say:

```
LINK : warning LNK4108: /ALIGN specified without /DRIVER; image may not run
```

We getting .exe of 720 bytes size. It running in Windows 7 x86, but not in x64 (the error message will be showed when trying to execute). By applying even more efforts, it is possible to make executable even shorter, but as you can see, compatibility problems may arise quickly.

50.2 Win32 PE

PE is a executable file format used in Windows.

The difference between .exe, .dll and .sys is that .exe and .sys usually does not have exports, only imports.

A **DLL**⁴, just as any other PE-file, has entry point (**OEP**) (the function `DllMain()` is located at it) but usually this function does nothing.

.sys is usually device driver.

As of drivers, Windows require the checksum is present in PE-file and must be correct ⁵.

Starting at Windows Vista, driver PE-files must be also signed by digital signature. It will fail to load without signature.

Any PE-file begins with tiny DOS-program, printing a message like "This program cannot be run in DOS mode." — if to run this program in DOS or Windows 3.1, this message will be printed.

³Portable Executable: [50.2](#)

⁴Dynamic-link library

⁵For example, Hiew([54](#)) can calculate it

50.2.1 Terminology

- Module — is a separate file, .exe or.dll.
- Process — a program loaded into memory and running. Commonly consisting of one .exe-file and bunch of .dll-files.
- Process memory — the memory a process works with. Each process has its own. There can usually be loaded modules, memory of the stack, [heap](#)(s), etc.
- [VA](#)⁶ — is address which will be used in program.
- Base address—is the address within a process memory at which a module will be loaded.
- [RVA](#)⁷—is a [VA](#)-address minus base address. Many addresses in PE-file tables uses exactly [RVA](#)-addresses.
- [IAT](#)⁸—an array of addresses of imported symbols⁹. Sometimes, a `IMAGE_DIRECTORY_ENTRY_IAT` data directory is points to the [IAT](#). It is worth to note that [IDA](#) (as of 6.1) may allocate a pseudo-section named `.idata` for [IAT](#), even if [IAT](#) is a part of another section!
- [INT](#)¹⁰—an array of names of symbols to be imported¹¹.

50.2.2 Base address

The fact is that several module authors may prepare DLL-files for others and there is no possibility to reach agreement, which addresses will be assigned to whose modules.

So that is why if two necessary for process loading DLLs has the same base addresses, one of which will be loaded at this base address, and another —at the other spare space in process memory, and each virtual addresses in the second DLL will be corrected.

Often, linker in [MSVC](#) generates an .exe-files with the base address 0x400000, and with the code section started at 0x401000. This mean [RVA](#) of code section begin is 0x1000. DLLs are often generated by this linked with the base address 0x10000000¹².

There is also another reason to load modules at various base addresses, rather at random ones.

It is [ASLR](#)^{13 14}.

The fact is that a shellcode trying to be executed on a compromised system must call a system functions.

In older [OS](#) (in [Windows NT](#) line: before Windows Vista), system DLL (like `kernel32.dll`, `user32.dll`) were always loaded at the known addresses, and also if to recall that its versions were rarely changed, an addresses of functions were fixed and shellcode can call it directly.

In order to avoid this, [ASLR](#) method loads your program and all modules it needs at random base addresses, each time different.

[ASLR](#) support is denoted in PE-file by setting the flag

`IMAGE_DLL_CHARACTERISTICS_DYNAMIC_BASE` [30].

50.2.3 Subsystem

There is also *subsystem* field, usually it is native (.sys-driver), console (console application) or [GUI](#) (non-console).

50.2.4 OS version

A PE-file also has minimal Windows version needed in order to load it. The table of version numbers stored in PE-file and corresponding Windows codenames is [here](#).

For example, [MSVC](#) 2005 compiles .exe-files running on Windows NT4 (version 4.00), but [MSVC](#) 2008 is not (files generated has version 5.00, at least Windows 2000 is needed to run them).

[MSVC](#) 2012 by default generates .exe-files of version 6.00, targeting at least Windows Vista, however, by [by changing compiler's options](#), it is possible to force it to compile for Windows XP.

⁶Virtual Address

⁷Relative Virtual Address

⁸Import Address Table

⁹ [24]

¹⁰Import Name Table

¹¹ [24]

¹²This can be changed by /BASE linker option

¹³Address Space Layout Randomization

¹⁴https://en.wikipedia.org/wiki/Address_space_layout_randomization

50.2.5 Sections

Division by sections, as it seems, are present in all executable file formats.

It is done in order to separate code from data, and data —from constant data.

- There will be flag *IMAGE_SCN_CNT_CODE* or *IMAGE_SCN_MEM_EXECUTE* on code section—this is executable code.
- On data section—*IMAGE_SCN_CNT_INITIALIZED_DATA*, *IMAGE_SCN_MEM_READ* and *IMAGE_SCN_MEM_WRITE* flags.
- On an empty section with uninitialized data—*IMAGE_SCN_CNT_UNINITIALIZED_DATA*, *IMAGE_SCN_MEM_READ* and *IMAGE_SCN_MEM_WRITE*.
- On a constant data section, in other words, protected from writing, there are may be flags *IMAGE_SCN_CNT_INITIALIZED_DATA* and *IMAGE_SCN_MEM_READ* without *IMAGE_SCN_MEM_WRITE*. A process will crash if it would try to write to this section.

Each section in PE-file may have a name, however, it is not very important. Often (but not always) code section have the name *.text*, data section — *.data*, constant data section — *.rdata* (*readable data*). Other popular section names are:

- *.idata*—imports section. [IDA](#) may create pseudo-section named like this: [50.2.1](#).
- *.edata*—exports section
- *.pdata*—section containing all information about exceptions in Windows NT for MIPS, [IA64](#) and x64: [50.3.3](#)
- *.reloc*—relocs section
- *.bss*—uninitialized data ([BSS](#))
- *.tls*—thread local storage ([TLS](#))
- *.rsrc*—resources
- *.CRT*—may present in binary files compiled by very old MSVC versions

PE-file packers/encryptors are often garble section names or replacing names to their own.

[MSVC](#) allows to declare data in arbitrarily named section ¹⁵.

Some compilers and linkers can add a section with debugging symbols and other debugging information (e.g. MinGW). However it is not so in modern versions of [MSVC](#) (a separate PDB-files are used there for this purpose).

That is how section described in the file:

```
typedef struct _IMAGE_SECTION_HEADER {
    BYTE  Name[IMAGE_SIZEOF_SHORT_NAME];
    union {
        DWORD PhysicalAddress;
        DWORD VirtualSize;
    } Misc;
    DWORD VirtualAddress;
    DWORD SizeOfRawData;
    DWORD PointerToRawData;
    DWORD PointerToRelocations;
    DWORD PointerToLinenumbers;
    WORD  NumberOfRelocations;
    WORD  NumberOfLinenumbers;
    DWORD Characteristics;
} IMAGE_SECTION_HEADER, *PIMAGE_SECTION_HEADER;
```

¹⁶

A word about terminology: *PointerToRawData* it called “Offset” and *VirtualAddress* is called “RVA” in Hiew.

¹⁵<http://msdn.microsoft.com/en-us/library/windows/desktop/cc307397.aspx>

¹⁶[http://msdn.microsoft.com/en-us/library/windows/desktop/ms680341\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms680341(v=vs.85).aspx)

50.2.6 Relocations (relocs)

AKA FIXUP-s (at least in Hiew).

This is also present in almost all executable file formats¹⁷.

Obviously, modules can be loaded on various base addresses, but how to deal with e.g. global variables? They must be accessed by an address. One solution is position-independent code(49.1). But it is not always suitable.

That is why relocations table is present. The addresses of points needs to be corrected in case of loading on another base address are just enumerated in the table.

For example, there is a global variable at the address 0x410000 and this is how it is accessed:

A1 00 00 41 00	mov	eax, [000410000]
----------------	-----	------------------

Base address of module is 0x400000, RVA of global variable is 0x10000.

If the module is loading on the base address 0x500000, the factual address of the global variable must be 0x510000.

As we can see, address of variable is encoded in the instruction MOV, after the byte 0xA1.

That is why address of 4 bytes, after 0xA1, is written into relocs table.

, OS-loader enumerates all addresses in table, finds each 32-bit word the address points on, subtracts real, original base address of it (we getting RVA here), and adds new base address to it.

If module is loading on original base address, nothing happens.

All global variables may be treated like that.

Relocs may have various types, however, in Windows, for x86 processors, the type is usually `IMAGE_REL_BASED_HIGHLOW`.

By the way, relocs are darkened in Hiew, for example fig.6.12.

50.2.7 Exports and imports

As all we know, any executable program must use OS services and other DLL-libraries somehow.

It can be said, functions from one module (usually DLL) must be connected somehow to a points of their calls in other module (.exe-file or another DLL).

Each DLL has “exports” for this, this is table of functions plus its addresses in a module.

Each .exe-file or DLL has “imports”, this is a table of functions it needs for execution including list of DLL filenames.

After loading main .exe-file, OS-loader, processes imports table: it loads additional DLL-files, finds function names among DLL exports and writes their addresses down in an IAT of main .exe-module.

As we can notice, during loading, loader must compare a lot of function names, but strings comparison is not a very fast procedure, so, there is a support of “ordinals” or “hints”, that is a function numbers stored in the table instead of their names.

That is how they can be located faster in loading DLL. Ordinals are always present in “export” table.

For example, program using MFC¹⁸ library usually loads mfc*.dll by ordinals, and in such programs there are no MFC function names in INT.

While loading such program in IDA, it will asks for a path to mfs*.dll files, in order to determine function names. If not to tell IDA path to this DLL, they will look like `mfc80_123` instead of function names.

Imports section

Often a separate section is allocated for imports table and everything related to it (with name like `.idata`), however, it is not a strict rule.

Imports is also confusing subject because of terminological mess. Let’s try to collect all information in one place.

¹⁷ Even .exe-files in MS-DOS

¹⁸ Microsoft Foundation Classes

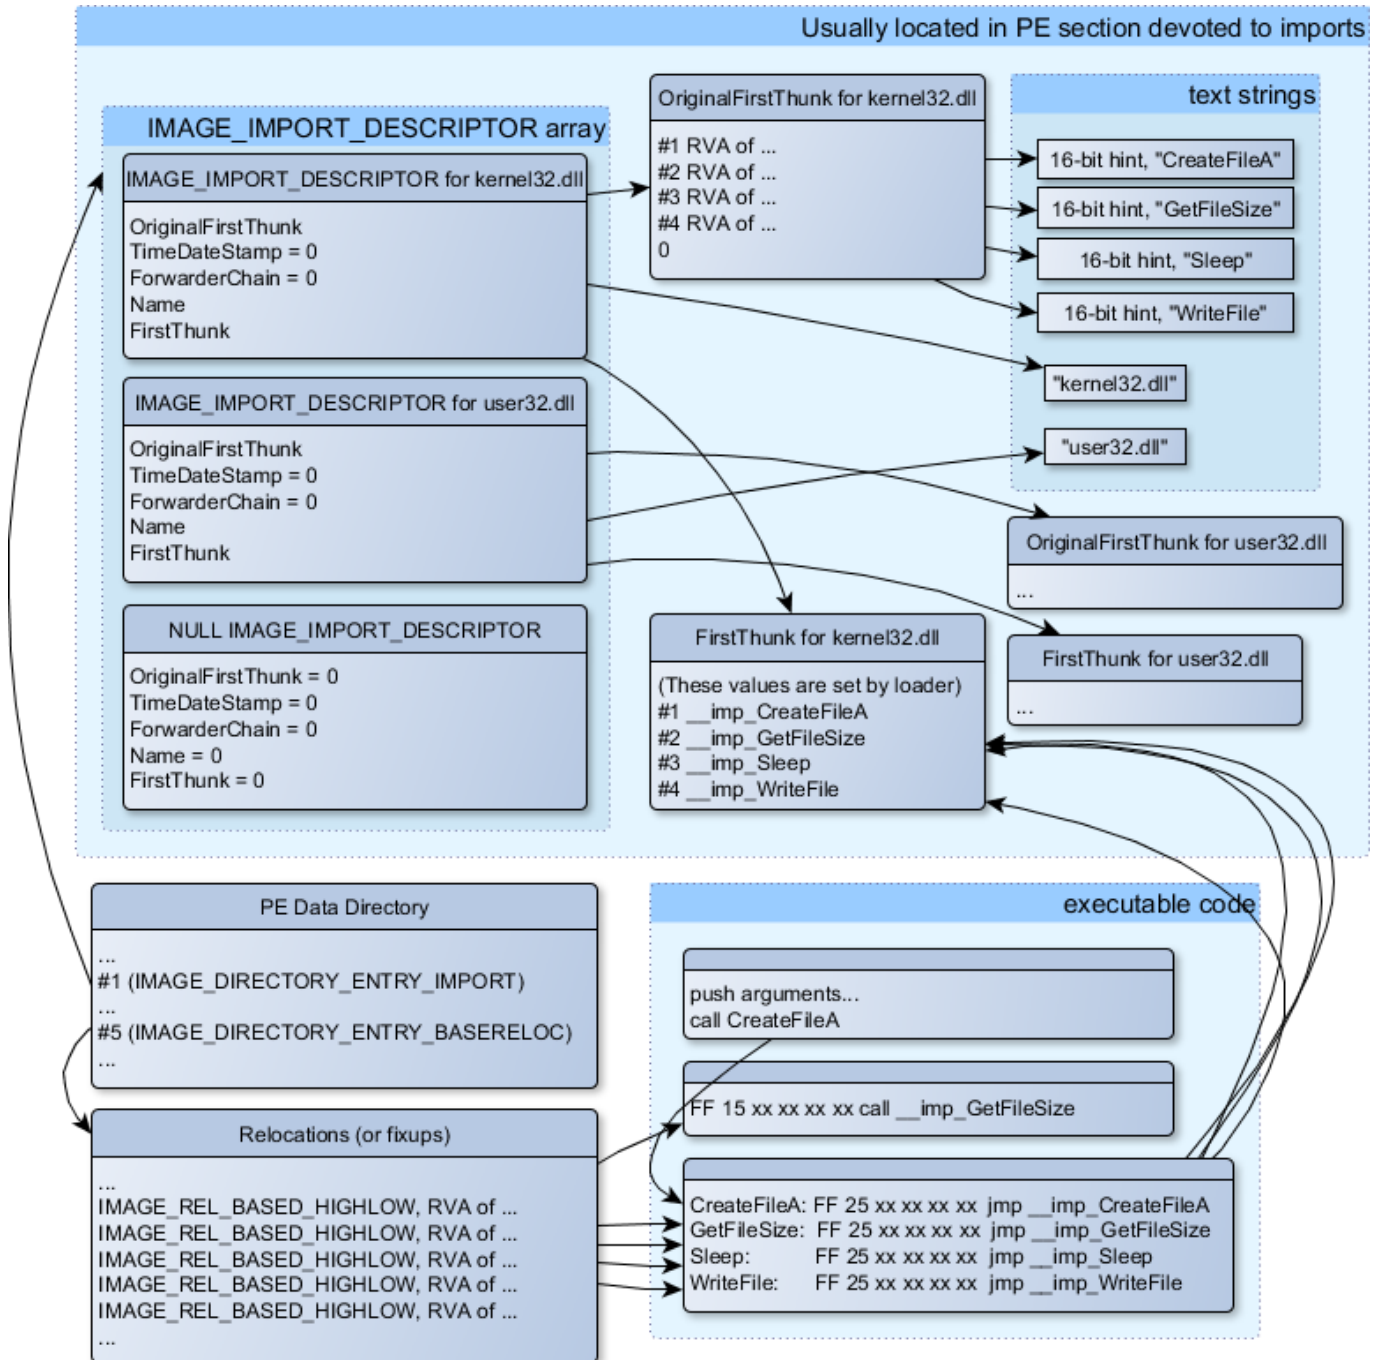


Figure 50.1: The scheme, uniting all PE-file structures related to imports

Main structure is the array of *IMAGE_IMPORT_DESCRIPTOR*. Each element for each DLL being imported.

Each element holds *RVA*-address of text string (DLL name) (*Name*).

OriginalFirstThunk is a *RVA*-address of *INT* table. This is array of *RVA*-addresses, each of which points to the text string with function name. Each string is prefixed by 16-bit integer ("hint")—"ordinal" of function.

While loading, if it is possible to find function by ordinal, then strings comparison will not occur. Array is terminated by zero. There is also a pointer to the *IAT* table with a name *FirstThunk*, it is just *RVA*-address of the place where loader will write addresses of functions resolved.

The points where loader writes addresses, *IDA* marks like: *__imp_CreateFileA*, etc.

There are at least two ways to use addresses written by loader.

- The code will have instructions like *call __imp_CreateFileA*, and since the field with the address of function imported is a global variable in some sense, the address of *call* instruction (plus 1 or 2) will be added to relocs table, for the case if module will be loaded on different base address.

But, obviously, this may enlarge relocs table significantly. Because there are might be a lot of calls to imported functions in the module. Furthermore, large relocs table slowing down the process of module loading.

- For each imported function, there is only one jump allocated, using JMP instruction plus reloc to this instruction. Such points are also called “thunks”. All calls to the imported functions are just CALL instructions to the corresponding “thunk”. In this case, additional relocs are not necessary because these CALL-s has relative addresses, they are not to be corrected.

Both of these methods can be combined. Apparently, linker creates individual “thunk” if there are too many calls to the functions, but by default it is not to be created.

By the way, an array of function addresses to which FirstThunk is pointing is not necessary to be located in IAT section. For example, I once wrote the PE_add_import¹⁹ utility for adding import to an existing .exe-file. Some time earlier, in the previous versions of the utility, at the place of the function you want to substitute by call to another DLL, the following code my utility wrote:

```
MOV EAX, [yourdll.dll!function]
JMP EAX
```

FirstThunk points to the first instruction. In other words, while loading yourdll.dll, loader writes address of the *function* right in the code.

It also worth noting a code section is usually write-protected, so my utility adds IMAGE_SCN_MEM_WRITE flag for code section. Otherwise, the program will crash while loading with the error code 5 (access denied).

One might ask: what if I supply a program with the DLL files set which are not supposed to change, is it possible to speed up loading process?

Yes, it is possible to write addresses of the functions to be imported into FirstThunk arrays in advance. The *Timestamp* field is present in the IMAGE_IMPORT_DESCRIPTOR structure. If a value is present there, then loader compare this value with date-time of the DLL file. If the values are equal to each other, then the loader is not do anything, and loading process will be faster. This is what called “old-style binding”²⁰. There is the BIND.EXE utility in Windows SDK for this. For speeding up of loading of your program, Matt Pietrek in [24], offers to do binding shortly after your program installation on the computer of the end user.

PE-files packers/encryptors may also compress/encrypt imports table. In this case, Windows loader, of course, will not load all necessary DLLs. Therefore, packer/encryptor do this on its own, with the help of LoadLibrary() and GetProcAddress() functions.

In the standard DLLs from Windows installation, often, IAT is located right in the beginning of PE-file. Supposedly, it is done for optimization. While loading, .exe file is not loaded into memory as a whole (recall huge install programs which are started suspiciously fast), it is “mapped”, and loaded into memory by parts as they are accessed. Probably, Microsoft developers decided it will be faster.

50.2.8 Resources

Resources in a PE-file is just a set of icons, pictures, text strings, dialog descriptions. Perhaps, they were separated from the main code, so all these things could be multilingual, and it would be simpler to pick text or picture for the language that is currently set in OS.

As a side effect, they can be edited easily and saved back to the executable file, even, if one does not have special knowledge, e.g. using ResHack editor(50.2.11).

50.2.9 .NET

.NET programs are compiled not into machine code but into special bytecode. Strictly speaking, there is bytecode instead of usual x86-code in the .exe-file, however, entry point (OEP) is pointing to the tiny fragment of x86-code:

```
jmp     mscoree.dll!_CorExeMain
```

.NET-loader is located in mscoree.dll, it will process the PE-file. It was so in pre-Windows XP OS. Starting from XP, OS-loader able to detect the .NET-file and run it without execution of that JMP instruction²¹.

¹⁹http://yurichev.com/PE_add_imports.html

²⁰<http://blogs.msdn.com/b/oldnewthing/archive/2010/03/18/9980802.aspx>. There is also “new-style binding”, I will write about it in future

²¹[http://msdn.microsoft.com/en-us/library/xh0859k0\(v=vs.110\).aspx](http://msdn.microsoft.com/en-us/library/xh0859k0(v=vs.110).aspx)

50.2.10 TLS

This section holds initialized data for TLS(47) (if needed). When new thread starting, its TLS-data is initialized by the data from this section.

Aside from that, PE-file specification also provides initialization of TLS-section, so-called, TLS callbacks. If they are present, they will be called before control passing to the main entry point (OEP). This is used widely in the PE-file packers/encryptors.

50.2.11 Tools

- objdump (from cygwin) for dumping all PE-file structures.
- Hiew(54) as editor.
- pefile — Python-library for PE-file processing²².
- ResHack AKA Resource Hacker — resources editor²³.

50.2.12 Further reading

- Daniel Pistelli — The .NET File Format²⁴

50.3 Windows SEH

50.3.1 Let's forget about MSVC

In Windows, SEH is intended for exceptions handling, nevertheless, it is language-agnostic, it is not connected to the C++ or OOP in any way. Here we will take a look on SEH in isolated (from C++ and MSVC extensions) form.

Each running process has a chain of SEH-handlers, TIB has address of the last handler. When exception occurred (division by zero, incorrect address access, user exception triggered by calling to `RaiseException()` function), OS will find the last handler in TIB, and will call it with passing all information about CPU state (register values, etc) at the moment of exception. Exception handler will consider exception, was it made for it? If so, it will handle exception. If no, it will signal to OS that it cannot handle it and OS will call next handler in chain, until a handler which is able to handle the exception will be found.

At the very end of the chain, there a standard handler, showing well-known dialog box, informing a process crash, some technical information about CPU state at the crash, and offering to collect all information and send it to developers in Microsoft.

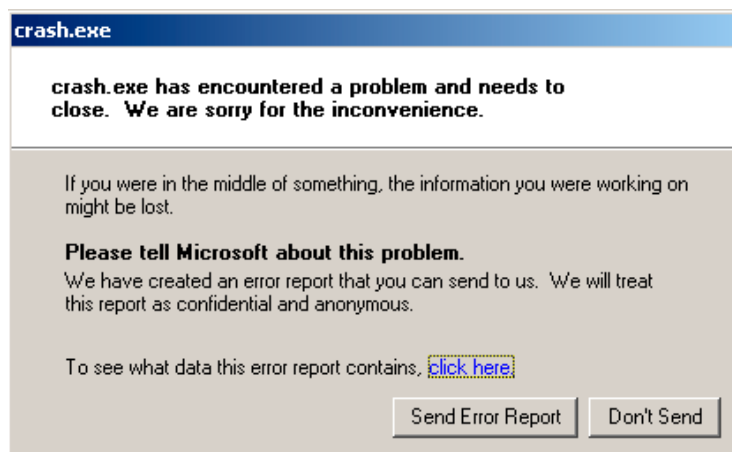


Figure 50.2: Windows XP

²²<https://code.google.com/p/pefile/>

²³<http://www.angusj.com/resourcehacker/>

²⁴<http://www.codeproject.com/Articles/12585/The-NET-File-Format>

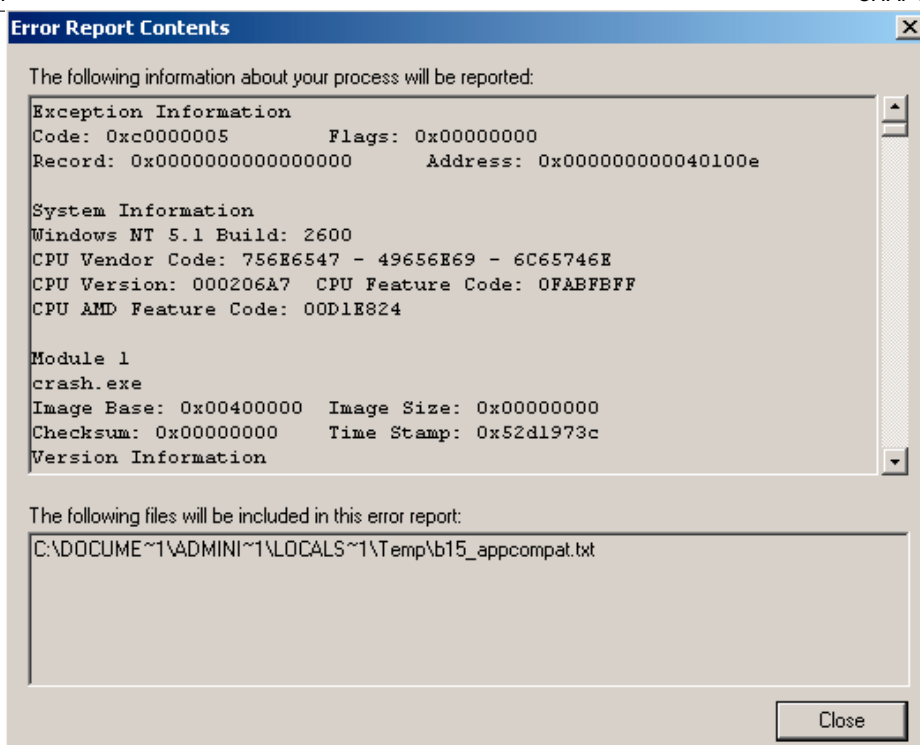


Figure 50.3: Windows XP

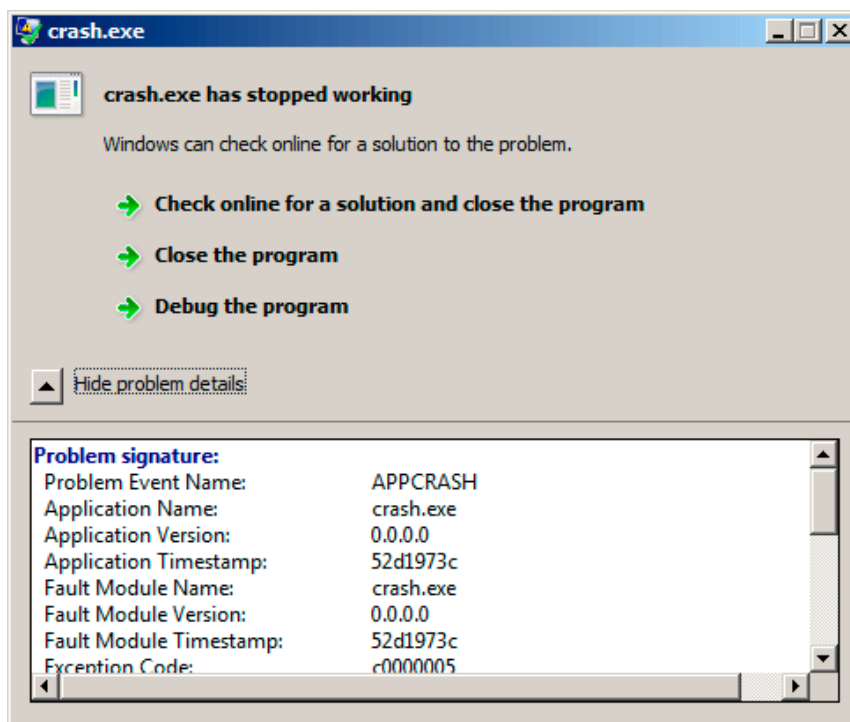


Figure 50.4: Windows 7

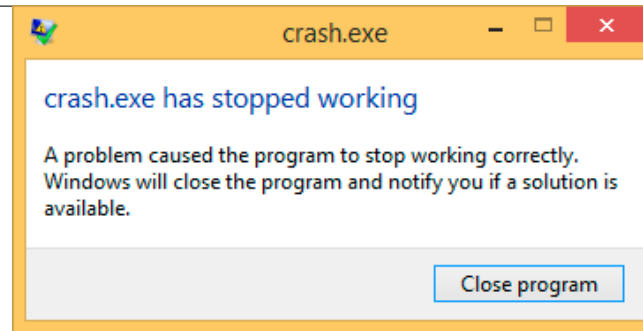


Figure 50.5: Windows 8.1

This handler was also called Dr. Watson earlier ²⁵.

By the way, some developers made their own handler, sending information about program crash to themselves. It is registered with the help of `SetUnhandledExceptionFilter()` and will be called if OS do not have any other way to handle exception. Other example is Oracle RDBMS it saves huge dumps containing all possible information about CPU and memory state.

Let's write our own primitive exception handler ²⁶:

```
#include <windows.h>
#include <stdio.h>

DWORD new_value=1234;

EXCEPTION_DISPOSITION __cdecl except_handler(
    struct _EXCEPTION_RECORD *ExceptionRecord,
    void * EstablisherFrame,
    struct _CONTEXT *ContextRecord,
    void * DispatcherContext )
{
    unsigned i;

    printf ("%s\n", __FUNCTION__);
    printf ("ExceptionRecord->ExceptionCode=0x%p\n", ExceptionRecord->ExceptionCode);
    printf ("ExceptionRecord->ExceptionFlags=0x%p\n", ExceptionRecord->ExceptionFlags);
    printf ("ExceptionRecord->ExceptionAddress=0x%p\n", ExceptionRecord->ExceptionAddress);

    if (ExceptionRecord->ExceptionCode==0xE1223344)
    {
        printf ("That's for us\n");
        // yes, we "handled" the exception
        return ExceptionContinueExecution;
    }
    else if (ExceptionRecord->ExceptionCode==EXCEPTION_ACCESS_VIOLATION)
    {
        printf ("ContextRecord->Eax=0x%08X\n", ContextRecord->Eax);
        // will it be possible to 'fix' it?
        printf ("Trying to fix wrong pointer address\n");
        ContextRecord->Eax=(DWORD)&new_value;
        // yes, we "handled" the exception
        return ExceptionContinueExecution;
    }
    else
    {
        printf ("We do not handle this\n");
        // someone else's problem
    }
}
```

²⁵[https://en.wikipedia.org/wiki/Dr._Watson_\(debugger\)](https://en.wikipedia.org/wiki/Dr._Watson_(debugger))

²⁶The example is based on the example from [23]

It is compiled with the SAFEH option: `cl seh1.cpp /link /safeseh:no`

[More about SAFEH](#)

```

        return ExceptionContinueSearch;
    };
}

int main()
{
    DWORD handler = (DWORD)except_handler; // take a pointer to our handler

    // install exception handler
    __asm
    {
        push    handler           // make EXCEPTION_REGISTRATION record:
        push    FS:[0]            // address of handler function
        push    FS:[0]            // address of previous handler
        mov     FS:[0],ESP        // add new EXCEPTION_REGISTRATION
    }

    RaiseException (0xE1223344, 0, 0, NULL);

    // now do something very bad
    int* ptr=NULL;
    int val=0;
    val=*ptr;
    printf ("val=%d\n", val);

    // deinstall exception handler
    __asm
    {
        mov     eax,[ESP]         // remove our EXCEPTION_REGISTRATION record
        mov     FS:[0], EAX       // get pointer to previous record
        add     esp, 8            // install previous record
        // clean our EXCEPTION_REGISTRATION off stack
    }

    return 0;
}

```

FS: segment register is pointing to the [TIB](#) in win32. The very first element in [TIB](#) is a pointer to the last handler in chain. We saving it in the stack and store an address of our handler there. The structure is named `_EXCEPTION_REGISTRATION`, it is a simplest singly-linked list and its elements are stored right in the stack.


Listing 50.1: MSVC/VC/crt/src/exsup.inc

```

_EXCEPTION_REGISTRATION struc
    prev    dd    ?
    handler dd    ?
_EXCEPTION_REGISTRATION ends

```

So each “handler” field points to handler and an each “prev” field points to previous record in the stack. The last record has 0xFFFFFFFF (-1) in “prev” field.

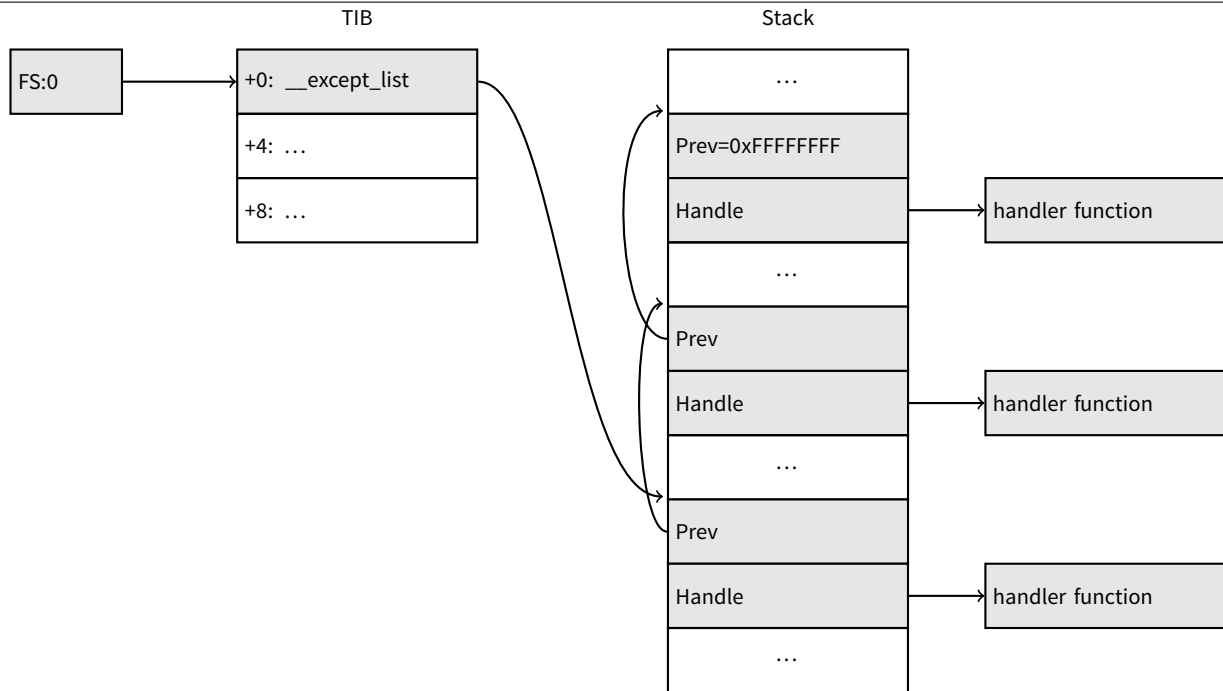


When our handler is installed, let's call `RaiseException()`²⁷. This is user exception. Handler will check the code. If the code is `0xE1223344`, it will return `ExceptionContinueExecution`, which means that handler fixes CPU state (it is usually EIP/ESP) and the OS can resume thread execution. If to alter the code slightly so the handler will return `ExceptionContinueSearch`, then OS will call other handlers, and very unlikely the one who can handle it will be founded, since no one have information about it (rather about its code). You will see the standard Windows dialog about process crash.

What is the difference between system exceptions and user? Here is a system ones:

as defined in WinBase.h	as defined in ntstatus.h	numerical value
EXCEPTION_ACCESS_VIOLATION	STATUS_ACCESS_VIOLATION	0xC0000005
EXCEPTION_DATATYPE_MISALIGNMENT	STATUS_DATATYPE_MISALIGNMENT	0x80000002
EXCEPTION_BREAKPOINT	STATUS_BREAKPOINT	0x80000003
EXCEPTION_SINGLE_STEP	STATUS_SINGLE_STEP	0x80000004
EXCEPTION_ARRAY_BOUNDS_EXCEEDED	STATUS_ARRAY_BOUNDS_EXCEEDED	0xC000008C
EXCEPTION_FLT_DENORMAL_OPERAND	STATUS_FLOAT_DENORMAL_OPERAND	0xC000008D
EXCEPTION_FLT_DIVIDE_BY_ZERO	STATUS_FLOAT_DIVIDE_BY_ZERO	0xC000008E
EXCEPTION_FLT_INEXACT_RESULT	STATUS_FLOAT_INEXACT_RESULT	0xC000008F
EXCEPTION_FLT_INVALID_OPERATION	STATUS_FLOAT_INVALID_OPERATION	0xC0000090
EXCEPTION_FLT_OVERFLOW	STATUS_FLOAT_OVERFLOW	0xC0000091
EXCEPTION_FLT_STACK_CHECK	STATUS_FLOAT_STACK_CHECK	0xC0000092
EXCEPTION_FLT_UNDERFLOW	STATUS_FLOAT_UNDERFLOW	0xC0000093
EXCEPTION_INT_DIVIDE_BY_ZERO	STATUS_INTEGER_DIVIDE_BY_ZERO	0xC0000094
EXCEPTION_INT_OVERFLOW	STATUS_INTEGER_OVERFLOW	0xC0000095
EXCEPTION_PRIV_INSTRUCTION	STATUS_PRIVILEGED_INSTRUCTION	0xC0000096
EXCEPTION_IN_PAGE_ERROR	STATUS_IN_PAGE_ERROR	0xC0000006
EXCEPTION_ILLEGAL_INSTRUCTION	STATUS_ILLEGAL_INSTRUCTION	0xC000001D
EXCEPTION_NONCONTINUABLE_EXCEPTION	STATUS_NONCONTINUABLE_EXCEPTION	0xC0000025
EXCEPTION_STACK_OVERFLOW	STATUS_STACK_OVERFLOW	0xC00000FD
EXCEPTION_INVALID_DISPOSITION	STATUS_INVALID_DISPOSITION	0xC0000026
EXCEPTION_GUARD_PAGE	STATUS_GUARD_PAGE_VIOLATION	0x80000001
EXCEPTION_INVALID_HANDLE	STATUS_INVALID_HANDLE	0xC0000008
EXCEPTION_POSSIBLE_DEADLOCK	STATUS_POSSIBLE_DEADLOCK	0xC0000194
CONTROL_C_EXIT	STATUS_CONTROL_C_EXIT	0xC000013A

That is how code is defined:



²⁷[http://msdn.microsoft.com/en-us/library/windows/desktop/ms680552\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms680552(v=vs.85).aspx)

S is a basic status code: 11—error; 10—warning; 01—informational; 00—success. U—whether the code is user code.

That is why I chose 0xE1223344— 0xE (1110b) mean this is 1) user exception; 2) error. But to be honest, this example works finely without these high bits.

Then we try to read a value from memory at the 0th address. Of course, there are nothing at this address in win32, so exception is raised. However, the very first handler will be called — yours, it will be notified first, checking the code on equality to the EXCEPTION_ACCESS_VIOLATION constant.

The code reading from memory at 0th address is looks like:

Listing 50.2: MSVC 2010

```
...
xor     eax, eax
mov     eax, DWORD PTR [eax] ; exception will occur here
push    eax
push    OFFSET msg
call    _printf
add     esp, 8
...
```

Will it be possible to fix error “on fly” and to continue program execution? Yes, our exception handler can fix EAX value and now let OS will execute this instruction once again. So that is what we do. `printf()` will print 1234, because, after execution of our handler, EAX will not be 0, it will contain address of global variable `new_value`. Execution will be resumed.

That is what is going on: memory manager in CPU signaling about error, the CPU suspends the thread, it finds exception handler in the Windows kernel, latter, in turn, is starting to call all handlers in SEH chain, one by one.

I use MSVC 2010 now, but of course, there are no any guarantee that EAX will be used for pointer.

This address replacement trick is looks showingly, and I offer it here for SEH internals illustration. Nevertheless, I cannot recall where it is used for “on-fly” error fixing in practice.

Why SEH-related records are stored right in the stack instead of some other place? Supposedly because then OS will not need to care about freeing this information, these records will be disposed when function finishing its execution. But I’m not 100%-sure and can be wrong. This is somewhat like `alloca()`: (4.2.4).

50.3.2 Now let’s get back to MSVC

Supposedly, Microsoft programmers need exceptions in C, but not in C++, so they added a non-standard C extension to MSVC²⁸. It is not related to C++ PL exceptions.

```
--try
{
    ...
}
__except(filter code)
{
    handler code
}
```

“Finally” block may be instead of handler code:

```
--try
{
    ...
}
__finally
{
    ...
}
```

The filter code is an expression, telling whether this handler code is coressponding to the exception raised. If your code is too big and cannot be fitted into one expression, a separate filter function can be defined.

There are a lot of such constructs in the Windows kernel. Here is couple of examples from there (WRK):

²⁸<http://msdn.microsoft.com/en-us/library/swepty51.aspx>

Listing 50.3: WRK-v1.2/base/ntos/ob/obwait.c

```

try {

    KeReleaseMutant( (PKMUTANT)SignalObject,
                     MUTANT_INCREMENT,
                     FALSE,
                     TRUE );

} except((GetExceptionCode () == STATUS_ABANDONED ||
         GetExceptionCode () == STATUS_MUTANT_NOT_OWNED)?
        EXCEPTION_EXECUTE_HANDLER :
        EXCEPTION_CONTINUE_SEARCH) {
    Status = GetExceptionCode();

    goto WaitExit;
}

```

Listing 50.4: WRK-v1.2/base/ntos/cache/cachesub.c

```

try {

    RtlCopyBytes( (PVOID)((PCHAR)CacheBuffer + PageOffset),
                  UserBuffer,
                  MorePages ?
                    (PAGE_SIZE - PageOffset) :
                    (ReceivedLength - PageOffset) );

} except( CcCopyReadExceptionFilter( GetExceptionInformation(),
                                     &Status ) ) {

```

Here is also filter code example:

Listing 50.5: WRK-v1.2/base/ntos/cache/copysup.c

```

LONG
CcCopyReadExceptionFilter(
    IN PEXCEPTION_POINTERS ExceptionPointer,
    IN PNTSTATUS ExceptionCode
)

/**+

Routine Description:

    This routine serves as a exception filter and has the special job of
    extracting the "real" I/O error when Mm raises STATUS_IN_PAGE_ERROR
    beneath us.

Arguments:

    ExceptionPointer - A pointer to the exception record that contains
                      the real Io Status.

    ExceptionCode - A pointer to an NTSTATUS that is to receive the real
                   status.

Return Value:

    EXCEPTION_EXECUTE_HANDLER

--*/

```

```

{
    *ExceptionCode = ExceptionPointer->ExceptionRecord->ExceptionCode;

    if ( (*ExceptionCode == STATUS_IN_PAGE_ERROR) &&
        (ExceptionPointer->ExceptionRecord->NumberParameters >= 3) ) {

        *ExceptionCode = (NTSTATUS) ExceptionPointer->ExceptionRecord->ExceptionInformation[2];
    }

    ASSERT( !NT_SUCCESS(*ExceptionCode) );

    return EXCEPTION_EXECUTE_HANDLER;
}


```

Internally, SEH is an extension of OS-supported exceptions. But the handler function is `_except_handler3` (for SEH3) or `_except_handler4` (for SEH4). The code of this handler is MSVC-related, it is located in its libraries, or in `msvcr*.dll`. It is very important to know that SEH is MSVC thing. Other compilers may offer something completely different.

SEH3

SEH3 has `_except_handler3` as handler functions, and extends `_EXCEPTION_REGISTRATION` table, adding a pointer to the *scope table* and *previous try level* variable. SEH4 extends *scope table* by 4 values for buffer overflow protection.

Scope table is a table consisting of pointers to the filter and handler codes, for each level of *try/except* nestedness.

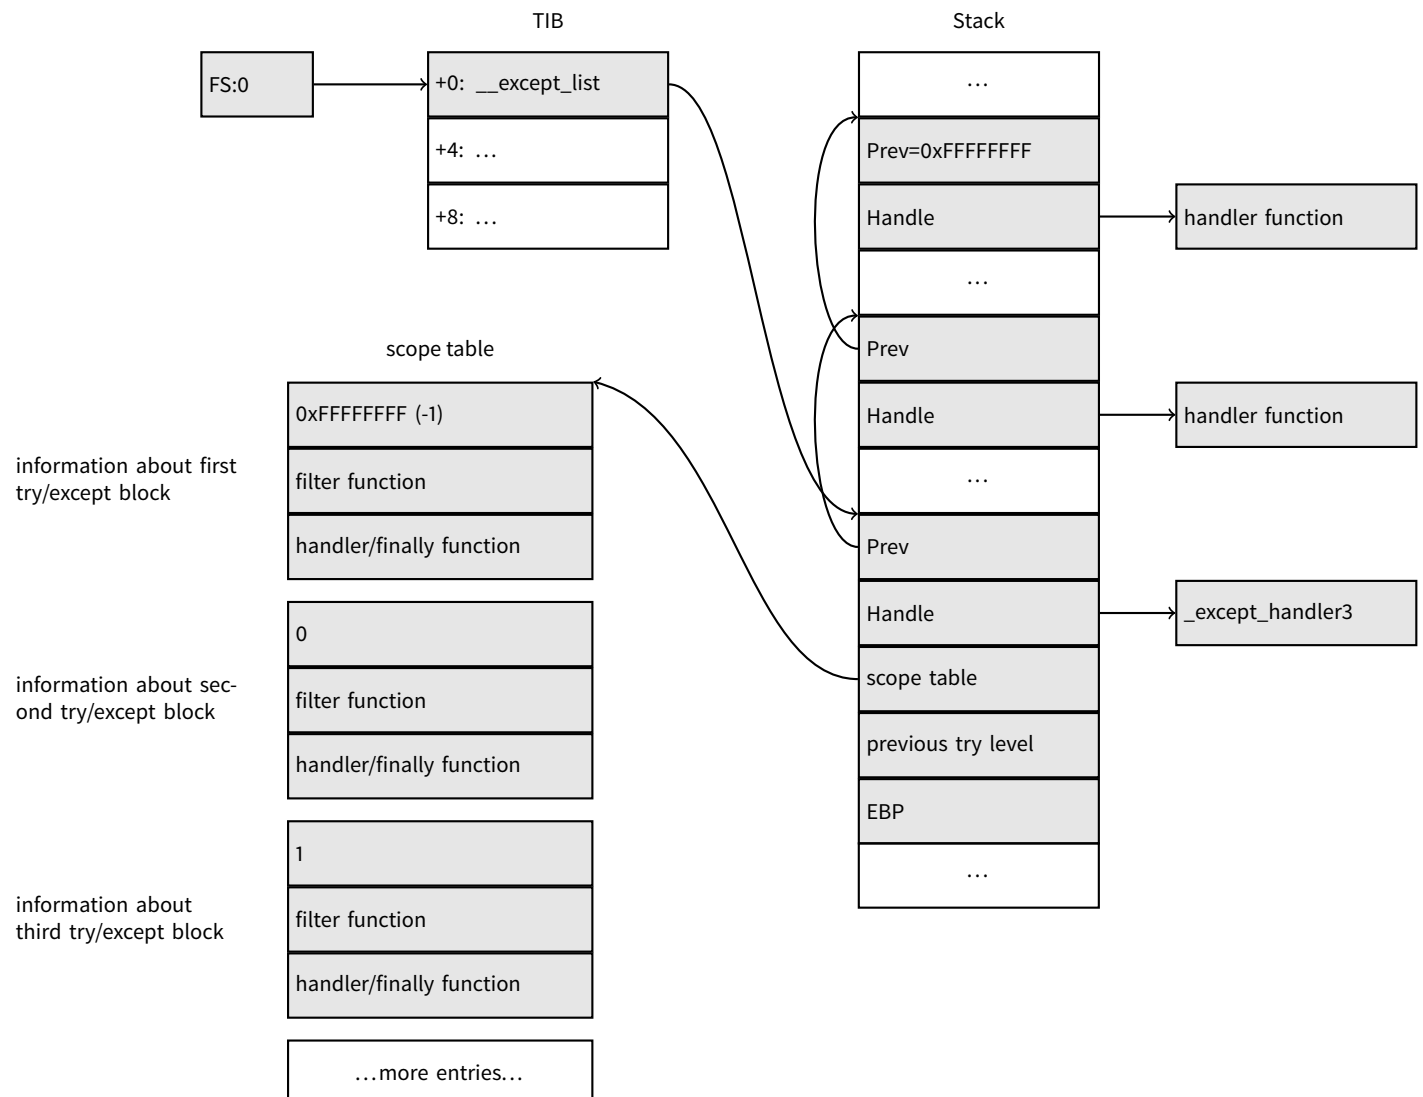

Again, it is very important to understand that OS take care only of *prev/handle* fields, and nothing more. It is job of `_except_handler3` function to read other fields, read *scope table*, and decide, which handler to execute and when.

The source code of `_except_handler3` function is closed. However, Sanos OS, which have win32 compatibility layer, has the same functions redeveloped, which are somewhat equivalent to those in Windows²⁹. Another reimplementations are present in Wine³⁰ and ReactOS³¹.

If the *filter* pointer is zero, *handler* pointer is the pointer to a *finally* code.

During execution, *previous try level* value in the stack is changing, so the `_except_handler3` will know about current state of nestedness, in order to know which *scope table* entry to use.

SEH3: one try/except block example

```
#include <stdio.h>
#include <windows.h>
#include <except.h>

int main()
{
    int* p = NULL;
    __try
    {
        printf("hello #1!\n");
        *p = 13;    // causes an access violation exception;
        printf("hello #2!\n");
    }
    __except(GetExceptionCode()==EXCEPTION_ACCESS_VIOLATION ?
             EXCEPTION_EXECUTE_HANDLER : EXCEPTION_CONTINUE_SEARCH)
    {
        printf("access violation, can't recover\n");
    }
}
```

Listing 50.6: MSVC 2003

```
$SG74605 DB    'hello #1!', 0aH, 00H
          ORG $+1
$SG74606 DB    'hello #2!', 0aH, 00H
          ORG $+1
$SG74608 DB    'access violation, can't recover', 0aH, 00H
_DATA      ENDS

; scope table

CONST      SEGMENT
$T74622 DD      0fffffffH    ; previous try level
          DD      FLAT:$L74617 ; filter
          DD      FLAT:$L74618 ; handler

CONST      ENDS
_TEXT      SEGMENT
$T74621 = -32    ; size = 4
_p$ = -28       ; size = 4
__$SEHRec$ = -24 ; size = 24
_main      PROC NEAR
          push    ebp
          mov     ebp, esp
```

²⁹<https://code.google.com/p/sanos/source/browse/src/win32/msvcrt/except.c>

³⁰https://github.com/mirrors/wine/blob/master/dlls/msvcrt/except_i386.c

³¹http://doxygen.reactos.org/d4/df2/lib_2sdk_2crt_2except_2except_8c_source.html

```

    push    -1                ; previous try level
    push    OFFSET FLAT:$T74622    ; scope table
    push    OFFSET FLAT:__except_handler3 ; handler
    mov     eax, DWORD PTR fs:__except_list
    push    eax                ; prev
    mov     DWORD PTR fs:__except_list, esp
    add     esp, -16
    push    ebx                ; saved 3 registers
    push    esi                ; saved 3 registers
    push    edi                ; saved 3 registers
    mov     DWORD PTR __$SEHRec$[ebp], esp
    mov     DWORD PTR _p$[ebp], 0
    mov     DWORD PTR __$SEHRec$[ebp+20], 0 ; previous try level
    push    OFFSET FLAT:$SG74605 ; 'hello #1!'
    call    _printf
    add     esp, 4
    mov     eax, DWORD PTR _p$[ebp]
    mov     DWORD PTR [eax], 13
    push    OFFSET FLAT:$SG74606 ; 'hello #2!'
    call    _printf
    add     esp, 4
    mov     DWORD PTR __$SEHRec$[ebp+20], -1 ; previous try level
    jmp     SHORT $L74616

; filter code

$L74617:
$L74627:
    mov     ecx, DWORD PTR __$SEHRec$[ebp+4]
    mov     edx, DWORD PTR [ecx]
    mov     eax, DWORD PTR [edx]
    mov     DWORD PTR $T74621[ebp], eax
    mov     eax, DWORD PTR $T74621[ebp]
    sub     eax, -1073741819; c0000005H
    neg     eax
    sbb     eax, eax
    inc     eax

$L74619:
$L74626:
    ret     0

; handler code

$L74618:
    mov     esp, DWORD PTR __$SEHRec$[ebp]
    push    OFFSET FLAT:$SG74608 ; 'access violation, can't recover'
    call    _printf
    add     esp, 4
    mov     DWORD PTR __$SEHRec$[ebp+20], -1 ; setting previous try level back to -1
$L74616:
    xor     eax, eax
    mov     ecx, DWORD PTR __$SEHRec$[ebp+8]
    mov     DWORD PTR fs:__except_list, ecx
    pop     edi
    pop     esi
    pop     ebx
    mov     esp, ebp
    pop     ebp
    ret     0
_main    ENDP
_TEXT    ENDS

```

END

Here we see how SEH frame is being constructed in the stack. *Scope table* is located in the CONST segment—indeed, these fields will not be changed. An interesting thing is how *previous try level* variable is changed. Initial value is 0xFFFFFFFF (−1). The moment when body of try statement is opened is marked as an instruction writing 0 to the variable. The moment when body of try statement is closed, −1 is returned back to it. We also see addresses of filter and handler code. Thus we can easily see the structure of *try/except* constructs in the function.

Since the SEH setup code in the function prologue may be shared between many of functions, sometimes compiler inserts a call to `SEH_prolog()` function in the prologue, which do that. SEH cleanup code may be in the `SEH_epilog()` function.

Let's try to run this example in [tracer](#):

```
tracer.exe -l:2.exe --dump-seh
```

Listing 50.7: tracer.exe output

```
EXCEPTION_ACCESS_VIOLATION at 2.exe!main+0x44 (0x401054) ExceptionInformation[0]=1
EAX=0x00000000 EBX=0x7efde000 ECX=0x0040cbc8 EDX=0x0008e3c8
ESI=0x00001db1 EDI=0x00000000 EBP=0x0018feac ESP=0x0018fe80
EIP=0x00401054
FLAGS=AF IF RF
* SEH frame at 0x18fe9c prev=0x18ff78 handler=0x401204 (2.exe!_except_handler3)
SEH3 frame. previous trylevel=0
scopetable entry[0]. previous try level=-1, filter=0x401070 (2.exe!main+0x60) handler=0x401088
(2.exe!main+0x78)
* SEH frame at 0x18ff78 prev=0x18ffc4 handler=0x401204 (2.exe!_except_handler3)
SEH3 frame. previous trylevel=0
scopetable entry[0]. previous try level=-1, filter=0x401531 (2.exe!mainCRTStartup+0x18d) handler
=0x401545 (2.exe!mainCRTStartup+0x1a1)
* SEH frame at 0x18ffc4 prev=0x18ffe4 handler=0x771f71f5 (ntdll.dll!__except_handler4)
SEH4 frame. previous trylevel=0
SEH4 header:      GSCookieOffset=0xffffffff GSCookieXOROffset=0x0
                  EHCookieOffset=0xffffffff EHCookieXOROffset=0x0
scopetable entry[0]. previous try level=-2, filter=0x771f74d0 (ntdll.dll!__safe_se_handler_table
+0x20) handler=0x771f90eb (ntdll.dll!_TppTerminateProcess@4+0x43)
* SEH frame at 0x18ffe4 prev=0xffffffff handler=0x77247428 (ntdll.dll!_FinalExceptionHandler@16)
```

We that SEH chain consisting of 4 handlers.

First two are located in our example. Two? But we made only one? Yes, another one is setting up in [CRT](#) function `_mainCRTStartup()`, and as it seems, it handles at least [FPU](#) exceptions. Its source code can be found in MSVS installation: `crt/src/winxfldr.c`.

Third is SEH4 frame in `ntdll.dll`, and the fourth handler is not MSVC-related located in `ntdll.dll`, and it has self-describing function name.

As you can see, there are 3 types of handlers in one chain: one is not related to MSVC at all (the last one) and two MSVC-related: SEH3 and SEH4.

SEH3: two try/except blocks example

```
#include <stdio.h>
#include <windows.h>
#include <excpt.h>

int filter_user_exceptions (unsigned int code, struct _EXCEPTION_POINTERS *ep)
{
    printf("in filter. code=0x%08X\n", code);
    if (code == 0x112233)
    {
        printf("yes, that is our exception\n");
        return EXCEPTION_EXECUTE_HANDLER;
    }
}
```

```

    }
    else
    {
        printf("not our exception\n");
        return EXCEPTION_CONTINUE_SEARCH;
    };
}
int main()
{
    int* p = NULL;
    __try
    {
        __try
        {
            printf ("hello!\n");
            RaiseException (0x112233, 0, 0, NULL);
            printf ("0x112233 raised. now let's crash\n");
            *p = 13;    // causes an access violation exception;
        }
        __except(GetExceptionCode()==EXCEPTION_ACCESS_VIOLATION ?
                EXCEPTION_EXECUTE_HANDLER : EXCEPTION_CONTINUE_SEARCH)
        {
            printf("access violation, can't recover\n");
        }
    }
    __except(filter_user_exceptions(GetExceptionCode(), GetExceptionInformation()))
    {
        // the filter_user_exceptions() function answering to the question
        // "is this exception belongs to this block?"
        // if yes, do the follow:
        printf("user exception caught\n");
    }
}

```

Now there are two try blocks. So the *scope table* now have two entries, each entry for each block. *Previous try level* is changing as execution flow entering or exiting try block.

Listing 50.8: MSVC 2003

```

$SG74606 DB      'in filter. code=0x%08X', 0aH, 00H
$SG74608 DB      'yes, that is our exception', 0aH, 00H
$SG74610 DB      'not our exception', 0aH, 00H
$SG74617 DB      'hello!', 0aH, 00H
$SG74619 DB      '0x112233 raised. now let's crash', 0aH, 00H
$SG74621 DB      'access violation, can't recover', 0aH, 00H
$SG74623 DB      'user exception caught', 0aH, 00H

_code$ = 8      ; size = 4
_ep$ = 12      ; size = 4
_filter_user_exceptions PROC NEAR
    push        ebp
    mov         ebp, esp
    mov         eax, DWORD PTR _code$[ebp]
    push        eax
    push        OFFSET FLAT:$SG74606 ; 'in filter. code=0x%08X'
    call        _printf
    add         esp, 8
    cmp         DWORD PTR _code$[ebp], 1122867; 00112233H
    jne         SHORT $L74607
    push        OFFSET FLAT:$SG74608 ; 'yes, that is our exception'
    call        _printf
    add         esp, 4

```

```

        mov     eax, 1
        jmp     SHORT $L74605
$L74607:
        push    OFFSET FLAT:$SG74610 ; 'not our exception'
        call    _printf
        add     esp, 4
        xor     eax, eax
$L74605:
        pop     ebp
        ret     0
_filter_user_exceptions ENDP

; scope table

CONST    SEGMENT
$T74644 DD      0fffffffH    ; previous try level for outer block
        DD      FLAT:$L74634 ; outer block filter
        DD      FLAT:$L74635 ; outer block handler
        DD      00H          ; previous try level for inner block
        DD      FLAT:$L74638 ; inner block filter
        DD      FLAT:$L74639 ; inner block handler
CONST    ENDS

$T74643 = -36          ; size = 4
$T74642 = -32          ; size = 4
_p$ = -28              ; size = 4
__$SEHRec$ = -24       ; size = 24
_main    PROC NEAR
        push    ebp
        mov     ebp, esp
        push    -1                      ; previous try level
        push    OFFSET FLAT:$T74644
        push    OFFSET FLAT:__except_handler3
        mov     eax, DWORD PTR fs:__except_list
        push    eax
        mov     DWORD PTR fs:__except_list, esp
        add     esp, -20
        push    ebx
        push    esi
        push    edi
        mov     DWORD PTR __$SEHRec$[ebp], esp
        mov     DWORD PTR _p$[ebp], 0
        mov     DWORD PTR __$SEHRec$[ebp+20], 0          ; outer try block entered. set previous
try level to 0
        mov     DWORD PTR __$SEHRec$[ebp+20], 1          ; inner try block entered. set previous
try level to 1
        push    OFFSET FLAT:$SG74617 ; 'hello!'
        call    _printf
        add     esp, 4
        push    0
        push    0
        push    0
        push    1122867 ; 00112233H
        call    DWORD PTR __imp__RaiseException@16
        push    OFFSET FLAT:$SG74619 ; '0x112233 raised. now let''s crash'
        call    _printf
        add     esp, 4
        mov     eax, DWORD PTR _p$[ebp]
        mov     DWORD PTR [eax], 13
        mov     DWORD PTR __$SEHRec$[ebp+20], 0          ; inner try block exited. set previous
try level back to 0

```

```

        jmp     SHORT $L74615

        ; inner block filter

$L74638:
$L74650:
        mov     ecx, DWORD PTR __$SEHRec$[ebp+4]
        mov     edx, DWORD PTR [ecx]
        mov     eax, DWORD PTR [edx]
        mov     DWORD PTR $T74643[ebp], eax
        mov     eax, DWORD PTR $T74643[ebp]
        sub     eax, -1073741819; c0000005H
        neg     eax
        sbb     eax, eax
        inc     eax
$L74640:
$L74648:
        ret     0

        ; inner block handler

$L74639:
        mov     esp, DWORD PTR __$SEHRec$[ebp]
        push    OFFSET FLAT:$SG74621 ; 'access violation, can't recover'
        call    _printf
        add     esp, 4
        mov     DWORD PTR __$SEHRec$[ebp+20], 0 ; inner try block exited. set previous try level
back to 0

$L74615:
        mov     DWORD PTR __$SEHRec$[ebp+20], -1 ; outer try block exited, set previous try level
back to -1
        jmp     SHORT $L74633

        ; outer block filter

$L74634:
$L74651:
        mov     ecx, DWORD PTR __$SEHRec$[ebp+4]
        mov     edx, DWORD PTR [ecx]
        mov     eax, DWORD PTR [edx]
        mov     DWORD PTR $T74642[ebp], eax
        mov     ecx, DWORD PTR __$SEHRec$[ebp+4]
        push    ecx
        mov     edx, DWORD PTR $T74642[ebp]
        push    edx
        call    _filter_user_exceptions
        add     esp, 8
$L74636:
$L74649:
        ret     0

        ; outer block handler

$L74635:
        mov     esp, DWORD PTR __$SEHRec$[ebp]
        push    OFFSET FLAT:$SG74623 ; 'user exception caught'
        call    _printf
        add     esp, 4
        mov     DWORD PTR __$SEHRec$[ebp+20], -1 ; both try blocks exited. set previous try level
back to -1

```

```

$L74633:
    xor     eax, eax
    mov     ecx, DWORD PTR __$SEHRec$[ebp+8]
    mov     DWORD PTR fs:__except_list, ecx
    pop     edi
    pop     esi
    pop     ebx
    mov     esp, ebp
    pop     ebp
    ret     0
_main     ENDP

```

If to set a breakpoint on `printf()` function which is called from the handler, we may also see how yet another SEH handler is added. Perhaps, yet another machinery inside of SEH handling process. Here we also see our *scope table* consisting of 2 entries.

```
tracer.exe -l:3.exe bpx=3.exe!printf --dump-seh
```

Listing 50.9: tracer.exe output

```


(0) 3.exe!printf
EAX=0x0000001b EBX=0x00000000 ECX=0x0040cc58 EDX=0x0008e3c8
ESI=0x00000000 EDI=0x00000000 EBP=0x0018f840 ESP=0x0018f838
EIP=0x004011b6
FLAGS=PF ZF IF
* SEH frame at 0x18f88c prev=0x18fe9c handler=0x771db4ad (ntdll.dll!ExecuteHandler2@20+0x3a)
* SEH frame at 0x18fe9c prev=0x18ff78 handler=0x4012e0 (3.exe!_except_handler3)
SEH3 frame. previous trylevel=1
scopetable entry[0]. previous try level=-1, filter=0x401120 (3.exe!main+0xb0) handler=0x40113b
(3.exe!main+0xcb)
scopetable entry[1]. previous try level=0, filter=0x4010e8 (3.exe!main+0x78) handler=0x401100 (3.
exe!main+0x90)
* SEH frame at 0x18ff78 prev=0x18ffc4 handler=0x4012e0 (3.exe!_except_handler3)
SEH3 frame. previous trylevel=0
scopetable entry[0]. previous try level=-1, filter=0x40160d (3.exe!mainCRTStartup+0x18d) handler
=0x401621 (3.exe!mainCRTStartup+0x1a1)
* SEH frame at 0x18ffc4 prev=0x18ffe4 handler=0x771f71f5 (ntdll.dll!__except_handler4)
SEH4 frame. previous trylevel=0
SEH4 header:      GSCookieOffset=0xffffffff EHCookieXOROffset=0x0
                  EHCookieOffset=0xffffffff EHCookieXOROffset=0x0
scopetable entry[0]. previous try level=-2, filter=0x771f74d0 (ntdll.dll!__safe_se_handler_table
+0x20) handler=0x771f90eb (ntdll.dll!_TppTerminateProcess@4+0x43)
* SEH frame at 0x18ffe4 prev=0xffffffff handler=0x77247428 (ntdll.dll!_FinalExceptionHandler@16)

```

SEH4

During buffer overflow (16.2) attack, address of the *scope table* can be rewritten, so starting at MSVC 2005, SEH3 was upgraded to SEH4 in order to have buffer overflow protection. The pointer to *scope table* is now *xored* with *security cookie*. *Scope table* extended to have a header, consisting of two pointers to *security cookies*. Each element have an offset inside of stack of another value: this is address of *stack frame* (EBP) *xored* with *security_cookie* as well, placed in the stack. This value will be read during exception handling and checked, if it is correct. *Security cookie* in the stack is random each time, so remote attacker, hopefully, will not be able to predict it.

Initial *previous try level* is -2 in SEH4 instead of -1 .

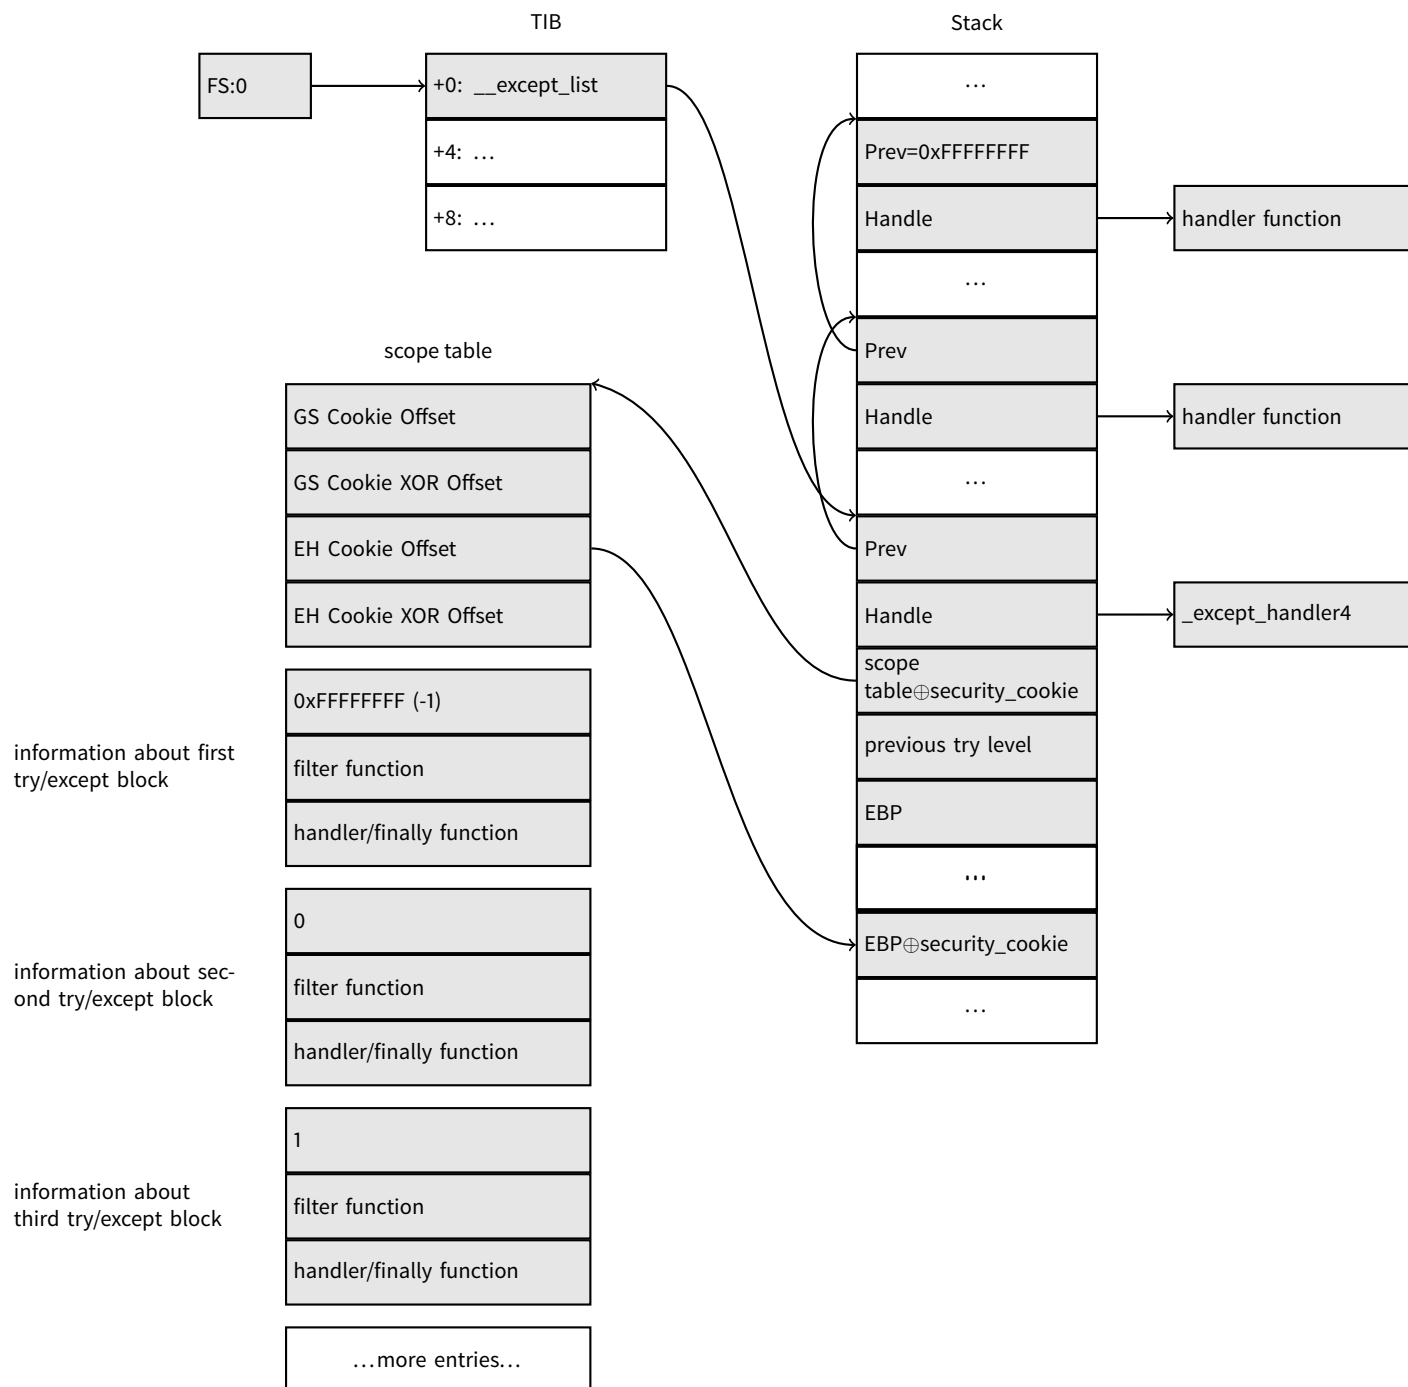

Here is both examples compiled in MSVC 2012 with SEH4:

Listing 50.10: MSVC 2012: one try block example

```
$SG85485 DB 'hello #1!', 0aH, 00H
$SG85486 DB 'hello #2!', 0aH, 00H
$SG85488 DB 'access violation, can't recover', 0aH, 00H

; scope table

xdata$x SEGMENT
__sehtable$_main DD 0fffffffH ; GS Cookie Offset
                DD 00H ; GS Cookie XOR Offset
                DD 0ffffffcH ; EH Cookie Offset
                DD 00H ; EH Cookie XOR Offset
                DD 0fffffffH ; previous try level
                DD FLAT:$LN12@main ; filter
```

```

        DD      FLAT:$LN8@main ; handler
xdata$x ENDS

$T2 = -36          ; size = 4
_p$ = -32          ; size = 4
tv68 = -28         ; size = 4
__$SEHRec$ = -24   ; size = 24
_main PROC
    push    ebp
    mov     ebp, esp
    push    -2
    push    OFFSET __sehtable$_main
    push    OFFSET __except_handler4
    mov     eax, DWORD PTR fs:0
    push    eax
    add     esp, -20
    push    ebx
    push    esi
    push    edi
    mov     eax, DWORD PTR ___security_cookie
    xor     DWORD PTR __$_SEHRec$[ebp+16], eax ; xored pointer to scope table
    xor     eax, ebp
    push    eax ; ebp ^ security_cookie
    lea     eax, DWORD PTR __$_SEHRec$[ebp+8] ; pointer to VC_EXCEPTION_REGISTRATION_RECORD
    mov     DWORD PTR fs:0, eax
    mov     DWORD PTR __$_SEHRec$[ebp], esp
    mov     DWORD PTR _p$[ebp], 0
    mov     DWORD PTR __$_SEHRec$[ebp+20], 0 ; previous try level
    push    OFFSET $SG85485 ; 'hello #1!'
    call    _printf
    add     esp, 4
    mov     eax, DWORD PTR _p$[ebp]
    mov     DWORD PTR [eax], 13
    push    OFFSET $SG85486 ; 'hello #2!'
    call    _printf
    add     esp, 4
    mov     DWORD PTR __$_SEHRec$[ebp+20], -2 ; previous try level
    jmp     SHORT $LN6@main

; filter

$LN7@main:
$LN12@main:
    mov     ecx, DWORD PTR __$_SEHRec$[ebp+4]
    mov     edx, DWORD PTR [ecx]
    mov     eax, DWORD PTR [edx]
    mov     DWORD PTR $T2[ebp], eax
    cmp     DWORD PTR $T2[ebp], -1073741819 ; c0000005H
    jne     SHORT $LN4@main
    mov     DWORD PTR tv68[ebp], 1
    jmp     SHORT $LN5@main
$LN4@main:
    mov     DWORD PTR tv68[ebp], 0
$LN5@main:
    mov     eax, DWORD PTR tv68[ebp]
$LN9@main:
$LN11@main:
    ret     0

; handler

```

```

$LN8@main:
    mov     esp, DWORD PTR __$SEHRec$[ebp]
    push    OFFSET $SG85488                ; 'access violation, can't recover'
    call    _printf
    add     esp, 4
    mov     DWORD PTR __$SEHRec$[ebp+20], -2 ; previous try level
$LN6@main:
    xor     eax, eax
    mov     ecx, DWORD PTR __$SEHRec$[ebp+8]
    mov     DWORD PTR fs:0, ecx
    pop     ecx
    pop     edi
    pop     esi
    pop     ebx
    mov     esp, ebp
    pop     ebp
    ret     0
_main     ENDP

```

Listing 50.11: MSVC 2012: two try blocks example

```

$SG85486 DB 'in filter. code=0x%08X', 0Ah, 00H
$SG85488 DB 'yes, that is our exception', 0Ah, 00H
$SG85490 DB 'not our exception', 0Ah, 00H
$SG85497 DB 'hello!', 0Ah, 00H
$SG85499 DB '0x112233 raised. now let's crash', 0Ah, 00H
$SG85501 DB 'access violation, can't recover', 0Ah, 00H
$SG85503 DB 'user exception caught', 0Ah, 00H

xdata$x SEGMENT
__sehtable$_main DD OfffffffffH ; GS Cookie Offset
                 DD 00H          ; GS Cookie XOR Offset
                 DD Offffffc8H    ; EH Cookie Offset
                 DD 00H          ; EH Cookie Offset
                 DD OfffffffffH    ; previous try level for outer block
                 DD FLAT:$LN19@main ; outer block filter
                 DD FLAT:$LN9@main  ; outer block handler
                 DD 00H          ; previous try level for inner block
                 DD FLAT:$LN18@main ; inner block filter
                 DD FLAT:$LN13@main ; inner block handler
xdata$x ENDS

$T2 = -40 ; size = 4
$T3 = -36 ; size = 4
_p$ = -32 ; size = 4
tv72 = -28 ; size = 4
__$SEHRec$ = -24 ; size = 24
_main PROC
    push    ebp
    mov     ebp, esp
    push    -2 ; initial previous try level
    push    OFFSET __sehtable$_main
    push    OFFSET __except_handler4
    mov     eax, DWORD PTR fs:0
    push    eax ; prev
    add     esp, -24
    push    ebx
    push    esi
    push    edi
    mov     eax, DWORD PTR ___security_cookie
    xor     DWORD PTR __$SEHRec$[ebp+16], eax ; xored pointer to scope table

```

```

    xor     eax, ebp                                ; ebp ^ security_cookie
    push    eax
    lea     eax, DWORD PTR __$SEHRec$[ebp+8]        ; pointer to
VC_EXCEPTION_REGISTRATION_RECORD
    mov     DWORD PTR fs:0, eax
    mov     DWORD PTR __$SEHRec$[ebp], esp
    mov     DWORD PTR _p$[ebp], 0
    mov     DWORD PTR __$SEHRec$[ebp+20], 0          ; entering outer try block, setting
previous try level=0
    mov     DWORD PTR __$SEHRec$[ebp+20], 1          ; entering inner try block, setting
previous try level=1
    push    OFFSET $SG85497                          ; 'hello!'
    call    _printf
    add     esp, 4
    push    0
    push    0
    push    0
    push    1122867                                    ; 00112233H
    call    DWORD PTR __imp__RaiseException@16
    push    OFFSET $SG85499                          ; '0x112233 raised. now let''s crash'
    call    _printf
    add     esp, 4
    mov     eax, DWORD PTR _p$[ebp]
    mov     DWORD PTR [eax], 13
    mov     DWORD PTR __$SEHRec$[ebp+20], 0          ; exiting inner try block, set previous
try level back to 0
    jmp     SHORT $LN2@main

    ; inner block filter

$LN12@main:
$LN18@main:
    mov     ecx, DWORD PTR __$SEHRec$[ebp+4]
    mov     edx, DWORD PTR [ecx]
    mov     eax, DWORD PTR [edx]
    mov     DWORD PTR $T3[ebp], eax
    cmp     DWORD PTR $T3[ebp], -1073741819 ; c0000005H
    jne     SHORT $LN5@main
    mov     DWORD PTR tv72[ebp], 1
    jmp     SHORT $LN6@main
$LN5@main:
    mov     DWORD PTR tv72[ebp], 0
$LN6@main:
    mov     eax, DWORD PTR tv72[ebp]
$LN14@main:
$LN16@main:
    ret     0

    ; inner block handler

$LN13@main:
    mov     esp, DWORD PTR __$SEHRec$[ebp]
    push    OFFSET $SG85501                          ; 'access violation, can''t recover'
    call    _printf
    add     esp, 4
    mov     DWORD PTR __$SEHRec$[ebp+20], 0          ; exiting inner try block, setting
previous try level back to 0
$LN2@main:
    mov     DWORD PTR __$SEHRec$[ebp+20], -2          ; exiting both blocks, setting previous
try level back to -2
    jmp     SHORT $LN7@main

```

```

        ; outer block filter

$LN8@main:
$LN19@main:
    mov     ecx, DWORD PTR __$SEHRec$[ebp+4]
    mov     edx, DWORD PTR [ecx]
    mov     eax, DWORD PTR [edx]
    mov     DWORD PTR $T2[ebp], eax
    mov     ecx, DWORD PTR __$SEHRec$[ebp+4]
    push    ecx
    mov     edx, DWORD PTR $T2[ebp]
    push    edx
    call    _filter_user_exceptions
    add     esp, 8
$LN10@main:
$LN17@main:
    ret     0

        ; outer block handler

$LN9@main:
    mov     esp, DWORD PTR __$SEHRec$[ebp]
    push    OFFSET $SG85503                ; 'user exception caught'
    call    _printf
    add     esp, 4
    mov     DWORD PTR __$SEHRec$[ebp+20], -2    ; exiting both blocks, setting previous
    try level back to -2
$LN7@main:
    xor     eax, eax
    mov     ecx, DWORD PTR __$SEHRec$[ebp+8]
    mov     DWORD PTR fs:0, ecx
    pop     ecx
    pop     edi
    pop     esi
    pop     ebx
    mov     esp, ebp
    pop     ebp
    ret     0
_main     ENDP

_code$ = 8      ; size = 4
_ep$ = 12      ; size = 4
_filter_user_exceptions PROC
    push    ebp
    mov     ebp, esp
    mov     eax, DWORD PTR _code$[ebp]
    push    eax
    push    OFFSET $SG85486                ; 'in filter. code=0x%08X'
    call    _printf
    add     esp, 8
    cmp     DWORD PTR _code$[ebp], 1122867    ; 00112233H
    jne     SHORT $LN2@filter_use
    push    OFFSET $SG85488                ; 'yes, that is our exception'
    call    _printf
    add     esp, 4
    mov     eax, 1
    jmp     SHORT $LN3@filter_use
    jmp     SHORT $LN3@filter_use
$LN2@filter_use:
    push    OFFSET $SG85490                ; 'not our exception'

```

```

    call    _printf
    add     esp, 4
    xor     eax, eax
$LN3@filter_use:
    pop     ebp
    ret     0
_filter_user_exceptions ENDP

```

Here is a meaning of *cookies*: *Cookie Offset* is a difference between address of saved EBP value in stack and the $EBP \oplus security_cookie$ value in the stack. *Cookie XOR Offset* is additional difference between $EBP \oplus security_cookie$ value and what is stored in the stack. If this equation is not true, a process will be stopped due to stack corruption:

$$security_cookie \oplus (CookieXOROffset + addressofsavedEBP) == stack[addressofsavedEBP + CookieOffset]$$

If *Cookie Offset* is -2 , it is not present.

Cookies checking is also implemented in my *tracer*, see <https://github.com/dennis714/tracer/blob/master/SEH.c> for details.

It is still possible to fall back to SEH3 in the compilers after (and including) MSVC 2005 by setting `/GS-` option, however, *CRT* code will use SEH4 anyway.

50.3.3 Windows x64

As you might think, it is not very fast thing to set up SEH frame at each function prologue. Another performance problem is to change *previous try level* value many times while function execution. So things are changed completely in x64: now all pointers to *try* blocks, filter and handler functions are stored in another PE-segment `.pdata`, that is where OS exception handler takes all the information.

These are two examples from the previous section compiled for x64:

Listing 50.12: MSVC 2012

```

$SG86276 DB      'hello #1!', 0aH, 00H
$SG86277 DB      'hello #2!', 0aH, 00H
$SG86279 DB      'access violation, can't recover', 0aH, 00H

pdata  SEGMENT
$pdata$main DD  imagerel $LN9
          DD     imagerel $LN9+61
          DD     imagerel $unwind$main
pdata  ENDS
pdata  SEGMENT
$pdata$main$filt$0 DD imagerel main$filt$0
          DD     imagerel main$filt$0+32
          DD     imagerel $unwind$main$filt$0
pdata  ENDS
xdata  SEGMENT
$unwind$main DD  020609H
          DD     030023206H
          DD     imagerel __C_specific_handler
          DD     01H
          DD     imagerel $LN9+8
          DD     imagerel $LN9+40
          DD     imagerel main$filt$0
          DD     imagerel $LN9+40
$unwind$main$filt$0 DD 020601H
          DD     050023206H
xdata  ENDS

_TEXT  SEGMENT
main   PROC
$LN9:
    push    rbx
    sub     rsp, 32

```

```

        xor     ebx, ebx
        lea     rcx, OFFSET FLAT:$SG86276 ; 'hello #1!'
        call    printf
        mov     DWORD PTR [rbx], 13
        lea     rcx, OFFSET FLAT:$SG86277 ; 'hello #2!'
        call    printf
        jmp     SHORT $LN8@main
$LN6@main:
        lea     rcx, OFFSET FLAT:$SG86279 ; 'access violation, can't recover'
        call    printf
        npad    1
$LN8@main:
        xor     eax, eax
        add     rsp, 32
        pop     rbx
        ret     0
main     ENDP
_TEXT    ENDS

text$x   SEGMENT
main$filt$0 PROC
        push    rbp
        sub     rsp, 32
        mov     rbp, rdx
$LN5@main$filt$:
        mov     rax, QWORD PTR [rcx]
        xor     ecx, ecx
        cmp     DWORD PTR [rax], -1073741819; c0000005H
        sete    cl
        mov     eax, ecx
$LN7@main$filt$:
        add     rsp, 32
        pop     rbp
        ret     0
        int     3
main$filt$0 ENDP
text$x   ENDS

```

Listing 50.13: MSVC 2012

```

$SG86277 DB      'in filter. code=0x%08X', 0aH, 00H
$SG86279 DB      'yes, that is our exception', 0aH, 00H
$SG86281 DB      'not our exception', 0aH, 00H
$SG86288 DB      'hello!', 0aH, 00H
$SG86290 DB      '0x112233 raised. now let's crash', 0aH, 00H
$SG86292 DB      'access violation, can't recover', 0aH, 00H
$SG86294 DB      'user exception caught', 0aH, 00H

pdata    SEGMENT
$pdata$filter_user_exceptions DD imagerel $LN6
        DD      imagerel $LN6+73
        DD      imagerel $unwind$filter_user_exceptions
$pdata$main DD      imagerel $LN14
        DD      imagerel $LN14+95
        DD      imagerel $unwind$main
pdata    ENDS
pdata    SEGMENT
$pdata$main$filt$0 DD      imagerel main$filt$0
        DD      imagerel main$filt$0+32
        DD      imagerel $unwind$main$filt$0
$pdata$main$filt$1 DD      imagerel main$filt$1

```

```

        DD      imagerel main$filt$1+30
        DD      imagerel $unwind$main$filt$1
pdata   ENDS

xdata   SEGMENT
$unwind$filter_user_exceptions DD 020601H
        DD      030023206H
$unwind$main DD 020609H
        DD      030023206H
        DD      imagerel __C_specific_handler
        DD      02H
        DD      imagerel $LN14+8
        DD      imagerel $LN14+59
        DD      imagerel main$filt$0
        DD      imagerel $LN14+59
        DD      imagerel $LN14+8
        DD      imagerel $LN14+74
        DD      imagerel main$filt$1
        DD      imagerel $LN14+74
$unwind$main$filt$0 DD 020601H
        DD      050023206H
$unwind$main$filt$1 DD 020601H
        DD      050023206H
xdata   ENDS

_TEXT   SEGMENT
main    PROC
$LN14:
        push    rbx
        sub     rsp, 32
        xor     ebx, ebx
        lea     rcx, OFFSET FLAT:$SG86288 ; 'hello!'
        call    printf
        xor     r9d, r9d
        xor     r8d, r8d
        xor     edx, edx
        mov     ecx, 1122867 ; 00112233H
        call    QWORD PTR __imp_RaiseException
        lea     rcx, OFFSET FLAT:$SG86290 ; '0x112233 raised. now let's crash'
        call    printf
        mov     DWORD PTR [rbx], 13
        jmp     SHORT $LN13@main
$LN11@main:
        lea     rcx, OFFSET FLAT:$SG86292 ; 'access violation, can't recover'
        call    printf
        npad    1
$LN13@main:
        jmp     SHORT $LN9@main
$LN7@main:
        lea     rcx, OFFSET FLAT:$SG86294 ; 'user exception caught'
        call    printf
        npad    1
$LN9@main:
        xor     eax, eax
        add     rsp, 32
        pop     rbx
        ret     0
main    ENDP

text$x   SEGMENT
main$filt$0 PROC

```

```

    push    rbp
    sub     rsp, 32
    mov     rbp, rdx
$LN10@main$filt$:
    mov     rax, QWORD PTR [rcx]
    xor     ecx, ecx
    cmp     DWORD PTR [rax], -1073741819; c0000005H
    sete    cl
    mov     eax, ecx
$LN12@main$filt$:
    add     rsp, 32
    pop     rbp
    ret     0
    int     3
main$filt$0 ENDP

main$filt$1 PROC
    push    rbp
    sub     rsp, 32
    mov     rbp, rdx
$LN6@main$filt$:
    mov     rax, QWORD PTR [rcx]
    mov     rdx, rcx
    mov     ecx, DWORD PTR [rax]
    call    filter_user_exceptions
    npad    1
$LN8@main$filt$:
    add     rsp, 32
    pop     rbp
    ret     0
    int     3
main$filt$1 ENDP
text$x ENDS

_TEXT SEGMENT
code$ = 48
ep$ = 56
filter_user_exceptions PROC
$LN6:
    push    rbx
    sub     rsp, 32
    mov     ebx, ecx
    mov     edx, ecx
    lea     rcx, OFFSET FLAT:$SG86277 ; 'in filter. code=0x%08X'
    call    printf
    cmp     ebx, 1122867; 00112233H
    jne     SHORT $LN2@filter_use
    lea     rcx, OFFSET FLAT:$SG86279 ; 'yes, that is our exception'
    call    printf
    mov     eax, 1
    add     rsp, 32
    pop     rbx
    ret     0
$LN2@filter_use:
    lea     rcx, OFFSET FLAT:$SG86281 ; 'not our exception'
    call    printf
    xor     eax, eax
    add     rsp, 32
    pop     rbx
    ret     0
filter_user_exceptions ENDP

```

```
_TEXT    ENDS
```

Read [32] for more detailed information about this.

Aside from exception information, `.pdata` is a section containing addresses of almost all function starts and ends, hence it may be useful for a tools targeting automated analysis.

50.3.4 Read more about SEH

[23], [32].

50.4 Windows NT: Critical section

Critical sections in any OS are very important in multithreaded environment, mostly used for issuing a guarantee that only one thread will access some data, while blocking other threads and interrupts.

That is how `CRITICAL_SECTION` structure is declared in Windows NT line OS:

Listing 50.14: (Windows Research Kernel v1.2) `public/sdk/inc/nturtl.h`

```
typedef struct _RTL_CRITICAL_SECTION {
    PRTL_CRITICAL_SECTION_DEBUG DebugInfo;

    //
    // The following three fields control entering and exiting the critical
    // section for the resource
    //

    LONG LockCount;
    LONG RecursionCount;
    HANDLE OwningThread;           // from the thread's ClientId->UniqueThread
    HANDLE LockSemaphore;
    ULONG_PTR SpinCount;          // force size on 64-bit systems when packed
} RTL_CRITICAL_SECTION, *PRTL_CRITICAL_SECTION;
```

That's is how `EnterCriticalSection()` function works:

Listing 50.15: Windows 2008/`ntdll.dll/x86` (begin)

```
_RtlEnterCriticalSection@4

var_C          = dword ptr -0Ch
var_8          = dword ptr -8
var_4          = dword ptr -4
arg_0          = dword ptr 8

                mov     edi, edi
                push    ebp
                mov     ebp, esp
                sub     esp, 0Ch
                push    esi
                push    edi
                mov     edi, [ebp+arg_0]
                lea     esi, [edi+4] ; LockCount
                mov     eax, esi
                lock btr dword ptr [eax], 0
                jnb     wait ; jump if CF=0

loc_7DE922DD:
                mov     eax, large fs:18h
                mov     ecx, [eax+24h]
                mov     [edi+0Ch], ecx
                mov     dword ptr [edi+8], 1
                pop     edi
```

```

xor     eax, eax
pop     esi
mov     esp, ebp
pop     ebp
retn    4

```

... skipped

The most important instruction in this code fragment is BTR (prefixed with LOCK): the zeroth bit is stored in CF flag and cleared in memory. This is [atomic operation](#), blocking all other CPUs to access this piece of memory (take a notice of LOCK prefix before BTR instruction). If the bit at LockCount was 1, fine, reset it and return from the function: we are in critical section. If not —critical section is already occupied by other thread, then wait. Wait is done there using WaitForSingleObject().

And here is how LeaveCriticalSection() function works:

Listing 50.16: Windows 2008/ntdll.dll/x86 (begin)

```

_RtlLeaveCriticalSection@4 proc near
arg_0          = dword ptr 8

    mov     edi, edi
    push    ebp
    mov     ebp, esp
    push    esi
    mov     esi, [ebp+arg_0]
    add     dword ptr [esi+8], 0FFFFFFFh ; RecursionCount
    jnz     short loc_7DE922B2
    push    ebx
    push    edi
    lea     edi, [esi+4] ; LockCount
    mov     dword ptr [esi+0Ch], 0
    mov     ebx, 1
    mov     eax, edi
    lock xadd [eax], ebx
    inc     ebx
    cmp     ebx, 0FFFFFFFh
    jnz     loc_7DEA8EB7

loc_7DE922B0:
    pop     edi
    pop     ebx

loc_7DE922B2:
    xor     eax, eax
    pop     esi
    pop     ebp
    retn    4

... skipped

```

XADD is “exchange and add”. In this case, it summing LockCount value and 1 and stores result in EBX register, and at the same time 1 goes to LockCount. This operation is atomic since it is prefixed by LOCK as well, meaning that all other CPUs or CPU cores in system are blocked from accessing this point of memory.

LOCK prefix is very important: two threads, each of which working on separate CPUs or CPU cores may try to enter critical section and to modify the value in memory simultaneously, this will result in unpredictable behaviour.

Part VI

Tools

Chapter 51

Disassembler

51.1 IDA

Older freeware version is available for downloading ¹.

Short hot-keys cheatsheet:

key	meaning
Space	switch listing and graph view
C	convert to code
D	convert to data
A	convert to string
*	convert to array
U	undefine
O	make offset of operand
H	make decimal number
R	make char
B	make binary number
Q	make hexadecimal number
N	rename identifier
?	calculator
G	jump to address
:	add comment
Ctrl-X	show references to the current function, label, variable (incl. in local stack)
X	show references to the function, label, variable, etc
Alt-I	search for constant
Ctrl-I	search for the next occurrence of constant
Alt-B	search for byte sequence
Ctrl-B	search for the next occurrence of byte sequence
Alt-T	search for text (including instructions, etc)
Ctrl-T	search for the next occurrence of text
Alt-P	edit current function
Enter	jump to function, variable, etc
Esc	get back
Num -	fold function or selected area
Num +	unhide function or area

Function/area folding may be useful for hiding function parts when you realize what they do. this is used in my script² for hiding some often used patterns of inline code.

¹<http://www.hex-rays.com/idadpro/idadownloadfreeware.htm>

²https://github.com/yurichev/IDA_scripts

Chapter 52

Debugger

I use *tracer*¹ instead of debugger.

I stopped to use debugger eventually, since all I need from it is to spot a function's arguments while execution, or registers' state at some point. To load debugger each time is too much, so I wrote a small utility *tracer*. It has console-interface, working from command-line, enable us to intercept function execution, set breakpoints at arbitrary places, spot registers' state, modify it, etc.

However, as for learning purposes, it is highly advisable to trace code in debugger manually, watch how register's state changing (e.g. classic SoftICE, OllyDbg, WinDbg highlighting changed registers), flags, data, change them manually, watch reaction, etc.

¹<http://yurichev.com/tracer-en.html>

Chapter 53

System calls tracing

53.0.1 strace / dtruss

Will show which system calls (syscalls([48](#))) are called by process right now. For example:

```
# strace df -h

...

access("/etc/ld.so.nohwcap", F_OK) = -1 ENOENT (No such file or directory)
open("/lib/i386-linux-gnu/libc.so.6", O_RDONLY|O_CLOEXEC) = 3
read(3, "\177ELF\1\1\1\0\0\0\0\0\0\0\0\3\0\3\0\1\0\0\0\220\232\1\0004\0\0\0"... , 512) = 512
fstat64(3, {st_mode=S_IFREG|0755, st_size=1770984, ...}) = 0
mmap2(NULL, 1780508, PROT_READ|PROT_EXEC, MAP_PRIVATE|MAP_DENYWRITE, 3, 0) = 0xb75b3000
```

MacOSX has dtruss for the same aim.

The Cygwin also has strace, but if I understood correctly, it works only for .exe-files compiled for cygwin environment itself.

Chapter 54

Other tools

- Microsoft Visual Studio Express¹: Stripped-down free Visual Studio version, convenient for simple experiments.
- Hiew² for small modifications of code in binary files.
- binary grep: the small utility for constants searching (or just any byte sequence) in a big pile of files, including non-executable: <https://github.com/yurichev/bgrep>.

¹<http://www.microsoft.com/express/Downloads/>

²<http://www.hiew.ru/>

Part VII

More examples

Chapter 55

Dongles

Occasionally I do software copy-protection [dongle](#) replacements, or “dongle emulators” and here are couple examples of my work¹.

About one of not described cases you may also read here: [\[36\]](#).

55.1 Example #1: MacOS Classic and PowerPC

I’ve got a program for MacOS Classic², for PowerPC. The company who developed the software product was disappeared long time ago, so the (legal) customer was afraid of physical dongle damage.

While running without dongle connected, a message box with a text “Invalid Security Device” appeared. Luckily, this text string can be found easily in the executable binary file.

I was not very familiar both with Mac OS Classic and PowerPC, but I tried anyway.

[IDA](#) opens the executable file smoothly, reported its type as “PEF (Mac OS or Be OS executable)” (indeed, it is a standard Mac OS Classic file format).

By searching for the text string with error message, I’ve got into this code fragment:

```
...
seg000:000C87FC 38 60 00 01      li      %r3, 1
seg000:000C8800 48 03 93 41      bl      check1
seg000:000C8804 60 00 00 00      nop
seg000:000C8808 54 60 06 3F      clrlwi. %r0, %r3, 24
seg000:000C880C 40 82 00 40      bne     OK
seg000:000C8810 80 62 9F D8      lwz     %r3, TC_aInvalidSecurityDevice
...
```

Yes, this is PowerPC code. The CPU is very typical 32-bit [RISC](#) of 1990s era. Each instruction occupies 4 bytes (just as in MIPS and ARM) and its names are somewhat resembling MIPS instruction names.

`check1()` is a function name I gave it to lately. BL is *Branch Link* instruction, e.g., intended for subroutines calling. The crucial point is [BNE](#) instruction jumping if dongle protection check is passed or not jumping if error is occurred: then the address of the text string being loaded into r3 register for the subsequent passage into message box routine.

From the [\[33\]](#) I’ve got to know the r3 register is used for values returning (and r4, in case of 64-bit values).

Another yet unknown instruction is CLRLWI. From [\[13\]](#) I’ve got to know that this instruction do both clearing and loading. In our case, it clears 24 high bits from the value in r3 and put it to r0, so it is analogical to MOVZX in x86 ([13.1](#)), but it also sets the flags, so the [BNE](#) can check them after.

Let’s take a look into `check1()` function:

```
seg000:00101B40      check1:                                # CODE XREF: seg000:00063E7Cp
seg000:00101B40                                           # sub_64070+160p ...
seg000:00101B40
seg000:00101B40      .set arg_8, 8
seg000:00101B40
seg000:00101B40 7C 08 02 A6      mflr    %r0
seg000:00101B44 90 01 00 08      stw     %r0, arg_8(%sp)
```

¹Read more about it: <http://yurichev.com/dongles.html>

²pre-UNIX MacOS

```

seg000:00101B48 94 21 FF C0          stwu    %sp, -0x40(%sp)
seg000:00101B4C 48 01 6B 39          bl      check2
seg000:00101B50 60 00 00 00          nop
seg000:00101B54 80 01 00 48          lwz     %r0, 0x40+arg_8(%sp)
seg000:00101B58 38 21 00 40          addi    %sp, %sp, 0x40
seg000:00101B5C 7C 08 03 A6          mtlr    %r0
seg000:00101B60 4E 80 00 20          blr
seg000:00101B60          # End of function check1

```

As I can see in [IDA](#), that function is called from many places in program, but only r3 register value is checked right after each call. All this function does is calling other function, so it is [thunk function](#): there is function prologue and epilogue, but r3 register is not touched, so `check1()` returns what `check2()` returns.

[BLR³](#) seems return from function, but since [IDA](#) does functions layout, we probably do not need to be interesting in this. It seems, since it is a typical [RISC](#), subroutines are called using [link register](#), just like in ARM.

`check2()` function is more complex:

```

seg000:00118684          check2:                                # CODE XREF: check1+Cp
seg000:00118684
seg000:00118684          .set var_18, -0x18
seg000:00118684          .set var_C, -0xC
seg000:00118684          .set var_8, -8
seg000:00118684          .set var_4, -4
seg000:00118684          .set arg_8, 8
seg000:00118684
seg000:00118684 93 E1 FF FC          stw     %r31, var_4(%sp)
seg000:00118688 7C 08 02 A6          mflr    %r0
seg000:0011868C 83 E2 95 A8          lwz     %r31, off_1485E8 # dword_24B704
seg000:00118690          .using  dword_24B704, %r31
seg000:00118690 93 C1 FF F8          stw     %r30, var_8(%sp)
seg000:00118694 93 A1 FF F4          stw     %r29, var_C(%sp)
seg000:00118698 7C 7D 1B 78          mr      %r29, %r3
seg000:0011869C 90 01 00 08          stw     %r0, arg_8(%sp)
seg000:001186A0 54 60 06 3E          clrlwi  %r0, %r3, 24
seg000:001186A4 28 00 00 01          cmplwi  %r0, 1
seg000:001186A8 94 21 FF B0          stwu    %sp, -0x50(%sp)
seg000:001186AC 40 82 00 0C          bne     loc_1186B8
seg000:001186B0 38 60 00 01          li      %r3, 1
seg000:001186B4 48 00 00 6C          b       exit
seg000:001186B8          #
-----
seg000:001186B8          loc_1186B8:                                # CODE XREF: check2+28j
seg000:001186B8 48 00 03 D5          bl      sub_118A8C
seg000:001186BC 60 00 00 00          nop
seg000:001186C0 3B C0 00 00          li      %r30, 0
seg000:001186C4          skip:                                    # CODE XREF: check2+94j
seg000:001186C4 57 C0 06 3F          clrlwi  %r0, %r30, 24
seg000:001186C8 41 82 00 18          beq     loc_1186E0
seg000:001186CC 38 61 00 38          addi    %r3, %sp, 0x50+var_18
seg000:001186D0 80 9F 00 00          lwz     %r4, dword_24B704
seg000:001186D4 48 00 C0 55          bl      .RBEFINDNEXT
seg000:001186D8 60 00 00 00          nop
seg000:001186DC 48 00 00 1C          b       loc_1186F8
seg000:001186E0          #
-----
seg000:001186E0          loc_1186E0:                                # CODE XREF: check2+44j
seg000:001186E0 80 BF 00 00          lwz     %r5, dword_24B704
seg000:001186E4 38 81 00 38          addi    %r4, %sp, 0x50+var_18

```

³(PowerPC) Branch to Link Register

```

seg000:001186E8 38 60 08 C2      li      %r3, 0x1234
seg000:001186EC 48 00 BF 99      bl      .RBEFINDFIRST
seg000:001186F0 60 00 00 00      nop
seg000:001186F4 3B C0 00 01      li      %r30, 1
seg000:001186F8
seg000:001186F8          loc_1186F8:          # CODE XREF: check2+58j
seg000:001186F8 54 60 04 3F      clrlwi. %r0, %r3, 16
seg000:001186FC 41 82 00 0C      beq     must_jump
seg000:00118700 38 60 00 00      li      %r3, 0          # error
seg000:00118704 48 00 00 1C      b       exit
seg000:00118708          #
-----
seg000:00118708
seg000:00118708          must_jump:          # CODE XREF: check2+78j
seg000:00118708 7F A3 EB 78      mr      %r3, %r29
seg000:0011870C 48 00 00 31      bl      check3
seg000:00118710 60 00 00 00      nop
seg000:00118714 54 60 06 3F      clrlwi. %r0, %r3, 24
seg000:00118718 41 82 FF AC      beq     skip
seg000:0011871C 38 60 00 01      li      %r3, 1
seg000:00118720
seg000:00118720          exit:          # CODE XREF: check2+30j
seg000:00118720          # check2+80j
seg000:00118720 80 01 00 58      lwz     %r0, 0x50+arg_8(%sp)
seg000:00118724 38 21 00 50      addi    %sp, %sp, 0x50
seg000:00118728 83 E1 FF FC      lwz     %r31, var_4(%sp)
seg000:0011872C 7C 08 03 A6      mtlr    %r0
seg000:00118730 83 C1 FF F8      lwz     %r30, var_8(%sp)
seg000:00118734 83 A1 FF F4      lwz     %r29, var_C(%sp)
seg000:00118738 4E 80 00 20      blr
seg000:00118738          # End of function check2

```

I'm lucky again: some function names are leaved in the executable (debug symbols section? I'm not sure, since I'm not very familiar with the file format, maybe it is some kind of PE exports? (50.2.7)), like .RBEFINDNEXT() and .RBEFINDFIRST(). Eventually these functions are calling other functions with names like .GetNextDeviceViaUSB(), .USBSendPKT(), so these are clearly dealing with USB device.

There are even a function named .GetNextEve3Device()—sounds familiar, there was Sentinel Eve3 dongle for ADB port (present on Macs) in 1990s.

Let's first take a look on how r3 register is set before return simultaneously ignoring all we see. We know that "good" r3 value should be non-zero, zero r3 will lead execution flow to the message box with an error message.

There are two instructions `li %r3, 1` present in the function and one `li %r3, 0` (*Load Immediate*, i.e., loading value into register). The very first instruction at 0x001186B0—frankly speaking, I don't know what it mean, I need some more time to learn PowerPC assembly language.

What we see next is, however, easier to understand: .RBEFINDFIRST() is called: in case of its failure, 0 is written into r3 and we jump to `exit`, otherwise another function is called (`check3()`)—if it is failing too, the .RBEFINDNEXT() is called, probably, in order to look for another USB device.

N.B.: `clrlwi. %r0, %r3, 16` it is analogical to what we already saw, but it clears 16 bits, i.e., .RBEFINDFIRST() probably returns 16-bit value.

B meaning *branch* is unconditional jump.

BEQ is inverse instruction of **BNE**.

Let's see `check3()`:

```

seg000:0011873C          check3:          # CODE XREF: check2+88p
seg000:0011873C
seg000:0011873C          .set var_18, -0x18
seg000:0011873C          .set var_C, -0xC
seg000:0011873C          .set var_8, -8
seg000:0011873C          .set var_4, -4
seg000:0011873C          .set arg_8, 8
seg000:0011873C
seg000:0011873C 93 E1 FF FC      stw     %r31, var_4(%sp)
seg000:00118740 7C 08 02 A6      mflr    %r0

```

```

seg000:00118744 38 A0 00 00      li      %r5, 0
seg000:00118748 93 C1 FF F8      stw      %r30, var_8(%sp)
seg000:0011874C 83 C2 95 A8      lwz      %r30, off_1485E8 # dword_24B704
seg000:00118750                .using  dword_24B704, %r30
seg000:00118750 93 A1 FF F4      stw      %r29, var_C(%sp)
seg000:00118754 3B A3 00 00      addi     %r29, %r3, 0
seg000:00118758 38 60 00 00      li      %r3, 0
seg000:0011875C 90 01 00 08      stw      %r0, arg_8(%sp)
seg000:00118760 94 21 FF B0      stwu     %sp, -0x50(%sp)
seg000:00118764 80 DE 00 00      lwz      %r6, dword_24B704
seg000:00118768 38 81 00 38      addi     %r4, %sp, 0x50+var_18
seg000:0011876C 48 00 C0 5D      bl      .RBEREAD
seg000:00118770 60 00 00 00      nop
seg000:00118774 54 60 04 3F      clrlwi. %r0, %r3, 16
seg000:00118778 41 82 00 0C      beq      loc_118784
seg000:0011877C 38 60 00 00      li      %r3, 0
seg000:00118780 48 00 02 F0      b        exit
seg000:00118784                #
-----
seg000:00118784
seg000:00118784                loc_118784:                # CODE XREF: check3+3Cj
seg000:00118784 A0 01 00 38      lhz      %r0, 0x50+var_18(%sp)
seg000:00118788 28 00 04 B2      cmplwi   %r0, 0x1100
seg000:0011878C 41 82 00 0C      beq      loc_118798
seg000:00118790 38 60 00 00      li      %r3, 0
seg000:00118794 48 00 02 DC      b        exit
seg000:00118798                #
-----
seg000:00118798
seg000:00118798                loc_118798:                # CODE XREF: check3+50j
seg000:00118798 80 DE 00 00      lwz      %r6, dword_24B704
seg000:0011879C 38 81 00 38      addi     %r4, %sp, 0x50+var_18
seg000:001187A0 38 60 00 01      li      %r3, 1
seg000:001187A4 38 A0 00 00      li      %r5, 0
seg000:001187A8 48 00 C0 21      bl      .RBEREAD
seg000:001187AC 60 00 00 00      nop
seg000:001187B0 54 60 04 3F      clrlwi. %r0, %r3, 16
seg000:001187B4 41 82 00 0C      beq      loc_1187C0
seg000:001187B8 38 60 00 00      li      %r3, 0
seg000:001187BC 48 00 02 B4      b        exit
seg000:001187C0                #
-----
seg000:001187C0
seg000:001187C0                loc_1187C0:                # CODE XREF: check3+78j
seg000:001187C0 A0 01 00 38      lhz      %r0, 0x50+var_18(%sp)
seg000:001187C4 28 00 06 4B      cmplwi   %r0, 0x09AB
seg000:001187C8 41 82 00 0C      beq      loc_1187D4
seg000:001187CC 38 60 00 00      li      %r3, 0
seg000:001187D0 48 00 02 A0      b        exit
seg000:001187D4                #
-----
seg000:001187D4
seg000:001187D4                loc_1187D4:                # CODE XREF: check3+8Cj
seg000:001187D4 4B F9 F3 D9      bl      sub_B7BAC
seg000:001187D8 60 00 00 00      nop
seg000:001187DC 54 60 06 3E      clrlwi   %r0, %r3, 24
seg000:001187E0 2C 00 00 05      cmpwi    %r0, 5
seg000:001187E4 41 82 01 00      beq      loc_1188E4
seg000:001187E8 40 80 00 10      bge      loc_1187F8
seg000:001187EC 2C 00 00 04      cmpwi    %r0, 4
seg000:001187F0 40 80 00 58      bge      loc_118848

```

```

seg000:001187F4 48 00 01 8C          b          loc_118980
seg000:001187F8                      #
-----
seg000:001187F8
seg000:001187F8          loc_1187F8:          # CODE XREF: check3+ACj
seg000:001187F8 2C 00 00 0B          cmpwi    %r0, 0xB
seg000:001187FC 41 82 00 08          beq      loc_118804
seg000:00118800 48 00 01 80          b        loc_118980
seg000:00118804          #
-----
seg000:00118804
seg000:00118804          loc_118804:          # CODE XREF: check3+C0j
seg000:00118804 80 DE 00 00          lwz      %r6, dword_24B704
seg000:00118808 38 81 00 38          addi     %r4, %sp, 0x50+var_18
seg000:0011880C 38 60 00 08          li       %r3, 8
seg000:00118810 38 A0 00 00          li       %r5, 0
seg000:00118814 48 00 BF B5          bl       .RBEREAD
seg000:00118818 60 00 00 00          nop
seg000:0011881C 54 60 04 3F          clrlwi. %r0, %r3, 16
seg000:00118820 41 82 00 0C          beq      loc_11882C
seg000:00118824 38 60 00 00          li       %r3, 0
seg000:00118828 48 00 02 48          b        exit
seg000:0011882C          #
-----
seg000:0011882C
seg000:0011882C          loc_11882C:          # CODE XREF: check3+E4j
seg000:0011882C A0 01 00 38          lhz      %r0, 0x50+var_18(%sp)
seg000:00118830 28 00 11 30          cmplwi   %r0, 0xFEAO
seg000:00118834 41 82 00 0C          beq      loc_118840
seg000:00118838 38 60 00 00          li       %r3, 0
seg000:0011883C 48 00 02 34          b        exit
seg000:00118840          #
-----
seg000:00118840
seg000:00118840          loc_118840:          # CODE XREF: check3+F8j
seg000:00118840 38 60 00 01          li       %r3, 1
seg000:00118844 48 00 02 2C          b        exit
seg000:00118848          #
-----
seg000:00118848
seg000:00118848          loc_118848:          # CODE XREF: check3+B4j
seg000:00118848 80 DE 00 00          lwz      %r6, dword_24B704
seg000:0011884C 38 81 00 38          addi     %r4, %sp, 0x50+var_18
seg000:00118850 38 60 00 0A          li       %r3, 0xA
seg000:00118854 38 A0 00 00          li       %r5, 0
seg000:00118858 48 00 BF 71          bl       .RBEREAD
seg000:0011885C 60 00 00 00          nop
seg000:00118860 54 60 04 3F          clrlwi. %r0, %r3, 16
seg000:00118864 41 82 00 0C          beq      loc_118870
seg000:00118868 38 60 00 00          li       %r3, 0
seg000:0011886C 48 00 02 04          b        exit
seg000:00118870          #
-----
seg000:00118870
seg000:00118870          loc_118870:          # CODE XREF: check3+128j
seg000:00118870 A0 01 00 38          lhz      %r0, 0x50+var_18(%sp)
seg000:00118874 28 00 03 F3          cmplwi   %r0, 0xA6E1
seg000:00118878 41 82 00 0C          beq      loc_118884
seg000:0011887C 38 60 00 00          li       %r3, 0
seg000:00118880 48 00 01 F0          b        exit
seg000:00118884          #

```

```

-----
seg000:00118884
seg000:00118884          loc_118884:          # CODE XREF: check3+13Cj
seg000:00118884 57 BF 06 3E          clrlwi  %r31, %r29, 24
seg000:00118888 28 1F 00 02          cmplwi  %r31, 2
seg000:0011888C 40 82 00 0C          bne     loc_118898
seg000:00118890 38 60 00 01          li      %r3, 1
seg000:00118894 48 00 01 DC          b       exit
seg000:00118898          #
-----
seg000:00118898
seg000:00118898          loc_118898:          # CODE XREF: check3+150j
seg000:00118898 80 DE 00 00          lwz     %r6, dword_24B704
seg000:0011889C 38 81 00 38          addi    %r4, %sp, 0x50+var_18
seg000:001188A0 38 60 00 0B          li      %r3, 0xB
seg000:001188A4 38 A0 00 00          li      %r5, 0
seg000:001188A8 48 00 BF 21          bl      .RBEREAD
seg000:001188AC 60 00 00 00          nop
seg000:001188B0 54 60 04 3F          clrlwi. %r0, %r3, 16
seg000:001188B4 41 82 00 0C          beq     loc_1188C0
seg000:001188B8 38 60 00 00          li      %r3, 0
seg000:001188BC 48 00 01 B4          b       exit
seg000:001188C0          #
-----
seg000:001188C0
seg000:001188C0          loc_1188C0:          # CODE XREF: check3+178j
seg000:001188C0 A0 01 00 38          lhz     %r0, 0x50+var_18(%sp)
seg000:001188C4 28 00 23 1C          cmplwi  %r0, 0x1C20
seg000:001188C8 41 82 00 0C          beq     loc_1188D4
seg000:001188CC 38 60 00 00          li      %r3, 0
seg000:001188D0 48 00 01 A0          b       exit
seg000:001188D4          #
-----
seg000:001188D4
seg000:001188D4          loc_1188D4:          # CODE XREF: check3+18Cj
seg000:001188D4 28 1F 00 03          cmplwi  %r31, 3
seg000:001188D8 40 82 01 94          bne     error
seg000:001188DC 38 60 00 01          li      %r3, 1
seg000:001188E0 48 00 01 90          b       exit
seg000:001188E4          #
-----
seg000:001188E4
seg000:001188E4          loc_1188E4:          # CODE XREF: check3+A8j
seg000:001188E4 80 DE 00 00          lwz     %r6, dword_24B704
seg000:001188E8 38 81 00 38          addi    %r4, %sp, 0x50+var_18
seg000:001188EC 38 60 00 0C          li      %r3, 0xC
seg000:001188F0 38 A0 00 00          li      %r5, 0
seg000:001188F4 48 00 BE D5          bl      .RBEREAD
seg000:001188F8 60 00 00 00          nop
seg000:001188FC 54 60 04 3F          clrlwi. %r0, %r3, 16
seg000:00118900 41 82 00 0C          beq     loc_11890C
seg000:00118904 38 60 00 00          li      %r3, 0
seg000:00118908 48 00 01 68          b       exit
seg000:0011890C          #
-----
seg000:0011890C
seg000:0011890C          loc_11890C:          # CODE XREF: check3+1C4j
seg000:0011890C A0 01 00 38          lhz     %r0, 0x50+var_18(%sp)
seg000:00118910 28 00 1F 40          cmplwi  %r0, 0x40FF
seg000:00118914 41 82 00 0C          beq     loc_118920
seg000:00118918 38 60 00 00          li      %r3, 0

```

```

seg000:0011891C 48 00 01 54          b      exit
seg000:00118920          #
-----
seg000:00118920
seg000:00118920          loc_118920:          # CODE XREF: check3+1D8j
seg000:00118920 57 BF 06 3E          clrlwi  %r31, %r29, 24
seg000:00118924 28 1F 00 02          cmplwi  %r31, 2
seg000:00118928 40 82 00 0C          bne     loc_118934
seg000:0011892C 38 60 00 01          li      %r3, 1
seg000:00118930 48 00 01 40          b      exit
seg000:00118934          #
-----
seg000:00118934
seg000:00118934          loc_118934:          # CODE XREF: check3+1ECj
seg000:00118934 80 DE 00 00          lwz     %r6, dword_24B704
seg000:00118938 38 81 00 38          addi    %r4, %sp, 0x50+var_18
seg000:0011893C 38 60 00 0D          li      %r3, 0xD
seg000:00118940 38 A0 00 00          li      %r5, 0
seg000:00118944 48 00 BE 85          bl      .RBEREAD
seg000:00118948 60 00 00 00          nop
seg000:0011894C 54 60 04 3F          clrlwi. %r0, %r3, 16
seg000:00118950 41 82 00 0C          beq     loc_11895C
seg000:00118954 38 60 00 00          li      %r3, 0
seg000:00118958 48 00 01 18          b      exit
seg000:0011895C          #
-----
seg000:0011895C
seg000:0011895C          loc_11895C:          # CODE XREF: check3+214j
seg000:0011895C A0 01 00 38          lhz     %r0, 0x50+var_18(%sp)
seg000:00118960 28 00 07 CF          cmplwi  %r0, 0xFC7
seg000:00118964 41 82 00 0C          beq     loc_118970
seg000:00118968 38 60 00 00          li      %r3, 0
seg000:0011896C 48 00 01 04          b      exit
seg000:00118970          #
-----
seg000:00118970
seg000:00118970          loc_118970:          # CODE XREF: check3+228j
seg000:00118970 28 1F 00 03          cmplwi  %r31, 3
seg000:00118974 40 82 00 F8          bne     error
seg000:00118978 38 60 00 01          li      %r3, 1
seg000:0011897C 48 00 00 F4          b      exit
seg000:00118980          #
-----
seg000:00118980
seg000:00118980          loc_118980:          # CODE XREF: check3+B8j
seg000:00118980          # check3+C4j
seg000:00118980 80 DE 00 00          lwz     %r6, dword_24B704
seg000:00118984 38 81 00 38          addi    %r4, %sp, 0x50+var_18
seg000:00118988 3B E0 00 00          li      %r31, 0
seg000:0011898C 38 60 00 04          li      %r3, 4
seg000:00118990 38 A0 00 00          li      %r5, 0
seg000:00118994 48 00 BE 35          bl      .RBEREAD
seg000:00118998 60 00 00 00          nop
seg000:0011899C 54 60 04 3F          clrlwi. %r0, %r3, 16
seg000:001189A0 41 82 00 0C          beq     loc_1189AC
seg000:001189A4 38 60 00 00          li      %r3, 0
seg000:001189A8 48 00 00 C8          b      exit
seg000:001189AC          #
-----
seg000:001189AC
seg000:001189AC          loc_1189AC:          # CODE XREF: check3+264j

```

```

seg000:001189AC A0 01 00 38      lhz      %r0, 0x50+var_18(%sp)
seg000:001189B0 28 00 1D 6A      cmplwi   %r0, 0xAED0
seg000:001189B4 40 82 00 0C      bne      loc_1189C0
seg000:001189B8 3B E0 00 01      li       %r31, 1
seg000:001189BC 48 00 00 14      b        loc_1189D0
seg000:001189C0                #
-----
seg000:001189C0
seg000:001189C0                loc_1189C0:                # CODE XREF: check3+278j
seg000:001189C0 28 00 18 28      cmplwi   %r0, 0x2818
seg000:001189C4 41 82 00 0C      beq      loc_1189D0
seg000:001189C8 38 60 00 00      li       %r3, 0
seg000:001189CC 48 00 00 A4      b        exit
seg000:001189D0                #
-----
seg000:001189D0
seg000:001189D0                loc_1189D0:                # CODE XREF: check3+280j
seg000:001189D0                # check3+288j
seg000:001189D0 57 A0 06 3E      clrlwi   %r0, %r29, 24
seg000:001189D4 28 00 00 02      cmplwi   %r0, 2
seg000:001189D8 40 82 00 20      bne      loc_1189F8
seg000:001189DC 57 E0 06 3F      clrlwi.  %r0, %r31, 24
seg000:001189E0 41 82 00 10      beq      good2
seg000:001189E4 48 00 4C 69      bl       sub_11D64C
seg000:001189E8 60 00 00 00      nop
seg000:001189EC 48 00 00 84      b        exit
seg000:001189F0                #
-----
seg000:001189F0
seg000:001189F0                good2:                # CODE XREF: check3+2A4j
seg000:001189F0 38 60 00 01      li       %r3, 1
seg000:001189F4 48 00 00 7C      b        exit
seg000:001189F8                #
-----
seg000:001189F8
seg000:001189F8                loc_1189F8:                # CODE XREF: check3+29Cj
seg000:001189F8 80 DE 00 00      lwz      %r6, dword_24B704
seg000:001189FC 38 81 00 38      addi     %r4, %sp, 0x50+var_18
seg000:00118A00 38 60 00 05      li       %r3, 5
seg000:00118A04 38 A0 00 00      li       %r5, 0
seg000:00118A08 48 00 BD C1      bl       .RBEREAD
seg000:00118A0C 60 00 00 00      nop
seg000:00118A10 54 60 04 3F      clrlwi.  %r0, %r3, 16
seg000:00118A14 41 82 00 0C      beq      loc_118A20
seg000:00118A18 38 60 00 00      li       %r3, 0
seg000:00118A1C 48 00 00 54      b        exit
seg000:00118A20                #
-----
seg000:00118A20
seg000:00118A20                loc_118A20:                # CODE XREF: check3+2D8j
seg000:00118A20 A0 01 00 38      lhz      %r0, 0x50+var_18(%sp)
seg000:00118A24 28 00 11 D3      cmplwi   %r0, 0xD300
seg000:00118A28 40 82 00 0C      bne      loc_118A34
seg000:00118A2C 3B E0 00 01      li       %r31, 1
seg000:00118A30 48 00 00 14      b        good1
seg000:00118A34                #
-----
seg000:00118A34
seg000:00118A34                loc_118A34:                # CODE XREF: check3+2ECj
seg000:00118A34 28 00 1A EB      cmplwi   %r0, 0xEBA1
seg000:00118A38 41 82 00 0C      beq      good1

```

```

seg000:00118A3C 38 60 00 00          li    %r3, 0
seg000:00118A40 48 00 00 30          b     exit
seg000:00118A44          #
-----
seg000:00118A44
seg000:00118A44          good1:          # CODE XREF: check3+2F4j
seg000:00118A44          # check3+2FCj
seg000:00118A44 57 A0 06 3E          clrlwi %r0, %r29, 24
seg000:00118A48 28 00 00 03          cmplwi %r0, 3
seg000:00118A4C 40 82 00 20          bne    error
seg000:00118A50 57 E0 06 3F          clrlwi. %r0, %r31, 24
seg000:00118A54 41 82 00 10          beq    good
seg000:00118A58 48 00 4B F5          bl     sub_11D64C
seg000:00118A5C 60 00 00 00          nop
seg000:00118A60 48 00 00 10          b     exit
seg000:00118A64          #
-----
seg000:00118A64
seg000:00118A64          good:          # CODE XREF: check3+318j
seg000:00118A64 38 60 00 01          li    %r3, 1
seg000:00118A68 48 00 00 08          b     exit
seg000:00118A6C          #
-----
seg000:00118A6C
seg000:00118A6C          error:          # CODE XREF: check3+19Cj
seg000:00118A6C          # check3+238j ...
seg000:00118A6C 38 60 00 00          li    %r3, 0
seg000:00118A70
seg000:00118A70          exit:          # CODE XREF: check3+44j
seg000:00118A70          # check3+58j ...
seg000:00118A70 80 01 00 58          lwz    %r0, 0x50+arg_8(%sp)
seg000:00118A74 38 21 00 50          addi   %sp, %sp, 0x50
seg000:00118A78 83 E1 FF FC          lwz    %r31, var_4(%sp)
seg000:00118A7C 7C 08 03 A6          mtlr   %r0
seg000:00118A80 83 C1 FF F8          lwz    %r30, var_8(%sp)
seg000:00118A84 83 A1 FF F4          lwz    %r29, var_C(%sp)
seg000:00118A88 4E 80 00 20          blr
seg000:00118A88          # End of function check3

```

There are a lot of calls to `.RBEREAD()`. The function is probably return some values from the dongle, so they are compared here with hard-coded variables using `CMPLWI`.

We also see that `r3` register is also filled before each call to `.RBEREAD()` by one of these values: 0, 1, 8, 0xA, 0xB, 0xC, 0xD, 4, 5. Probably memory address or something like that?

Yes, indeed, by googling these function names it is easy to find Sentinel Eve3 dongle manual!

I probably even do not need to learn other PowerPC instructions: all this function does is just calls `.RBEREAD()`, compare its results with constants and returns 1 if comparisons are fine or 0 otherwise.

OK, all we've got is that `check1()` should return always 1 or any other non-zero value. But since I'm not very confident in PowerPC instructions, I will be careful: I will patch jumps in `check2()` at 0x001186FC and 0x00118718.

At 0x001186FC I wrote bytes 0x48 and 0 thus converting `BEQ` instruction into B (unconditional jump): I spot its opcode in the code without even referring to [13].

At 0x00118718 I wrote 0x60 and 3 zero bytes thus converting it to `NOP` instruction: I spot its opcode in the code too.

Summarizing, such small modifications can be done with `IDA` and minimal assembly language knowledge.

55.2 Example #2: SCO OpenServer

An ancient software for SCO OpenServer from 1997 developed by a company disappeared long time ago.

There is a special dongle driver to be installed in the system, containing text strings: "Copyright 1989, Rainbow Technologies, Inc., Irvine, CA" and "Sentinel Integrated Driver Ver. 3.0".

After driver installation in SCO OpenServer, these device files are appeared in `/dev` filesystem:

```
/dev/rbsl8
```

```
/dev/rbsl9
/dev/rbsl10
```

The program without dongle connected reports error, but the error string cannot be found in the executables. Thanks to [IDA](#), it does its job perfectly working out COFF executable used in SCO OpenServer. I've tried to find "rbsl" and indeed, found it in this code fragment:

```
.text:00022AB8      public SSQC
.text:00022AB8 SSQC      proc near                ; CODE XREF: SSQ+7p
.text:00022AB8
.text:00022AB8 var_44      = byte ptr -44h
.text:00022AB8 var_29      = byte ptr -29h
.text:00022AB8 arg_0       = dword ptr 8
.text:00022AB8
.text:00022AB8      push     ebp
.text:00022AB9      mov      ebp, esp
.text:00022ABB      sub      esp, 44h
.text:00022ABE      push     edi
.text:00022ABF      mov      edi, offset unk_4035D0
.text:00022AC4      push     esi
.text:00022AC5      mov      esi, [ebp+arg_0]
.text:00022AC8      push     ebx
.text:00022AC9      push     esi
.text:00022ACA      call     strlen
.text:00022ACF      add      esp, 4
.text:00022AD2      cmp      eax, 2
.text:00022AD7      jnz      loc_22BA4
.text:00022ADD      inc      esi
.text:00022ADE      mov      al, [esi-1]
.text:00022AE1      movsx    eax, al
.text:00022AE4      cmp      eax, '3'
.text:00022AE9      jz       loc_22B84
.text:00022AEF      cmp      eax, '4'
.text:00022AF4      jz       loc_22B94
.text:00022AFA      cmp      eax, '5'
.text:00022AFF      jnz      short loc_22B6B
.text:00022B01      movsx    ebx, byte ptr [esi]
.text:00022B04      sub      ebx, '0'
.text:00022B07      mov      eax, 7
.text:00022B0C      add      eax, ebx
.text:00022B0E      push     eax
.text:00022B0F      lea      eax, [ebp+var_44]
.text:00022B12      push     offset aDevS1D ; "/dev/sl%d"
.text:00022B17      push     eax
.text:00022B18      call     nl_sprintf
.text:00022B1D      push     0 ; int
.text:00022B1F      push     offset aDevRbsl8 ; char *
.text:00022B24      call     _access
.text:00022B29      add      esp, 14h
.text:00022B2C      cmp      eax, 0FFFFFFFFh
.text:00022B31      jz       short loc_22B48
.text:00022B33      lea      eax, [ebx+7]
.text:00022B36      push     eax
.text:00022B37      lea      eax, [ebp+var_44]
.text:00022B3A      push     offset aDevRbslD ; "/dev/rbsl%d"
.text:00022B3F      push     eax
.text:00022B40      call     nl_sprintf
.text:00022B45      add      esp, 0Ch
.text:00022B48
.text:00022B48 loc_22B48: ; CODE XREF: SSQC+79j
.text:00022B48      mov      edx, [edi]
.text:00022B4A      test     edx, edx
```

```

.text:00022B4C      jle      short loc_22B57
.text:00022B4E      push     edx                ; int
.text:00022B4F      call    _close
.text:00022B54      add     esp, 4
.text:00022B57
.text:00022B57 loc_22B57:                                ; CODE XREF: SSQC+94j
.text:00022B57      push     2                ; int
.text:00022B59      lea     eax, [ebp+var_44]
.text:00022B5C      push     eax                ; char *
.text:00022B5D      call    _open
.text:00022B62      add     esp, 8
.text:00022B65      test    eax, eax
.text:00022B67      mov     [edi], eax
.text:00022B69      jge     short loc_22B78
.text:00022B6B
.text:00022B6B loc_22B6B:                                ; CODE XREF: SSQC+47j
.text:00022B6B      mov     eax, 0FFFFFFFFh
.text:00022B70      pop     ebx
.text:00022B71      pop     esi
.text:00022B72      pop     edi
.text:00022B73      mov     esp, ebp
.text:00022B75      pop     ebp
.text:00022B76      retn
.text:00022B76 ; -----
.text:00022B77      align 4
.text:00022B78
.text:00022B78 loc_22B78:                                ; CODE XREF: SSQC+B1j
.text:00022B78      pop     ebx
.text:00022B79      pop     esi
.text:00022B7A      pop     edi
.text:00022B7B      xor     eax, eax
.text:00022B7D      mov     esp, ebp
.text:00022B7F      pop     ebp
.text:00022B80      retn
.text:00022B80 ; -----
.text:00022B81      align 4
.text:00022B84
.text:00022B84 loc_22B84:                                ; CODE XREF: SSQC+31j
.text:00022B84      mov     al, [esi]
.text:00022B86      pop     ebx
.text:00022B87      pop     esi
.text:00022B88      pop     edi
.text:00022B89      mov     ds:byte_407224, al
.text:00022B8E      mov     esp, ebp
.text:00022B90      xor     eax, eax
.text:00022B92      pop     ebp
.text:00022B93      retn
.text:00022B94 ; -----
.text:00022B94
.text:00022B94 loc_22B94:                                ; CODE XREF: SSQC+3Cj
.text:00022B94      mov     al, [esi]
.text:00022B96      pop     ebx
.text:00022B97      pop     esi
.text:00022B98      pop     edi
.text:00022B99      mov     ds:byte_407225, al
.text:00022B9E      mov     esp, ebp
.text:00022BA0      xor     eax, eax
.text:00022BA2      pop     ebp
.text:00022BA3      retn
.text:00022BA4 ; -----
.text:00022BA4

```

```

.text:00022BA4 loc_22BA4:                                ; CODE XREF: SSQC+1Fj
.text:00022BA4      movsx   eax, ds:byte_407225
.text:00022BAB      push    esi
.text:00022BAC      push    eax
.text:00022BAD      movsx   eax, ds:byte_407224
.text:00022BB4      push    eax
.text:00022BB5      lea     eax, [ebp+var_44]
.text:00022BB8      push    offset a46CCS ; "46%c%c%s"
.text:00022BBD      push    eax
.text:00022BBE      call   nl_sprintf
.text:00022BC3      lea     eax, [ebp+var_44]
.text:00022BC6      push    eax
.text:00022BC7      call   strlen
.text:00022BCC      add     esp, 18h
.text:00022BCF      cmp     eax, 1Bh
.text:00022BD4      jle     short loc_22BDA
.text:00022BD6      mov     [ebp+var_29], 0
.text:00022BDA      loc_22BDA:                                ; CODE XREF: SSQC+11Cj
.text:00022BDA      lea     eax, [ebp+var_44]
.text:00022BDD      push    eax
.text:00022BDE      call   strlen
.text:00022BE3      push    eax ; unsigned int
.text:00022BE4      lea     eax, [ebp+var_44]
.text:00022BE7      push    eax ; void *
.text:00022BE8      mov     eax, [edi]
.text:00022BEA      push    eax ; int
.text:00022BEB      call   _write
.text:00022BF0      add     esp, 10h
.text:00022BF3      pop     ebx
.text:00022BF4      pop     esi
.text:00022BF5      pop     edi
.text:00022BF6      mov     esp, ebp
.text:00022BF8      pop     ebp
.text:00022BF9      retn
.text:00022BF9 ; -----
.text:00022BFA      db 0Eh dup(90h)
.text:00022BFA SSQC      endp

```

Yes, indeed, the program should communicate with driver somehow and that is how it is.

The only place SSQC() function called is the [thunk function](#):

```

.text:0000DBE8      public SSQ
.text:0000DBE8 SSQ      proc near                                ; CODE XREF: sys_info+A9p
.text:0000DBE8                                ; sys_info+CBp ...
.text:0000DBE8      arg_0      = dword ptr 8
.text:0000DBE8      push    ebp
.text:0000DBE9      mov     ebp, esp
.text:0000DBEB      mov     edx, [ebp+arg_0]
.text:0000DBEE      push    edx
.text:0000DBEF      call   SSQC
.text:0000DBF4      add     esp, 4
.text:0000DBF7      mov     esp, ebp
.text:0000DBF9      pop     ebp
.text:0000DBFA      retn
.text:0000DBFA ; -----
.text:0000DBFB      align 4
.text:0000DBFB SSQ      endp

```

SSQ() is called at least from 2 functions.

One of these is:

```
.data:0040169C _51_52_53      dd offset aPressAnyKeyT_0 ; DATA XREF: init_sys+392r
.data:0040169C                                     ; sys_info+A1r
.data:0040169C                                     ; "PRESS ANY KEY TO CONTINUE: "
.data:004016A0      dd offset a51                ; "51"
.data:004016A4      dd offset a52                ; "52"
.data:004016A8      dd offset a53                ; "53"

...

.data:004016B8 _3C_or_3E      dd offset a3c                ; DATA XREF: sys_info:loc_D67Br
.data:004016B8                                     ; "3C"
.data:004016BC      dd offset a3e                ; "3E"

; these names I gave to the labels:
.data:004016C0 answers1      dd 6B05h                ; DATA XREF: sys_info+E7r
.data:004016C4                                     dd 3D87h
.data:004016C8 answers2      dd 3Ch                ; DATA XREF: sys_info+F2r
.data:004016CC                                     dd 832h
.data:004016D0 _C_and_B      db 0Ch                ; DATA XREF: sys_info+BAr
.data:004016D0                                     ; sys_info:OKr
.data:004016D1 byte_4016D1    db 0Bh                ; DATA XREF: sys_info+FDr
.data:004016D2                                     db 0

...

.text:0000D652      xor     eax, eax
.text:0000D654      mov     al, ds:ctl_port
.text:0000D659      mov     ecx, _51_52_53[eax*4]
.text:0000D660      push    ecx
.text:0000D661      call   SSQ
.text:0000D666      add     esp, 4
.text:0000D669      cmp     eax, 0FFFFFFFFh
.text:0000D66E      jz      short loc_D6D1
.text:0000D670      xor     ebx, ebx
.text:0000D672      mov     al, _C_and_B
.text:0000D677      test    al, al
.text:0000D679      jz      short loc_D6C0
.text:0000D67B      loc_D67B:                                     ; CODE XREF: sys_info+106j
.text:0000D67B      mov     eax, _3C_or_3E[ebx*4]
.text:0000D682      push    eax
.text:0000D683      call   SSQ
.text:0000D688      push    offset a4g                ; "4G"
.text:0000D68D      call   SSQ
.text:0000D692      push    offset a0123456789 ; "0123456789"
.text:0000D697      call   SSQ
.text:0000D69C      add     esp, 0Ch
.text:0000D69F      mov     edx, answers1[ebx*4]
.text:0000D6A6      cmp     eax, edx
.text:0000D6A8      jz      short OK
.text:0000D6AA      mov     ecx, answers2[ebx*4]
.text:0000D6B1      cmp     eax, ecx
.text:0000D6B3      jz      short OK
.text:0000D6B5      mov     al, byte_4016D1[ebx]
.text:0000D6BB      inc     ebx
.text:0000D6BC      test    al, al
.text:0000D6BE      jnz     short loc_D67B
.text:0000D6C0      loc_D6C0:                                     ; CODE XREF: sys_info+C1j
```

```

.text:0000D6C0      inc     ds:ctl_port
.text:0000D6C6      xor     eax, eax
.text:0000D6C8      mov     al, ds:ctl_port
.text:0000D6CD      cmp     eax, edi
.text:0000D6CF      jle     short loc_D652
.text:0000D6D1
.text:0000D6D1 loc_D6D1:      ; CODE XREF: sys_info+98j
.text:0000D6D1      ; sys_info+B6j
.text:0000D6D1      mov     edx, [ebp+var_8]
.text:0000D6D4      inc     edx
.text:0000D6D5      mov     [ebp+var_8], edx
.text:0000D6D8      cmp     edx, 3
.text:0000D6DB      jle     loc_D641
.text:0000D6E1
.text:0000D6E1 loc_D6E1:      ; CODE XREF: sys_info+16j
.text:0000D6E1      ; sys_info+51j ...
.text:0000D6E1      pop     ebx
.text:0000D6E2      pop     edi
.text:0000D6E3      mov     esp, ebp
.text:0000D6E5      pop     ebp
.text:0000D6E6      retn
.text:0000D6E6 ; -----
.text:0000D6E7      align 4
.text:0000D6E8
.text:0000D6E8 OK:      ; CODE XREF: sys_info+F0j
.text:0000D6E8      ; sys_info+FBj
.text:0000D6E8      mov     al, _C_and_B[ebx]
.text:0000D6EE      pop     ebx
.text:0000D6EF      pop     edi
.text:0000D6F0      mov     ds:ctl_model, al
.text:0000D6F5      mov     esp, ebp
.text:0000D6F7      pop     ebp
.text:0000D6F8      retn
.text:0000D6F8 sys_info      endp

```

“3C” and “3E” are sounds familiar: there was a Sentinel Pro dongle by Rainbow with no memory, providing only one crypto-hashing secret function.

But what is hash-function? Simplest example is CRC32, an algorithm providing “stronger” checksum for integrity checking purposes. It is impossible to restore original text from the hash value, it just has much less information: there can be long text, but CRC32 result is always limited to 32 bits. But CRC32 is not cryptographically secure: it is known how to alter a text in that way so the resulting CRC32 hash value will be one we need. Cryptographical hash functions are protected from this. They are widely used to hash user passwords in order to store them in the database, like MD5, SHA1, etc. Indeed: an internet forum database may not contain user passwords (stolen database will compromise all user’s passwords) but only hashes (a cracker will not be able to reveal passwords). Besides, an internet forum engine is not aware of your password, it should only check if its hash is the same as in the database, then it will give you access in this case. One of the simplest passwords cracking methods is just to brute-force all passwords in order to wait when resulting value will be the same as we need. Other methods are much more complex.

But let’s back to the program. So the program can only check the presence or absence of a dongle connected. No other information can be written to such a dongle with no memory. Two-character codes are commands (we can see how commands are handled in `SSQC()` function) and all other strings are hashed inside the dongle transforming into 16-bit number. The algorithm was secret, so it was not possible to write driver replacement or to remake dongle hardware emulating it perfectly. However, it was always possible to intercept all accesses to it and to find what constants the hash function results compared to. Needless to say it is possible to build a robust software copy protection scheme based on secret cryptographical hash-function: let it to encrypt/decrypt data files your software dealing with.

But let’s back to the code.

Codes 51/52/53 are used for LPT printer port selection. 3x/4x is for “family” selection (that’s how Sentinel Pro dongles are differentiated from each other: more than one dongle can be connected to LPT port).

The only non-2-character string passed to the hashing function is "0123456789". Then, the result is compared against the set of valid results. If it is correct, 0xC or 0xB is to be written into global variable `ctl_model`.

Another text string to be passed is "PRESS ANY KEY TO CONTINUE: ", but the result is not checked. I don't know why, probably by mistake. (What a strange feeling: to reveal bugs in such ancient software.)

Let's see where the value from the global variable `ctl_mode` is used.

One of such places is:

```
.text:0000D708 prep_sys      proc near                ; CODE XREF: init_sys+46Ap
.text:0000D708
.text:0000D708 var_14      = dword ptr -14h
.text:0000D708 var_10      = byte ptr -10h
.text:0000D708 var_8       = dword ptr -8
.text:0000D708 var_2       = word ptr -2
.text:0000D708
.text:0000D708          push     ebp
.text:0000D709          mov      eax, ds:net_env
.text:0000D70E          mov      ebp, esp
.text:0000D710          sub      esp, 1Ch
.text:0000D713          test     eax, eax
.text:0000D715          jnz      short loc_D734
.text:0000D717          mov      al, ds:ctl_model
.text:0000D71C          test     al, al
.text:0000D71E          jnz      short loc_D77E
.text:0000D720          mov      [ebp+var_8], offset aIeCvulnvv0kgT_ ; "Ie-cvulnvV\\\bOKG]
    T_"
.text:0000D727          mov      edx, 7
.text:0000D72C          jmp      loc_D7E7
...

.text:0000D7E7 loc_D7E7:                ; CODE XREF: prep_sys+24j
.text:0000D7E7                ; prep_sys+33j
.text:0000D7E7          push     edx
.text:0000D7E8          mov      edx, [ebp+var_8]
.text:0000D7EB          push     20h
.text:0000D7ED          push     edx
.text:0000D7EE          push     16h
.text:0000D7F0          call     err_warn
.text:0000D7F5          push     offset station_sem
.text:0000D7FA          call     ClosSem
.text:0000D7FF          call     startup_err
```

If it is 0, an encrypted error message is passed into decryption routine and printed.

Error strings decryption routine is seems simple [xoring](#):

```
.text:0000A43C err_warn      proc near                ; CODE XREF: prep_sys+E8p
.text:0000A43C                ; prep_sys+2Fp ...
.text:0000A43C
.text:0000A43C var_55      = byte ptr -55h
.text:0000A43C var_54      = byte ptr -54h
.text:0000A43C arg_0       = dword ptr 8
.text:0000A43C arg_4       = dword ptr 0Ch
.text:0000A43C arg_8       = dword ptr 10h
.text:0000A43C arg_C       = dword ptr 14h
.text:0000A43C
.text:0000A43C          push     ebp
.text:0000A43D          mov      ebp, esp
.text:0000A43F          sub      esp, 54h
.text:0000A442          push     edi
.text:0000A443          mov      ecx, [ebp+arg_8]
.text:0000A446          xor      edi, edi
.text:0000A448          test     ecx, ecx
```

```

.text:0000A44A      push     esi
.text:0000A44B      jle      short loc_A466
.text:0000A44D      mov      esi, [ebp+arg_C] ; key
.text:0000A450      mov      edx, [ebp+arg_4] ; string
.text:0000A453
.text:0000A453 loc_A453:                                ; CODE XREF: err_warn+28j
.text:0000A453      xor      eax, eax
.text:0000A455      mov      al, [edx+edi]
.text:0000A458      xor      eax, esi
.text:0000A45A      add      esi, 3
.text:0000A45D      inc      edi
.text:0000A45E      cmp      edi, ecx
.text:0000A460      mov      [ebp+edi+var_55], al
.text:0000A464      jnl      short loc_A453
.text:0000A466
.text:0000A466 loc_A466:                                ; CODE XREF: err_warn+Fj
.text:0000A466      mov      [ebp+edi+var_54], 0
.text:0000A46B      mov      eax, [ebp+arg_0]
.text:0000A46E      cmp      eax, 18h
.text:0000A473      jnz      short loc_A49C
.text:0000A475      lea      eax, [ebp+var_54]
.text:0000A478      push     eax
.text:0000A479      call     status_line
.text:0000A47E      add      esp, 4
.text:0000A481
.text:0000A481 loc_A481:                                ; CODE XREF: err_warn+72j
.text:0000A481      push     50h
.text:0000A483      push     0
.text:0000A485      lea      eax, [ebp+var_54]
.text:0000A488      push     eax
.text:0000A489      call     memset
.text:0000A48E      call     pcv_refresh
.text:0000A493      add      esp, 0Ch
.text:0000A496      pop      esi
.text:0000A497      pop      edi
.text:0000A498      mov      esp, ebp
.text:0000A49A      pop      ebp
.text:0000A49B      retn
.text:0000A49C ; -----
.text:0000A49C
.text:0000A49C loc_A49C:                                ; CODE XREF: err_warn+37j
.text:0000A49C      push     0
.text:0000A49E      lea      eax, [ebp+var_54]
.text:0000A4A1      mov      edx, [ebp+arg_0]
.text:0000A4A4      push     edx
.text:0000A4A5      push     eax
.text:0000A4A6      call     pcv_lputs
.text:0000A4AB      add      esp, 0Ch
.text:0000A4AE      jmp      short loc_A481
.text:0000A4AE err_warn      endp

```

That's why I was unable to find error messages in the executable files, because they are encrypted, this is popular practice.

Another call to SSQ() hashing function passes "offln" string to it and comparing result with 0xFE81 and 0x12A9. If it not so, it deals with some timer() function (maybe waiting for poorly connected dongle to be reconnected and check again?) and then decrypt another error message to dump.

```

.text:0000DA55 loc_DA55:                                ; CODE XREF: sync_sys+24Cj
.text:0000DA55      push     offset a0ffln ; "offln"
.text:0000DA5A      call     SSQ
.text:0000DA5F      add      esp, 4
.text:0000DA62      mov      dl, [ebx]
.text:0000DA64      mov      esi, eax

```

```

.text:0000DA66      cmp     dl, 0Bh
.text:0000DA69      jnz     short loc_DA83
.text:0000DA6B      cmp     esi, 0FE81h
.text:0000DA71      jz      OK
.text:0000DA77      cmp     esi, 0FFFFFF8EFh
.text:0000DA7D      jz      OK
.text:0000DA83
.text:0000DA83 loc_DA83:                                ; CODE XREF: sync_sys+201j
.text:0000DA83      mov     cl, [ebp]
.text:0000DA85      cmp     cl, 0Ch
.text:0000DA88      jnz     short loc_DA9F
.text:0000DA8A      cmp     esi, 12A9h
.text:0000DA90      jz      OK
.text:0000DA96      cmp     esi, 0FFFFFFF5h
.text:0000DA99      jz      OK
.text:0000DA9F
.text:0000DA9F loc_DA9F:                                ; CODE XREF: sync_sys+220j
.text:0000DA9F      mov     eax, [ebp+var_18]
.text:0000DAA2      test    eax, eax
.text:0000DAA4      jz      short loc_DAB0
.text:0000DAA6      push    24h
.text:0000DAA8      call    timer
.text:0000DAAD      add     esp, 4
.text:0000DAB0
.text:0000DAB0 loc_DAB0:                                ; CODE XREF: sync_sys+23Cj
.text:0000DAB0      inc     edi
.text:0000DAB1      cmp     edi, 3
.text:0000DAB4      jle     short loc_DA55
.text:0000DAB6      mov     eax, ds:net_env
.text:0000DABB      test    eax, eax
.text:0000DABD      jz      short error
...

.text:0000DAF7 error:                                ; CODE XREF: sync_sys+255j
.text:0000DAF7                                ; sync_sys+274j ...
.text:0000DAF7      mov     [ebp+var_8], offset encrypted_error_message2
.text:0000DAFE      mov     [ebp+var_C], 17h ; decrypting key
.text:0000DB05      jmp     decrypt_end_print_message
...

; this name I gave to label:
.text:0000D9B6 decrypt_end_print_message:            ; CODE XREF: sync_sys+29Dj
.text:0000D9B6                                ; sync_sys+2ABj
.text:0000D9B6      mov     eax, [ebp+var_18]
.text:0000D9B9      test    eax, eax
.text:0000D9BB      jnz     short loc_D9FB
.text:0000D9BD      mov     edx, [ebp+var_C] ; key
.text:0000D9C0      mov     ecx, [ebp+var_8] ; string
.text:0000D9C3      push    edx
.text:0000D9C4      push    20h
.text:0000D9C6      push    ecx
.text:0000D9C7      push    18h
.text:0000D9C9      call    err_warn
.text:0000D9CE      push    0Fh
.text:0000D9D0      push    190h
.text:0000D9D5      call    sound
.text:0000D9DA      mov     [ebp+var_18], 1
.text:0000D9E1      add     esp, 18h
.text:0000D9E4      call    pcv_kbhit

```

```
.text:0000D9E9      test     eax, eax
.text:0000D9EB      jz       short loc_D9FB

...

; this name I gave to label:
.data:00401736 encrypted_error_message2 db 74h, 72h, 78h, 43h, 48h, 6, 5Ah, 49h, 4Ch, 2 dup(47h)
.data:00401736      db 51h, 4Fh, 47h, 61h, 20h, 22h, 3Ch, 24h, 33h, 36h, 76h
.data:00401736      db 3Ah, 33h, 31h, 0Ch, 0, 0Bh, 1Fh, 7, 1Eh, 1Ah
```

Dongle bypassing is pretty straightforward: just patch all jumps after CMP the relevant instructions. Another option is to write our own SCO OpenServer driver.

55.2.1 Decrypting error messages

By the way, we can also try to decrypt all error messages. The algorithm, locating in `err_warn()` function is very simple, indeed:

Listing 55.1: Decrypting function

```
.text:0000A44D      mov     esi, [ebp+arg_C] ; key
.text:0000A450      mov     edx, [ebp+arg_4] ; string
.text:0000A453 loc_A453:
.text:0000A453      xor     eax, eax
.text:0000A455      mov     al, [edx+edi] ; load encrypted byte
.text:0000A458      xor     eax, esi ; decrypt it
.text:0000A45A      add     esi, 3 ; change key for the next byte
.text:0000A45D      inc     edi
.text:0000A45E      cmp     edi, ecx
.text:0000A460      mov     [ebp+edi+var_55], al
.text:0000A464      jnl     short loc_A453
```

As we can see, not just string supplied to the decrypting function, but also the key:

```
.text:0000DAF7 error: ; CODE XREF: sync_sys+255j
.text:0000DAF7 ; sync_sys+274j ...
.text:0000DAF7      mov     [ebp+var_8], offset encrypted_error_message2
.text:0000DAFE      mov     [ebp+var_C], 17h ; decrypting key
.text:0000DB05      jmp     decrypt_end_print_message

...

; this name I gave to label:
.text:0000D9B6 decrypt_end_print_message: ; CODE XREF: sync_sys+29Dj
.text:0000D9B6 ; sync_sys+2ABj
.text:0000D9B6      mov     eax, [ebp+var_18]
.text:0000D9B9      test    eax, eax
.text:0000D9BB      jnz     short loc_D9FB
.text:0000D9BD      mov     edx, [ebp+var_C] ; key
.text:0000D9C0      mov     ecx, [ebp+var_8] ; string
.text:0000D9C3      push    edx
.text:0000D9C4      push    20h
.text:0000D9C6      push    ecx
.text:0000D9C7      push    18h
.text:0000D9C9      call    err_warn
```

The algorithm is simple [xoring](#): each byte is xored with a key, but key is increased by 3 after processing of each byte. I wrote a simple Python script to check my insights:

Listing 55.2: Python 3.x

```
#!/usr/bin/python
import sys
```

```

msg=[0x74, 0x72, 0x78, 0x43, 0x48, 0x6, 0x5A, 0x49, 0x4C, 0x47, 0x47,
0x51, 0x4F, 0x47, 0x61, 0x20, 0x22, 0x3C, 0x24, 0x33, 0x36, 0x76,
0x3A, 0x33, 0x31, 0x0C, 0x0, 0x0B, 0x1F, 0x7, 0x1E, 0x1A]

key=0x17
tmp=key
for i in msg:
    sys.stdout.write ("%c" % (i^tmp))
    tmp=tmp+3
sys.stdout.flush()

```

And it prints: “check security device connection”. So yes, this is decrypted message.

There are also other encrypted messages with corresponding keys. But needless to say that it is possible to decrypt them without keys. First, we may observe that key is byte in fact. It is because core decrypting instruction (XOR) works on byte level. Key is located in ESI register, but only byte part of ESI is used. Hence, key may be greater than 255, but its value will always be rounded.

As a consequence, we can just try brute-force, trying all possible keys in 0..255 range. We will also skip messages containing unprintable characters.

Listing 55.3: Python 3.x

```

#!/usr/bin/python
import sys, curses.ascii

msgs=[
[0x74, 0x72, 0x78, 0x43, 0x48, 0x6, 0x5A, 0x49, 0x4C, 0x47, 0x47,
0x51, 0x4F, 0x47, 0x61, 0x20, 0x22, 0x3C, 0x24, 0x33, 0x36, 0x76,
0x3A, 0x33, 0x31, 0x0C, 0x0, 0x0B, 0x1F, 0x7, 0x1E, 0x1A],

[0x49, 0x65, 0x2D, 0x63, 0x76, 0x75, 0x6C, 0x6E, 0x76, 0x56, 0x5C,
8, 0x4F, 0x4B, 0x47, 0x5D, 0x54, 0x5F, 0x1D, 0x26, 0x2C, 0x33,
0x27, 0x28, 0x6F, 0x72, 0x75, 0x78, 0x7B, 0x7E, 0x41, 0x44],

[0x45, 0x61, 0x31, 0x67, 0x72, 0x79, 0x68, 0x52, 0x4A, 0x52, 0x50,
0x0C, 0x4B, 0x57, 0x43, 0x51, 0x58, 0x5B, 0x61, 0x37, 0x33, 0x2B,
0x39, 0x39, 0x3C, 0x38, 0x79, 0x3A, 0x30, 0x17, 0x0B, 0x0C],

[0x40, 0x64, 0x79, 0x75, 0x7F, 0x6F, 0x0, 0x4C, 0x40, 0x9, 0x4D, 0x5A,
0x46, 0x5D, 0x57, 0x49, 0x57, 0x3B, 0x21, 0x23, 0x6A, 0x38, 0x23,
0x36, 0x24, 0x2A, 0x7C, 0x3A, 0x1A, 0x6, 0x0D, 0x0E, 0x0A, 0x14,
0x10],

[0x72, 0x7C, 0x72, 0x79, 0x76, 0x0,
0x50, 0x43, 0x4A, 0x59, 0x5D, 0x5B, 0x41, 0x41, 0x1B, 0x5A,
0x24, 0x32, 0x2E, 0x29, 0x28, 0x70, 0x20, 0x22, 0x38, 0x28, 0x36,
0x0D, 0x0B, 0x48, 0x4B, 0x4E]]

def is_string_printable(s):
    return all(list(map(lambda x: curses.ascii.isprint(x), s)))

cnt=1
for msg in msgs:
    print ("message #%d" % cnt)
    for key in range(0,256):
        result=[]
        tmp=key
        for i in msg:
            result.append (i^tmp)
            tmp=tmp+3
        if is_string_printable (result):
            print ("key=", key, "value=", "".join(list(map(chr, result))))

```

```
cnt=cnt+1
```

And we getting:

Listing 55.4: Results

```
message #1
key= 20 value= 'eb^h%|' 'hudw|_af{n~f%ljmSbnwlpk
key= 21 value= ajc|i"}cawtgv{^bgto}g"millcmvkqh
key= 22 value= bkd\j#rbbvsfuz!cduh|d#bhomdlujni
key= 23 value= check security device connection
key= 24 value= lifbl!pd|tqhsx#ejwjbb!'nQofbshlo
message #2
key= 7 value= No security device found
key= 8 value= An#rbbvsVuz!cduhld#ghtme?!#!'!#!
message #3
key= 7 value= Bk<waoqNUpu$'yrea\wpmpusj,bkIjh
key= 8 value= Mj?vfnr0jqv%gxqd' '_vwlstlk/clHii
key= 9 value= Lm>ugasLkvw&fgpgag^uvcrwml.'mwhj
key= 10 value= 0l!td'tMhwx'efwfbf!tubuvnm!anvok
key= 11 value= No security device station found
key= 12 value= In#rjbvsnuz!{duhdd#r{'whho#gPtme
message #4
key= 14 value= Number of authorized users exceeded
key= 15 value= Ovlmdq!hg#'juknuhydk!vrbsp!Zy'dbefe
message #5
key= 17 value= check security device station
key= 18 value= 'ijbh!td'tmhwx'efwfbf!tubuVnm!'!
```

There are some garbage, but we can quickly find English-language messages!

By the way, since algorithm is simple xoring encryption, the very same function can be used for encrypting messages. If we need, we can encrypt our own messages, and patch the program by inserting them.

55.3 Example #3: MS-DOS

Another very old software for MS-DOS from 1995 also developed by a company disappeared long time ago.

In the pre-DOS extenders era, all the software for MS-DOS were mostly rely on 16-bit 8086 or 80286 CPUs, so en masse code was 16-bit. 16-bit code is mostly same as you already saw in this book, but all registers are 16-bit and there are less number of instructions available.

MS-DOS environment has no any system drivers, any program may deal with bare hardware via ports, so here you may see OUT/IN instructions, which are mostly present in drivers in our times (it is impossible to access ports directly in [user mode](#) in all modern OS).

Given that, the MS-DOS program working with a dongle should access LPT printer port directly. So we can just search for such instructions. And yes, here it is:

```
seg030:0034          out_port      proc far                ; CODE XREF: sent_pro+22p
seg030:0034                                     ; sent_pro+2Ap ...
seg030:0034
seg030:0034          arg_0         = byte ptr 6
seg030:0034
seg030:0034 55             push     bp
seg030:0035 8B EC         mov      bp, sp
seg030:0037 8B 16 7E E7    mov      dx, _out_port ; 0x378
seg030:003B 8A 46 06      mov      al, [bp+arg_0]
seg030:003E EE           out       dx, al
seg030:003F 5D           pop       bp
seg030:0040 CB           retf
seg030:0040          out_port      endp
```

(All label names in this example were given by me).

out_port() is referenced only in one function:

```

seg030:0041      sent_pro      proc far                ; CODE XREF: check_dongle+34p
seg030:0041
seg030:0041      var_3        = byte ptr -3
seg030:0041      var_2        = word ptr -2
seg030:0041      arg_0        = dword ptr  6
seg030:0041
seg030:0041 C8 04 00 00      enter    4, 0
seg030:0045 56              push     si
seg030:0046 57              push     di
seg030:0047 8B 16 82 E7      mov      dx, _in_port_1 ; 0x37A
seg030:004B EC              in        al, dx
seg030:004C 8A D8           mov      bl, al
seg030:004E 80 E3 FE       and      bl, 0FEh
seg030:0051 80 CB 04       or       bl, 4
seg030:0054 8A C3           mov      al, bl
seg030:0056 88 46 FD       mov      [bp+var_3], al
seg030:0059 80 E3 1F       and      bl, 1Fh
seg030:005C 8A C3           mov      al, bl
seg030:005E EE              out      dx, al
seg030:005F 68 FF 00       push     0FFh
seg030:0062 0E              push     cs
seg030:0063 E8 CE FF       call     near ptr out_port
seg030:0066 59              pop      cx
seg030:0067 68 D3 00       push     0D3h
seg030:006A 0E              push     cs
seg030:006B E8 C6 FF       call     near ptr out_port
seg030:006E 59              pop      cx
seg030:006F 33 F6           xor      si, si
seg030:0071 EB 01           jmp      short loc_359D4
seg030:0073      ;
-----
seg030:0073
seg030:0073      loc_359D3:                ; CODE XREF: sent_pro+37j
seg030:0073 46              inc      si
seg030:0074
seg030:0074      loc_359D4:                ; CODE XREF: sent_pro+30j
seg030:0074 81 FE 96 00      cmp      si, 96h
seg030:0078 7C F9           jl       short loc_359D3
seg030:007A 68 C3 00       push     0C3h
seg030:007D 0E              push     cs
seg030:007E E8 B3 FF       call     near ptr out_port
seg030:0081 59              pop      cx
seg030:0082 68 C7 00       push     0C7h
seg030:0085 0E              push     cs
seg030:0086 E8 AB FF       call     near ptr out_port
seg030:0089 59              pop      cx
seg030:008A 68 D3 00       push     0D3h
seg030:008D 0E              push     cs
seg030:008E E8 A3 FF       call     near ptr out_port
seg030:0091 59              pop      cx
seg030:0092 68 C3 00       push     0C3h
seg030:0095 0E              push     cs
seg030:0096 E8 9B FF       call     near ptr out_port
seg030:0099 59              pop      cx
seg030:009A 68 C7 00       push     0C7h
seg030:009D 0E              push     cs
seg030:009E E8 93 FF       call     near ptr out_port
seg030:00A1 59              pop      cx
seg030:00A2 68 D3 00       push     0D3h
seg030:00A5 0E              push     cs

```

```

seg030:00A6 E8 8B FF      call    near ptr out_port
seg030:00A9 59          pop     cx
seg030:00AA BF FF FF      mov     di, 0FFFFh
seg030:00AD EB 40        jmp     short loc_35A4F
seg030:00AF          ;
-----
seg030:00AF
seg030:00AF          loc_35A0F:          ; CODE XREF: sent_pro+BDj
seg030:00AF BE 04 00      mov     si, 4
seg030:00B2
seg030:00B2          loc_35A12:          ; CODE XREF: sent_pro+ACj
seg030:00B2 D1 E7        shl     di, 1
seg030:00B4 8B 16 80 E7    mov     dx, _in_port_2 ; 0x379
seg030:00B8 EC          in     al, dx
seg030:00B9 A8 80        test    al, 80h
seg030:00BB 75 03        jnz     short loc_35A20
seg030:00BD 83 CF 01      or      di, 1
seg030:00C0
seg030:00C0          loc_35A20:          ; CODE XREF: sent_pro+7Aj
seg030:00C0 F7 46 FE 08+    test    [bp+var_2], 8
seg030:00C5 74 05        jz      short loc_35A2C
seg030:00C7 68 D7 00      push    0D7h ; '+'
seg030:00CA EB 0B        jmp     short loc_35A37
seg030:00CC          ;
-----
seg030:00CC
seg030:00CC          loc_35A2C:          ; CODE XREF: sent_pro+84j
seg030:00CC 68 C3 00      push    0C3h
seg030:00CF 0E          push    cs
seg030:00D0 E8 61 FF      call    near ptr out_port
seg030:00D3 59          pop     cx
seg030:00D4 68 C7 00      push    0C7h
seg030:00D7
seg030:00D7          loc_35A37:          ; CODE XREF: sent_pro+89j
seg030:00D7 0E          push    cs
seg030:00D8 E8 59 FF      call    near ptr out_port
seg030:00DB 59          pop     cx
seg030:00DC 68 D3 00      push    0D3h
seg030:00DF 0E          push    cs
seg030:00E0 E8 51 FF      call    near ptr out_port
seg030:00E3 59          pop     cx
seg030:00E4 8B 46 FE      mov     ax, [bp+var_2]
seg030:00E7 D1 E0        shl     ax, 1
seg030:00E9 89 46 FE      mov     [bp+var_2], ax
seg030:00EC 4E          dec     si
seg030:00ED 75 C3        jnz     short loc_35A12
seg030:00EF
seg030:00EF          loc_35A4F:          ; CODE XREF: sent_pro+6Cj
seg030:00EF C4 5E 06      les     bx, [bp+arg_0]
seg030:00F2 FF 46 06      inc     word ptr [bp+arg_0]
seg030:00F5 26 8A 07      mov     al, es:[bx]
seg030:00F8 98          cbw
seg030:00F9 89 46 FE      mov     [bp+var_2], ax
seg030:00FC 0B C0        or      ax, ax
seg030:00FE 75 AF        jnz     short loc_35A0F
seg030:0100 68 FF 00      push    0FFh
seg030:0103 0E          push    cs
seg030:0104 E8 2D FF      call    near ptr out_port
seg030:0107 59          pop     cx
seg030:0108 8B 16 82 E7    mov     dx, _in_port_1 ; 0x37A
seg030:010C EC          in     al, dx

```

```

seg030:010D 8A C8      mov     cl, al
seg030:010F 80 E1 5F    and     cl, 5Fh
seg030:0112 8A C1      mov     al, cl
seg030:0114 EE        out     dx, al
seg030:0115 EC        in      al, dx
seg030:0116 8A C8      mov     cl, al
seg030:0118 F6 C1 20    test    cl, 20h
seg030:011B 74 08      jz      short loc_35A85
seg030:011D 8A 5E FD    mov     bl, [bp+var_3]
seg030:0120 80 E3 DF    and     bl, 0DFh
seg030:0123 EB 03      jmp     short loc_35A88
seg030:0125           ;

-----
seg030:0125
seg030:0125           loc_35A85:           ; CODE XREF: sent_pro+DAj
seg030:0125 8A 5E FD    mov     bl, [bp+var_3]
seg030:0128
seg030:0128           loc_35A88:           ; CODE XREF: sent_pro+E2j
seg030:0128 F6 C1 80    test    cl, 80h
seg030:012B 74 03      jz      short loc_35A90
seg030:012D 80 E3 7F    and     bl, 7Fh
seg030:0130
seg030:0130           loc_35A90:           ; CODE XREF: sent_pro+EAj
seg030:0130 8B 16 82 E7    mov     dx, _in_port_1 ; 0x37A
seg030:0134 8A C3      mov     al, bl
seg030:0136 EE        out     dx, al
seg030:0137 8B C7      mov     ax, di
seg030:0139 5F        pop     di
seg030:013A 5E        pop     si
seg030:013B C9        leave
seg030:013C CB        retf
seg030:013C           sent_pro      endp

```

It is also Sentinel Pro “hashing” dongle as in the previous example. I figured out its type by noticing that a text strings are also passed here and 16 bit values are also returned and compared with others.

So that is how Sentinel Pro is accessed via ports. Output port address is usually 0x378, i.e., printer port, the data to the old printers in pre-USB era were passed to it. The port is one-directional, because when it was developed, no one can imagined someone will need to transfer information from the printer ⁴. The only way to get information from the printer, is a status register on port 0x379, it contain such bits as “paper out”, “ack”, “busy” —thus printer may signal to the host computer that it is ready or not and if a paper present in it. So the dongle return information from one of these bits, by one bit at each iteration.

_in_port_2 has address of status word (0x379) and _in_port_1 has control register address (0x37A).

It seems, the dongle return information via “busy” flag at seg030:00B9: each bit is stored in the DI register, later returned at the function end.

What all these bytes sent to output port mean? I don’t know. Probably commands to the dongle. But generally speaking, it is not necessary to know: it is easy to solve our task without that knowledge.

Here is a dongle checking routine:

```

00000000 struct_0      struc ; (sizeof=0x1B)
00000000 field_0       db 25 dup(?)           ; string(C)
00000019 _A            dw ?
0000001B struct_0      ends

dseg:3CBC 61 63 72 75+_Q      struct_0 <'hello', 01122h>
dseg:3CBC 6E 00 00 00+      ; DATA XREF: check_dongle+2Eo

... skipped ...

dseg:3E00 63 6F 66 66+      struct_0 <'coffee', 7EB7h>
dseg:3E1B 64 6F 67 00+      struct_0 <'dog', 0FFADh>
dseg:3E36 63 61 74 00+      struct_0 <'cat', 0FF5Fh>

```

⁴If to consider Centronics only. Following IEEE 1284 standard allows to transfer information from the printer.

```

dseg:3E51 70 61 70 65+      struct_0 <'paper', 0FFDFh>
dseg:3E6C 63 6F 6B 65+      struct_0 <'coke', 0F568h>
dseg:3E87 63 6C 6F 63+      struct_0 <'clock', 55EAh>
dseg:3EA2 64 69 72 00+      struct_0 <'dir', 0FFAEh>
dseg:3EBD 63 6F 70 79+      struct_0 <'copy', 0F557h>

seg030:0145      check_dongle      proc far      ; CODE XREF: sub_3771D+3EP
seg030:0145
seg030:0145      var_6              = dword ptr -6
seg030:0145      var_2              = word ptr -2
seg030:0145
seg030:0145 C8 06 00 00      enter      6, 0
seg030:0149 56              push      si
seg030:014A 66 6A 00      push      large 0      ; newtime
seg030:014D 6A 00      push      0      ; cmd
seg030:014F 9A C1 18 00+    call      _biostime
seg030:0154 52              push      dx
seg030:0155 50              push      ax
seg030:0156 66 58      pop       eax
seg030:0158 83 C4 06      add       sp, 6
seg030:015B 66 89 46 FA      mov       [bp+var_6], eax
seg030:015F 66 3B 06 D8+    cmp       eax, _expiration
seg030:0164 7E 44      jle       short loc_35B0A
seg030:0166 6A 14      push      14h
seg030:0168 90      nop
seg030:0169 0E      push      cs
seg030:016A E8 52 00      call     near ptr get_rand
seg030:016D 59      pop       cx
seg030:016E 8B F0      mov       si, ax
seg030:0170 6B C0 1B      imul      ax, 1Bh
seg030:0173 05 BC 3C      add       ax, offset _Q
seg030:0176 1E      push      ds
seg030:0177 50      push      ax
seg030:0178 0E      push      cs
seg030:0179 E8 C5 FE      call     near ptr sent_pro
seg030:017C 83 C4 04      add       sp, 4
seg030:017F 89 46 FE      mov       [bp+var_2], ax
seg030:0182 8B C6      mov       ax, si
seg030:0184 6B C0 12      imul      ax, 12
seg030:0187 66 0F BF C0      movsx     eax, ax
seg030:018B 66 8B 56 FA      mov       edx, [bp+var_6]
seg030:018F 66 03 D0      add       edx, eax
seg030:0192 66 89 16 D8+    mov       _expiration, edx
seg030:0197 8B DE      mov       bx, si
seg030:0199 6B DB 1B      imul      bx, 27
seg030:019C 8B 87 D5 3C      mov       ax, _Q._A[bx]
seg030:01A0 3B 46 FE      cmp       ax, [bp+var_2]
seg030:01A3 74 05      jz        short loc_35B0A
seg030:01A5 B8 01 00      mov       ax, 1
seg030:01A8 EB 02      jmp       short loc_35B0C
seg030:01AA      ;

-----
seg030:01AA
seg030:01AA      loc_35B0A:      ; CODE XREF: check_dongle+1Fj
seg030:01AA      ; check_dongle+5Ej
seg030:01AA 33 C0      xor       ax, ax
seg030:01AC
seg030:01AC      loc_35B0C:      ; CODE XREF: check_dongle+63j
seg030:01AC 5E      pop       si
seg030:01AD C9      leave

```

```
seg030:01AE CB          retf
seg030:01AE          check_dongle endp
```

Since the routine may be called too frequently, e.g., before each important software feature executing, and the dongle accessing process is generally slow (because of slow printer port and also slow [MCU⁵](#) in the dongle), so they probably added a way to skip dongle checking too often, using checking current time in `biostime()` function.

`get_rand()` function uses standard C function:

```
seg030:01BF          get_rand      proc far          ; CODE XREF: check_dongle+25p
seg030:01BF
seg030:01BF          arg_0          = word ptr 6
seg030:01BF
seg030:01BF 55          push      bp
seg030:01C0 8B EC        mov      bp, sp
seg030:01C2 9A 3D 21 00+   call     _rand
seg030:01C7 66 0F BF C0    movsx   eax, ax
seg030:01CB 66 0F BF 56+   movsx   edx, [bp+arg_0]
seg030:01D0 66 0F AF C2    imul    eax, edx
seg030:01D4 66 BB 00 80+   mov     ebx, 8000h
seg030:01DA 66 99          cdq
seg030:01DC 66 F7 FB        idiv    ebx
seg030:01DF 5D          pop     bp
seg030:01E0 CB          retf
seg030:01E0          get_rand      endp
```

So the text string is selected randomly, passed into dongle, and then the result of hashing is compared with correct value. Text strings are seems to be chosen randomly as well.

And that is how the main dongle checking function is called:

```
seg033:087B 9A 45 01 96+   call     check_dongle
seg033:0880 0B C0          or      ax, ax
seg033:0882 74 62          jz      short OK
seg033:0884 83 3E 60 42+   cmp     word_620E0, 0
seg033:0889 75 5B          jnz     short OK
seg033:088B FF 06 60 42        inc     word_620E0
seg033:088F 1E          push    ds
seg033:0890 68 22 44        push    offset aTrupcRequiresA ; "This Software Requires
a Software Lock\n"
seg033:0893 1E          push    ds
seg033:0894 68 60 E9        push    offset byte_6C7E0 ; dest
seg033:0897 9A 79 65 00+   call     _strcpy
seg033:089C 83 C4 08          add     sp, 8
seg033:089F 1E          push    ds
seg033:08A0 68 42 44        push    offset aPleaseContactA ; "Please Contact ..."
seg033:08A3 1E          push    ds
seg033:08A4 68 60 E9        push    offset byte_6C7E0 ; dest
seg033:08A7 9A CD 64 00+   call     _strcat
```

Dongle bypassing is easy, just force the `check_dongle()` function to always return 0.

For example, by inserting this code at its beginning:

```
mov ax,0
retf
```

Observant reader might recall that `strcpy()` C function usually requires two pointers in arguments, but we saw how 4 values are passed:

```
seg033:088F 1E          push    ds
seg033:0890 68 22 44        push    offset aTrupcRequiresA ; "This Software Requires
a Software Lock\n"
seg033:0893 1E          push    ds
seg033:0894 68 60 E9        push    offset byte_6C7E0 ; dest
```

⁵Microcontroller unit

seg033:0897 9A 79 65 00+	call	_strcpy
seg033:089C 83 C4 08	add	sp, 8

Read more about it here: [66](#).

So as you may see, `strcpy()` and any other function taking pointer(s) in arguments, works with 16-bit pairs.

Let's back to our example. DS is currently set to data segment located in the executable, that is where the text string is stored.

In the `sent_pro()` function, each byte of string is loaded at `seg030:00EF`: the `LES` instruction loads ES:BX pair simultaneously from the passed argument. The `MOV` at `seg030:00F5` loads the byte from the memory to which ES:BX pair points.

At `seg030:00F2` only 16-bit word is [incremented](#), not segment value. This means, the string passed to the function cannot be located on two data segments boundaries.

Chapter 56

“QR9”: Rubik’s cube inspired amateur crypto-algorithm

Sometimes amateur cryptosystems appear to be pretty bizarre.

I was asked to reverse engineer an amateur cryptoalgorithm of some data crypting utility, source code of which was lost¹. Here is also [IDA](#) exported listing from original crypting utility:

```
.text:00541000 set_bit      proc near                ; CODE XREF: rotate1+42
.text:00541000                                     ; rotate2+42 ...
.text:00541000
.text:00541000 arg_0      = dword ptr 4
.text:00541000 arg_4      = dword ptr 8
.text:00541000 arg_8      = dword ptr 0Ch
.text:00541000 arg_C      = byte ptr 10h
.text:00541000
.text:00541000          mov     al, [esp+arg_C]
.text:00541004          mov     ecx, [esp+arg_8]
.text:00541008          push    esi
.text:00541009          mov     esi, [esp+4+arg_0]
.text:0054100D          test    al, al
.text:0054100F          mov     eax, [esp+4+arg_4]
.text:00541013          mov     dl, 1
.text:00541015          jz      short loc_54102B
.text:00541017          shl     dl, cl
.text:00541019          mov     cl, cube64[eax+esi*8]
.text:00541020          or      cl, dl
.text:00541022          mov     cube64[eax+esi*8], cl
.text:00541029          pop     esi
.text:0054102A          retn
.text:0054102B ; -----
.text:0054102B
.text:0054102B loc_54102B:                ; CODE XREF: set_bit+15
.text:0054102B          shl     dl, cl
.text:0054102D          mov     cl, cube64[eax+esi*8]
.text:00541034          not     dl
.text:00541036          and     cl, dl
.text:00541038          mov     cube64[eax+esi*8], cl
.text:0054103F          pop     esi
.text:00541040          retn
.text:00541040 set_bit      endp
.text:00541040
.text:00541040 ; -----
.text:00541041          align 10h
.text:00541050
.text:00541050 ; ===== S U B R O U T I N E =====
.text:00541050
```

¹I also got permit from customer to publish the algorithm details

```

.text:00541050
.text:00541050 get_bit      proc near          ; CODE XREF: rotate1+16
.text:00541050                                     ; rotate2+16 ...
.text:00541050
.text:00541050 arg_0      = dword ptr  4
.text:00541050 arg_4      = dword ptr  8
.text:00541050 arg_8      = byte ptr  0Ch
.text:00541050
.text:00541050          mov     eax, [esp+arg_4]
.text:00541054          mov     ecx, [esp+arg_0]
.text:00541058          mov     al, cube64[eax+ecx*8]
.text:0054105F          mov     cl, [esp+arg_8]
.text:00541063          shr     al, cl
.text:00541065          and     al, 1
.text:00541067          retn
.text:00541067 get_bit      endp
.text:00541067
.text:00541067 ; -----
.text:00541068          align 10h
.text:00541070
.text:00541070 ; ===== S U B R O U T I N E =====
.text:00541070
.text:00541070 rotate1      proc near          ; CODE XREF: rotate_all_with_password+8E
.text:00541070
.text:00541070 internal_array_64= byte ptr -40h
.text:00541070 arg_0      = dword ptr  4
.text:00541070
.text:00541070          sub     esp, 40h
.text:00541073          push    ebx
.text:00541074          push    ebp
.text:00541075          mov     ebp, [esp+48h+arg_0]
.text:00541079          push    esi
.text:0054107A          push    edi
.text:0054107B          xor     edi, edi      ; EDI is loop1 counter
.text:0054107D          lea     ebx, [esp+50h+internal_array_64]
.text:00541081
.text:00541081 first_loop1_begin:          ; CODE XREF: rotate1+2E
.text:00541081          xor     esi, esi      ; ESI is loop2 counter
.text:00541083
.text:00541083 first_loop2_begin:          ; CODE XREF: rotate1+25
.text:00541083          push    ebp          ; arg_0
.text:00541084          push    esi
.text:00541085          push    edi
.text:00541086          call   get_bit
.text:0054108B          add     esp, 0Ch
.text:0054108E          mov     [ebx+esi], al  ; store to internal array
.text:00541091          inc     esi
.text:00541092          cmp     esi, 8
.text:00541095          jnl     short first_loop2_begin
.text:00541097          inc     edi
.text:00541098          add     ebx, 8
.text:0054109B          cmp     edi, 8
.text:0054109E          jnl     short first_loop1_begin
.text:005410A0          lea     ebx, [esp+50h+internal_array_64]
.text:005410A4          mov     edi, 7          ; EDI is loop1 counter, initial state is 7
.text:005410A9
.text:005410A9 second_loop1_begin:          ; CODE XREF: rotate1+57
.text:005410A9          xor     esi, esi      ; ESI is loop2 counter
.text:005410AB
.text:005410AB second_loop2_begin:          ; CODE XREF: rotate1+4E

```

```

.text:005410AB      mov     al, [ebx+esi]    ; value from internal array
.text:005410AE      push    eax
.text:005410AF      push    ebp                ; arg_0
.text:005410B0      push    edi
.text:005410B1      push    esi
.text:005410B2      call    set_bit
.text:005410B7      add     esp, 10h
.text:005410BA      inc     esi                ; increment loop2 counter
.text:005410BB      cmp     esi, 8
.text:005410BE      jl      short second_loop2_begin
.text:005410C0      dec     edi                ; decrement loop2 counter
.text:005410C1      add     ebx, 8
.text:005410C4      cmp     edi, 0FFFFFFFh
.text:005410C7      jg      short second_loop1_begin
.text:005410C9      pop     edi
.text:005410CA      pop     esi
.text:005410CB      pop     ebp
.text:005410CC      pop     ebx
.text:005410CD      add     esp, 40h
.text:005410D0      retn
.text:005410D0 rotate1      endp
.text:005410D0
.text:005410D0 ; -----
.text:005410D1      align 10h
.text:005410E0
.text:005410E0 ; ===== S U B R O U T I N E =====
.text:005410E0
.text:005410E0
.text:005410E0 rotate2      proc near                ; CODE XREF: rotate_all_with_password+7A
.text:005410E0
.text:005410E0 internal_array_64= byte ptr -40h
.text:005410E0 arg_0        = dword ptr 4
.text:005410E0
.text:005410E0      sub     esp, 40h
.text:005410E3      push    ebx
.text:005410E4      push    ebp
.text:005410E5      mov     ebp, [esp+48h+arg_0]
.text:005410E9      push    esi
.text:005410EA      push    edi
.text:005410EB      xor     edi, edi        ; loop1 counter
.text:005410ED      lea     ebx, [esp+50h+internal_array_64]
.text:005410F1
.text:005410F1 loc_5410F1:                ; CODE XREF: rotate2+2E
.text:005410F1      xor     esi, esi        ; loop2 counter
.text:005410F3
.text:005410F3 loc_5410F3:                ; CODE XREF: rotate2+25
.text:005410F3      push    esi            ; loop2
.text:005410F4      push    edi            ; loop1
.text:005410F5      push    ebp            ; arg_0
.text:005410F6      call    get_bit
.text:005410FB      add     esp, 0Ch
.text:005410FE      mov     [ebx+esi], al    ; store to internal array
.text:00541101      inc     esi            ; increment loop1 counter
.text:00541102      cmp     esi, 8
.text:00541105      jl      short loc_5410F3
.text:00541107      inc     edi            ; increment loop2 counter
.text:00541108      add     ebx, 8
.text:0054110B      cmp     edi, 8
.text:0054110E      jl      short loc_5410F1
.text:00541110      lea     ebx, [esp+50h+internal_array_64]
.text:00541114      mov     edi, 7          ; loop1 counter is initial state 7

```

```

.text:00541119
.text:00541119 loc_541119:                ; CODE XREF: rotate2+57
.text:00541119                xor     esi, esi                ; loop2 counter
.text:0054111B
.text:0054111B loc_54111B:                ; CODE XREF: rotate2+4E
.text:0054111B                mov     al, [ebx+esi]        ; get byte from internal array
.text:0054111E                push   eax
.text:0054111F                push   edi                ; loop1 counter
.text:00541120                push   esi                ; loop2 counter
.text:00541121                push   ebp                ; arg_0
.text:00541122                call  set_bit
.text:00541127                add     esp, 10h
.text:0054112A                inc     esi                ; increment loop2 counter
.text:0054112B                cmp     esi, 8
.text:0054112E                jl     short loc_54111B
.text:00541130                dec     edi                ; decrement loop2 counter
.text:00541131                add     ebx, 8
.text:00541134                cmp     edi, 0FFFFFFFh
.text:00541137                jg     short loc_541119
.text:00541139                pop     edi
.text:0054113A                pop     esi
.text:0054113B                pop     ebp
.text:0054113C                pop     ebx
.text:0054113D                add     esp, 40h
.text:00541140                retn
.text:00541140 rotate2                endp
.text:00541140
.text:00541140 ; -----
.text:00541141                align 10h
.text:00541150
.text:00541150 ; ===== S U B R O U T I N E =====
.text:00541150
.text:00541150
.text:00541150 rotate3                proc near                ; CODE XREF: rotate_all_with_password+66
.text:00541150                = byte ptr -40h
.text:00541150 var_40
.text:00541150                = dword ptr 4
.text:00541150 arg_0
.text:00541150
.text:00541150                sub     esp, 40h
.text:00541153                push   ebx
.text:00541154                push   ebp
.text:00541155                mov     ebp, [esp+48h+arg_0]
.text:00541159                push   esi
.text:0054115A                push   edi
.text:0054115B                xor     edi, edi
.text:0054115D                lea     ebx, [esp+50h+var_40]
.text:00541161
.text:00541161 loc_541161:                ; CODE XREF: rotate3+2E
.text:00541161                xor     esi, esi
.text:00541163
.text:00541163 loc_541163:                ; CODE XREF: rotate3+25
.text:00541163                push   esi
.text:00541164                push   ebp
.text:00541165                push   edi
.text:00541166                call  get_bit
.text:0054116B                add     esp, 0Ch
.text:0054116E                mov     [ebx+esi], al
.text:00541171                inc     esi
.text:00541172                cmp     esi, 8
.text:00541175                jl     short loc_541163
.text:00541177                inc     edi

```

```

.text:00541178      add     ebx, 8
.text:0054117B      cmp     edi, 8
.text:0054117E      jl      short loc_541161
.text:00541180      xor     ebx, ebx
.text:00541182      lea     edi, [esp+50h+var_40]
.text:00541186
.text:00541186 loc_541186:      ; CODE XREF: rotate3+54
.text:00541186      mov     esi, 7
.text:0054118B
.text:0054118B loc_54118B:      ; CODE XREF: rotate3+4E
.text:0054118B      mov     al, [edi]
.text:0054118D      push    eax
.text:0054118E      push    ebx
.text:0054118F      push    ebp
.text:00541190      push    esi
.text:00541191      call    set_bit
.text:00541196      add     esp, 10h
.text:00541199      inc     edi
.text:0054119A      dec     esi
.text:0054119B      cmp     esi, 0FFFFFFFFh
.text:0054119E      jg      short loc_54118B
.text:005411A0      inc     ebx
.text:005411A1      cmp     ebx, 8
.text:005411A4      jl      short loc_541186
.text:005411A6      pop     edi
.text:005411A7      pop     esi
.text:005411A8      pop     ebp
.text:005411A9      pop     ebx
.text:005411AA      add     esp, 40h
.text:005411AD      retn
.text:005411AD rotate3      endp
.text:005411AD
.text:005411AD ; -----
.text:005411AE      align 10h
.text:005411B0
.text:005411B0 ; ===== S U B R O U T I N E =====
.text:005411B0
.text:005411B0
.text:005411B0 rotate_all_with_password proc near      ; CODE XREF: crypt+1F
.text:005411B0      ; decrypt+36
.text:005411B0
.text:005411B0 arg_0      = dword ptr 4
.text:005411B0 arg_4      = dword ptr 8
.text:005411B0
.text:005411B0      mov     eax, [esp+arg_0]
.text:005411B4      push    ebp
.text:005411B5      mov     ebp, eax
.text:005411B7      cmp     byte ptr [eax], 0
.text:005411BA      jz      exit
.text:005411C0      push    ebx
.text:005411C1      mov     ebx, [esp+8+arg_4]
.text:005411C5      push    esi
.text:005411C6      push    edi
.text:005411C7
.text:005411C7 loop_begin:      ; CODE XREF: rotate_all_with_password+9F
.text:005411C7      movsx   eax, byte ptr [ebp+0]
.text:005411CB      push    eax      ; C
.text:005411CC      call    _tolower
.text:005411D1      add     esp, 4
.text:005411D4      cmp     al, 'a'
.text:005411D6      jl      short next_character_in_password

```

```

.text:005411D8      cmp     al, 'z'
.text:005411DA      jg      short next_character_in_password
.text:005411DC      movsx   ecx, al
.text:005411DF      sub     ecx, 'a'
.text:005411E2      cmp     ecx, 24
.text:005411E5      jle     short skip_subtracting
.text:005411E7      sub     ecx, 24
.text:005411EA
.text:005411EA skip_subtracting:                                ; CODE XREF: rotate_all_with_password+35
.text:005411EA      mov     eax, 55555556h
.text:005411EF      imul    ecx
.text:005411F1      mov     eax, edx
.text:005411F3      shr     eax, 1Fh
.text:005411F6      add     edx, eax
.text:005411F8      mov     eax, ecx
.text:005411FA      mov     esi, edx
.text:005411FC      mov     ecx, 3
.text:00541201      cdq
.text:00541202      idiv    ecx
.text:00541204      sub     edx, 0
.text:00541207      jz      short call_rotate1
.text:00541209      dec     edx
.text:0054120A      jz      short call_rotate2
.text:0054120C      dec     edx
.text:0054120D      jnz     short next_character_in_password
.text:0054120F      test    ebx, ebx
.text:00541211      jle     short next_character_in_password
.text:00541213      mov     edi, ebx
.text:00541215
.text:00541215 call_rotate3:                                ; CODE XREF: rotate_all_with_password+6F
.text:00541215      push    esi
.text:00541216      call    rotate3
.text:0054121B      add     esp, 4
.text:0054121E      dec     edi
.text:0054121F      jnz     short call_rotate3
.text:00541221      jmp     short next_character_in_password
.text:00541223 ; -----
.text:00541223
.text:00541223 call_rotate2:                                ; CODE XREF: rotate_all_with_password+5A
.text:00541223      test    ebx, ebx
.text:00541225      jle     short next_character_in_password
.text:00541227      mov     edi, ebx
.text:00541229
.text:00541229 loc_541229:                                ; CODE XREF: rotate_all_with_password+83
.text:00541229      push    esi
.text:0054122A      call    rotate2
.text:0054122F      add     esp, 4
.text:00541232      dec     edi
.text:00541233      jnz     short loc_541229
.text:00541235      jmp     short next_character_in_password
.text:00541237 ; -----
.text:00541237
.text:00541237 call_rotate1:                                ; CODE XREF: rotate_all_with_password+57
.text:00541237      test    ebx, ebx
.text:00541239      jle     short next_character_in_password
.text:0054123B      mov     edi, ebx
.text:0054123D
.text:0054123D loc_54123D:                                ; CODE XREF: rotate_all_with_password+97
.text:0054123D      push    esi
.text:0054123E      call    rotate1
.text:00541243      add     esp, 4

```

```

.text:00541246      dec     edi
.text:00541247      jnz     short loc_54123D
.text:00541249
.text:00541249 next_character_in_password:      ; CODE XREF: rotate_all_with_password+26
.text:00541249      ; rotate_all_with_password+2A ...
.text:00541249      mov     al, [ebp+1]
.text:0054124C      inc     ebp
.text:0054124D      test    al, al
.text:0054124F      jnz     loop_begin
.text:00541255      pop     edi
.text:00541256      pop     esi
.text:00541257      pop     ebx
.text:00541258
.text:00541258 exit:      ; CODE XREF: rotate_all_with_password+A
.text:00541258      pop     ebp
.text:00541259      retn
.text:00541259 rotate_all_with_password endp
.text:00541259
.text:00541259 ; -----
.text:0054125A      align 10h
.text:00541260
.text:00541260 ; ===== S U B R O U T I N E =====
.text:00541260
.text:00541260
.text:00541260 crypt      proc near      ; CODE XREF: crypt_file+8A
.text:00541260
.text:00541260 arg_0      = dword ptr 4
.text:00541260 arg_4      = dword ptr 8
.text:00541260 arg_8      = dword ptr 0Ch
.text:00541260
.text:00541260      push    ebx
.text:00541261      mov     ebx, [esp+4+arg_0]
.text:00541265      push    ebp
.text:00541266      push    esi
.text:00541267      push    edi
.text:00541268      xor     ebp, ebp
.text:0054126A
.text:0054126A loc_54126A:      ; CODE XREF: crypt+41
.text:0054126A      mov     eax, [esp+10h+arg_8]
.text:0054126E      mov     ecx, 10h
.text:00541273      mov     esi, ebx
.text:00541275      mov     edi, offset cube64
.text:0054127A      push    1
.text:0054127C      push    eax
.text:0054127D      rep movsd
.text:0054127F      call    rotate_all_with_password
.text:00541284      mov     eax, [esp+18h+arg_4]
.text:00541288      mov     edi, ebx
.text:0054128A      add     ebp, 40h
.text:0054128D      add     esp, 8
.text:00541290      mov     ecx, 10h
.text:00541295      mov     esi, offset cube64
.text:0054129A      add     ebx, 40h
.text:0054129D      cmp     ebp, eax
.text:0054129F      rep movsd
.text:005412A1      jl     short loc_54126A
.text:005412A3      pop     edi
.text:005412A4      pop     esi
.text:005412A5      pop     ebp
.text:005412A6      pop     ebx
.text:005412A7      retn

```

```

.text:005412A7 crypt                endp
.text:005412A7
.text:005412A7 ; -----
.text:005412A8                    align 10h
.text:005412B0
.text:005412B0 ; ===== S U B R O U T I N E =====
.text:005412B0
.text:005412B0 ; int __cdecl decrypt(int, int, void *Src)
.text:005412B0 decrypt            proc near                ; CODE XREF: decrypt_file+99
.text:005412B0
.text:005412B0 arg_0              = dword ptr 4
.text:005412B0 arg_4              = dword ptr 8
.text:005412B0 Src                = dword ptr 0Ch
.text:005412B0
.text:005412B0                mov     eax, [esp+Src]
.text:005412B4                push    ebx
.text:005412B5                push    ebp
.text:005412B6                push    esi
.text:005412B7                push    edi
.text:005412B8                push    eax                ; Src
.text:005412B9                call    __strdup
.text:005412BE                push    eax                ; Str
.text:005412BF                mov     [esp+18h+Src], eax
.text:005412C3                call    __strrev
.text:005412C8                mov     ebx, [esp+18h+arg_0]
.text:005412CC                add     esp, 8
.text:005412CF                xor     ebp, ebp
.text:005412D1
.text:005412D1 loc_5412D1:                ; CODE XREF: decrypt+58
.text:005412D1                mov     ecx, 10h
.text:005412D6                mov     esi, ebx
.text:005412D8                mov     edi, offset cube64
.text:005412DD                push    3
.text:005412DF                rep movsd
.text:005412E1                mov     ecx, [esp+14h+Src]
.text:005412E5                push    ecx
.text:005412E6                call    rotate_all_with_password
.text:005412EB                mov     eax, [esp+18h+arg_4]
.text:005412EF                mov     edi, ebx
.text:005412F1                add     ebp, 40h
.text:005412F4                add     esp, 8
.text:005412F7                mov     ecx, 10h
.text:005412FC                mov     esi, offset cube64
.text:00541301                add     ebx, 40h
.text:00541304                cmp     ebp, eax
.text:00541306                rep movsd
.text:00541308                jnl     short loc_5412D1
.text:0054130A                mov     edx, [esp+10h+Src]
.text:0054130E                push    edx                ; Memory
.text:0054130F                call    _free
.text:00541314                add     esp, 4
.text:00541317                pop     edi
.text:00541318                pop     esi
.text:00541319                pop     ebp
.text:0054131A                pop     ebx
.text:0054131B                retn
.text:0054131B decrypt            endp
.text:0054131B
.text:0054131B ; -----
.text:0054131C                    align 10h

```

```

.text:00541320
.text:00541320 ; ===== S U B R O U T I N E =====
.text:00541320
.text:00541320
.text:00541320 ; int __cdecl crypt_file(int Str, char *Filename, int password)
.text:00541320 crypt_file      proc near                      ; CODE XREF: _main+42
.text:00541320
.text:00541320 Str                = dword ptr 4
.text:00541320 Filename          = dword ptr 8
.text:00541320 password           = dword ptr 0Ch
.text:00541320
.text:00541320          mov     eax, [esp+Str]
.text:00541324          push    ebp
.text:00541325          push    offset Mode      ; "rb"
.text:0054132A          push    eax           ; Filename
.text:0054132B          call    _fopen          ; open file
.text:00541330          mov     ebp, eax
.text:00541332          add     esp, 8
.text:00541335          test    ebp, ebp
.text:00541337          jnz     short loc_541348
.text:00541339          push    offset Format      ; "Cannot open input file!\n"
.text:0054133E          call    _printf
.text:00541343          add     esp, 4
.text:00541346          pop     ebp
.text:00541347          retn
.text:00541348 ; -----
.text:00541348
.text:00541348 loc_541348:                      ; CODE XREF: crypt_file+17
.text:00541348          push    ebx
.text:00541349          push    esi
.text:0054134A          push    edi
.text:0054134B          push    2                ; Origin
.text:0054134D          push    0                ; Offset
.text:0054134F          push    ebp                ; File
.text:00541350          call    _fseek
.text:00541355          push    ebp                ; File
.text:00541356          call    _ftell          ; get file size
.text:0054135B          push    0                ; Origin
.text:0054135D          push    0                ; Offset
.text:0054135F          push    ebp                ; File
.text:00541360          mov     [esp+2Ch+Str], eax
.text:00541364          call    _fseek          ; rewind to start
.text:00541369          mov     esi, [esp+2Ch+Str]
.text:0054136D          and     esi, 0FFFFFFC0h ; reset all lowest 6 bits
.text:00541370          add     esi, 40h         ; align size to 64-byte border
.text:00541373          push    esi              ; Size
.text:00541374          call    _malloc
.text:00541379          mov     ecx, esi
.text:0054137B          mov     ebx, eax          ; allocated buffer pointer -> to EBX
.text:0054137D          mov     edx, ecx
.text:0054137F          xor     eax, eax
.text:00541381          mov     edi, ebx
.text:00541383          push    ebp              ; File
.text:00541384          shr     ecx, 2
.text:00541387          rep stosd
.text:00541389          mov     ecx, edx
.text:0054138B          push    1                ; Count
.text:0054138D          and     ecx, 3
.text:00541390          rep stosb          ; memset (buffer, 0, aligned_size)
.text:00541392          mov     eax, [esp+38h+Str]
.text:00541396          push    eax              ; ElementSize

```

```

.text:00541397      push     ebx                ; DstBuf
.text:00541398      call     _fread                ; read file
.text:0054139D      push     ebp                ; File
.text:0054139E      call     _fclose
.text:005413A3      mov      ecx, [esp+44h+password]
.text:005413A7      push     ecx                ; password
.text:005413A8      push     esi                ; aligned size
.text:005413A9      push     ebx                ; buffer
.text:005413AA      call     crypt                ; do crypt
.text:005413AF      mov      edx, [esp+50h+Filename]
.text:005413B3      add      esp, 40h
.text:005413B6      push     offset aWb          ; "wb"
.text:005413BB      push     edx                ; Filename
.text:005413BC      call     _fopen
.text:005413C1      mov      edi, eax
.text:005413C3      push     edi                ; File
.text:005413C4      push     1                  ; Count
.text:005413C6      push     3                  ; Size
.text:005413C8      push     offset aQr9        ; "QR9"
.text:005413CD      call     _fwrite            ; write file signature
.text:005413D2      push     edi                ; File
.text:005413D3      push     1                  ; Count
.text:005413D5      lea      eax, [esp+30h+Str]
.text:005413D9      push     4                  ; Size
.text:005413DB      push     eax                ; Str
.text:005413DC      call     _fwrite            ; write original file size
.text:005413E1      push     edi                ; File
.text:005413E2      push     1                  ; Count
.text:005413E4      push     esi                ; Size
.text:005413E5      push     ebx                ; Str
.text:005413E6      call     _fwrite            ; write crypted file
.text:005413EB      push     edi                ; File
.text:005413EC      call     _fclose
.text:005413F1      push     ebx                ; Memory
.text:005413F2      call     _free
.text:005413F7      add      esp, 40h
.text:005413FA      pop      edi
.text:005413FB      pop      esi
.text:005413FC      pop      ebx
.text:005413FD      pop      ebp
.text:005413FE      retn
.text:005413FE      crypt_file      endp
.text:005413FE
.text:005413FE ; -----
.text:005413FF      align 10h
.text:00541400
.text:00541400 ; ===== S U B R O U T I N E =====
.text:00541400
.text:00541400
.text:00541400 ; int __cdecl decrypt_file(char *Filename, int, void *Src)
.text:00541400      decrypt_file      proc near                ; CODE XREF: _main+6E
.text:00541400
.text:00541400      Filename          = dword ptr 4
.text:00541400      arg_4              = dword ptr 8
.text:00541400      Src                = dword ptr 0Ch
.text:00541400
.text:00541400      mov      eax, [esp+Filename]
.text:00541404      push     ebx
.text:00541405      push     ebp
.text:00541406      push     esi
.text:00541407      push     edi

```

```

.text:00541408      push    offset aRb      ; "rb"
.text:0054140D      push    eax              ; Filename
.text:0054140E      call    _fopen
.text:00541413      mov     esi, eax
.text:00541415      add     esp, 8
.text:00541418      test    esi, esi
.text:0054141A      jnz     short loc_54142E
.text:0054141C      push    offset aCannotOpenIn_0 ; "Cannot open input file!\n"
.text:00541421      call    _printf
.text:00541426      add     esp, 4
.text:00541429      pop     edi
.text:0054142A      pop     esi
.text:0054142B      pop     ebp
.text:0054142C      pop     ebx
.text:0054142D      retn

.text:0054142E ; -----
.text:0054142E      loc_54142E:                ; CODE XREF: decrypt_file+1A
.text:0054142E      push    2                  ; Origin
.text:00541430      push    0                  ; Offset
.text:00541432      push    esi                ; File
.text:00541433      call    _fseek
.text:00541438      push    esi                ; File
.text:00541439      call    _ftell
.text:0054143E      push    0                  ; Origin
.text:00541440      push    0                  ; Offset
.text:00541442      push    esi                ; File
.text:00541443      mov     ebp, eax
.text:00541445      call    _fseek
.text:0054144A      push    ebp                ; Size
.text:0054144B      call    _malloc
.text:00541450      push    esi                ; File
.text:00541451      mov     ebx, eax
.text:00541453      push    1                  ; Count
.text:00541455      push    ebp                ; ElementSize
.text:00541456      push    ebx                ; DstBuf
.text:00541457      call    _fread
.text:0054145C      push    esi                ; File
.text:0054145D      call    _fclose
.text:00541462      add     esp, 34h
.text:00541465      mov     ecx, 3
.text:0054146A      mov     edi, offset aQr9_0 ; "QR9"
.text:0054146F      mov     esi, ebx
.text:00541471      xor     edx, edx
.text:00541473      repe    cmpsb
.text:00541475      jz      short loc_541489
.text:00541477      push    offset aFileIsNotCrypt ; "File is not crypted!\n"
.text:0054147C      call    _printf
.text:00541481      add     esp, 4
.text:00541484      pop     edi
.text:00541485      pop     esi
.text:00541486      pop     ebp
.text:00541487      pop     ebx
.text:00541488      retn

.text:00541489 ; -----
.text:00541489      loc_541489:                ; CODE XREF: decrypt_file+75
.text:00541489      mov     eax, [esp+10h+Src]
.text:0054148D      mov     edi, [ebx+3]
.text:00541490      add     ebp, 0FFFFFFF9h
.text:00541493      lea     esi, [ebx+7]

```

```

.text:00541496      push     eax                ; Src
.text:00541497      push     ebp                ; int
.text:00541498      push     esi                ; int
.text:00541499      call    decrypt
.text:0054149E      mov     ecx, [esp+1Ch+arg_4]
.text:005414A2      push     offset aWb_0        ; "wb"
.text:005414A7      push     ecx                ; Filename
.text:005414A8      call    _fopen
.text:005414AD      mov     ebp, eax
.text:005414AF      push     ebp                ; File
.text:005414B0      push     1                  ; Count
.text:005414B2      push     edi                ; Size
.text:005414B3      push     esi                ; Str
.text:005414B4      call    _fwrite
.text:005414B9      push     ebp                ; File
.text:005414BA      call    _fclose
.text:005414BF      push     ebx                ; Memory
.text:005414C0      call    _free
.text:005414C5      add     esp, 2Ch
.text:005414C8      pop     edi
.text:005414C9      pop     esi
.text:005414CA      pop     ebp
.text:005414CB      pop     ebx
.text:005414CC      retn
.text:005414CC decrypt_file  endp

```

All function and label names are given by me while analysis.

I started from top. Here is a function taking two file names and password.

```

.text:00541320 ; int __cdecl crypt_file(int Str, char *Filename, int password)
.text:00541320 crypt_file      proc near
.text:00541320
.text:00541320 Str            = dword ptr 4
.text:00541320 Filename        = dword ptr 8
.text:00541320 password         = dword ptr 0Ch
.text:00541320

```

Open file and report error in case of error:

```

.text:00541320      mov     eax, [esp+Str]
.text:00541324      push     ebp
.text:00541325      push     offset Mode        ; "rb"
.text:0054132A      push     eax                ; Filename
.text:0054132B      call    _fopen              ; open file
.text:00541330      mov     ebp, eax
.text:00541332      add     esp, 8
.text:00541335      test    ebp, ebp
.text:00541337      jnz     short loc_541348
.text:00541339      push     offset Format       ; "Cannot open input file!\n"
.text:0054133E      call    _printf
.text:00541343      add     esp, 4
.text:00541346      pop     ebp
.text:00541347      retn
.text:00541348 ; -----
.text:00541348
.text:00541348 loc_541348:

```

Get file size via fseek()/ftell():

```

.text:00541348 push     ebx
.text:00541349 push     esi
.text:0054134A push     edi
.text:0054134B push     2                ; Origin

```

```
.text:0054134D push    0                ; Offset
.text:0054134F push    ebp          ; File

; move current file position to the end
.text:00541350 call    _fseek
.text:00541355 push    ebp          ; File
.text:00541356 call    _ftell        ; get current file position
.text:0054135B push    0                ; Origin
.text:0054135D push    0                ; Offset
.text:0054135F push    ebp          ; File
.text:00541360 mov     [esp+2Ch+Str], eax

; move current file position to the start
.text:00541364 call    _fseek
```

This fragment of code calculates file size aligned on a 64-byte boundary. This is because this cryptalgorithm works with only 64-byte blocks. Its operation is pretty straightforward: divide file size by 64, forget about remainder and add 1, then multiple by 64. The following code removes remainder as if value was already divided by 64 and adds 64. It is almost the same.

```
.text:00541369 mov     esi, [esp+2Ch+Str]
.text:0054136D and     esi, 0FFFFFFC0h ; reset all lowest 6 bits
.text:00541370 add     esi, 40h        ; align size to 64-byte border
```

Allocate buffer with aligned size:

```
.text:00541373          push    esi                ; Size
.text:00541374          call    _malloc
```

Call `memset()`, e.g., clears allocated buffer².

```
.text:00541379 mov     ecx, esi
.text:0054137B mov     ebx, eax                ; allocated buffer pointer -> to EBX
.text:0054137D mov     edx, ecx
.text:0054137F xor     eax, eax
.text:00541381 mov     edi, ebx
.text:00541383 push    ebp          ; File
.text:00541384 shr     ecx, 2
.text:00541387 rep stosd
.text:00541389 mov     ecx, edx
.text:0054138B push    1                ; Count
.text:0054138D and     ecx, 3
.text:00541390 rep stosb                ; memset (buffer, 0, aligned_size)
```

Read file via standard C function `fread()`.

```
.text:00541392          mov     eax, [esp+38h+Str]
.text:00541396          push    eax                ; ElementSize
.text:00541397          push    ebx                ; DstBuf
.text:00541398          call    _fread            ; read file
.text:0054139D          push    ebp          ; File
.text:0054139E          call    _fclose
```

Call `crypt()`. This function takes buffer, buffer size (aligned) and password string.

```
.text:005413A3          mov     ecx, [esp+44h+password]
.text:005413A7          push    ecx                ; password
.text:005413A8          push    esi                ; aligned size
.text:005413A9          push    ebx                ; buffer
.text:005413AA          call    crypt                ; do crypt
```

Create output file. By the way, developer forgot to check if it was created correctly! File opening result is being checked though.

²`malloc()` + `memset()` could be replaced by `calloc()`

```

.text:005413AF      mov     edx, [esp+50h+Filename]
.text:005413B3      add     esp, 40h
.text:005413B6      push    offset aWb          ; "wb"
.text:005413BB      push    edx                  ; Filename
.text:005413BC      call    _fopen
.text:005413C1      mov     edi, eax

```

Newly created file handle is in the EDI register now. Write signature "QR9".

```

.text:005413C3      push    edi                  ; File
.text:005413C4      push    1                   ; Count
.text:005413C6      push    3                   ; Size
.text:005413C8      push    offset aQr9         ; "QR9"
.text:005413CD      call    _fwrite             ; write file signature

```

Write actual file size (not aligned):

```

.text:005413D2      push    edi                  ; File
.text:005413D3      push    1                   ; Count
.text:005413D5      lea     eax, [esp+30h+Str]
.text:005413D9      push    4                   ; Size
.text:005413DB      push    eax                  ; Str
.text:005413DC      call    _fwrite             ; write original file size

```

Write crypted buffer:

```

.text:005413E1      push    edi                  ; File
.text:005413E2      push    1                   ; Count
.text:005413E4      push    esi                  ; Size
.text:005413E5      push    ebx                  ; Str
.text:005413E6      call    _fwrite             ; write encrypted file

```

Close file and free allocated buffer:

```

.text:005413EB      push    edi                  ; File
.text:005413EC      call    _fclose
.text:005413F1      push    ebx                  ; Memory
.text:005413F2      call    _free
.text:005413F7      add     esp, 40h
.text:005413FA      pop     edi
.text:005413FB      pop     esi
.text:005413FC      pop     ebx
.text:005413FD      pop     ebp
.text:005413FE      retn
.text:005413FE crypt_file  endp

```

Here is reconstructed C-code:

```

void crypt_file(char *fin, char* fout, char *pw)
{
    FILE *f;
    int flen, flen_aligned;
    BYTE *buf;

    f=fopen(fin, "rb");

    if (f==NULL)
    {
        printf ("Cannot open input file!\n");
        return;
    };

    fseek (f, 0, SEEK_END);
    flen=ftell (f);

```

```

fseek (f, 0, SEEK_SET);

flen_aligned=(flen&0xFFFFFC0)+0x40;

buf=(BYTE*)malloc (flen_aligned);
memset (buf, 0, flen_aligned);

fread (buf, flen, 1, f);

fclose (f);

crypt (buf, flen_aligned, pw);

f=fopen(fout, "wb");

fwrite ("QR9", 3, 1, f);
fwrite (&flen, 4, 1, f);
fwrite (buf, flen_aligned, 1, f);

fclose (f);

free (buf);
};

```

Decrypting procedure is almost the same:

```

.text:00541400 ; int __cdecl decrypt_file(char *Filename, int, void *Src)
.text:00541400 decrypt_file      proc near
.text:00541400
.text:00541400 Filename          = dword ptr 4
.text:00541400 arg_4              = dword ptr 8
.text:00541400 Src                = dword ptr 0Ch
.text:00541400
.text:00541400          mov     eax, [esp+Filename]
.text:00541404          push    ebx
.text:00541405          push    ebp
.text:00541406          push    esi
.text:00541407          push    edi
.text:00541408          push    offset aRb          ; "rb"
.text:0054140D          push    eax              ; Filename
.text:0054140E          call    _fopen
.text:00541413          mov     esi, eax
.text:00541415          add     esp, 8
.text:00541418          test    esi, esi
.text:0054141A          jnz     short loc_54142E
.text:0054141C          push    offset aCannotOpenIn_0 ; "Cannot open input file!\n"
.text:00541421          call    _printf
.text:00541426          add     esp, 4
.text:00541429          pop     edi
.text:0054142A          pop     esi
.text:0054142B          pop     ebp
.text:0054142C          pop     ebx
.text:0054142D          retn
.text:0054142E ; -----
.text:0054142E
.text:0054142E loc_54142E:
.text:0054142E          push    2              ; Origin
.text:00541430          push    0              ; Offset
.text:00541432          push    esi              ; File
.text:00541433          call    _fseek
.text:00541438          push    esi              ; File
.text:00541439          call    _ftell

```

```

.text:0054143E      push     0                ; Origin
.text:00541440      push     0                ; Offset
.text:00541442      push     esi              ; File
.text:00541443      mov     ebp, eax
.text:00541445      call    _fseek
.text:0054144A      push     ebp              ; Size
.text:0054144B      call    _malloc
.text:00541450      push     esi              ; File
.text:00541451      mov     ebx, eax
.text:00541453      push     1                ; Count
.text:00541455      push     ebp              ; ElementSize
.text:00541456      push     ebx              ; DstBuf
.text:00541457      call    _fread
.text:0054145C      push     esi              ; File
.text:0054145D      call    _fclose

```

Check signature (first 3 bytes):

```

.text:00541462      add     esp, 34h
.text:00541465      mov     ecx, 3
.text:0054146A      mov     edi, offset aQr9_0 ; "QR9"
.text:0054146F      mov     esi, ebx
.text:00541471      xor     edx, edx
.text:00541473      repe    cmpsb
.text:00541475      jz      short loc_541489

```

Report an error if signature is absent:

```

.text:00541477      push    offset aFileIsNotCrypt ; "File is not crypted!\n"
.text:0054147C      call    _printf
.text:00541481      add     esp, 4
.text:00541484      pop     edi
.text:00541485      pop     esi
.text:00541486      pop     ebp
.text:00541487      pop     ebx
.text:00541488      retn
.text:00541489 ; -----
.text:00541489
.text:00541489 loc_541489:

```

Call decrypt().

```

.text:00541489      mov     eax, [esp+10h+Src]
.text:0054148D      mov     edi, [ebx+3]
.text:00541490      add     ebp, 0FFFFFFF9h
.text:00541493      lea     esi, [ebx+7]
.text:00541496      push    eax                ; Src
.text:00541497      push    ebp                ; int
.text:00541498      push    esi                ; int
.text:00541499      call    decrypt
.text:0054149E      mov     ecx, [esp+1Ch+arg_4]
.text:005414A2      push    offset aWb_0        ; "wb"
.text:005414A7      push    ecx                ; Filename
.text:005414A8      call    _fopen
.text:005414AD      mov     ebp, eax
.text:005414AF      push    ebp                ; File
.text:005414B0      push    1                  ; Count
.text:005414B2      push    edi                ; Size
.text:005414B3      push    esi                ; Str
.text:005414B4      call    _fwrite
.text:005414B9      push    ebp                ; File
.text:005414BA      call    _fclose
.text:005414BF      push    ebx                ; Memory

```

```

.text:005414C0      call    _free
.text:005414C5      add     esp, 2Ch
.text:005414C8      pop     edi
.text:005414C9      pop     esi
.text:005414CA      pop     ebp
.text:005414CB      pop     ebx
.text:005414CC      retn
.text:005414CC decrypt_file  endp

```

Here is reconstructed C-code:

```

void decrypt_file(char *fin, char* fout, char *pw)
{
    FILE *f;
    int real_flen, flen;
    BYTE *buf;

    f=fopen(fin, "rb");

    if (f==NULL)
    {
        printf ("Cannot open input file!\n");
        return;
    };

    fseek (f, 0, SEEK_END);
    flen=ftell (f);
    fseek (f, 0, SEEK_SET);

    buf=(BYTE*)malloc (flen);

    fread (buf, flen, 1, f);

    fclose (f);

    if (memcmp (buf, "QR9", 3)!=0)
    {
        printf ("File is not crypted!\n");
        return;
    };

    memcpy (&real_flen, buf+3, 4);

    decrypt (buf+(3+4), flen-(3+4), pw);

    f=fopen(fout, "wb");

    fwrite (buf+(3+4), real_flen, 1, f);

    fclose (f);

    free (buf);
};

```

OK, now let's go deeper.

Function crypt():

```

.text:00541260 crypt      proc near
.text:00541260
.text:00541260 arg_0      = dword ptr  4
.text:00541260 arg_4      = dword ptr  8
.text:00541260 arg_8      = dword ptr  0Ch
.text:00541260

```

```
.text:00541260      push    ebx
.text:00541261      mov     ebx, [esp+4+arg_0]
.text:00541265      push    ebp
.text:00541266      push    esi
.text:00541267      push    edi
.text:00541268      xor     ebp, ebp
.text:0054126A
.text:0054126A loc_54126A:
```

This fragment of code copies part of input buffer to internal array I named later “cube64”. The size is in the ECX register. MOVSD means *move 32-bit dword*, so, 16 of 32-bit dwords are exactly 64 bytes.

```
.text:0054126A      mov     eax, [esp+10h+arg_8]
.text:0054126E      mov     ecx, 10h
.text:00541273      mov     esi, ebx    ; EBX is pointer within input buffer
.text:00541275      mov     edi, offset cube64
.text:0054127A      push    1
.text:0054127C      push    eax
.text:0054127D      rep movsd
```

Call rotate_all_with_password():

```
.text:0054127F      call    rotate_all_with_password
```

Copy cryptd contents back from “cube64” to buffer:

```
.text:00541284      mov     eax, [esp+18h+arg_4]
.text:00541288      mov     edi, ebx
.text:0054128A      add     ebp, 40h
.text:0054128D      add     esp, 8
.text:00541290      mov     ecx, 10h
.text:00541295      mov     esi, offset cube64
.text:0054129A      add     ebx, 40h    ; add 64 to input buffer pointer
.text:0054129D      cmp     ebp, eax    ; EBP contain amount of cryptd data.
.text:0054129F      rep movsd
```

If EBP is not bigger that input argument size, then continue to next block.

```
.text:005412A1      jl     short loc_54126A
.text:005412A3      pop     edi
.text:005412A4      pop     esi
.text:005412A5      pop     ebp
.text:005412A6      pop     ebx
.text:005412A7      retn
.text:005412A7 crypt      endp
```

Reconstructed crypt() function:

```
void crypt (BYTE *buf, int sz, char *pw)
{
    int i=0;

    do
    {
        memcpy (cube, buf+i, 8*8);
        rotate_all (pw, 1);
        memcpy (buf+i, cube, 8*8);
        i+=64;
    }
    while (i<sz);
};
```

OK, now let’s go deeper into function rotate_all_with_password(). It takes two arguments: password string and number. In crypt(), number 1 is used, and in the decrypt() function (where rotate_all_with_password() function is called too), number is 3.

```
.text:005411B0 rotate_all_with_password proc near
.text:005411B0
.text:005411B0 arg_0          = dword ptr 4
.text:005411B0 arg_4          = dword ptr 8
.text:005411B0
.text:005411B0             mov     eax, [esp+arg_0]
.text:005411B4             push    ebp
.text:005411B5             mov     ebp, eax
```

Check for character in password. If it is zero, exit:

```
.text:005411B7             cmp     byte ptr [eax], 0
.text:005411BA             jz      exit
.text:005411C0             push    ebx
.text:005411C1             mov     ebx, [esp+8+arg_4]
.text:005411C5             push    esi
.text:005411C6             push    edi
.text:005411C7
.text:005411C7 loop_begin:
```

Call tolower(), standard C function.

```
.text:005411C7             movsx   eax, byte ptr [ebp+0]
.text:005411CB             push    eax                ; C
.text:005411CC             call    _tolower
.text:005411D1             add     esp, 4
```

Hmm, if password contains non-alphabetical latin character, it is skipped! Indeed, if we run crypting utility and try non-alphabetical latin characters in password, they seem to be ignored.

```
.text:005411D4             cmp     al, 'a'
.text:005411D6             jl      short next_character_in_password
.text:005411D8             cmp     al, 'z'
.text:005411DA             jg      short next_character_in_password
.text:005411DC             movsx   ecx, al
```

Subtract “a” value (97) from character.

```
.text:005411DF             sub     ecx, 'a' ; 97
```

After subtracting, we’ll get 0 for “a” here, 1 for “b”, etc. And 25 for “z”.

```
.text:005411E2             cmp     ecx, 24
.text:005411E5             jle     short skip_subtracting
.text:005411E7             sub     ecx, 24
```

It seems, “y” and “z” are exceptional characters too. After that fragment of code, “y” becomes 0 and “z” —1. This means, 26 Latin alphabet symbols will become values in range 0..23, (24 in total).

```
.text:005411EA
.text:005411EA skip_subtracting:                                ; CODE XREF: rotate_all_with_password+35
```

This is actually division via multiplication. Read more about it in the “Division by 9” section (14).

The code actually divides password character value by 3.

```
.text:005411EA             mov     eax, 55555556h
.text:005411EF             imul    ecx
.text:005411F1             mov     eax, edx
.text:005411F3             shr     eax, 1Fh
.text:005411F6             add     edx, eax
.text:005411F8             mov     eax, ecx
.text:005411FA             mov     esi, edx
.text:005411FC             mov     ecx, 3
.text:00541201             cdq
.text:00541202             idiv    ecx
```

EDX is the remainder of division.

```
.text:00541204 sub     edx, 0
.text:00541207 jz      short call_rotate1 ; if remainder is zero, go to rotate1
.text:00541209 dec     edx
.text:0054120A jz      short call_rotate2 ; .. it it is 1, go to rotate2
.text:0054120C dec     edx
.text:0054120D jnz     short next_character_in_password
.text:0054120F test    ebx, ebx
.text:00541211 jle     short next_character_in_password
.text:00541213 mov     edi, ebx
```

If remainder is 2, call rotate3(). The EDI is a second argument of the rotate_all_with_password() function. As I already wrote, 1 is for crypting operations and 3 is for decrypting. So, here is a loop. When crypting, rotate1/2/3 will be called the same number of times as given in the first argument.

```
.text:00541215 call_rotate3:
.text:00541215         push     esi
.text:00541216         call     rotate3
.text:0054121B         add      esp, 4
.text:0054121E         dec      edi
.text:0054121F         jnz      short call_rotate3
.text:00541221         jmp      short next_character_in_password
.text:00541223 call_rotate2:
.text:00541223         test     ebx, ebx
.text:00541225         jle      short next_character_in_password
.text:00541227         mov      edi, ebx
.text:00541229 loc_541229:
.text:00541229         push     esi
.text:0054122A         call     rotate2
.text:0054122F         add      esp, 4
.text:00541232         dec      edi
.text:00541233         jnz      short loc_541229
.text:00541235         jmp      short next_character_in_password
.text:00541237 call_rotate1:
.text:00541237         test     ebx, ebx
.text:00541239         jle      short next_character_in_password
.text:0054123B         mov      edi, ebx
.text:0054123D loc_54123D:
.text:0054123D         push     esi
.text:0054123E         call     rotate1
.text:00541243         add      esp, 4
.text:00541246         dec      edi
.text:00541247         jnz      short loc_54123D
.text:00541249
```

Fetch next character from password string.

```
.text:00541249 next_character_in_password:
.text:00541249         mov      al, [ebp+1]
```

Increment character pointer within password string:

```
.text:0054124C         inc      ebp
.text:0054124D         test     al, al
.text:0054124F         jnz      loop_begin
.text:00541255         pop      edi
.text:00541256         pop      esi
.text:00541257         pop      ebx
.text:00541258
```

```
.text:00541258 exit:
.text:00541258          pop     ebp
.text:00541259          retn
.text:00541259 rotate_all_with_password endp
```

Here is reconstructed C code:

```
void rotate_all (char *pwd, int v)
{
    char *p=pwd;

    while (*p)
    {
        char c=*p;
        int q;

        c=tolower (c);

        if (c>='a' && c<='z')
        {
            q=c-'a';
            if (q>24)
                q-=24;

            int quotient=q/3;
            int remainder=q % 3;

            switch (remainder)
            {
                case 0: for (int i=0; i<v; i++) rotate1 (quotient); break;
                case 1: for (int i=0; i<v; i++) rotate2 (quotient); break;
                case 2: for (int i=0; i<v; i++) rotate3 (quotient); break;
            };

            p++;
        };
    };
};
```

Now let’s go deeper and investigate rotate1/2/3 functions. Each function calls two another functions. I eventually gave them names `set_bit()` and `get_bit()`.

Let’s start with `get_bit()`:

```
.text:00541050 get_bit      proc near
.text:00541050
.text:00541050 arg_0        = dword ptr 4
.text:00541050 arg_4        = dword ptr 8
.text:00541050 arg_8        = byte ptr 0Ch
.text:00541050
.text:00541050          mov     eax, [esp+arg_4]
.text:00541054          mov     ecx, [esp+arg_0]
.text:00541058          mov     al, cube64[eax+ecx*8]
.text:0054105F          mov     cl, [esp+arg_8]
.text:00541063          shr     al, cl
.text:00541065          and     al, 1
.text:00541067          retn
.text:00541067 get_bit      endp
```

...in other words: calculate an index in the array `cube64`: `arg_4 + arg_0 * 8`. Then shift a byte from an array by `arg_8` bits right. Isolate lowest bit and return it.

Let’s see another function, `set_bit()`:

```
.text:00541000 set_bit      proc near
```

```

.text:00541000
.text:00541000 arg_0          = dword ptr 4
.text:00541000 arg_4          = dword ptr 8
.text:00541000 arg_8          = dword ptr 0Ch
.text:00541000 arg_C          = byte ptr 10h
.text:00541000
.text:00541000          mov     al, [esp+arg_C]
.text:00541004          mov     ecx, [esp+arg_8]
.text:00541008          push    esi
.text:00541009          mov     esi, [esp+4+arg_0]
.text:0054100D          test    al, al
.text:0054100F          mov     eax, [esp+4+arg_4]
.text:00541013          mov     dl, 1
.text:00541015          jz      short loc_54102B

```

Value in the DL is 1 here. Shift left it by arg_8. For example, if arg_8 is 4, value in the DL register became 0x10 or 1000 in binary form.

```

.text:00541017          shl     dl, cl
.text:00541019          mov     cl, cube64[eax+esi*8]

```

Get bit from array and explicitly set one.

```

.text:00541020          or      cl, dl

```

Store it back:

```

.text:00541022          mov     cube64[eax+esi*8], cl
.text:00541029          pop     esi
.text:0054102A          retn
.text:0054102B ; -----
.text:0054102B
.text:0054102B loc_54102B:
.text:0054102B          shl     dl, cl

```

If arg_C is not zero...

```

.text:0054102D          mov     cl, cube64[eax+esi*8]

```

...invert DL. For example, if DL state after shift was 0x10 or 1000 in binary form, there will be 0xEF after NOT instruction or 11101111 in binary form.

```

.text:00541034          not     dl

```

This instruction clears bit, in other words, it saves all bits in CL which are also set in DL except those in DL which are cleared. This means that if DL is e.g. 11101111 in binary form, all bits will be saved except 5th (counting from lowest bit).

```

.text:00541036          and     cl, dl

```

Store it back:

```

.text:00541038          mov     cube64[eax+esi*8], cl
.text:0054103F          pop     esi
.text:00541040          retn
.text:00541040 set_bit      endp

```

It is almost the same as get_bit(), except, if arg_C is zero, the function clears specific bit in array, or sets it otherwise.

We also know the array size is 64. First two arguments both in the set_bit() and get_bit() functions could be seen as 2D coordinates. Then array will be 8*8 matrix.

Here is C representation of what we already know:

```

#define IS_SET(flag, bit)    ((flag) & (bit))
#define SET_BIT(var, bit)    ((var) |= (bit))
#define REMOVE_BIT(var, bit) ((var) &= ~(bit))

char cube[8][8];

```

```

void set_bit (int x, int y, int shift, int bit)
{
    if (bit)
        SET_BIT (cube[x][y], 1<<shift);
    else
        REMOVE_BIT (cube[x][y], 1<<shift);
};

int get_bit (int x, int y, int shift)
{
    if ((cube[x][y]>>shift)&1==1)
        return 1;
    return 0;
};

```

Now let's get back to rotate1/2/3 functions.

```

.text:00541070 rotate1      proc near
.text:00541070

```

Internal array allocation in local stack, its size 64 bytes:

```

.text:00541070 internal_array_64= byte ptr -40h
.text:00541070 arg_0          = dword ptr  4
.text:00541070
.text:00541070         sub     esp, 40h
.text:00541073         push    ebx
.text:00541074         push    ebp
.text:00541075         mov     ebp, [esp+48h+arg_0]
.text:00541079         push    esi
.text:0054107A         push    edi
.text:0054107B         xor     edi, edi          ; EDI is loop1 counter

```

EBX is a pointer to internal array:

```

.text:0054107D         lea     ebx, [esp+50h+internal_array_64]
.text:00541081

```

Two nested loops are here:

```

.text:00541081 first_loop1_begin:
.text:00541081         xor     esi, esi          ; ESI is loop 2 counter
.text:00541083
.text:00541083 first_loop2_begin:
.text:00541083         push    ebp          ; arg_0
.text:00541084         push    esi          ; loop 1 counter
.text:00541085         push    edi          ; loop 2 counter
.text:00541086         call   get_bit
.text:0054108B         add     esp, 0Ch
.text:0054108E         mov     [ebx+esi], al    ; store to internal array
.text:00541091         inc     esi          ; increment loop 1 counter
.text:00541092         cmp     esi, 8
.text:00541095         jle     short first_loop2_begin
.text:00541097         inc     edi          ; increment loop 2 counter
.text:00541098         add     ebx, 8          ; increment internal array pointer by 8 at each loop 1
        iteration
.text:0054109B         cmp     edi, 8
.text:0054109E         jle     short first_loop1_begin

```

...we see that both loop counters are in range 0..7. Also they are used as the first and the second arguments of the get_bit() function. Third argument of the get_bit() is the only argument of rotate1(). What get_bit() returns, is being placed into internal array.

Prepare pointer to internal array again:

```

.text:005410A0    lea     ebx, [esp+50h+internal_array_64]
.text:005410A4    mov     edi, 7          ; EDI is loop 1 counter, initial state is 7
.text:005410A9
.text:005410A9    second_loop1_begin:
.text:005410A9    xor     esi, esi        ; ESI is loop 2 counter
.text:005410AB
.text:005410AB    second_loop2_begin:
.text:005410AB    mov     al, [ebx+esi]   ; value from internal array
.text:005410AE    push    eax
.text:005410AF    push    ebp            ; arg_0
.text:005410B0    push    edi            ; loop 1 counter
.text:005410B1    push    esi            ; loop 2 counter
.text:005410B2    call    set_bit
.text:005410B7    add     esp, 10h
.text:005410BA    inc     esi            ; increment loop 2 counter
.text:005410BB    cmp     esi, 8
.text:005410BE    jlt     short second_loop2_begin
.text:005410C0    dec     edi            ; decrement loop 2 counter
.text:005410C1    add     ebx, 8          ; increment pointer in internal array
.text:005410C4    cmp     edi, 0FFFFFFFh
.text:005410C7    jgt     short second_loop1_begin
.text:005410C9    pop     edi
.text:005410CA    pop     esi
.text:005410CB    pop     ebp
.text:005410CC    pop     ebx
.text:005410CD    add     esp, 40h
.text:005410D0    retn
.text:005410D0    rotate1      endp

```

...this code is placing contents from internal array to cube global array via `set_bit()` function, *but*, in different order! Now loop 1 counter is in range 7 to 0, [decrementing](#) at each iteration!

C code representation looks like:

```

void rotate1 (int v)
{
    bool tmp[8][8]; // internal array
    int i, j;

    for (i=0; i<8; i++)
        for (j=0; j<8; j++)
            tmp[i][j]=get_bit (i, j, v);

    for (i=0; i<8; i++)
        for (j=0; j<8; j++)
            set_bit (j, 7-i, v, tmp[x][y]);
};

```

Not very understandable, but if we will take a look at `rotate2()` function:

```

.text:005410E0    rotate2 proc near
.text:005410E0
.text:005410E0    internal_array_64 = byte ptr -40h
.text:005410E0    arg_0 = dword ptr 4
.text:005410E0
.text:005410E0    sub     esp, 40h
.text:005410E3    push    ebx
.text:005410E4    push    ebp
.text:005410E5    mov     ebp, [esp+48h+arg_0]
.text:005410E9    push    esi
.text:005410EA    push    edi
.text:005410EB    xor     edi, edi        ; loop 1 counter
.text:005410ED    lea     ebx, [esp+50h+internal_array_64]

```

```

.text:005410F1
.text:005410F1 loc_5410F1:
.text:005410F1     xor     esi, esi           ; loop 2 counter
.text:005410F3
.text:005410F3 loc_5410F3:
.text:005410F3     push    esi           ; loop 2 counter
.text:005410F4     push    edi           ; loop 1 counter
.text:005410F5     push    ebp           ; arg_0
.text:005410F6     call   get_bit
.text:005410FB     add     esp, 0Ch
.text:005410FE     mov     [ebx+esi], al    ; store to internal array
.text:00541101     inc     esi             ; increment loop 1 counter
.text:00541102     cmp     esi, 8
.text:00541105     jnl     short loc_5410F3
.text:00541107     inc     edi             ; increment loop 2 counter
.text:00541108     add     ebx, 8
.text:0054110B     cmp     edi, 8
.text:0054110E     jnl     short loc_5410F1
.text:00541110     lea     ebx, [esp+50h+internal_array_64]
.text:00541114     mov     edi, 7          ; loop 1 counter is initial state 7
.text:00541119
.text:00541119 loc_541119:
.text:00541119     xor     esi, esi           ; loop 2 counter
.text:0054111B
.text:0054111B loc_54111B:
.text:0054111B     mov     al, [ebx+esi]    ; get byte from internal array
.text:0054111E     push    eax
.text:0054111F     push    edi           ; loop 1 counter
.text:00541120     push    esi           ; loop 2 counter
.text:00541121     push    ebp           ; arg_0
.text:00541122     call   set_bit
.text:00541127     add     esp, 10h
.text:0054112A     inc     esi             ; increment loop 2 counter
.text:0054112B     cmp     esi, 8
.text:0054112E     jnl     short loc_54111B
.text:00541130     dec     edi             ; decrement loop 2 counter
.text:00541131     add     ebx, 8
.text:00541134     cmp     edi, 0FFFFFFFh
.text:00541137     jg      short loc_541119
.text:00541139     pop     edi
.text:0054113A     pop     esi
.text:0054113B     pop     ebp
.text:0054113C     pop     ebx
.text:0054113D     add     esp, 40h
.text:00541140     retn
.text:00541140 rotate2 endp

```

It is *almost* the same, except of different order of arguments of the `get_bit()` and `set_bit()`. Let’s rewrite it in C-like code:

```

void rotate2 (int v)
{
    bool tmp[8][8]; // internal array
    int i, j;

    for (i=0; i<8; i++)
        for (j=0; j<8; j++)
            tmp[i][j]=get_bit (v, i, j);

    for (i=0; i<8; i++)
        for (j=0; j<8; j++)
            set_bit (v, j, 7-i, tmp[i][j]);
}

```

```
};
```

Let’s also rewrite rotate3() function:

```
void rotate3 (int v)
{
    bool tmp[8][8];
    int i, j;

    for (i=0; i<8; i++)
        for (j=0; j<8; j++)
            tmp[i][j]=get_bit (i, v, j);

    for (i=0; i<8; i++)
        for (j=0; j<8; j++)
            set_bit (7-j, v, i, tmp[i][j]);
};
```

Well, now things are simpler. If we consider cube64 as 3D cube 8*8*8, where each element is bit, get_bit() and set_bit() take just coordinates of bit on input.

rotate1/2/3 functions are in fact rotating all bits in specific plane. Three functions are each for each cube side and v argument is setting plane in range 0..7.

Maybe, algorithm’s author was thinking of 8*8*8 [Rubik’s cube](#)?!

Yes, indeed.

Let’s get closer into decrypt() function, I rewrote it here:

```
void decrypt (BYTE *buf, int sz, char *pw)
{
    char *p=strdup (pw);
    strrev (p);
    int i=0;

    do
    {
        memcpy (cube, buf+i, 8*8);
        rotate_all (p, 3);
        memcpy (buf+i, cube, 8*8);
        i+=64;
    }
    while (i<sz);

    free (p);
};
```

It is almost the same except of crypt(), but password string is reversed by [strrev\(\)](#) standard C function and rotate_all() is called with argument 3.

This means, in case of decryption, each corresponding rotate1/2/3 call will be performed thrice.

This is almost as in Rubik’s cube! If you want to get back, do the same in reverse order and direction! If you need to undo effect of rotating one place in clockwise direction, rotate it thrice in counter-clockwise direction.

rotate1() is apparently for rotating “front” plane. rotate2() is apparently for rotating “top” plane. rotate3() is apparently for rotating “left” plane.

Let’s get back to the core of rotate_all() function:

```
q=c-'a';
if (q>24)
    q-=24;

int quotient=q/3; // in range 0..7
int remainder=q % 3;

switch (remainder)
{
    case 0: for (int i=0; i<v; i++) rotate1 (quotient); break; // front
```

```

    case 1: for (int i=0; i<v; i++) rotate2 (quotient); break; // top
    case 2: for (int i=0; i<v; i++) rotate3 (quotient); break; // left
};

```

Now it is much simpler to understand: each password character defines side (one of three) and plane (one of 8). $3 \cdot 8 = 24$, that is why two last characters of Latin alphabet are remapped to fit an alphabet of exactly 24 elements.

The algorithm is clearly weak: in case of short passwords, one can see, that in crypted file there are an original bytes of the original file in binary files editor.

Here is reconstructed whole source code:

```

#include <windows.h>

#include <stdio.h>
#include <assert.h>

#define IS_SET(flag, bit)      ((flag) & (bit))
#define SET_BIT(var, bit)     ((var) |= (bit))
#define REMOVE_BIT(var, bit)  ((var) &= ~(bit))

static BYTE cube[8][8];

void set_bit (int x, int y, int z, bool bit)
{
    if (bit)
        SET_BIT (cube[x][y], 1<<z);
    else
        REMOVE_BIT (cube[x][y], 1<<z);
};

bool get_bit (int x, int y, int z)
{
    if ((cube[x][y]>>z)&1==1)
        return true;
    return false;
};

void rotate_f (int row)
{
    bool tmp[8][8];
    int x, y;

    for (x=0; x<8; x++)
        for (y=0; y<8; y++)
            tmp[x][y]=get_bit (x, y, row);

    for (x=0; x<8; x++)
        for (y=0; y<8; y++)
            set_bit (y, 7-x, row, tmp[x][y]);
};

void rotate_t (int row)
{
    bool tmp[8][8];
    int y, z;

    for (y=0; y<8; y++)
        for (z=0; z<8; z++)
            tmp[y][z]=get_bit (row, y, z);

    for (y=0; y<8; y++)
        for (z=0; z<8; z++)
            set_bit (row, z, 7-y, tmp[y][z]);
};

```

```

};

void rotate_l (int row)
{
    bool tmp[8][8];
    int x, z;

    for (x=0; x<8; x++)
        for (z=0; z<8; z++)
            tmp[x][z]=get_bit (x, row, z);

    for (x=0; x<8; x++)
        for (z=0; z<8; z++)
            set_bit (7-z, row, x, tmp[x][z]);
};

void rotate_all (char *pwd, int v)
{
    char *p=pwd;

    while (*p)
    {
        char c=*p;
        int q;

        c=tolower (c);

        if (c>='a' && c<='z')
        {
            q=c-'a';
            if (q>24)
                q-=24;

            int quotient=q/3;
            int remainder=q % 3;

            switch (remainder)
            {
                case 0: for (int i=0; i<v; i++) rotate1 (quotient); break;
                case 1: for (int i=0; i<v; i++) rotate2 (quotient); break;
                case 2: for (int i=0; i<v; i++) rotate3 (quotient); break;
            };

            p++;
        };
    };

};

void crypt (BYTE *buf, int sz, char *pw)
{
    int i=0;

    do
    {
        memcpy (cube, buf+i, 8*8);
        rotate_all (pw, 1);
        memcpy (buf+i, cube, 8*8);
        i+=64;
    }
    while (i<sz);
};

```

```

void decrypt (BYTE *buf, int sz, char *pw)
{
    char *p=strdup (pw);
    strrev (p);
    int i=0;

    do
    {
        memcpy (cube, buf+i, 8*8);
        rotate_all (p, 3);
        memcpy (buf+i, cube, 8*8);
        i+=64;
    }
    while (i<sz);

    free (p);
};

void crypt_file(char *fin, char* fout, char *pw)
{
    FILE *f;
    int flen, flen_aligned;
    BYTE *buf;

    f=fopen(fin, "rb");

    if (f==NULL)
    {
        printf ("Cannot open input file!\n");
        return;
    };

    fseek (f, 0, SEEK_END);
    flen=ftell (f);
    fseek (f, 0, SEEK_SET);

    flen_aligned=(flen&0xFFFFFC0)+0x40;

    buf=(BYTE*)malloc (flen_aligned);
    memset (buf, 0, flen_aligned);

    fread (buf, flen, 1, f);

    fclose (f);

    crypt (buf, flen_aligned, pw);

    f=fopen(fout, "wb");

    fwrite ("QR9", 3, 1, f);
    fwrite (&flen, 4, 1, f);
    fwrite (buf, flen_aligned, 1, f);

    fclose (f);

    free (buf);
};

void decrypt_file(char *fin, char* fout, char *pw)

```

```

{
    FILE *f;
    int real_flen, flen;
    BYTE *buf;

    f=fopen(fin, "rb");

    if (f==NULL)
    {
        printf ("Cannot open input file!\n");
        return;
    };

    fseek (f, 0, SEEK_END);
    flen=ftell (f);
    fseek (f, 0, SEEK_SET);

    buf=(BYTE*)malloc (flen);

    fread (buf, flen, 1, f);

    fclose (f);

    if (memcmp (buf, "QR9", 3)!=0)
    {
        printf ("File is not crypted!\n");
        return;
    };

    memcpy (&real_flen, buf+3, 4);

    decrypt (buf+(3+4), flen-(3+4), pw);

    f=fopen(fout, "wb");

    fwrite (buf+(3+4), real_flen, 1, f);

    fclose (f);

    free (buf);
};

// run: input output 0/1 password
// 0 for encrypt, 1 for decrypt

int main(int argc, char *argv[])
{
    if (argc!=5)
    {
        printf ("Incorrect parameters!\n");
        return 1;
    };

    if (strcmp (argv[3], "0")==0)
        crypt_file (argv[1], argv[2], argv[4]);
    else
        if (strcmp (argv[3], "1")==0)
            decrypt_file (argv[1], argv[2], argv[4]);
        else
            printf ("Wrong param %s\n", argv[3]);
}

```

```
    return 0;  
};
```

Chapter 57

SAP

57.1 About SAP client network traffic compression

(Tracing connection between TDW_NOCOMPRESS SAPGUI¹ environment variable to the pesky nagging pop-up window and actual data compression routine.)

It is known that network traffic between SAPGUI and SAP is not crypted by default, it is rather compressed (read [here](#) and [here](#)).

It is also known that by setting environment variable *TDW_NOCOMPRESS* to 1, it is possible to turn network packets compression off.

But you will see a nagging pop-up window cannot be closed:

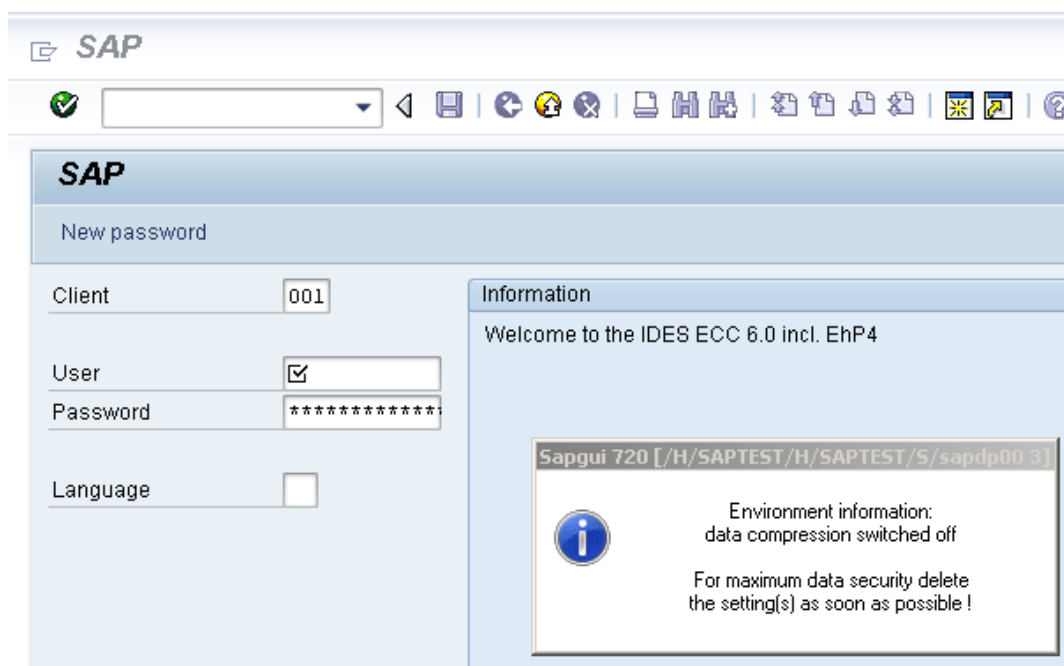


Figure 57.1: Screenshot

Let's see, if we can remove the window somehow.

But before this, let's see what we already know. First: we know the environment variable *TDW_NOCOMPRESS* is checked somewhere inside of SAPGUI client. Second: string like "data compression switched off" must be present somewhere too. With the help of FAR file manager I found that both of these strings are stored in the SAPguilib.dll file.

So let's open SAPguilib.dll in [IDA](#) and search for "TDW_NOCOMPRESS" string. Yes, it is present and there is only one reference to it.

We see the following fragment of code (all file offsets are valid for SAPGUI 720 win32, SAPguilib.dll file version 7200,1,0,9009):

.text:6440D51B	lea	eax, [ebp+2108h+var_211C]
.text:6440D51E	push	eax ; int
.text:6440D51F	push	offset aTdw_nocompress ; "TDW_NOCOMPRESS"

¹SAP GUI client

```
.text:6440D524      mov     byte ptr [edi+15h], 0
.text:6440D528      call    chk_env
.text:6440D52D      pop     ecx
.text:6440D52E      pop     ecx
.text:6440D52F      push    offset byte_64443AF8
.text:6440D534      lea     ecx, [ebp+2108h+var_211C]

; demangled name: int ATL::CStringT::Compare(char const *)const
.text:6440D537      call    ds:mfc90_1603
.text:6440D53D      test    eax, eax
.text:6440D53F      jz      short loc_6440D55A
.text:6440D541      lea     ecx, [ebp+2108h+var_211C]

; demangled name: const char* ATL::CSimpleStringT::operator PCXSTR
.text:6440D544      call    ds:mfc90_910
.text:6440D54A      push    eax                ; Str
.text:6440D54B      call    ds:atoi
.text:6440D551      test    eax, eax
.text:6440D553      setnz   al
.text:6440D556      pop     ecx
.text:6440D557      mov     [edi+15h], al
```

String returned by `chk_env()` via second argument is then handled by MFC string functions and then `atoi()`² is called. After that, numerical value is stored to `edi+15h`.

Also take a look onto `chk_env()` function (I gave a name to it):

```
.text:64413F20 ; int __cdecl chk_env(char *VarName, int)
.text:64413F20 chk_env      proc near
.text:64413F20
.text:64413F20 DstSize      = dword ptr -0Ch
.text:64413F20 var_8          = dword ptr -8
.text:64413F20 DstBuf        = dword ptr -4
.text:64413F20 VarName        = dword ptr 8
.text:64413F20 arg_4          = dword ptr 0Ch
.text:64413F20
.text:64413F20      push    ebp
.text:64413F21      mov     ebp, esp
.text:64413F23      sub     esp, 0Ch
.text:64413F26      mov     [ebp+DstSize], 0
.text:64413F2D      mov     [ebp+DstBuf], 0
.text:64413F34      push    offset unk_6444C88C
.text:64413F39      mov     ecx, [ebp+arg_4]

; (demangled name) ATL::CStringT::operator=(char const *)
.text:64413F3C      call    ds:mfc90_820
.text:64413F42      mov     eax, [ebp+VarName]
.text:64413F45      push    eax                ; VarName
.text:64413F46      mov     ecx, [ebp+DstSize]
.text:64413F49      push    ecx                ; DstSize
.text:64413F4A      mov     edx, [ebp+DstBuf]
.text:64413F4D      push    edx                ; DstBuf
.text:64413F4E      lea     eax, [ebp+DstSize]
.text:64413F51      push    eax                ; ReturnSize
.text:64413F52      call    ds:getenv_s
.text:64413F58      add     esp, 10h
.text:64413F5B      mov     [ebp+var_8], eax
.text:64413F5E      cmp     [ebp+var_8], 0
.text:64413F62      jz      short loc_64413F68
.text:64413F64      xor     eax, eax
.text:64413F66      jmp     short loc_64413FBC
```

²standard C library function, converting number in string into number

```

.text:64413F68 ; -----
.text:64413F68
.text:64413F68 loc_64413F68:
.text:64413F68      cmp      [ebp+DstSize], 0
.text:64413F6C      jnz      short loc_64413F72
.text:64413F6E      xor      eax, eax
.text:64413F70      jmp      short loc_64413FBC
.text:64413F72 ; -----
.text:64413F72
.text:64413F72 loc_64413F72:
.text:64413F72      mov      ecx, [ebp+DstSize]
.text:64413F75      push     ecx
.text:64413F76      mov      ecx, [ebp+arg_4]

; demangled name: ATL::CSimpleStringT<char, 1>::Preallocate(int)
.text:64413F79      call     ds:mfc90_2691
.text:64413F7F      mov      [ebp+DstBuf], eax
.text:64413F82      mov      edx, [ebp+VarName]
.text:64413F85      push     edx                ; VarName
.text:64413F86      mov      eax, [ebp+DstSize]
.text:64413F89      push     eax                ; DstSize
.text:64413F8A      mov      ecx, [ebp+DstBuf]
.text:64413F8D      push     ecx                ; DstBuf
.text:64413F8E      lea      edx, [ebp+DstSize]
.text:64413F91      push     edx                ; ReturnSize
.text:64413F92      call     ds:getenv_s
.text:64413F98      add      esp, 10h
.text:64413F9B      mov      [ebp+var_8], eax
.text:64413F9E      push     0FFFFFFFh
.text:64413FA0      mov      ecx, [ebp+arg_4]

; demangled name: ATL::CSimpleStringT::ReleaseBuffer(int)
.text:64413FA3      call     ds:mfc90_5835
.text:64413FA9      cmp      [ebp+var_8], 0
.text:64413FAD      jz       short loc_64413FB3
.text:64413FAF      xor      eax, eax
.text:64413FB1      jmp      short loc_64413FBC
.text:64413FB3 ; -----
.text:64413FB3
.text:64413FB3 loc_64413FB3:
.text:64413FB3      mov      ecx, [ebp+arg_4]

; demangled name: const char* ATL::CSimpleStringT::operator PCXSTR
.text:64413FB6      call     ds:mfc90_910
.text:64413FBC
.text:64413FBC loc_64413FBC:
.text:64413FBC
.text:64413FBC      mov      esp, ebp
.text:64413FBE      pop      ebp
.text:64413FBF      retn
.text:64413FBF chk_env      endp

```

Yes. `getenv_s()`³ function is Microsoft security-enhanced version of `getenv()`⁴.

There is also a MFC string manipulations.

Lots of other environment variables are checked as well. Here is a list of all variables being checked and what SAPGUI could write to trace log when logging is turned on:

³[http://msdn.microsoft.com/en-us/library/tb2sfw2z\(VS.80\).aspx](http://msdn.microsoft.com/en-us/library/tb2sfw2z(VS.80).aspx)

⁴Standard C library returning environment variable

DPTRACE	"GUI-OPTION: Trace set to %d"
TDW_HEXDUMP	"GUI-OPTION: Hexdump enabled"
TDW_WORKDIR	"GUI-OPTION: working directory '%s'"
TDW_SPLASHSRCEENOFF	"GUI-OPTION: Splash Screen Off" / "GUI-OPTION: Splash Screen On"
TDW_REPLYTIMEOUT	"GUI-OPTION: reply timeout %d milliseconds"
TDW_PLAYBACKTIMEOUT	"GUI-OPTION: PlaybackTimeout set to %d milliseconds"
TDW_NOCOMPRESS	"GUI-OPTION: no compression read"
TDW_EXPERT	"GUI-OPTION: expert mode"
TDW_PLAYBACKPROGRESS	"GUI-OPTION: PlaybackProgress"
TDW_PLAYBACKNETTRAFFIC	"GUI-OPTION: PlaybackNetTraffic"
TDW_PLAYLOG	"GUI-OPTION: /PlayLog is YES, file %s"
TDW_PLAYTIME	"GUI-OPTION: /PlayTime set to %d milliseconds"
TDW_LOGFILE	"GUI-OPTION: TDW_LOGFILE '%s'"
TDW_WAN	"GUI-OPTION: WAN - low speed connection enabled"
TDW_FULLMENU	"GUI-OPTION: FullMenu enabled"
SAP_CP / SAP_CODEPAGE	"GUI-OPTION: SAP_CODEPAGE '%d'"
UPDOWNLOAD_CP	"GUI-OPTION: UPDOWNLOAD_CP '%d'"
SNC_PARTNERNAME	"GUI-OPTION: SNC name '%s'"
SNC_QOP	"GUI-OPTION: SNC_QOP '%s'"
SNC_LIB	"GUI-OPTION: SNC is set to: %s"
SAPGUI_INPLACE	"GUI-OPTION: environment variable SAPGUI_INPLACE is on"

Settings for each variable are written to the array via pointer in the EDI register. EDI is being set before the function call:

```
.text:6440EE00      lea     edi, [ebp+2884h+var_2884] ; options here like +0x15...
.text:6440EE03      lea     ecx, [esi+24h]
.text:6440EE06      call    load_command_line
.text:6440EE0B      mov     edi, eax
.text:6440EE0D      xor     ebx, ebx
.text:6440EE0F      cmp     edi, ebx
.text:6440EE11      jz      short loc_6440EE42
.text:6440EE13      push    edi
.text:6440EE14      push    offset aSapguiStoppedA ; "Sapgui stopped after commandline
        interp"...
.text:6440EE19      push    dword_644F93E8
.text:6440EE1F      call    FEWTraceError
```

Now, can we find "data record mode switched on" string? Yes, and here is the only reference in function `CDwsGui::PrepareInfoWindow`. How do I know class/method names? There is a lot of special debugging calls writing to log-files like:

```
.text:64405160      push    dword ptr [esi+2854h]
.text:64405166      push    offset aCdwsguiPrepare ; "\nCDwsGui::PrepareInfoWindow:
        sapgui env"...
.text:6440516B      push    dword ptr [esi+2848h]
.text:64405171      call    dbg
.text:64405176      add     esp, 0Ch
```

...or:

```
.text:6440237A      push    eax
.text:6440237B      push    offset aCclientStart_6 ; "CClient::Start: set shortcut
        user to '%\%'..."
.text:64402380      push    dword ptr [edi+4]
.text:64402383      call    dbg
.text:64402388      add     esp, 0Ch
```

It is **very** useful.

So let's see contents of the pesky nagging pop-up window function:

```
.text:64404F4F      CDwsGui__PrepareInfoWindow proc near
.text:64404F4F
.text:64404F4F      pvParam      = byte ptr -3Ch
.text:64404F4F      var_38       = dword ptr -38h
```

```

.text:64404F4F var_34      = dword ptr -34h
.text:64404F4F rc        = tagRECT ptr -2Ch
.text:64404F4F cy        = dword ptr -1Ch
.text:64404F4F h         = dword ptr -18h
.text:64404F4F var_14    = dword ptr -14h
.text:64404F4F var_10    = dword ptr -10h
.text:64404F4F var_4     = dword ptr -4
.text:64404F4F
.text:64404F4F          push    30h
.text:64404F51          mov     eax, offset loc_64438E00
.text:64404F56          call    __EH_prolog3
.text:64404F5B          mov     esi, ecx          ; ECX is pointer to object
.text:64404F5D          xor     ebx, ebx
.text:64404F5F          lea     ecx, [ebp+var_14]
.text:64404F62          mov     [ebp+var_10], ebx

; demangled name: ATL::CStringT(void)
.text:64404F65          call    ds:mfc90_316
.text:64404F6B          mov     [ebp+var_4], ebx
.text:64404F6E          lea     edi, [esi+2854h]
.text:64404F74          push   offset aEnvironmentInf ; "Environment information:\n"
.text:64404F79          mov     ecx, edi

; demangled name: ATL::CStringT::operator=(char const *)
.text:64404F7B          call    ds:mfc90_820
.text:64404F81          cmp     [esi+38h], ebx
.text:64404F84          mov     ebx, ds:mfc90_2539
.text:64404F8A          jbe     short loc_64404FA9
.text:64404F8C          push   dword ptr [esi+34h]
.text:64404F8F          lea     eax, [ebp+var_14]
.text:64404F92          push   offset aWorkingDirecto ; "working directory: '%s'\n"
.text:64404F97          push   eax

; demangled name: ATL::CStringT::Format(char const *,...)
.text:64404F98          call    ebx ; mfc90_2539
.text:64404F9A          add     esp, 0Ch
.text:64404F9D          lea     eax, [ebp+var_14]
.text:64404FA0          push   eax
.text:64404FA1          mov     ecx, edi

; demangled name: ATL::CStringT::operator+=(class ATL::CSimpleStringT<char, 1> const &)
.text:64404FA3          call    ds:mfc90_941
.text:64404FA9
.text:64404FA9 loc_64404FA9:
.text:64404FA9          mov     eax, [esi+38h]
.text:64404FAC          test    eax, eax
.text:64404FAE          jbe     short loc_64404FD3
.text:64404FB0          push   eax
.text:64404FB1          lea     eax, [ebp+var_14]
.text:64404FB4          push   offset aTraceLevelDAct ; "trace level %d activated\n"
.text:64404FB9          push   eax

; demangled name: ATL::CStringT::Format(char const *,...)
.text:64404FBA          call    ebx ; mfc90_2539
.text:64404FBC          add     esp, 0Ch
.text:64404FBE          lea     eax, [ebp+var_14]
.text:64404FC2          push   eax
.text:64404FC3          mov     ecx, edi

; demangled name: ATL::CStringT::operator+=(class ATL::CSimpleStringT<char, 1> const &)
.text:64404FC5          call    ds:mfc90_941

```

```

.text:64404FCB          xor     ebx, ebx
.text:64404FCD          inc     ebx
.text:64404FCE          mov     [ebp+var_10], ebx
.text:64404FD1          jmp     short loc_64404FD6
.text:64404FD3 ; -----
.text:64404FD3
.text:64404FD3 loc_64404FD3:
.text:64404FD3          xor     ebx, ebx
.text:64404FD5          inc     ebx
.text:64404FD6
.text:64404FD6 loc_64404FD6:
.text:64404FD6          cmp     [esi+38h], ebx
.text:64404FD9          jbe     short loc_64404FF1
.text:64404FDB          cmp     dword ptr [esi+2978h], 0
.text:64404FE2          jz      short loc_64404FF1
.text:64404FE4          push   offset aHexdumpInTrace ; "hexdump in trace activated\n"
.text:64404FE9          mov     ecx, edi

; demangled name: ATL::CStringT::operator+=(char const *)
.text:64404FEB          call    ds:mfc90_945
.text:64404FF1
.text:64404FF1 loc_64404FF1:
.text:64404FF1
.text:64404FF1          cmp     byte ptr [esi+78h], 0
.text:64404FF5          jz      short loc_64405007
.text:64404FF7          push   offset aLoggingActivat ; "logging activated\n"
.text:64404FFC          mov     ecx, edi

; demangled name: ATL::CStringT::operator+=(char const *)
.text:64404FFE          call    ds:mfc90_945
.text:64405004          mov     [ebp+var_10], ebx
.text:64405007
.text:64405007 loc_64405007:
.text:64405007          cmp     byte ptr [esi+3Dh], 0
.text:6440500B          jz      short bypass
.text:6440500D          push   offset aDataCompressio ; "data compression switched off\n"
.text:64405012          mov     ecx, edi

; demangled name: ATL::CStringT::operator+=(char const *)
.text:64405014          call    ds:mfc90_945
.text:6440501A          mov     [ebp+var_10], ebx
.text:6440501D
.text:6440501D bypass:
.text:6440501D          mov     eax, [esi+20h]
.text:64405020          test    eax, eax
.text:64405022          jz      short loc_6440503A
.text:64405024          cmp     dword ptr [eax+28h], 0
.text:64405028          jz      short loc_6440503A
.text:6440502A          push   offset aDataRecordMode ; "data record mode switched on\n"
.text:6440502F          mov     ecx, edi

; demangled name: ATL::CStringT::operator+=(char const *)
.text:64405031          call    ds:mfc90_945
.text:64405037          mov     [ebp+var_10], ebx
.text:6440503A
.text:6440503A loc_6440503A:
.text:6440503A
.text:6440503A          mov     ecx, edi
.text:6440503C          cmp     [ebp+var_10], ebx
.text:6440503F          jnz     loc_64405142
.text:64405045          push   offset aForMaximumData ; "\nFor maximum data security

```

```

delete\nthe s"...

; demangled name: ATL::CStringT::operator+=(char const *)
.text:6440504A      call     ds:mfc90_945
.text:64405050      xor      edi, edi
.text:64405052      push     edi                ; fWinIni
.text:64405053      lea      eax, [ebp+pvParam]
.text:64405056      push     eax                ; pvParam
.text:64405057      push     edi                ; uiParam
.text:64405058      push     30h                ; uiAction
.text:6440505A      call     ds:SystemParametersInfoA
.text:64405060      mov      eax, [ebp+var_34]
.text:64405063      cmp      eax, 1600
.text:64405068      jle      short loc_64405072
.text:6440506A      cdq
.text:6440506B      sub      eax, edx
.text:6440506D      sar      eax, 1
.text:6440506F      mov      [ebp+var_34], eax
.text:64405072
.text:64405072 loc_64405072:
.text:64405072      push     edi                ; hWnd
.text:64405073      mov      [ebp+cy], 0A0h
.text:6440507A      call     ds:GetDC
.text:64405080      mov      [ebp+var_10], eax
.text:64405083      mov      ebx, 12Ch
.text:64405088      cmp      eax, edi
.text:6440508A      jz       loc_64405113
.text:64405090      push     11h                ; i
.text:64405092      call     ds:GetStockObject
.text:64405098      mov      edi, ds>SelectObject
.text:6440509E      push     eax                ; h
.text:6440509F      push     [ebp+var_10]        ; hdc
.text:644050A2      call     edi ; SelectObject
.text:644050A4      and      [ebp+rc.left], 0
.text:644050A8      and      [ebp+rc.top], 0
.text:644050AC      mov      [ebp+h], eax
.text:644050AF      push     401h                ; format
.text:644050B4      lea      eax, [ebp+rc]
.text:644050B7      push     eax                ; lprc
.text:644050B8      lea      ecx, [esi+2854h]
.text:644050BE      mov      [ebp+rc.right], ebx
.text:644050C1      mov      [ebp+rc.bottom], 0B4h

; demangled name: ATL::CSimpleStringT::GetLength(void)
.text:644050C8      call     ds:mfc90_3178
.text:644050CE      push     eax                ; cchText
.text:644050CF      lea      ecx, [esi+2854h]

; demangled name: const char* ATL::CSimpleStringT::operator PCXSTR
.text:644050D5      call     ds:mfc90_910
.text:644050DB      push     eax                ; lpchText
.text:644050DC      push     [ebp+var_10]        ; hdc
.text:644050DF      call     ds:DrawTextA
.text:644050E5      push     4                ; nIndex
.text:644050E7      call     ds:GetSystemMetrics
.text:644050ED      mov      ecx, [ebp+rc.bottom]
.text:644050F0      sub      ecx, [ebp+rc.top]
.text:644050F3      cmp      [ebp+h], 0
.text:644050F7      lea      eax, [eax+ecx+28h]
.text:644050FB      mov      [ebp+cy], eax
.text:644050FE      jz       short loc_64405108

```

```

.text:64405100      push    [ebp+h]          ; h
.text:64405103      push    [ebp+var_10]      ; hdc
.text:64405106      call     edi ; SelectObject
.text:64405108
.text:64405108 loc_64405108:
.text:64405108      push    [ebp+var_10]      ; hDC
.text:6440510B      push    0                      ; hWnd
.text:6440510D      call     ds:ReleaseDC
.text:64405113
.text:64405113 loc_64405113:
.text:64405113      mov     eax, [ebp+var_38]
.text:64405116      push    80h                  ; uFlags
.text:6440511B      push    [ebp+cy]             ; cy
.text:6440511E      inc     eax
.text:6440511F      push    ebx                  ; cx
.text:64405120      push    eax                  ; Y
.text:64405121      mov     eax, [ebp+var_34]
.text:64405124      add     eax, 0FFFFFFD4h
.text:64405129      cdq
.text:6440512A      sub     eax, edx
.text:6440512C      sar     eax, 1
.text:6440512E      push    eax                  ; X
.text:6440512F      push    0                    ; hWndInsertAfter
.text:64405131      push    dword ptr [esi+285Ch] ; hWnd
.text:64405137      call     ds:SetWindowPos
.text:6440513D      xor     ebx, ebx
.text:6440513F      inc     ebx
.text:64405140      jmp     short loc_6440514D
.text:64405142 ; -----
.text:64405142
.text:64405142 loc_64405142:
.text:64405142      push    offset byte_64443AF8

; demangled name: ATL::CStringT::operator=(char const *)
.text:64405147      call     ds:mfc90_820
.text:6440514D
.text:6440514D loc_6440514D:
.text:6440514D      cmp     dword_6450B970, ebx
.text:64405153      jnl     short loc_64405188
.text:64405155      call     sub_6441C910
.text:6440515A      mov     dword_644F858C, ebx
.text:64405160      push    dword ptr [esi+2854h]
.text:64405166      push    offset aCdwsguiPrepare ; "\nCdwsgui::PrepareInfoWindow:
    sapgui env"...
.text:6440516B      push    dword ptr [esi+2848h]
.text:64405171      call     dbg
.text:64405176      add     esp, 0Ch
.text:64405179      mov     dword_644F858C, 2
.text:64405183      call     sub_6441C920
.text:64405188
.text:64405188 loc_64405188:
.text:64405188      or     [ebp+var_4], 0FFFFFFFh
.text:6440518C      lea     ecx, [ebp+var_14]

; demangled name: ATL::CStringT::~~CStringT()
.text:6440518F      call     ds:mfc90_601
.text:64405195      call     __EH_epilog3
.text:6440519A      retn
.text:6440519A CDwsgui__PrepareInfoWindow endp

```

ECX at function start gets pointer to object (since it is thiscall (31.1.1)-type of function). In our case, the object obviously

has class type *CDwsGui*. Depends of option turned on in the object, specific message part will be concatenated to resulting message.

If value at `this+0x3D` address is not zero, compression is off:

```
.text:64405007 loc_64405007:
.text:64405007          cmp     byte ptr [esi+3Dh], 0
.text:6440500B          jz     short bypass
.text:6440500D          push   offset aDataCompressio ; "data compression switched off\n"
.text:64405012          mov     ecx, edi

; demangled name: ATL::CStringT::operator+=(char const *)
.text:64405014          call    ds:mfc90_945
.text:6440501A          mov     [ebp+var_10], ebx
.text:6440501D
.text:6440501D bypass:
```

It is interesting, that finally, *var_10* variable state defines whether the message is to be shown at all:

```
.text:6440503C          cmp     [ebp+var_10], ebx
.text:6440503F          jnz     exit ; bypass drawing

; add strings "For maximum data security delete" / "the setting(s) as soon as possible !":

.text:64405045          push   offset aForMaximumData ; "\nFor maximum data security
        delete\nthe s"...
.text:6440504A          call    ds:mfc90_945 ; ATL::CStringT::operator+=(char const *)
.text:64405050          xor     edi, edi
.text:64405052          push   edi ; fWinIni
.text:64405053          lea     eax, [ebp+pvParam]
.text:64405056          push   eax ; pvParam
.text:64405057          push   edi ; uiParam
.text:64405058          push   30h ; uiAction
.text:6440505A          call    ds:SystemParametersInfoA
.text:64405060          mov     eax, [ebp+var_34]
.text:64405063          cmp     eax, 1600
.text:64405068          jle     short loc_64405072
.text:6440506A          cdq
.text:6440506B          sub     eax, edx
.text:6440506D          sar     eax, 1
.text:6440506F          mov     [ebp+var_34], eax
.text:64405072
.text:64405072 loc_64405072:

start drawing:

.text:64405072          push   edi ; hWnd
.text:64405073          mov     [ebp+cy], 0A0h
.text:6440507A          call    ds:GetDC
```

Let's check our theory on practice.

JNZ at this line ...

```
.text:6440503F          jnz     exit ; bypass drawing
```

...replace it with just JMP, and get SAPGUI working without the pesky nagging pop-up window appearing!

Now let's dig deeper and find connection between 0x15 offset in the `load_command_line()` (I gave the name to the function) function and `this+0x3D` variable in the *CDwsGui::PrepareInfoWindow*. Are we sure the value is the same?

I'm starting to search for all occurrences of 0x15 value in code. For a small programs like SAPGUI, it sometimes works. Here is the first occurrence I got:

```
.text:64404C19 sub_64404C19      proc near
.text:64404C19
.text:64404C19 arg_0           = dword ptr 4
.text:64404C19
```

```
.text:64404C19      push    ebx
.text:64404C1A      push    ebp
.text:64404C1B      push    esi
.text:64404C1C      push    edi
.text:64404C1D      mov     edi, [esp+10h+arg_0]
.text:64404C21      mov     eax, [edi]
.text:64404C23      mov     esi, ecx ; ESI/ECX are pointers to some unknown object.
.text:64404C25      mov     [esi], eax
.text:64404C27      mov     eax, [edi+4]
.text:64404C2A      mov     [esi+4], eax
.text:64404C2D      mov     eax, [edi+8]
.text:64404C30      mov     [esi+8], eax
.text:64404C33      lea     eax, [edi+0Ch]
.text:64404C36      push    eax
.text:64404C37      lea     ecx, [esi+0Ch]

; demangled name: ATL::CStringT::operator=(class ATL::CStringT ... &)
.text:64404C3A      call    ds:mfc90_817
.text:64404C40      mov     eax, [edi+10h]
.text:64404C43      mov     [esi+10h], eax
.text:64404C46      mov     al, [edi+14h]
.text:64404C49      mov     [esi+14h], al
.text:64404C4C      mov     al, [edi+15h] ; copy byte from 0x15 offset
.text:64404C4F      mov     [esi+15h], al ; to 0x15 offset in CDwsGui object
```

The function was called from the function named *CDwsGui::CopyOptions!* And thanks again for debugging information. But the real answer in the function *CDwsGui::Init()*:

```
.text:6440B0BF loc_6440B0BF:
.text:6440B0BF      mov     eax, [ebp+arg_0]
.text:6440B0C2      push    [ebp+arg_4]
.text:6440B0C5      mov     [esi+2844h], eax
.text:6440B0CB      lea     eax, [esi+28h] ; ESI is pointer to CDwsGui object
.text:6440B0CE      push    eax
.text:6440B0CF      call    CDwsGui__CopyOptions
```

Finally, we understand: array filled in the *load_command_line()* function is actually placed in the *CDwsGui* class but on this+0x28 address. 0x15 + 0x28 is exactly 0x3D. OK, we found the point where the value is copied to.

Let's also find other places where 0x3D offset is used. Here is one of them in the *CDwsGui::SapguiRun* function (again, thanks to debugging calls):

```
.text:64409D58      cmp     [esi+3Dh], bl ; ESI is pointer to CDwsGui object
.text:64409D5B      lea     ecx, [esi+2B8h]
.text:64409D61      setz    al
.text:64409D64      push    eax ; arg_10 of CConnectionContext::
CreateNetwork
.text:64409D65      push    dword ptr [esi+64h]

; demangled name: const char* ATL::CSimpleStringT::operator PCXSTR
.text:64409D68      call    ds:mfc90_910
.text:64409D68      ; no arguments
.text:64409D6E      push    eax
.text:64409D6F      lea     ecx, [esi+2BCh]

; demangled name: const char* ATL::CSimpleStringT::operator PCXSTR
.text:64409D75      call    ds:mfc90_910
.text:64409D75      ; no arguments
.text:64409D7B      push    eax
.text:64409D7C      push    esi
.text:64409D7D      lea     ecx, [esi+8]
.text:64409D80      call    CConnectionContext__CreateNetwork
```

Let's check our findings. Replace the `setz al` here to the `xor eax, eax / nop` instructions, clear `TDW_NOCOMPRESS` environment variable and run `SAPGUI`. Wow! There is no more pesky nagging window (just as expected, because variable is not set) but in `Wireshark` we can see the network packets are not compressed anymore! Obviously, this is the point where compression flag is to be set in the `CConnectionContext` object.

So, compression flag is passed in the 5th argument of function `CConnectionContext::CreateNetwork`. Inside the function, another one is called:

```
...
.text:64403476      push    [ebp+compression]
.text:64403479      push    [ebp+arg_C]
.text:6440347C      push    [ebp+arg_8]
.text:6440347F      push    [ebp+arg_4]
.text:64403482      push    [ebp+arg_0]
.text:64403485      call    CNetwork__CNetwork
```

Compression flag is passing here in the 5th argument to the `CNetwork::CNetwork` constructor.

And here is how `CNetwork` constructor sets a flag in the `CNetwork` object according to the 5th argument **and** an another variable which probably could affect network packets compression too.

```
.text:64411DF1      cmp     [ebp+compression], esi
.text:64411DF7      jz      short set_EAX_to_0
.text:64411DF9      mov     al, [ebx+78h] ; another value may affect compression?
.text:64411DFC      cmp     al, '3'
.text:64411DFE      jz      short set_EAX_to_1
.text:64411E00      cmp     al, '4'
.text:64411E02      jnz     short set_EAX_to_0
.text:64411E04
.text:64411E04 set_EAX_to_1:
.text:64411E04      xor     eax, eax
.text:64411E06      inc     eax ; EAX -> 1
.text:64411E07      jmp     short loc_64411E0B
.text:64411E09 ; -----
.text:64411E09
.text:64411E09 set_EAX_to_0:
.text:64411E09
.text:64411E09      xor     eax, eax ; EAX -> 0
.text:64411E0B
.text:64411E0B loc_64411E0B:
.text:64411E0B      mov     [ebx+3A4h], eax ; EBX is pointer to CNetwork object
```

At this point we know the compression flag is stored in the `CNetwork` class at `this+0x3A4` address.

Now let's dig across `SAPguilib.dll` for `0x3A4` value. And here is the second occurrence in the `CDwsGui::OnClientMessageWrite` (endless thanks for debugging information):

```
.text:64406F76 loc_64406F76:
.text:64406F76      mov     ecx, [ebp+7728h+var_7794]
.text:64406F79      cmp     dword ptr [ecx+3A4h], 1
.text:64406F80      jnz     compression_flag_is_zero
.text:64406F86      mov     byte ptr [ebx+7], 1
.text:64406F8A      mov     eax, [esi+18h]
.text:64406F8D      mov     ecx, eax
.text:64406F8F      test    eax, eax
.text:64406F91      ja      short loc_64406FFF
.text:64406F93      mov     ecx, [esi+14h]
.text:64406F96      mov     eax, [esi+20h]
.text:64406F99
.text:64406F99 loc_64406F99:
.text:64406F99      push    dword ptr [edi+2868h] ; int
.text:64406F9F      lea     edx, [ebp+7728h+var_77A4]
.text:64406FA2      push    edx ; int
.text:64406FA3      push    30000 ; int
.text:64406FA8      lea     edx, [ebp+7728h+Dst]
.text:64406FAB      push    edx ; Dst
```

```

.text:64406FAC      push     ecx                ; int
.text:64406FAD      push     eax                ; Src
.text:64406FAE      push     dword ptr [edi+28C0h] ; int
.text:64406FB4      call     sub_644055C5        ; actual compression routine
.text:64406FB9      add      esp, 1Ch
.text:64406FBC      cmp     eax, 0FFFFFFF6h
.text:64406FBF      jz      short loc_64407004
.text:64406FC1      cmp     eax, 1
.text:64406FC4      jz      loc_6440708C
.text:64406FCA      cmp     eax, 2
.text:64406FCD      jz      short loc_64407004
.text:64406FCF      push     eax
.text:64406FD0      push     offset aCompressionErr ; "compression error [rc = %d]-
        program wi"...
.text:64406FD5      push     offset aGui_err_compre ; "GUI_ERR_COMPRESS"
.text:64406FDA      push     dword ptr [edi+28D0h]
.text:64406FE0      call     SapPcTxtRead

```

Let's take a look into `sub_644055C5`. In it we can only see call to `memcpy()` and an other function named (by IDA) `sub_64417440`. And, let's take a look inside `sub_64417440`. What we see is:

```

.text:6441747C      push     offset aErrorCsrcompre ; "\nERROR: CsRCompress: invalid
        handle"
.text:64417481      call     eax ; dword_644F94C8
.text:64417483      add     esp, 4

```

Voilà! We've found the function which actually compresses data. As I [revealed in past](#), this function is used in SAP and also open-source MaxDB project. So it is available in sources.

Doing last check here:

```

.text:64406F79      cmp     dword ptr [ecx+3A4h], 1
.text:64406F80      jnz     compression_flag_is_zero

```

Replace JNZ here for unconditional JMP. Remove environment variable `TDW_NOCOMPRESS`. Voilà! In Wireshark we see the client messages are not compressed. Server responses, however, are compressed.

So we found exact connection between environment variable and the point where data compression routine may be called or may be bypassed.

57.2 SAP 6.0 password checking functions

While returning again to my SAP 6.0 IDES installed in VMware box, I figured out I forgot the password for SAP* account, then it back to my memory, but now I got error message «*Password logon no longer possible - too many failed attempts*», since I've spent all these attempts in trying to recall it.

First extremely good news is the full `disp+work.pdb` file is supplied with SAP, it contain almost everything: function names, structures, types, local variable and argument names, etc. What a lavish gift!

I got `TYPEINFODUMP`⁵ utility for converting PDB files into something readable and greppable.

Here is an example of function information + its arguments + its local variables:

```

FUNCTION ThVmcSysEvent
  Address:      10143190  Size:      675 bytes  Index:      60483  TypeIndex:      60484
  Type: int NEAR_C ThVmcSysEvent (unsigned int, unsigned char, unsigned short*)
Flags: 0
PARAMETER events
  Address: Reg335+288  Size:      4 bytes  Index:      60488  TypeIndex:      60489
  Type: unsigned int
Flags: d0
PARAMETER opcode
  Address: Reg335+296  Size:      1 bytes  Index:      60490  TypeIndex:      60491
  Type: unsigned char
Flags: d0
PARAMETER serverName

```

⁵<http://www.debuginfo.com/tools/typeinfodump.html>

```

Address: Reg335+304 Size:      8 bytes Index:    60492 TypeIndex:    60493
Type: unsigned short*
Flags: d0
STATIC_LOCAL_VAR func
Address:      12274af0 Size:      8 bytes Index:    60495 TypeIndex:    60496
Type: wchar_t*
Flags: 80
LOCAL_VAR admhead
Address: Reg335+304 Size:      8 bytes Index:    60498 TypeIndex:    60499
Type: unsigned char*
Flags: 90
LOCAL_VAR record
Address: Reg335+64 Size:     204 bytes Index:    60501 TypeIndex:    60502
Type: AD_RECORD
Flags: 90
LOCAL_VAR adlen
Address: Reg335+296 Size:      4 bytes Index:    60508 TypeIndex:    60509
Type: int
Flags: 90

```

And here is an example of some structure:

```

STRUCT DBSL_STMTID
Size: 120 Variables: 4 Functions: 0 Base classes: 0
MEMBER moduletype
Type: DBSL_MODULETYPE
Offset: 0 Index: 3 TypeIndex: 38653
MEMBER module
Type: wchar_t module[40]
Offset: 4 Index: 3 TypeIndex: 831
MEMBER stmtnum
Type: long
Offset: 84 Index: 3 TypeIndex: 440
MEMBER timestamp
Type: wchar_t timestamp[15]
Offset: 88 Index: 3 TypeIndex: 6612

```

Wow!

Another good news is: *debugging* calls (there are plenty of them) are very useful.

Here you can also notice *ct_level* global variable⁶, reflecting current trace level.

There is a lot of such debugging inclusions in the *disp+work.exe* file:

```

cmp     cs:ct_level, 1
jl      short loc_1400375DA
call    DpLock
lea     rcx, aDpxxtool4_c ; "dpxxtool4.c"
mov     edx, 4Eh          ; line
call    CTrcSaveLocation
mov     r8, cs:func_48
mov     rcx, cs:hdl       ; hdl
lea     rdx, aSDpreadmemvalu ; "%s: DpReadMemValue (%d)"
mov     r9d, ebx
call    DpTrcErr
call    DpUnlock

```

If current trace level is bigger or equal to threshold defined in the code here, debugging message will be written to log files like *dev_w0*, *dev_disp*, and other *dev** files.

Let's do grepping on file I got with the help of TYPEINFODUMP utility:

```
cat "disp+work.pdb.d" | grep FUNCTION | grep -i password
```

I got:

⁶More about trace level: http://help.sap.com/saphelp_nwpi71/helpdata/en/46/962416a5a613e8e10000000a155369/content.htm

```

FUNCTION rcui::AgiPassword::DiagISelection
FUNCTION ssf_password_encrypt
FUNCTION ssf_password_decrypt
FUNCTION password_logon_disabled
FUNCTION dySignSkipUserPassword
FUNCTION migrate_password_history
FUNCTION password_is_initial
FUNCTION rcui::AgiPassword::IsVisible
FUNCTION password_distance_ok
FUNCTION get_password_downwards_compatibility
FUNCTION dySignUnSkipUserPassword
FUNCTION rcui::AgiPassword::GetTypeNames
FUNCTION 'rcui::AgiPassword::AgiPassword'::'1'::dtor$2
FUNCTION 'rcui::AgiPassword::AgiPassword'::'1'::dtor$0
FUNCTION 'rcui::AgiPassword::AgiPassword'::'1'::dtor$1
FUNCTION usm_set_password
FUNCTION rcui::AgiPassword::TraceTo
FUNCTION days_since_last_password_change
FUNCTION rsecgrp_generate_random_password
FUNCTION rcui::AgiPassword::'scalar deleting destructor'
FUNCTION password_attempt_limit_exceeded
FUNCTION handle_incorrect_password
FUNCTION 'rcui::AgiPassword::'scalar deleting destructor''::'1'::dtor$1
FUNCTION calculate_new_password_hash
FUNCTION shift_password_to_history
FUNCTION rcui::AgiPassword::GetType
FUNCTION found_password_in_history
FUNCTION 'rcui::AgiPassword::'scalar deleting destructor''::'1'::dtor$0
FUNCTION rcui::AgiObj::IsaPassword
FUNCTION password_idle_check
FUNCTION SlicHwPasswordForDay
FUNCTION rcui::AgiPassword::IsaPassword
FUNCTION rcui::AgiPassword::AgiPassword
FUNCTION delete_user_password
FUNCTION usm_set_user_password
FUNCTION Password_API
FUNCTION get_password_change_for_SSO
FUNCTION password_in_USR40
FUNCTION rsec_agrp_abap_generate_random_password

```

Let's also try to search for debug messages which contain words «password» and «locked». One of them is the string «user was locked by subsequently failed password logon attempts» referenced in function `password_attempt_limit_exceeded()`.

Other string this function I found may write to log file are: «password logon attempt will be rejected immediately (preventing dictionary attacks)», «failed-logon lock: expired (but not removed due to 'read-only' operation)», «failed-logon lock: expired => removed».

After playing for a little with this function, I quickly noticed the problem is exactly in it. It is called from `chkpass()` function—one of the password checking functions.

First, I would like to be sure I'm at the correct point:

Run my [tracer](#):

```
tracer64.exe -a:disp+work.exe bpf=disp+work.exe!chkpass,args:3,unicode
```

```

PID=2236|TID=2248|(0) disp+work.exe!chkpass (0x202c770, L"Brewered1
    ", 0x41) (called from 0x1402f1060 (disp+work.exe!usrexist+0x3c0))
PID=2236|TID=2248|(0) disp+work.exe!chkpass -> 0x35

```

Call path is: `syssigni()` -> `DylSigni()` -> `dychkurs()` -> `usrexist()` -> `chkpass()`.

Number 0x35 is an error returning in `chkpass()` at that point:

```
.text:00000001402ED567 loc_1402ED567 ; CODE XREF: chkpass+B4
```

```

.text:00000001402ED567      mov     rcx, rbx          ; usr02
.text:00000001402ED56A      call    password_idle_check
.text:00000001402ED56F      cmp     eax, 33h
.text:00000001402ED572      jz      loc_1402EDB4E
.text:00000001402ED578      cmp     eax, 36h
.text:00000001402ED57B      jz      loc_1402EDB3D
.text:00000001402ED581      xor     edx, edx          ; usr02_readonly
.text:00000001402ED583      mov     rcx, rbx          ; usr02
.text:00000001402ED586      call    password_attempt_limit_exceeded
.text:00000001402ED58B      test    al, al
.text:00000001402ED58D      jz      short loc_1402ED5A0
.text:00000001402ED58F      mov     eax, 35h
.text:00000001402ED594      add     rsp, 60h
.text:00000001402ED598      pop     r14
.text:00000001402ED59A      pop     r12
.text:00000001402ED59C      pop     rdi
.text:00000001402ED59D      pop     rsi
.text:00000001402ED59E      pop     rbx
.text:00000001402ED59F      retn

```

Fine, let's check:

```
tracer64.exe -a:disp+work.exe bpf=disp+work.exe!password_attempt_limit_exceeded,args:4,unicode,rt:0
```

```

PID=2744|TID=360|(0) disp+work.exe!password_attempt_limit_exceeded (0x202c770, 0, 0x257758, 0) (
  called from 0x1402ed58b (disp+work.exe!chckpass+0xeb))
PID=2744|TID=360|(0) disp+work.exe!password_attempt_limit_exceeded -> 1
PID=2744|TID=360|We modify return value (EAX/RAX) of this function to 0
PID=2744|TID=360|(0) disp+work.exe!password_attempt_limit_exceeded (0x202c770, 0, 0, 0) (called
  from 0x1402e9794 (disp+work.exe!chnypass+0xe4))
PID=2744|TID=360|(0) disp+work.exe!password_attempt_limit_exceeded -> 1
PID=2744|TID=360|We modify return value (EAX/RAX) of this function to 0

```

Excellent! I can successfully login now.

By the way, if I try to pretend I forgot the password, fixing *chckpass()* function return value at 0 is enough to bypass check:

```
tracer64.exe -a:disp+work.exe bpf=disp+work.exe!chckpass,args:3,unicode,rt:0
```

```

PID=2744|TID=360|(0) disp+work.exe!chckpass (0x202c770, L"bogus
  ", 0x41) (called from 0x1402f1060 (disp+work.exe!usrexist+0x3c0))
PID=2744|TID=360|(0) disp+work.exe!chckpass -> 0x35
PID=2744|TID=360|We modify return value (EAX/RAX) of this function to 0

```

What also can be said while analyzing *password_attempt_limit_exceeded()* function is that at the very beginning of it, this call might be seen:

```

lea     rcx, aLoginFailed_us ; "login/failed_user_auto_unlock"
call    sapgparam
test    rax, rax
jz      short loc_1402E19DE
movzx   eax, word ptr [rax]
cmp     ax, 'N'
jz      short loc_1402E19D4
cmp     ax, 'n'
jz      short loc_1402E19D4
cmp     ax, 'O'
jnz     short loc_1402E19DE

```

Obviously, function *sapgparam()* used to query value of some configuration parameter. This function can be called from 1768 different places. It seems, with the help of this information, we can easily find places in code, control flow of which can be affected by specific configuration parameters.

It is really sweet. Function names are very clear, much clearer than in the Oracle RDBMS. It seems, *disp+work* process written in C++. It was apparently rewritten some time ago?

Chapter 58

Oracle RDBMS

58.1 V\$VERSION table in the Oracle RDBMS

Oracle RDBMS 11.2 is a huge program, main module `oracle.exe` contain approx. 124,000 functions. For comparison, Windows 7 x86 kernel (`ntoskrnl.exe`) —approx. 11,000 functions and Linux 3.9.8 kernel (with default drivers compiled) —31,000 functions.

Let's start with an easy question. Where Oracle RDBMS get all this information, when we execute such simple statement in SQL*Plus:

```
SQL> select * from V$VERSION;
```

And we've got:

BANNER

```
-----
Oracle Database 11g Enterprise Edition Release 11.2.0.1.0 - Production
PL/SQL Release 11.2.0.1.0 - Production
CORE      11.2.0.1.0      Production
TNS for 32-bit Windows: Version 11.2.0.1.0 - Production
NLSRTL Version 11.2.0.1.0 - Production
```

Let's start. Where in the Oracle RDBMS we may find a string `V$VERSION`?

As of win32-version, `oracle.exe` file contain the string, which can be investigated easily. But we can also use object (`.o`) files from Linux version of Oracle RDBMS since, unlike win32 version `oracle.exe`, function names (and global variables as well) are preserved there.

So, `kqf.o` file contain `V$VERSION` string. The object file is in the main Oracle-library `libserver11.a`.

A reference to this text string we may find in the `kqfviw` table stored in the same file, `kqf.o`:

Listing 58.1: `kqf.o`

```
.rodata:0800C4A0 kqfviw          dd 0Bh                ; DATA XREF: kqfchk:loc_8003A6D
.rodata:0800C4A0                ; kqfgbn+34
.rodata:0800C4A4                dd offset _2__STRING_10102_0 ; "GV$WAITSTAT"
.rodata:0800C4A8                dd 4
.rodata:0800C4AC                dd offset _2__STRING_10103_0 ; "NULL"
.rodata:0800C4B0                dd 3
.rodata:0800C4B4                dd 0
.rodata:0800C4B8                dd 195h
.rodata:0800C4BC                dd 4
.rodata:0800C4C0                dd 0
.rodata:0800C4C4                dd 0FFFFFFC1CBh
.rodata:0800C4C8                dd 3
.rodata:0800C4CC                dd 0
.rodata:0800C4D0                dd 0Ah
.rodata:0800C4D4                dd offset _2__STRING_10104_0 ; "V$WAITSTAT"
.rodata:0800C4D8                dd 4
.rodata:0800C4DC                dd offset _2__STRING_10103_0 ; "NULL"
.rodata:0800C4E0                dd 3
```

```

.rodata:0800C4E4      dd 0
.rodata:0800C4E8      dd 4Eh
.rodata:0800C4EC      dd 3
.rodata:0800C4F0      dd 0
.rodata:0800C4F4      dd 0FFFFFFC003h
.rodata:0800C4F8      dd 4
.rodata:0800C4FC      dd 0
.rodata:0800C500      dd 5
.rodata:0800C504      dd offset _2__STRING_10105_0 ; "GV$BH"
.rodata:0800C508      dd 4
.rodata:0800C50C      dd offset _2__STRING_10103_0 ; "NULL"
.rodata:0800C510      dd 3
.rodata:0800C514      dd 0
.rodata:0800C518      dd 269h
.rodata:0800C51C      dd 15h
.rodata:0800C520      dd 0
.rodata:0800C524      dd 0FFFFFFC1EDh
.rodata:0800C528      dd 8
.rodata:0800C52C      dd 0
.rodata:0800C530      dd 4
.rodata:0800C534      dd offset _2__STRING_10106_0 ; "V$BH"
.rodata:0800C538      dd 4
.rodata:0800C53C      dd offset _2__STRING_10103_0 ; "NULL"
.rodata:0800C540      dd 3
.rodata:0800C544      dd 0
.rodata:0800C548      dd 0F5h
.rodata:0800C54C      dd 14h
.rodata:0800C550      dd 0
.rodata:0800C554      dd 0FFFFFFC1EEh
.rodata:0800C558      dd 5
.rodata:0800C55C      dd 0

```

By the way, often, while analysing Oracle RDBMS internals, you may ask yourself, why functions and global variable names are so weird. Supposedly, since Oracle RDBMS is very old product and was developed in C in 1980-s. And that was a time when C standard guaranteed function names/variables support only up to 6 characters inclusive: «6 significant initial characters in an external identifier»¹

Probably, the table `kqfviw` contain most (maybe even all) views prefixed with `V$`, these are *fixed views*, present all the time. Superficially, by noticing cyclic recurrence of data, we can easily see that each `kqfviw` table element has 12 32-bit fields. It is very simple to create a 12-elements structure in [IDA](#) and apply it to all table elements. As of Oracle RDBMS version 11.2, there are 1023 table elements, i.e., there are described 1023 of all possible *fixed views*. We will return to this number later.

As we can see, there is not much information in these numbers in fields. The very first number is always equals to name of view (without terminating zero. This is correct for each element. But this information is not very useful.

We also know that information about all fixed views can be retrieved from *fixed view* named `V$FIXED_VIEW_DEFINITION` (by the way, the information for this view is also taken from `kqfviw` and `kqfvip` tables.) By the way, there are 1023 elements too.

```
SQL> select * from V$FIXED_VIEW_DEFINITION where view_name='V$VERSION';
```

```
VIEW_NAME
```

```
VIEW_DEFINITION
```

```
V$VERSION
```

```
select BANNER from GV$VERSION where inst_id = USERENV('Instance')
```

So, `V$VERSION` is some kind of *thunk view* for another view, named `GV$VERSION`, which is, in turn:

```
SQL> select * from V$FIXED_VIEW_DEFINITION where view_name='GV$VERSION';
```

```
VIEW_NAME
```

¹Draft ANSI C Standard (ANSI X3J11/88-090) (May 13, 1988)

```
-----
VIEW_DEFINITION
-----
```

```
GV$VERSION
select inst_id, banner from x$version
```

Tables prefixed as X\$ in the Oracle RDBMS – is service tables too, undocumented, cannot be changed by user and refreshed dynamically.

Let's also try to search the text `select BANNER from GV$VERSION where inst_id = USERENV('Instance')` in the `kqf.o` file and we find it in the `kqfvip` table:

Listing 58.2: `kqf.o`

```
rodata:080185A0 kqfvip          dd offset _2__STRING_11126_0 ; DATA XREF: kqfgvcn+18
.rodata:080185A0                                ; kqfgvt+F
.rodata:080185A0                                ; "select inst_id,decode(indx,1,'data
      bloc"...
.rodata:080185A4          dd offset kqfv459_c_0
.rodata:080185A8          dd 0
.rodata:080185AC          dd 0
...
.rodata:08019570          dd offset _2__STRING_11378_0 ; "select  BANNER from GV$VERSION
      where in"...
.rodata:08019574          dd offset kqfv133_c_0
.rodata:08019578          dd 0
.rodata:0801957C          dd 0
.rodata:08019580          dd offset _2__STRING_11379_0 ; "select inst_id,decode(bitand(
      cfflg,1),0)"...
.rodata:08019584          dd offset kqfv403_c_0
.rodata:08019588          dd 0
.rodata:0801958C          dd 0
.rodata:08019590          dd offset _2__STRING_11380_0 ; "select  STATUS , NAME,
      IS_RECOVERY_DEST"...
.rodata:08019594          dd offset kqfv199_c_0
```

The table appear to have 4 fields in each element. By the way, there are 1023 elements too. The second field pointing to another table, containing table fields for this *fixed view*. As of `V$VERSION`, this table contain only two elements, first is 6 and second is BANNER string (the number (6) is this string length) and after, *terminating* element contain 0 and *null* C-string:

Listing 58.3: `kqf.o`

```
.rodata:080BBAC4 kqfv133_c_0  dd 6                                ; DATA XREF: .rodata:08019574
.rodata:080BBAC8          dd offset _2__STRING_5017_0 ; "BANNER"
.rodata:080BBACC          dd 0
.rodata:080BBAD0          dd offset _2__STRING_0_0
```

By joining data from both `kqfviv` and `kqfvip` tables, we may get SQL-statements which are executed when user wants to query information from specific *fixed view*.

So I wrote an `oracle tables`² program, so to gather all this information from Oracle RDBMS for Linux object files. For `V$VERSION`, we may find this:

Listing 58.4: Result of oracle tables

```
kqfviv_element.viewname: [V$VERSION] ?: 0x3 0x43 0x1 0xffffc085 0x4
kqfvip_element.statement: [select  BANNER from GV$VERSION where inst_id = USERENV('Instance')]
kqfvip_element.params:
[BANNER]
```

and:

²http://yurichev.com/oracle_tables.html

Listing 58.5: Result of oracle tables

```
kqfviw_element.viewname: [GV$VERSION]?: 0x3 0x26 0x2 0xffffc192 0x1
kqfvip_element.statement: [select inst_id, banner from x$version]
kqfvip_element.params:
[INST_ID] [BANNER]
```

GV\$VERSION *fixed view* is distinct from V\$VERSION in only that way that it contains one more field with *instance* identifier. Anyway, we stuck at the table X\$VERSION. Just like any other X\$-tables, it is undocumented, however, we can query it:

```
SQL> select * from x$version;

ADDR          INDX    INST_ID
-----
BANNER
-----

ODBAF574          0          1
Oracle Database 11g Enterprise Edition Release 11.2.0.1.0 - Production
...
```

This table has additional fields like ADDR and INDX.

While scrolling `kqf.o` in [IDA](#) we may spot another table containing pointer to the X\$VERSION string, this is `kqftab`:

Listing 58.6: `kqf.o`

```
.rodata:0803CAC0          dd 9          ; element number 0x1f6
.rodata:0803CAC4          dd offset _2__STRING_13113_0 ; "X$VERSION"
.rodata:0803CAC8          dd 4
.rodata:0803CACC          dd offset _2__STRING_13114_0 ; "kqvt"
.rodata:0803CAD0          dd 4
.rodata:0803CAD4          dd 4
.rodata:0803CAD8          dd 0
.rodata:0803CADC          dd 4
.rodata:0803CAE0          dd 0Ch
.rodata:0803CAE4          dd 0FFFFC075h
.rodata:0803CAE8          dd 3
.rodata:0803CAEC          dd 0
.rodata:0803CAF0          dd 7
.rodata:0803CAF4          dd offset _2__STRING_13115_0 ; "X$KQFSZ"
.rodata:0803CAF8          dd 5
.rodata:0803CAFC          dd offset _2__STRING_13116_0 ; "kqfsz"
.rodata:0803CB00          dd 1
.rodata:0803CB04          dd 38h
.rodata:0803CB08          dd 0
.rodata:0803CB0C          dd 7
.rodata:0803CB10          dd 0
.rodata:0803CB14          dd 0FFFFC09Dh
.rodata:0803CB18          dd 2
.rodata:0803CB1C          dd 0
```

There are a lot of references to X\$-table names, apparently, to all Oracle RDBMS 11.2 X\$-tables. But again, we have not enough information. I have no idea, what `kqvt` string means. `kq` prefix may means *kernel* and *query*. `v`, apparently, means *version* and `t` — *type*? Frankly speaking, I do not know.

The table named similarly can be found in `kqf.o`:

Listing 58.7: `kqf.o`

```
.rodata:0808C360 kqvt_c_0          kqftap_param <4, offset _2__STRING_19_0, 917h, 0, 0, 0, 4, 0, 0>
.rodata:0808C360          ; DATA XREF: .rodata:08042680
.rodata:0808C360          ; "ADDR"
.rodata:0808C384          kqftap_param <4, offset _2__STRING_20_0, 0B02h, 0, 0, 0, 4, 0,
0> ; "INDX"
```

```
.rodata:0808C3A8      kqftap_param <7, offset _2__STRING_21_0, 0B02h, 0, 0, 0, 4, 0,
    0> ; "INST_ID"
.rodata:0808C3CC      kqftap_param <6, offset _2__STRING_5017_0, 601h, 0, 0, 0, 50h,
    0, 0> ; "BANNER"
.rodata:0808C3F0      kqftap_param <0, offset _2__STRING_0_0, 0, 0, 0, 0, 0, 0, 0>
```

It contains information about all fields in the X\$VERSION table. The only reference to this table present in the kqftap table:

Listing 58.8: kqf.o

```
.rodata:08042680      kqftap_element <0, offset kqvt_c_0, offset kqvrow, 0> ; element
    0x1f6
```

It is interesting that this element here is 0x1f6th (502nd), just as a pointer to the X\$VERSION string in the kqftab table. Probably, kqftap and kqftab tables complement each other, just like kqfvip and kqfviv. We also see a pointer to the kqvrow() function. Finally, we got something useful!

So I added these tables to my oracle tables³ utility too. For X\$VERSION I've got:

Listing 58.9: Result of oracle tables

```
kqftab_element.name: [X$VERSION] ?: [kqvt] 0x4 0x4 0x4 0xc 0xffffc075 0x3
kqftap_param.name=[ADDR] ?: 0x917 0x0 0x0 0x0 0x4 0x0 0x0
kqftap_param.name=[INDX] ?: 0xb02 0x0 0x0 0x0 0x4 0x0 0x0
kqftap_param.name=[INST_ID] ?: 0xb02 0x0 0x0 0x0 0x4 0x0 0x0
kqftap_param.name=[BANNER] ?: 0x601 0x0 0x0 0x0 0x50 0x0 0x0
kqftap_element.fn1=kqvrow
kqftap_element.fn2=NULL
```

With the help of [tracer](#), it is easy to check that this function called 6 times in row (from the qerfxFetch() function) while querying X\$VERSION table.

Let's run [tracer](#) in the cc mode (it will comment each executed instruction):

```
tracer -a:oracle.exe bpf=oracle.exe!_kqvrow,trace:cc
```

```
_kqvrow_      proc near
var_7C        = byte ptr -7Ch
var_18        = dword ptr -18h
var_14        = dword ptr -14h
Dest          = dword ptr -10h
var_C         = dword ptr -0Ch
var_8         = dword ptr -8
var_4         = dword ptr -4
arg_8         = dword ptr 10h
arg_C         = dword ptr 14h
arg_14        = dword ptr 1Ch
arg_18        = dword ptr 20h

; FUNCTION CHUNK AT .text1:056C11A0 SIZE 00000049 BYTES

                push    ebp
                mov     ebp, esp
                sub     esp, 7Ch
                mov     eax, [ebp+arg_14] ; [EBP+1Ch]=1
                mov     ecx, TlsIndex ; [69AEB08h]=0
                mov     edx, large fs:2Ch
                mov     edx, [edx+ecx*4] ; [EDX+ECX*4]=0xc98c938
                cmp     eax, 2 ; EAX=1
                mov     eax, [ebp+arg_8] ; [EBP+10h]=0xcdfe554
                jz      loc_2CE1288
                mov     ecx, [eax] ; [EAX]=0..5
                mov     [ebp+var_4], edi ; EDI=0xc98c938
```

³http://yurichev.com/oracle_tables.html

```

loc_2CE10F6:                                ; CODE XREF: _kqvrow_+10A
                                           ; _kqvrow_+1A9
        cmp     ecx, 5                     ; ECX=0..5
        ja      loc_56C11C7
        mov     edi, [ebp+arg_18] ; [EBP+20h]=0
        mov     [ebp+var_14], edx ; EDX=0xc98c938
        mov     [ebp+var_8], ebx ; EBX=0
        mov     ebx, eax                  ; EAX=0xcdfe554
        mov     [ebp+var_C], esi ; ESI=0xcdfe248

loc_2CE110D:                                ; CODE XREF: _kqvrow_+29E00E6
        mov     edx, ds:off_628B09C[ecx*4] ; [ECX*4+628B09Ch]=0x2ce1116, 0x2ce11ac, 0
        x2ce11db, 0x2ce11f6, 0x2ce1236, 0x2ce127a
        jmp     edx                       ; EDX=0x2ce1116, 0x2ce11ac, 0x2ce11db, 0x2ce11f6, 0
        x2ce1236, 0x2ce127a
; -----

loc_2CE1116:                                ; DATA XREF: .rdata:off_628B09C
        push    offset aXKqvvsBuffer ; "x$kqvvs buffer"
        mov     ecx, [ebp+arg_C] ; [EBP+14h]=0x8a172b4
        xor     edx, edx
        mov     esi, [ebp+var_14] ; [EBP-14h]=0xc98c938
        push    edx                       ; EDX=0
        push    edx                       ; EDX=0
        push    50h
        push    ecx                       ; ECX=0x8a172b4
        push    dword ptr [esi+10494h] ; [ESI+10494h]=0xc98cd58
        call    _kghalf                   ; tracing nested maximum level (1) reached, skipping this
CALL
        mov     esi, ds:__imp__vsnum ; [59771A8h]=0x61bc49e0
        mov     [ebp+Dest], eax ; EAX=0xce2ffb0
        mov     [ebx+8], eax ; EAX=0xce2ffb0
        mov     [ebx+4], eax ; EAX=0xce2ffb0
        mov     edi, [esi] ; [ESI]=0xb200100
        mov     esi, ds:__imp__vsenstr ; [597D6D4h]=0x65852148, "- Production"
        push    esi                       ; ESI=0x65852148, "- Production"
        mov     ebx, edi ; EDI=0xb200100
        shr     ebx, 18h ; EBX=0xb200100
        mov     ecx, edi ; EDI=0xb200100
        shr     ecx, 14h ; ECX=0xb200100
        and     ecx, 0Fh ; ECX=0xb2
        mov     edx, edi ; EDI=0xb200100
        shr     edx, 0Ch ; EDX=0xb200100
        movzx   edx, dl ; DL=0
        mov     eax, edi ; EDI=0xb200100
        shr     eax, 8 ; EAX=0xb200100
        and     eax, 0Fh ; EAX=0xb2001
        and     edi, 0FFh ; EDI=0xb200100
        push    edi ; EDI=0
        mov     edi, [ebp+arg_18] ; [EBP+20h]=0
        push    eax ; EAX=1
        mov     eax, ds:__imp__vsnbans ; [597D6D8h]=0x65852100, "Oracle Database 11g
Enterprise Edition Release %d.%d.%d.%d.%d %s"
        push    edx ; EDX=0
        push    ecx ; ECX=2
        push    ebx ; EBX=0xb
        mov     ebx, [ebp+arg_8] ; [EBP+10h]=0xcdfe554
        push    eax ; EAX=0x65852100, "Oracle Database 11g Enterprise Edition
Release %d.%d.%d.%d.%d %s"
        mov     eax, [ebp+Dest] ; [EBP-10h]=0xce2ffb0

```

```

        push    eax                ; EAX=0xce2ffb0
        call    ds:__imp__sprintf ; op1=MSVCR80.dll!sprintf tracing nested maximum level
(1) reached, skipping this CALL
        add     esp, 38h
        mov     dword ptr [ebx], 1

loc_2CE1192:                        ; CODE XREF: _kqvrow_+FB
                                    ; _kqvrow_+128 ...
        test    edi, edi           ; EDI=0
        jnz     __VInfreq__kqvrow
        mov     esi, [ebp+var_C] ; [EBP-0Ch]=0xcdfe248
        mov     edi, [ebp+var_4] ; [EBP-4]=0xc98c938
        mov     eax, ebx           ; EBX=0xcdfe554
        mov     ebx, [ebp+var_8] ; [EBP-8]=0
        lea     eax, [eax+4]       ; [EAX+4]=0xce2ffb0, "NLSRTL Version 11.2.0.1.0 -
Production", "Oracle Database 11g Enterprise Edition Release 11.2.0.1.0 - Production", "PL/
SQL Release 11.2.0.1.0 - Production", "TNS for 32-bit Windows: Version 11.2.0.1.0 -
Production"

loc_2CE11A8:                        ; CODE XREF: _kqvrow_+29E00F6
        mov     esp, ebp
        pop     ebp
        retn                                ; EAX=0xcdfe558
; -----

loc_2CE11AC:                        ; DATA XREF: .rdata:0628B0A0
        mov     edx, [ebx+8]       ; [EBX+8]=0xce2ffb0, "Oracle Database 11g Enterprise
Edition Release 11.2.0.1.0 - Production"
        mov     dword ptr [ebx], 2
        mov     [ebx+4], edx       ; EDX=0xce2ffb0, "Oracle Database 11g Enterprise Edition
Release 11.2.0.1.0 - Production"
        push    edx               ; EDX=0xce2ffb0, "Oracle Database 11g Enterprise Edition
Release 11.2.0.1.0 - Production"
        call    _kkxvsn           ; tracing nested maximum level (1) reached, skipping this
CALL
        pop     ecx
        mov     edx, [ebx+4]       ; [EBX+4]=0xce2ffb0, "PL/SQL Release 11.2.0.1.0 -
Production"
        movzx   ecx, byte ptr [edx] ; [EDX]=0x50
        test    ecx, ecx           ; ECX=0x50
        jnz     short loc_2CE1192
        mov     edx, [ebp+var_14]
        mov     esi, [ebp+var_C]
        mov     eax, ebx
        mov     ebx, [ebp+var_8]
        mov     ecx, [eax]
        jmp     loc_2CE10F6
; -----

loc_2CE11DB:                        ; DATA XREF: .rdata:0628B0A4
        push    0
        push    50h
        mov     edx, [ebx+8]       ; [EBX+8]=0xce2ffb0, "PL/SQL Release 11.2.0.1.0 -
Production"
        mov     [ebx+4], edx       ; EDX=0xce2ffb0, "PL/SQL Release 11.2.0.1.0 - Production"
        push    edx               ; EDX=0xce2ffb0, "PL/SQL Release 11.2.0.1.0 - Production"
        call    _lmxver           ; tracing nested maximum level (1) reached, skipping this
CALL
        add     esp, 0Ch
        mov     dword ptr [ebx], 3
        jmp     short loc_2CE1192

```

```

; -----
loc_2CE11F6:                                ; DATA XREF: .rdata:0628B0A8
        mov     edx, [ebx+8]                ; [EBX+8]=0xce2ffb0
        mov     [ebp+var_18], 50h
        mov     [ebx+4], edx                ; EDX=0xce2ffb0
        push    0
        call    _npinli                    ; tracing nested maximum level (1) reached, skipping this
CALL
        pop     ecx
        test    eax, eax                    ; EAX=0
        jnz     loc_56C11DA
        mov     ecx, [ebp+var_14]           ; [EBP-14h]=0xc98c938
        lea     edx, [ebp+var_18]           ; [EBP-18h]=0x50
        push    edx                        ; EDX=0xd76c93c
        push    dword ptr [ebx+8]           ; [EBX+8]=0xce2ffb0
        push    dword ptr [ecx+13278h]      ; [ECX+13278h]=0xacce190
        call    _nrtnsvrs                  ; tracing nested maximum level (1) reached, skipping this
CALL
        add     esp, 0Ch

loc_2CE122B:                                ; CODE XREF: _kqvrow_+29E0118
        mov     dword ptr [ebx], 4
        jmp     loc_2CE1192
; -----

loc_2CE1236:                                ; DATA XREF: .rdata:0628B0AC
        lea     edx, [ebp+var_7C]           ; [EBP-7Ch]=1
        push    edx                        ; EDX=0xd76c8d8
        push    0
        mov     esi, [ebx+8]                ; [EBX+8]=0xce2ffb0, "TNS for 32-bit Windows: Version
11.2.0.1.0 - Production"
        mov     [ebx+4], esi                ; ESI=0xce2ffb0, "TNS for 32-bit Windows: Version
11.2.0.1.0 - Production"
        mov     ecx, 50h
        mov     [ebp+var_18], ecx           ; ECX=0x50
        push    ecx                        ; ECX=0x50
        push    esi                        ; ESI=0xce2ffb0, "TNS for 32-bit Windows: Version
11.2.0.1.0 - Production"
        call    _lxvers                    ; tracing nested maximum level (1) reached, skipping this
CALL
        add     esp, 10h
        mov     edx, [ebp+var_18]           ; [EBP-18h]=0x50
        mov     dword ptr [ebx], 5
        test    edx, edx                    ; EDX=0x50
        jnz     loc_2CE1192
        mov     edx, [ebp+var_14]
        mov     esi, [ebp+var_C]
        mov     eax, ebx
        mov     ebx, [ebp+var_8]
        mov     ecx, 5
        jmp     loc_2CE10F6
; -----

loc_2CE127A:                                ; DATA XREF: .rdata:0628B0B0
        mov     edx, [ebp+var_14]           ; [EBP-14h]=0xc98c938
        mov     esi, [ebp+var_C]           ; [EBP-0Ch]=0xcdfe248
        mov     edi, [ebp+var_4]           ; [EBP-4]=0xc98c938
        mov     eax, ebx                    ; EBX=0xcdfe554
        mov     ebx, [ebp+var_8]           ; [EBP-8]=0

```

```

loc_2CE1288:                ; CODE XREF: _kqvrow_+1F
        mov     eax, [eax+8]    ; [EAX+8]=0xce2ffb0, "NLSRTL Version 11.2.0.1.0 -
        Production"
        test    eax, eax        ; EAX=0xce2ffb0, "NLSRTL Version 11.2.0.1.0 - Production"
        jz      short loc_2CE12A7
        push    offset aXKqvvsnBuffer ; "x$kqvvsn buffer"
        push    eax             ; EAX=0xce2ffb0, "NLSRTL Version 11.2.0.1.0 - Production"
        mov     eax, [ebp+arg_C] ; [EBP+14h]=0x8a172b4
        push    eax             ; EAX=0x8a172b4
        push    dword ptr [edx+10494h] ; [EDX+10494h]=0xc98cd58
        call    _kghfrf         ; tracing nested maximum level (1) reached, skipping this
        CALL
        add     esp, 10h

loc_2CE12A7:                ; CODE XREF: _kqvrow_+1C1
        xor     eax, eax
        mov     esp, ebp
        pop     ebp
        retn                     ; EAX=0
_kqvrow_    endp

```

Now it is easy to see that row number is passed from outside of function. The function returns the string constructing it as follows:

String 1	Using vsnstr, vsnnum, vsnban global variables. Calling sprintf().
String 2	Calling kkvvsn().
String 3	Calling lmxver().
String 4	Calling npinli(), nrtnsvrs().
String 5	Calling lxvers().

That's how corresponding functions are called for determining each module's version.

58.2 X\$KSMLRU table in Oracle RDBMS

There is a mention of a special table in the *Diagnosing and Resolving Error ORA-04031 on the Shared Pool or Other Memory Pools* [Video] [ID 146599.1] note:

There is a fixed table called X\$KSMLRU that tracks allocations in the shared pool that cause other objects in the shared pool to be aged out. This fixed table can be used to identify what is causing the large allocation.

If many objects are being periodically flushed from the shared pool then this will cause response time problems and will likely cause library cache latch contention problems when the objects are reloaded into the shared pool.

One unusual thing about the X\$KSMLRU fixed table is that the contents of the fixed table are erased whenever someone selects from the fixed table. This is done since the fixed table stores only the largest allocations that have occurred. The values are reset after being selected so that subsequent large allocations can be noted even if they were not quite as large as others that occurred previously. Because of this resetting, the output of selecting from this table should be carefully kept since it cannot be retrieved back after the query is issued.

However, as it can be easily checked, this table's contents is cleared each time table querying. Are we able to find why? Let's back to tables we already know: kqftab and kqftap which were generated with oracle tables⁴ help, containing all information about X\$-tables, now we can see here, the ksmlrs() function is called to prepare this table's elements:

Listing 58.10: Result of oracle tables

```

kqftab_element.name: [X$KSMLRU] ?: [ksmlr] 0x4 0x64 0x11 0xc 0xffffc0bb 0x5
kqftap_param.name=[ADDR] ?: 0x917 0x0 0x0 0x0 0x4 0x0 0x0
kqftap_param.name=[INDX] ?: 0xb02 0x0 0x0 0x0 0x4 0x0 0x0

```

⁴http://yurichev.com/oracle_tables.html

```

kqftap_param.name=[INST_ID] ? : 0xb02 0x0 0x0 0x0 0x4 0x0 0x0
kqftap_param.name=[KSMLRIDX] ? : 0xb02 0x0 0x0 0x0 0x4 0x0 0x0
kqftap_param.name=[KSMLRDUR] ? : 0xb02 0x0 0x0 0x0 0x4 0x4 0x0
kqftap_param.name=[KSMLRSHRPOOL] ? : 0xb02 0x0 0x0 0x0 0x4 0x8 0x0
kqftap_param.name=[KSMLRCOM] ? : 0x501 0x0 0x0 0x0 0x14 0xc 0x0
kqftap_param.name=[KSMLRSIZ] ? : 0x2 0x0 0x0 0x0 0x4 0x20 0x0
kqftap_param.name=[KSMLRNUM] ? : 0x2 0x0 0x0 0x0 0x4 0x24 0x0
kqftap_param.name=[KSMLRHON] ? : 0x501 0x0 0x0 0x0 0x20 0x28 0x0
kqftap_param.name=[KSMLROHV] ? : 0xb02 0x0 0x0 0x0 0x4 0x48 0x0
kqftap_param.name=[KSMLRSES] ? : 0x17 0x0 0x0 0x0 0x4 0x4c 0x0
kqftap_param.name=[KSMLRADU] ? : 0x2 0x0 0x0 0x0 0x4 0x50 0x0
kqftap_param.name=[KSMLRNID] ? : 0x2 0x0 0x0 0x0 0x4 0x54 0x0
kqftap_param.name=[KSMLRNSD] ? : 0x2 0x0 0x0 0x0 0x4 0x58 0x0
kqftap_param.name=[KSMLRNCD] ? : 0x2 0x0 0x0 0x0 0x4 0x5c 0x0
kqftap_param.name=[KSMLRNED] ? : 0x2 0x0 0x0 0x0 0x4 0x60 0x0
kqftap_element.fn1=ksmlrs
kqftap_element.fn2=NULL

```

Indeed, with the [tracer](#) help it is easy to see this function is called each time we query the X\$KSMLRU table.

Here we see a references to the `ksmsplu_sp()` and `ksmsplu_jp()` functions, each of them call the `ksmsplu()` finally. At the end of the `ksmsplu()` function we see a call to the `memset()`:

Listing 58.11: ksm.o

```

...
.text:00434C50 loc_434C50:                                ; DATA XREF: .rdata:off_5E50EA8
.text:00434C50      mov     edx, [ebp-4]
.text:00434C53      mov     [eax], esi
.text:00434C55      mov     esi, [edi]
.text:00434C57      mov     [eax+4], esi
.text:00434C5A      mov     [edi], eax
.text:00434C5C      add     edx, 1
.text:00434C5F      mov     [ebp-4], edx
.text:00434C62      jnz     loc_434B7D
.text:00434C68      mov     ecx, [ebp+14h]
.text:00434C6B      mov     ebx, [ebp-10h]
.text:00434C6E      mov     esi, [ebp-0Ch]
.text:00434C71      mov     edi, [ebp-8]
.text:00434C74      lea     eax, [ecx+8Ch]
.text:00434C7A      push    370h                ; Size
.text:00434C7F      push    0                   ; Val
.text:00434C81      push    eax                 ; Dst
.text:00434C82      call    __intel_fast_memset
.text:00434C87      add     esp, 0Ch
.text:00434C8A      mov     esp, ebp
.text:00434C8C      pop     ebp
.text:00434C8D      retn
.text:00434C8D _ksmsplu      endp

```

Constructions like `memset (block, 0, size)` are often used just to zero memory block. What if we would take a risk, block `memset ()` call and see what will happen?

Let's run [tracer](#) with the following options: set breakpoint at 0x434C7A (the point where `memset ()` arguments are to be passed), thus, that [tracer](#) set program counter EIP at this point to the point where passed to the `memset ()` arguments are to be cleared (at 0x434C8A) It can be said, we just simulate an unconditional jump from the address 0x434C7A to 0x434C8A.

```
tracer -a:oracle.exe bpx=oracle.exe!0x00434C7A,set(eip,0x00434C8A)
```

(Important: all these addresses are valid only for win32-version of Oracle RDBMS 11.2)

Indeed, now we can query X\$KSMLRU table as many times as we want and it is not clearing anymore!

Do not try this at home ("MythBusters") Do not try this on your production servers.

It is probably not a very useful or desired system behaviour, but as an experiment of locating piece of code we need, that is perfectly suit our needs!

58.3 V\$TIMER table in Oracle RDBMS

V\$TIMER is another *fixed view*, reflecting a rapidly changing value:

V\$TIMER displays the elapsed time in hundredths of a second. Time is measured since the beginning of the epoch, which is operating system specific, and wraps around to 0 again whenever the value overflows four bytes (roughly 497 days).

(From Oracle RDBMS documentation ⁵)

It is interesting the periods are different for Oracle for win32 and for Linux. Will we able to find a function generating this value?

As we can see, this information is finally taken from X\$KSUTM table.

```
SQL> select * from V$FIXED_VIEW_DEFINITION where view_name='V$TIMER';
```

```
VIEW_NAME
```

```
VIEW_DEFINITION
```

```
V$TIMER
```

```
select HSECS from GV$TIMER where inst_id = USERENV('Instance')
```

```
SQL> select * from V$FIXED_VIEW_DEFINITION where view_name='GV$TIMER';
```

```
VIEW_NAME
```

```
VIEW_DEFINITION
```

```
GV$TIMER
```

```
select inst_id,ksutmtim from x$ksutm
```

Now we stuck in a small problem, there are no references to value generating function(s) in the tables kqftab/kqftap:

Listing 58.12: Result of oracle tables

```
kqftab_element.name: [X$KSUTM] ?: [ksutm] 0x1 0x4 0x4 0x0 0xffffc09b 0x3
kqftap_param.name=[ADDR] ?: 0x10917 0x0 0x0 0x0 0x4 0x0 0x0
kqftap_param.name=[INDX] ?: 0x20b02 0x0 0x0 0x0 0x4 0x0 0x0
kqftap_param.name=[INST_ID] ?: 0xb02 0x0 0x0 0x0 0x4 0x0 0x0
kqftap_param.name=[KSUTMTIM] ?: 0x1302 0x0 0x0 0x0 0x4 0x0 0x1e
kqftap_element.fn1=NULL
kqftap_element.fn2=NULL
```

Let's try to find a string KSUTMTIM, and we find it in this function:

```
kqfd_DRN_ksutm_c proc near ; DATA XREF: .rodata:0805B4E8
```

```
arg_0 = dword ptr 8
```

```
arg_8 = dword ptr 10h
```

```
arg_C = dword ptr 14h
```

```
push ebp
```

```
mov ebp, esp
```

```
push [ebp+arg_C]
```

```
push offset ksugtm
```

```
push offset _2__STRING_1263_0 ; "KSUTMTIM"
```

```
push [ebp+arg_8]
```

⁵http://docs.oracle.com/cd/B28359_01/server.111/b28320/dynviews_3104.htm

```

        push    [ebp+arg_0]
        call    kqfd_cfui_drain
        add     esp, 14h
        mov     esp, ebp
        pop     ebp
        retn
kqfd_DRN_ksutm_c endp

```

The function `kqfd_DRN_ksutm_c()` is mentioned in `kqfd_tab_registry_0` table:

```

dd offset _2__STRING_62_0 ; "X$KSUTM"
dd offset kqfd_OPN_ksutm_c
dd offset kqfd_tabl_fetch
dd 0
dd 0
dd offset kqfd_DRN_ksutm_c

```

There are is a function `ksugtm()` referenced here. Let's see what's in it (Linux x86):

Listing 58.13: `ksu.o`

```

ksugtm      proc near
var_1C      = byte ptr -1Ch
arg_4       = dword ptr  0Ch

        push    ebp
        mov     ebp, esp
        sub     esp, 1Ch
        lea     eax, [ebp+var_1C]
        push    eax
        call    slgcs
        pop     ecx
        mov     edx, [ebp+arg_4]
        mov     [edx], eax
        mov     eax, 4
        mov     esp, ebp
        pop     ebp
        retn
ksugtm      endp

```

Almost the same code in win32-version.

Is this the function we are looking for? Let's see:

```
tracer -a:oracle.exe bpf=oracle.exe!_ksugtm,args:2,dump_args:0x4
```

Let's try again:

```
SQL> select * from V$TIMER;
```

```

HSECS
-----

```

```
27294929
```

```
SQL> select * from V$TIMER;
```

```

HSECS
-----

```

```
27295006
```

```
SQL> select * from V$TIMER;
```

```

HSECS
-----

```

```
27295167
```

Listing 58.14: [tracer](#) output

```

TID=2428|(0) oracle.exe!_ksugtm (0x0, 0xd76c5f0) (called from oracle.exe!__VInfreq__qerfxFetch+0
    xfad (0x56bb6d5))
Argument 2/2
0D76C5F0: 38 C9                                "8."
TID=2428|(0) oracle.exe!_ksugtm () -> 0x4 (0x4)
Argument 2/2 difference
00000000: D1 7C A0 01                                ".|.."
TID=2428|(0) oracle.exe!_ksugtm (0x0, 0xd76c5f0) (called from oracle.exe!__VInfreq__qerfxFetch+0
    xfad (0x56bb6d5))
Argument 2/2
0D76C5F0: 38 C9                                "8."
TID=2428|(0) oracle.exe!_ksugtm () -> 0x4 (0x4)
Argument 2/2 difference
00000000: 1E 7D A0 01                                ".}.."
TID=2428|(0) oracle.exe!_ksugtm (0x0, 0xd76c5f0) (called from oracle.exe!__VInfreq__qerfxFetch+0
    xfad (0x56bb6d5))
Argument 2/2
0D76C5F0: 38 C9                                "8."
TID=2428|(0) oracle.exe!_ksugtm () -> 0x4 (0x4)
Argument 2/2 difference
00000000: BF 7D A0 01                                ".}.."

```

Indeed —the value is the same we see in SQL*Plus and it is returning via second argument.

Let's see what is in `slgcs()` (Linux x86):

```

slgcs      proc near
var_4      = dword ptr -4
arg_0      = dword ptr 8

    push    ebp
    mov     ebp, esp
    push    esi
    mov     [ebp+var_4], ebx
    mov     eax, [ebp+arg_0]
    call    $+5
    pop     ebx
    nop
    ; PIC mode
    mov     ebx, offset _GLOBAL_OFFSET_TABLE_
    mov     dword ptr [eax], 0
    call    sltrgtime64    ; PIC mode
    push    0
    push    0Ah
    push    edx
    push    eax
    call    __udivdi3    ; PIC mode
    mov     ebx, [ebp+var_4]
    add     esp, 10h
    mov     esp, ebp
    pop     ebp
    retn
slgcs      endp

```

(it is just a call to `sltrgtime64()` and division of its result by 10 ([14](#)))

And win32-version:

```

_slgcs      proc near                                ; CODE XREF: _dbgfigHtElResetCount+15
                                                    ; _dbgerRunActions+1528
    db      66h
    nop
    push    ebp

```

```

        mov     ebp, esp
        mov     eax, [ebp+8]
        mov     dword ptr [eax], 0
        call    ds:__imp__GetTickCount@0 ; GetTickCount()
        mov     edx, eax
        mov     eax, 0CCCCCCCdh
        mul     edx
        shr     edx, 3
        mov     eax, edx
        mov     esp, ebp
        pop     ebp
        retn
_slgcs    endp

```

It is just result of `GetTickCount()` ⁶ divided by 10 (14).

Voilà! That's why win32-version and Linux x86 version show different results, just because they are generated by different OS functions.

Drain apparently means *connecting* specific table column to specific function.

I added the table `kqfd_tab_registry_0` to oracle tables⁷, now we can see, how table column's variables are *connected* to specific functions:

```

[X$KSUTM] [kqfd_OPN_ksutm_c] [kqfd_tabl_fetch] [NULL] [NULL] [kqfd_DRN_ksutm_c]
[X$KSUSGIF] [kqfd_OPN_ksusg_c] [kqfd_tabl_fetch] [NULL] [NULL] [kqfd_DRN_ksusg_c]

```

OPN, apparently, *open*, and *DRN*, apparently, meaning *drain*.

⁶[http://msdn.microsoft.com/en-us/library/windows/desktop/ms724408\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms724408(v=vs.85).aspx)

⁷http://yurichev.com/oracle_tables.html

Chapter 59

Handwritten assembly code

59.1 EICAR test file

This .COM-file is intended for antivirus testing, it is possible to run in MS-DOS and it will print string: “EICAR-STANDARD-ANTIVIRUS-TEST-FILE!”¹.

Its important property is that it's entirely consisting of printable ASCII-symbols, which, in turn, makes possible to create it in any text editor:

```
X50!P%@AP[4\PZX54(P^)7CC)7}$EICAR-STANDARD-ANTIVIRUS-TEST-FILE!$H+H*
```

Let's decompile it:

```
; initial conditions: SP=0FFFEh, SS:[SP]=0
0100 58          pop      ax
; AX=0, SP=0
0101 35 4F 21     xor      ax, 214Fh
; AX = 214Fh and SP = 0
0104 50          push     ax
; AX = 214Fh, SP = FFFEh and SS:[FFFE] = 214Fh
0105 25 40 41     and      ax, 4140h
; AX = 140h, SP = FFFEh and SS:[FFFE] = 214Fh
0108 50          push     ax
; AX = 140h, SP = FFFCh, SS:[FFFC] = 140h and SS:[FFFE] = 214Fh
0109 5B          pop      bx
; AX = 140h, BX = 140h, SP = FFFEh and SS:[FFFE] = 214Fh
010A 34 5C        xor      al, 5Ch
; AX = 11Ch, BX = 140h, SP = FFFEh and SS:[FFFE] = 214Fh
010C 50          push     ax
010D 5A          pop      dx
; AX = 11Ch, BX = 140h, DX = 11Ch, SP = FFFEh and SS:[FFFE] = 214Fh
010E 58          pop      ax
; AX = 214Fh, BX = 140h, DX = 11Ch and SP = 0
010F 35 34 28     xor      ax, 2834h
; AX = 97Bh, BX = 140h, DX = 11Ch and SP = 0
0112 50          push     ax
0113 5E          pop      si
; AX = 97Bh, BX = 140h, DX = 11Ch, SI = 97Bh and SP = 0
0114 29 37        sub      [bx], si
0116 43          inc      bx
0117 43          inc      bx
0118 29 37        sub      [bx], si
011A 7D 24        jge      short near ptr word_10140
011C 45 49 43 ...  db 'EICAR-STANDARD-ANTIVIRUS-TEST-FILE!$'
0140 48 2B word_10140 dw 2B48h ; CD 21 (INT 21) will be here
0142 48 2A        dw 2A48h ; CD 20 (INT 20) will be here
0144 0D          db 0Dh
0145 0A          db 0Ah
```

¹https://en.wikipedia.org/wiki/EICAR_test_file

I added comments about registers and stack after each instruction.
Essentially, all these instructions are here only to execute this code:

```
B4 09      MOV AH, 9
BA 1C 01   MOV DX, 11Ch
CD 21      INT 21h
CD 20      INT 20h
```

INT 21h with 9th function (passed in AH) just prints a string, address of which is passed in DS:DX. By the way, the string should be terminated with '\$' sign. Apparently, it's inherited from [CP/M](#) and this function was leaved in DOS for compatibility. INT 20h exits to DOS.

But as we can see, these instruction's opcodes are not strictly printable. So the main part of EICAR-file is:

- preparing register (AH and DX) values we need;
- preparing INT 21 and INT 20 opcodes in memory;
- executing INT 21 and INT 20.

By the way, this technique is widely used in shellcode constructing, when one need to pass x86-code in the string form. Here is also a list of all x86 instructions which has printable opcodes: [80.6.6](#).

Chapter 60


Demos

Demos (or demomaking) was an excellent exercise in mathematics, computer graphics programming and very tight x86 hand coding.

60.1 10 PRINT CHR\$(205.5+RND(1)); : GOTO 10

All examples here are MS-DOS .COM files.

In [9] we can read about one of the most simplest possible random maze generators. It just prints slash or backslash character randomly and endlessly, resulting something like:

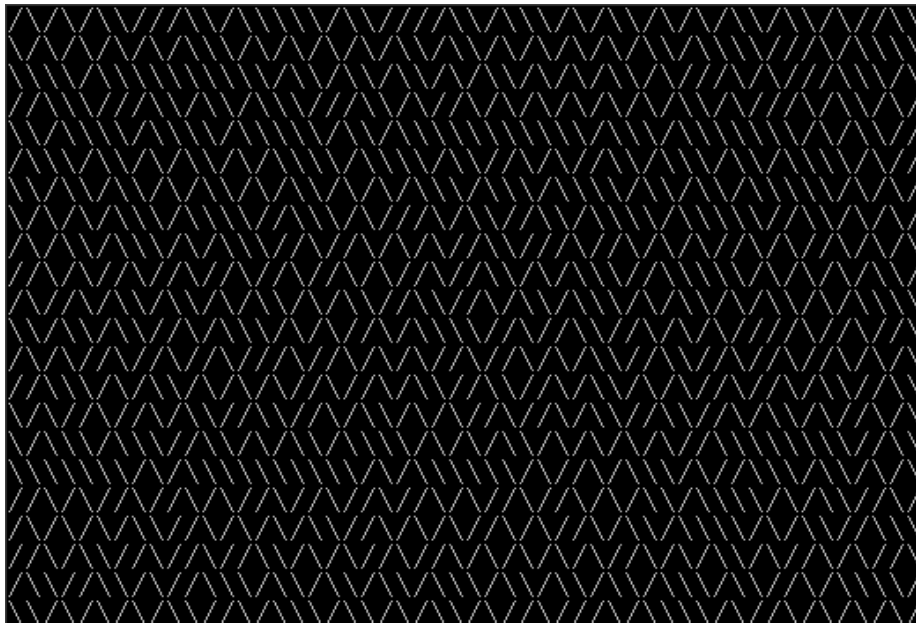

There are some known implementations for 16-bit x86.

60.1.1 Trixter's 42 byte version

The listing taken from his website¹, but comments are mine.

```
00000000: B001      mov      al,1          ; set 40x25 videomode
00000002: CD10      int      010
00000004: 30FF      xor      bh,bh        ; set videopage for int 10h call
00000006: B9D007    mov      cx,007D0       ; 2000 characters to output
00000009: 31C0      xor      ax,ax
0000000B: 9C        pushf                ; push flags
; get random value from timer chip
0000000C: FA        cli                  ; disable interrupts
0000000D: E643      out      043,al       ; write 0 to port 43h
```

¹<http://trixter.oldskool.org/2012/12/17/maze-generation-in-thirteen-bytes/>

```

; read 16-bit value from port 40h
0000000F: E440      in      al,040
00000011: 88C4      mov      ah,al
00000013: E440      in      al,040
00000015: 9D        popf                     ; enable interrupts by restoring IF flag
00000016: 86C4      xchg      ah,al
; here we have 16-bit pseudorandom value
00000018: D1E8      shr      ax,1
0000001A: D1E8      shr      ax,1
; CF currently have second bit from the value
0000001C: B05C      mov      al,05C ;'\
; if CF=1, skip the next instruction
0000001E: 7202      jc      00000022
; if CF=0, reload AL register with another character
00000020: B02F      mov      al,02F ;'/'
; output character
00000022: B40E      mov      ah,00E
00000024: CD10      int      010
00000026: E2E1      loop     00000009 ; loop 2000 times
00000028: CD20      int      020      ; exit to DOS

```

Pseudo-random value here is in fact the time passed from the system boot, taken from 8253 time chip, the value increases by one 18.2 times per second.

By writing zero to port 43h, we mean the command is "select counter 0", "counter latch", "binary counter" (not BCD² value).

Interrupts enabled back with POPF instruction, which restores IF flag as well.

It is not possible to use IN instruction with other registers instead of AL, hence that shuffling.

60.1.2 My attempt to reduce Trixter's version: 27 bytes

We can say that since we use timer not to get precise time value, but pseudo-random one, so we may not spent time (and code) to disable interrupts. Another thing we might say that we need only bit from a low 8-bit part, so let's read only it.

I reduced the code slightly and I've got 27 bytes:

```

00000000: B9D007      mov      cx,007D0 ; limit output to 2000 characters
00000003: 31C0      xor      ax,ax ; command to timer chip
00000005: E643      out      043,al
00000007: E440      in      al,040 ; read 8-bit of timer
00000009: D1E8      shr      ax,1 ; get second bit to CF flag
0000000B: D1E8      shr      ax,1
0000000D: B05C      mov      al,05C ; prepare '\
0000000F: 7202      jc      00000013
00000011: B02F      mov      al,02F ; prepare '/'
; output character to screen
00000013: B40E      mov      ah,00E
00000015: CD10      int      010
00000017: E2EA      loop     00000003
; exit to DOS
00000019: CD20      int      020

```

60.1.3 Take a random memory garbage as a source of randomness

Since it is MS-DOS, there are no memory protection at all, we can read from whatever address. Even more than that: simple LODSB instruction will read byte from DS:SI address, but it's not a problem if register values are not setted up, let it read 1) random bytes; 2) from random memory place!

So it is suggested in Trixter webpage³ to use LODSB without any setup.

It is also suggested that SCASB instruction can be used instead, because it sets flag according to the byte it read.

Another idea to minimize code is to use INT 29h DOS syscall, which just prints character stored in AL register.

²Binary-coded decimal

³<http://trixter.oldschool.org/2012/12/17/maze-generation-in-thirteen-bytes/>

That is what Peter Ferrie and Andrey “herm1t” Baranovich did (11 and 10 bytes) ⁴:

Listing 60.1: Andrey “herm1t” Baranovich: 11 bytes

```
00000000: B05C      mov     al,05C    ;'\ '
; read AL byte from random place of memory
00000002: AE        scasb
; PF = parity(AL - random_memory_byte) = parity(5Ch - random_memory_byte)
00000003: 7A02      jp      00000007
00000005: B02F      mov     al,02F    ;'/'
00000007: CD29      int      029      ; output AL to screen
00000009: EBF5      jmp     00000000 ; loop endlessly
```

SCASB also use value in AL register, it subtract random memory byte value from 5Ch value in AL. JP is rare instruction, here it used for checking parity flag (PF), which is generated by the formulae in the listing. As a consequence, the output character is determined not by some bit in random memory byte, but by sum of bits, this (hoperfully) makes result more distributed.

It is possible to make this even shorter by using undocumented x86 instruction SALC (AKA SETALC) (“Set AL CF”). It was introduced in NEC V20 CPU and sets AL to 0xFF if CF is 1 or to 0 if otherwise. So this code will not run on 8086/8088.

Listing 60.2: Peter Ferrie: 10 bytes

```
; AL is random at this point
00000000: AE        scasb
; CF is set accoring subtracting random memory byte from AL.
; so it is somewhat random at this point
00000001: D6        setalc
; AL is set to 0xFF if CF=1 or to 0 if otherwise
00000002: 242D      and     al,02D    ;'- '
; AL here is 0x2D or 0
00000004: 042F      add     al,02F    ;'/'
; AL here is 0x5C or 0x2F
00000006: CD29      int      029      ; output AL to screen
00000008: EBF6      jmps    00000000 ; loop endlessly
```

So it is possible to get rid of conditional jumps at all. The ASCII⁵ code of backslash (“\”) is 0x5C and 0x2F for slash (“/”). So we need to convert one (pseudo-random) bit in CF flag to 0x5C or 0x2F value.

This is done easily: by AND-ing all bits in AL (where all 8 bits are set or cleared) with 0x2D we have just 0 or 0x2D. By adding 0x2F to this value, we get 0x5C or 0x2F. Then just ouptut it to screen.

60.1.4 Conclusion

It is also worth adding that result may be different in DOSBox, Windows NT and even MS-DOS, due to different conditions: timer chip may be emulated differently, initial register contents may be different as well.

⁴<http://pferrie.host22.com/misc/10print.htm>

⁵American Standard Code for Information Interchange

Part VIII

Other things

Chapter 61

npad

It is an assembly language macro for label aligning by a specific border.

That's often need for the busy labels to where control flow is often passed, e.g., loop body begin. So the CPU will effectively load data or code from the memory, through memory bus, cache lines, etc.

Taken from `listing.inc` (MSVC):

By the way, it is curious example of different NOP variations. All these instructions has no effects whatsoever, but has different size.

```
;; LISTING.INC
;;
;; This file contains assembler macros and is included by the files created
;; with the -FA compiler switch to be assembled by MASM (Microsoft Macro
;; Assembler).
;;
;; Copyright (c) 1993-2003, Microsoft Corporation. All rights reserved.

;; non destructive nops
npad macro size
if size eq 1
    nop
else
    if size eq 2
        mov edi, edi
    else
        if size eq 3
            ; lea ecx, [ecx+00]
            DB 8DH, 49H, 00H
        else
            if size eq 4
                ; lea esp, [esp+00]
                DB 8DH, 64H, 24H, 00H
            else
                if size eq 5
                    add eax, DWORD PTR 0
                else
                    if size eq 6
                        ; lea ebx, [ebx+00000000]
                        DB 8DH, 9BH, 00H, 00H, 00H, 00H
                    else
                        if size eq 7
                            ; lea esp, [esp+00000000]
                            DB 8DH, 0A4H, 24H, 00H, 00H, 00H, 00H
                        else
                            if size eq 8
                                ; jmp .+8; .npad 6
                                DB 0EBH, 06H, 8DH, 9BH, 00H, 00H, 00H, 00H
                            else
                                if size eq 9
```

[illegible]

Chapter 62

Compiler intrinsic

A function specific to a compiler which is not usual library function. Compiler generate a specific machine code instead of call to it. It is often a pseudofunction for specific [CPU](#) instruction.

For example, there are no cyclic shift operations in C/C++ languages, but present in most [CPUs](#). For programmer's convenience, at least MSVC has pseudofunctions `_rotl()` and `_rotr()`¹ which are translated by compiler directly to the ROL/ROR x86 instructions.

Another example are functions enabling to generate SSE-instructions right in the code.

Full list of MSVC intrinsics: <http://msdn.microsoft.com/en-us/library/26td21ds.aspx>.

¹<http://msdn.microsoft.com/en-us/library/5cc576c4.aspx>

Chapter 63

Compiler's anomalies

Intel C++ 10.1, which was used for Oracle RDBMS 11.2 Linux86 compilation, may emit two JZ in row, and there are no references to the second JZ. Second JZ is thus senseless.

Listing 63.1: kdli.o from libserver11.a

```
.text:08114CF1          loc_8114CF1:                                ; CODE XREF:
    __PGOSF539_kdlimemSer+89A
.text:08114CF1          ; __PGOSF539_kdlimemSer
    +3994
.text:08114CF1 8B 45 08          mov     eax, [ebp+arg_0]
.text:08114CF4 0F B6 50 14      movzx   edx, byte ptr [eax+14h]
.text:08114CF8 F6 C2 01          test    dl, 1
.text:08114CFB 0F 85 17 08 00 00 jnz     loc_8115518
.text:08114D01 85 C9            test    ecx, ecx
.text:08114D03 0F 84 8A 00 00 00 jz      loc_8114D93
.text:08114D09 0F 84 09 08 00 00 jz      loc_8115518
.text:08114D0F 8B 53 08          mov     edx, [ebx+8]
.text:08114D12 89 55 FC          mov     [ebp+var_4], edx
.text:08114D15 31 C0            xor     eax, eax
.text:08114D17 89 45 F4          mov     [ebp+var_C], eax
.text:08114D1A 50              push    eax
.text:08114D1B 52              push    edx
.text:08114D1C E8 03 54 00 00      call    len2nbytes
.text:08114D21 83 C4 08          add     esp, 8
```

Listing 63.2: from the same code

```
.text:0811A2A5          loc_811A2A5:                                ; CODE XREF:
    kdliSerLengths+11C
.text:0811A2A5          ; kdliSerLengths+1C1
.text:0811A2A5 8B 7D 08          mov     edi, [ebp+arg_0]
.text:0811A2A8 8B 7F 10          mov     edi, [edi+10h]
.text:0811A2AB 0F B6 57 14      movzx   edx, byte ptr [edi+14h]
.text:0811A2AF F6 C2 01          test    dl, 1
.text:0811A2B2 75 3E            jnz     short loc_811A2F2
.text:0811A2B4 83 E0 01          and     eax, 1
.text:0811A2B7 74 1F            jz      short loc_811A2D8
.text:0811A2B9 74 37            jz      short loc_811A2F2
.text:0811A2BB 6A 00            push    0
.text:0811A2BD FF 71 08          push    dword ptr [ecx+8]
.text:0811A2C0 E8 5F FE FF FF      call    len2nbytes
```

It is probably code generator bug was not found by tests, because, resulting code is working correctly anyway.

Another compiler anomaly I described here ([17.2.4](#)).

I demonstrate such cases here, so to understand that such compilers errors are possible and sometimes one should not to rack one's brain and think why compiler generated such strange code.

Chapter 64

OpenMP

OpenMP is one of the simplest ways to parallelize simple algorithm.

As an example, let's try to build a program to compute cryptographic *nonce*. In my simplistic example, *nonce* is a number added to the plain unencrypted text in order to produce hash with some specific feature. For example, at some step, Bitcoin protocol require to find a such *nonce* so resulting hash will contain specific number of running zeroes. This is also called “proof of work”¹ (i.e., system prove it did some intensive calculations and spent some time for it).

My example is not related to Bitcoin, it will try to add a numbers to the “hello, world!_” string in order to find such number when “hello, world!_<number>” will contain at least 3 zero bytes after hashing this string by SHA512 algorithm.

Let's limit our brute-force to the interval in 0..INT32_MAX-1 (i.e., 0x7FFFFFFE or 2147483646).

The algorithm is pretty straightforward:

```
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <time.h>
#include "sha512.h"

int found=0;
int32_t checked=0;

int32_t* __min;
int32_t* __max;

time_t start;

#ifdef __GNUC__
#define min(X,Y) ((X) < (Y) ? (X) : (Y))
#define max(X,Y) ((X) > (Y) ? (X) : (Y))
#endif

void check_nonce (int32_t nonce)
{
    uint8_t buf[32];
    struct sha512_ctx ctx;
    uint8_t res[64];

    // update statistics
    int t=omp_get_thread_num();

    if (__min[t]==-1)
        __min[t]=nonce;
    if (__max[t]==-1)
        __max[t]=nonce;

    __min[t]=min(__min[t], nonce);
    __max[t]=max(__max[t], nonce);
}
```

¹https://en.wikipedia.org/wiki/Proof-of-work_system

```

// idle if valid nonce found
if (found)
    return;

memset (buf, 0, sizeof(buf));
sprintf (buf, "hello, world!_%d", nonce);

sha512_init_ctx (&ctx);
sha512_process_bytes (buf, strlen(buf), &ctx);
sha512_finish_ctx (&ctx, &res);
if (res[0]==0 && res[1]==0 && res[2]==0)
{
    printf ("found (thread %d): [%s]. seconds spent=%d\n", t, buf, time(NULL)-start);
    found=1;
};
#pragma omp atomic
checked++;

#pragma omp critical
if ((checked % 100000)==0)
    printf ("checked=%d\n", checked);
};

int main()
{
    int32_t i;
    int threads=omp_get_max_threads();
    printf ("threads=%d\n", threads);

    __min=(int32_t*)malloc(threads*sizeof(int32_t));
    __max=(int32_t*)malloc(threads*sizeof(int32_t));
    for (i=0; i<threads; i++)
        __min[i]=__max[i]=-1;

    start=time(NULL);

    #pragma omp parallel for
    for (i=0; i<INT32_MAX; i++)
        check_nonce (i);

    for (i=0; i<threads; i++)
        printf ("__min[%d]=0x%08x __max[%d]=0x%08x\n", i, __min[i], i, __max[i]);

    free(__min); free(__max);
};

```

check_nonce() function is just add a number to the string, hashes it by SHA512 and checks for 3 zero bytes in the result. Very important part of the code is:

```

#pragma omp parallel for
for (i=0; i<INT32_MAX; i++)
    check_nonce (i);

```

Yes, that simple, without #pragma we just call check_nonce() for each number from 0 to INT32_MAX (0x7fffffff or 2147483647). With #pragma, a compiler adds a special code which will slice the loop interval to smaller intervals, to run them by all CPU cores available².

The example may be compiled³ in MSVC 2012:

```
cl openmp_example.c sha512.obj /openmp /O1 /Zi /Faopenmp_example.asm
```

²N.B.: I intentionally demonstrate here simplest possible example, but in practice, usage of OpenMP may be harder and more complex

³sha512.c(h) and u64.h files can be taken from the OpenSSL library: <http://www.openssl.org/source/>

Or in GCC:

```
gcc -fopenmp 2.c sha512.c -S -masm=intel
```

64.1 MSVC

Now that's how MSVC 2012 generates main loop:

Listing 64.1: MSVC 2012

```
push    OFFSET _main$omp$1
push    0
push    1
call    __vcomp_fork
add     esp, 16                      ; 00000010H
```

All functions prefixed by `vcomp` are OpenMP-related and stored in the `vcomp*.dll` file. So here is a group of threads are started.

Let's take a look on `_main$omp$1`:

Listing 64.2: MSVC 2012

```
$T1 = -8                      ; size = 4
$T2 = -4                      ; size = 4
_main$omp$1 PROC              ; COMDAT
    push    ebp
    mov     ebp, esp
    push    ecx
    push    ecx
    push    esi
    lea     eax, DWORD PTR $T2[ebp]
    push    eax
    lea     eax, DWORD PTR $T1[ebp]
    push    eax
    push    1
    push    1
    push    2147483646          ; 7fffffffH
    push    0
    call    __vcomp_for_static_simple_init
    mov     esi, DWORD PTR $T1[ebp]
    add     esp, 24             ; 00000018H
    jmp     SHORT $LN6@main$omp$1
$LL2@main$omp$1:
    push    esi
    call    _check_nonce
    pop     ecx
    inc     esi
$LN6@main$omp$1:
    cmp     esi, DWORD PTR $T2[ebp]
    jle     SHORT $LL2@main$omp$1
    call    __vcomp_for_static_end
    pop     esi
    leave
    ret     0
_main$omp$1 ENDP
```

This function will be started n times in parallel, where n is number of CPU cores. `vcomp_for_static_simple_init()` is calculating interval for the `for()` construct for the current thread, depending on the current thread number. Loop begin and end values are stored in `$T1` and `$T2` local variables. You may also notice `7fffffffh` (or `2147483646`) as an argument to the `vcomp_for_static_simple_init()` function—this is a number of iterations of the whole loop to be divided evenly.

Then we see a new loop with a call to `check_nonce()` function which do all work.

I also added some code in the beginning of `check_nonce()` function to gather statistics, with which arguments the function was called.

This is what we see while run it:

```
threads=4
...
checked=2800000
checked=3000000
checked=3200000
checked=3300000
found (thread 3): [hello, world!_1611446522]. seconds spent=3
__min[0]=0x00000000 __max[0]=0xffffffff
__min[1]=0x20000000 __max[1]=0x3fffffff
__min[2]=0x40000000 __max[2]=0x5fffffff
__min[3]=0x60000000 __max[3]=0x7fffffff
```

Yes, result is correct, first 3 bytes are zeroes:

```
C:\...\sha512sum test
000000
f4a8fac5a4ed38794da4c1e39f54279ad5d9bb3c5465cdf57adaf60403df6e3fe6019f5764fc9975e505a7395fed78
0fee50eb38dd4c0279cb114672e2 *test
```

Running time is ≈ 2.3 seconds on my 4-core Intel Xeon E3-1220 3.10 GHz. In the task manager I see 5 threads: 1 main thread + 4 more started. I did not any further optimizations to keep my example as small and clear as possible. But probably it can be done much faster. My [CPU](#) has 4 cores, that is why OpenMP started exactly 4 threads.

By looking at the statistics table we can clearly see how loop was finely sliced by 4 even parts. Oh well, almost even, if not to consider the last bit.

There are also pragmas for [atomic operations](#).

Let's see how this code is compiled:

```
#pragma omp atomic
checked++;

#pragma omp critical
if ((checked % 100000)==0)
    printf ("checked=%d\n", checked);
```

Listing 64.3: MSVC 2012

```
push    edi
push    OFFSET _checked
call    __vcomp_atomic_add_i4
; Line 55
push    OFFSET _$vcomp$critsect$
call    __vcomp_enter_critsect
add     esp, 12                ; 0000000cH
; Line 56
mov     ecx, DWORD PTR _checked
mov     eax, ecx
cdq
mov     esi, 100000            ; 000186a0H
idiv    esi
test    edx, edx
jne     SHORT $LN1@check_nonc
; Line 57
push    ecx
push    OFFSET ??_C@_OM@NPNHLI00@checked?$DN?$CFd?6?$AA@
call    _printf
pop     ecx
pop     ecx
$LN1@check_nonc:
push    DWORD PTR _$vcomp$critsect$
call    __vcomp_leave_critsect
```

pop	ecx
-----	-----

As it turns out, `vcomp_atomic_add_i4()` function in the `vcomp*.dll` is just a tiny function having `LOCK XADD` instruction⁴.

`vcomp_enter_critsect()` eventually calling win32 API function `EnterCriticalSection()` ⁵.

64.2 GCC

GCC 4.8.1 produces the program which shows exactly the same statistics table, so, GCC implementation divides the loop by parts in the same fashion.

Listing 64.4: GCC 4.8.1

```
mov    edi, OFFSET FLAT:main._omp_fn.0
call   GOMP_parallel_start
mov    edi, 0
call   main._omp_fn.0
call   GOMP_parallel_end
```

Unlike MSVC implementation, what GCC code is doing is starting 3 threads, but also runs fourth in the current thread. So there will be 4 threads instead of 5 as in MSVC.

Here is a `main._omp_fn.0` function:

Listing 64.5: GCC 4.8.1

```
main._omp_fn.0:
    push    rbp
    mov     rbp, rsp
    push    rbx
    sub     rsp, 40
    mov     QWORD PTR [rbp-40], rdi
    call    omp_get_num_threads
    mov     ebx, eax
    call    omp_get_thread_num
    mov     esi, eax
    mov     eax, 2147483647 ; 0x7FFFFFFF
    cdq
    idiv    ebx
    mov     ecx, eax
    mov     eax, 2147483647 ; 0x7FFFFFFF
    cdq
    idiv    ebx
    mov     eax, edx
    cmp     esi, eax
    jl      .L15
.L18:
    imul    esi, ecx
    mov     edx, esi
    add     eax, edx
    lea     ebx, [rax+rcx]
    cmp     eax, ebx
    jge     .L14
    mov     DWORD PTR [rbp-20], eax
.L17:
    mov     eax, DWORD PTR [rbp-20]
    mov     edi, eax
    call    check_nonce
    add     DWORD PTR [rbp-20], 1
    cmp     DWORD PTR [rbp-20], ebx
    jl      .L17
    jl      .L17
```

⁴Read more about LOCK prefix: [80.6.1](#)

⁵Read more about critical sections here: [50.4](#)

```

        jmp     .L14
.L15:
        mov     eax, 0
        add     ecx, 1
        jmp     .L18
.L14:
        add     rsp, 40
        pop     rbx
        pop     rbp
        ret

```

Here we see that division clearly: by calling to `omp_get_num_threads()` and `omp_get_thread_num()` we got number of threads running, and also current thread number, and then determine loop interval. Then run `check_nonce()`.

GCC also inserted `LOCK ADD` instruction right in the code, where MSVC generated call to separate DLL function:

Listing 64.6: GCC 4.8.1

```

        lock add     DWORD PTR checked[rip], 1
        call     GOMP_critical_start
        mov     ecx, DWORD PTR checked[rip]
        mov     edx, 351843721
        mov     eax, ecx
        imul    edx
        sar     edx, 13
        mov     eax, ecx
        sar     eax, 31
        sub     edx, eax
        mov     eax, edx
        imul    eax, eax, 100000
        sub     ecx, eax
        mov     eax, ecx
        test    eax, eax
        jne     .L7
        mov     eax, DWORD PTR checked[rip]
        mov     esi, eax
        mov     edi, OFFSET FLAT:.LC2 ; "checked=%d\n"
        mov     eax, 0
        call    printf
.L7:
        call    GOMP_critical_end

```

Functions prefixed with GOMP are from GNU OpenMP library. Unlike `vcomp*.dll`, its sources are freely available: <https://github.com/mirrors/gcc/tree/master/libgomp>.

Chapter 65

Itanium

Although almost failed, another very interesting architecture is Intel Itanium (IA64). While OOE¹ CPUs decides how to rearrange instructions and execute them in parallel, EPIC² was an attempt to shift these decisions to the compiler: to let it group instructions at the compile stage.

This result in notoriously complex compilers.

Here is one sample of IA64 code: simple cryptoalgorithm from Linux kernel:

Listing 65.1: Linux kernel 3.2.0.4

```
#define TEA_ROUNDS          32
#define TEA_DELTA           0x9e3779b9

static void tea_encrypt(struct crypto_tfm *tfm, u8 *dst, const u8 *src)
{
    u32 y, z, n, sum = 0;
    u32 k0, k1, k2, k3;
    struct tea_ctx *ctx = crypto_tfm_ctx(tfm);
    const __le32 *in = (const __le32 *)src;
    __le32 *out = (__le32 *)dst;

    y = le32_to_cpu(in[0]);
    z = le32_to_cpu(in[1]);

    k0 = ctx->KEY[0];
    k1 = ctx->KEY[1];
    k2 = ctx->KEY[2];
    k3 = ctx->KEY[3];

    n = TEA_ROUNDS;

    while (n-- > 0) {
        sum += TEA_DELTA;
        y += ((z << 4) + k0) ^ (z + sum) ^ ((z >> 5) + k1);
        z += ((y << 4) + k2) ^ (y + sum) ^ ((y >> 5) + k3);
    }

    out[0] = cpu_to_le32(y);
    out[1] = cpu_to_le32(z);
}
```

Here is how it was compiled:

Listing 65.2: Linux Kernel 3.2.0.4 for Itanium 2 (McKinley)

```
0090|                                tea_encrypt:
0090|08 80 80 41 00 21                adds r16 = 96, r32                // ptr to ctx->KEY
    | [2]
```

¹Out-of-order execution

²Explicitly parallel instruction computing

0096 80 C0 82 00 42 00	adds r8 = 88, r32	// ptr to ctx->KEY
[0]		
009C 00 00 04 00	nop.i 0	
00A0 09 18 70 41 00 21	adds r3 = 92, r32	// ptr to ctx->KEY
[1]		
00A6 F0 20 88 20 28 00	ld4 r15 = [r34], 4	// load z
00AC 44 06 01 84	adds r32 = 100, r32;;	// ptr to ctx->KEY
[3]		
00B0 08 98 00 20 10 10	ld4 r19 = [r16]	// r19=k2
00B6 00 01 00 00 42 40	mov r16 = r0	// r0 always
contain zero		
00BC 00 08 CA 00	mov.i r2 = ar.lc	// save lc
register		
00C0 05 70 00 44 10 10 9E FF FF FF 7F 20	ld4 r14 = [r34]	// load y
00CC 92 F3 CE 6B	movl r17 = 0xFFFFFFFF9E3779B9;;	// TEA_DELTA
00D0 08 00 00 00 01 00	nop.m 0	
00D6 50 01 20 20 20 00	ld4 r21 = [r8]	// r21=k0
00DC F0 09 2A 00	mov.i ar.lc = 31	// TEA_ROUNDS is
32		
00E0 0A A0 00 06 10 10	ld4 r20 = [r3];;	// r20=k1
00E6 20 01 80 20 20 00	ld4 r18 = [r32]	// r18=k3
00EC 00 00 04 00	nop.i 0	
00F0		
00F0	loc_F0:	
00F0 09 80 40 22 00 20	add r16 = r16, r17	// r16=sum, r17=
TEA_DELTA		
00F6 D0 71 54 26 40 80	shladd r29 = r14, 4, r21	// r14=y, r21=k0
00FC A3 70 68 52	extr.u r28 = r14, 5, 27;;	
0100 03 F0 40 1C 00 20	add r30 = r16, r14	
0106 B0 E1 50 00 40 40	add r27 = r28, r20;;	// r20=k1
010C D3 F1 3C 80	xor r26 = r29, r30;;	
0110 0B C8 6C 34 0F 20	xor r25 = r27, r26;;	
0116 F0 78 64 00 40 00	add r15 = r15, r25	// r15=z
011C 00 00 04 00	nop.i 0;;	
0120 00 00 00 00 01 00	nop.m 0	
0126 80 51 3C 34 29 60	extr.u r24 = r15, 5, 27	
012C F1 98 4C 80	shladd r11 = r15, 4, r19	// r19=k2
0130 0B B8 3C 20 00 20	add r23 = r15, r16;;	
0136 A0 C0 48 00 40 00	add r10 = r24, r18	// r18=k3
013C 00 00 04 00	nop.i 0;;	
0140 0B 48 28 16 0F 20	xor r9 = r10, r11;;	
0146 60 B9 24 1E 40 00	xor r22 = r23, r9	
014C 00 00 04 00	nop.i 0;;	
0150 11 00 00 00 01 00	nop.m 0	
0156 E0 70 58 00 40 A0	add r14 = r14, r22	
015C A0 FF FF 48	br.cloop.sptk.few loc_F0;;	
0160 09 20 3C 42 90 15	st4 [r33] = r15, 4	// store z
0166 00 00 00 02 00 00	nop.m 0	
016C 20 08 AA 00	mov.i ar.lc = r2;;	// restore lc
register		
0170 11 00 38 42 90 11	st4 [r33] = r14	// store y
0176 00 00 00 02 00 80	nop.i 0	
017C 08 00 84 00	br.ret.sptk.many b0;;	

First of all, all IA64 instructions are grouped into 3-instruction bundles. Each bundle has size of 16 bytes and consists of template code + 3 instructions. IDA shows bundles into 6+6+4 bytes—you may easily spot the pattern.

All 3 instructions from each bundle usually executes simultaneously, unless one of instructions have “stop bit”.

Supposedly, Intel and HP engineers gathered statistics of most occurred instruction patterns and decided to bring bundle types (AKA “templates”): a bundle code defines instruction types in the bundle. There are 12 of them. For example, zeroth bundle type is MII, meaning: first instruction is Memory (load or store), second and third are I (integer instructions). Another example is bundle type 0x1d: MFB: first instruction is Memory (load or store), second is Float (FPU instruction), third is Branch

(branch instruction).

If compiler cannot pick suitable instruction to relevant bundle slot, it may insert **NOP**: you may see here `nop.i` instructions (**NOP** at the place where integer instruction might be) or `nop.m` (a memory instruction might be at this slot). **NOPs** are inserted automatically when one use assembly language manually.

And that is not all. Bundles are also grouped. Each bundle may have “stop bit”, so all the consecutive bundles with terminating bundle which have “stop bit” may be executed simultaneously. In practice, Itanium 2 may execute 2 bundles at once, resulting execution of 6 instructions at once.

So all instructions inside bundle and bundle group cannot interfere with each other (i.e., should not have data hazards). If they do, results will be undefined.

Each stop bit is marked in assembly language as `;;` (two semicolons) after instruction. So, instructions at [180-19c] may be executed simultaneously: they do not interfere. Next group is [1a0-1bc].

We also see a stop bit at 22c. The next instruction at 230 have stop bit too. This mean, this instruction is to be executed as isolated from all others (as in **CISC**). Indeed: the next instruction at 236 use result from it (value in register r10), so they cannot be executed at the same time. Apparently, compiler was not able to find a better way to parallelize instructions, which is, in other words, to load **CPU** as much as possible, hence too much stop bits and **NOPs**. Manual assembly programming is tedious job as well: programmer should group instructions manually.

Programmer is still able to add stop-bits to each instructions, but this will degrade all performance Itanium was made for.

Interesting examples of manual **IA64** assembly code can be found in Linux kernel sources:

<http://lxr.free-electrons.com/source/arch/ia64/lib/>.

Another introductory Itanium assembly paper: [5].

Another very interesting Itanium feature is *speculative execution* and NaT (“not a thing”) bit, somewhat resembling **NaN** numbers:

<http://blogs.msdn.com/b/oldnewthing/archive/2004/01/19/60162.aspx>.

Chapter 66

8086 memory model

Dealing with 16-bit programs for MS-DOS or Win16 (55.3 or 30.5), we can see that pointer consisting of two 16-bit values. What it means? Oh yes, that is another MS-DOS and 8086 weird artefact.

8086/8088 was a 16-bit CPU, but was able to address 20-bit address RAM (thus resulting 1MB external memory). External memory address space was divided between RAM (640KB max), ROM¹, windows for video memory, EMS cards, etc.

Let's also recall that 8086/8088 was in fact inheritor of 8-bit 8080 CPU. The 8080 has 16-bit memory spaces, i.e., it was able to address only 64KB. And probably of old software porting reason², 8086 can support 64KB windows, many of them placed simultaneously within 1MB address space. This is some kind of toy-level virtualization. All 8086 registers are 16-bit, so to address more, a special segment registers (CS, DS, ES, SS) were introduced. Each 20-bit pointer is calculated using values from a segment register and an address register pair (e.g. DS:BX) as follows:

$$real_address = (segment_register \ll 4) + address_register$$

For example, graphics (EGA³, VGA⁴) video RAM window on old IBM PC-compatibles has size of 64KB. For accessing it, a 0xA000 value should be stored in one of segment registers, e.g. into DS. Then DS:0 will address the very first byte of video RAM and DS:0xFFFF is the very last byte of RAM. The real address on 20-bit address bus, however, will range from 0xA0000 to 0xAFFFF.

The program may contain hardcoded addresses like 0x1234, but OS may need to load program on arbitrary addresses, so it recalculates segment register values in such a way, so the program will not care about where in the RAM it is placed.

So, any pointer in old MS-DOS environment was in fact consisted of segment address and the address inside segment, i.e., two 16-bit values. 20-bit was enough for that, though, but one will need to recalculate the addresses very often: passing more information on stack seems better space/convenience balance.

By the way, because of all this, it was not possible to allocate the memory block larger than 64KB.

Segment registers were reused at 80286 as selectors, serving different function.

When 80386 CPU and computers with bigger RAM were introduced, MS-DOS was still popular, so the DOS extenders emerged: these were in fact a step toward “serious” OS, switching CPU into protected mode and providing much better memory APIs for the programs which still needs to be runned from MS-DOS. Widely popular examples include DOS/4GW (DOOM video game was compiled for it), Phar Lap, PMODE.

By the way, the same was of addressing memory was in 16-bit line of Windows 3.x, before Win32.

¹Read-only memory

²I'm not 100% sure here

³Enhanced Graphics Adapter

⁴Video Graphics Array

Chapter 67

Basic blocks reordering

67.1 Profile-guided optimization

This optimization method may move some [basic blocks](#) to another section of the executable binary file.

Obviously, there are parts in function which are executed most often (e.g., loop bodies) and less often (e.g., error reporting code, exception handlers).

The compiler adding instrumentation code into the executable, then developer run it with a lot of tests for statistics collecting. Then the compiler, with the help of statistics gathered, prepares final executable file with all infrequently executed code moved into another section.

As a result, all frequently executed function code is compacted, and that is very important for execution speed and cache memory.

Example from Oracle RDBMS code, which was compiled by Intel C++:

Listing 67.1: orageneric11.dll (win32)

```

public _skgfsync
proc near
_skgfsync
; address 0x6030D86A

    db      66h
    nop
    push    ebp
    mov     ebp, esp
    mov     edx, [ebp+0Ch]
    test    edx, edx
    jz      short loc_6030D884
    mov     eax, [edx+30h]
    test    eax, 400h
    jnz     __VInfreq__skgfsync ; write to log
continue:
    mov     eax, [ebp+8]
    mov     edx, [ebp+10h]
    mov     dword ptr [eax], 0
    lea     eax, [edx+0Fh]
    and     eax, 0FFFFFFFh
    mov     ecx, [eax]
    cmp     ecx, 45726963h
    jnz     error ; exit with error
    mov     esp, ebp
    pop     ebp
    retn
_skgfsync
endp

...

; address 0x60B953F0

```

```

__VInfreq__skgfsync:
    mov     eax, [edx]
    test    eax, eax
    jz      continue
    mov     ecx, [ebp+10h]
    push    ecx
    mov     ecx, [ebp+8]
    push    ecx
    push    edx
    push    ecx
    push    offset ... ; "skgfsync(se=0x%x, ctx=0x%x, iov=0x%x)\n"
    push    dword ptr [edx+4]
    call    dword ptr [eax] ; write to log
    add     esp, 14h
    jmp     continue
; -----
error:
    mov     edx, [ebp+8]
    mov     dword ptr [edx], 69AAh ; 27050 "function called with invalid FIB/IOV
    structure"
    mov     eax, [eax]
    mov     [edx+4], eax
    mov     dword ptr [edx+8], 0FA4h ; 4004
    mov     esp, ebp
    pop     ebp
    retn
; END OF FUNCTION CHUNK FOR _skgfsync

```

The distance of addresses of these two code fragments is almost 9 MB.

All infrequently executed code was placed at the end of the code section of DLL file, among all function parts. This part of function was marked by Intel C++ compiler with `VInfreq` prefix. Here we see that a part of function which writes to log-file (presumably in case of error or warning or something like that) which was probably not executed very often when Oracle developers gathered statistics (if was executed at all). The writing to log basic block is eventually return control flow into the “hot” part of the function.

Another “infrequent” part is a [basic block](#) returning error code 27050.

In Linux ELF files, all infrequently executed code is moved by Intel C++ into separate `text.unlikely` section, leaving all “hot” code in the `text.hot` section.

From a reverse engineer’s perspective, this information may help to split the function to its core and error handling parts.

Part IX

Books/blogs worth reading

Chapter 68

Books

68.1 Windows

[30].

68.2 C/C++

[16].

68.3 x86 / x86-64

[14], [1]

68.4 ARM

ARM manuals: <http://infocenter.arm.com/help/index.jsp?topic=/com.arm.doc.subset.architecture.reference/index.html>

Chapter 69

Blogs

69.1 Windows

- [Microsoft: Raymond Chen](#)
- <http://www.nynaeve.net/>

Chapter 70

Other

There are two excellent RE¹-related subreddits on reddit.com: [ReverseEngineering](#) and [REMath](#) (for the topics on the intersection of RE and mathematics).

There are also RE part of Stack Exchange website:
<http://reverseengineering.stackexchange.com/>.

¹Reverse Engineering

Part X

Exercises

There are two questions almost for every exercise, if otherwise is not specified:

1) What this function does? Answer in one-sentence form.

2) Rewrite this function into C/C++.

It is allowed to use Google to search for any leads. However, if you like to make your task harder, you may try to solve it without Google.

Hints and solutions are in the appendix of this book.

Chapter 71

Level 1

Level 1 exercises are ones you may try to solve in mind.

71.1 Exercise 1.1

71.1.1 MSVC 2012 x64 + /Ox

```
a$ = 8
b$ = 16
f      PROC
        cmp     ecx, edx
        cmovg   edx, ecx
        mov     eax, edx
        ret     0
f      ENDP
```

71.1.2 Keil (ARM)

```
CMP     r0,r1
MOVLE   r0,r1
BX      lr
```

71.1.3 Keil (thumb)

```
CMP     r0,r1
BGT     |L0.6|
MOVS    r0,r1
|L0.6|
BX      lr
```

71.2 Exercise 1.2

Why LOOP instruction is not used by compilers anymore?

71.3 Exercise 1.3

Take an loop example from “Loops” section (12), compile it in your favorite OS and compiler and modify (patch) executable file, so the loop range will be [6..20].

Chapter 72

Level 2

For solving exercises of level 2, you probably will need text editor or paper with pencil.

72.1 Exercise 2.1

This is standard C library function. Source code taken from OpenWatcom.

72.1.1 MSVC 2010

```

_TEXT    SEGMENT
_input$ = 8                                ; size = 1
_f PROC
    push    ebp
    mov     ebp, esp
    movsx   eax, BYTE PTR _input$[ebp]
    cmp     eax, 97                        ; 00000061H
    jl      SHORT $LN1@f
    movsx   ecx, BYTE PTR _input$[ebp]
    cmp     ecx, 122                        ; 0000007aH
    jg      SHORT $LN1@f
    movsx   edx, BYTE PTR _input$[ebp]
    sub     edx, 32                         ; 00000020H
    mov     BYTE PTR _input$[ebp], dl
$LN1@f:
    mov     al, BYTE PTR _input$[ebp]
    pop     ebp
    ret     0
_f ENDP
_TEXT    ENDS

```

72.1.2 GCC 4.4.1 + -O3

```

_f      proc near
input   = dword ptr 8

        push    ebp
        mov     ebp, esp
        movzx   eax, byte ptr [ebp+input]
        lea     edx, [eax-61h]
        cmp     dl, 19h
        ja      short loc_80483F2
        sub     eax, 20h

```

```
loc_80483F2:
        pop     ebp
        retn
_f      endp
```

72.1.3 Keil (ARM) + -O3

```
SUB     r1,r0,#0x61
CMP     r1,#0x19
SUBLS   r0,r0,#0x20
ANDLS   r0,r0,#0xff
BX      lr
```

72.1.4 Keil (thumb) + -O3

```
MOVS    r1,r0
SUBS    r1,r1,#0x61
CMP     r1,#0x19
BHI     |L0.14|
SUBS    r0,r0,#0x20
LSLS    r0,r0,#24
LSRS    r0,r0,#24
|L0.14|
BX      lr
```

72.2 Exercise 2.2

. This is also standard C library function. Source code is taken from OpenWatcom and modified slightly.
This function also use these standard C functions: isspace() and isdigit().

72.2.1 MSVC 2010 + /Ox

```
EXTRN   _isdigit:PROC
EXTRN   _isspace:PROC
EXTRN   ___ptr_check:PROC
; Function compile flags: /Ogtpy
_TEXT   SEGMENT
_p$ = 8                                     ; size = 4
_f      PROC
    push    ebx
    push    esi
    mov     esi, DWORD PTR _p$[esp+4]
    push    edi
    push    0
    push    esi
    call    ___ptr_check
    mov     eax, DWORD PTR [esi]
    push    eax
    call    _isspace
    add     esp, 12                         ; 0000000cH
    test    eax, eax
    je      SHORT $LN6@f
    npad    2
$LN6@f:
    mov     ecx, DWORD PTR [esi+4]
    add     esi, 4
```

```

    push    ecx
    call    _isspace
    add     esp, 4
    test    eax, eax
    jne     SHORT $LL70f
$LN60f:
    mov     bl, BYTE PTR [esi]
    cmp     bl, 43                ; 0000002bH
    je      SHORT $LN40f
    cmp     bl, 45                ; 0000002dH
    jne     SHORT $LN50f
$LN40f:
    add     esi, 4
$LN50f:
    mov     edx, DWORD PTR [esi]
    push    edx
    xor     edi, edi
    call    _isdigit
    add     esp, 4
    test    eax, eax
    je      SHORT $LN20f
$LL30f:
    mov     ecx, DWORD PTR [esi]
    mov     edx, DWORD PTR [esi+4]
    add     esi, 4
    lea     eax, DWORD PTR [edi+edi*4]
    push    edx
    lea     edi, DWORD PTR [ecx+eax*2-48]
    call    _isdigit
    add     esp, 4
    test    eax, eax
    jne     SHORT $LL30f
$LN20f:
    cmp     bl, 45                ; 0000002dH
    jne     SHORT $LN140f
    neg     edi
$LN140f:
    mov     eax, edi
    pop     edi
    pop     esi
    pop     ebx
    ret     0
_f        ENDP
_TEXT     ENDS

```

72.2.2 GCC 4.4.1

This exercise is slightly harder since GCC compiled `isspace()` and `isdigit()` functions as inline-functions and inserted their bodies right into the code.

```

_f        proc near

var_10    = dword ptr -10h
var_9     = byte ptr -9
input     = dword ptr 8

    push    ebp
    mov     ebp, esp
    sub     esp, 18h
    jmp     short loc_8048410

loc_804840C:

```

```

        add     [ebp+input], 4

loc_8048410:
        call    ___ctype_b_loc
        mov     edx, [eax]
        mov     eax, [ebp+input]
        mov     eax, [eax]
        add     eax, eax
        lea     eax, [edx+eax]
        movzx   eax, word ptr [eax]
        movzx   eax, ax
        and     eax, 2000h
        test    eax, eax
        jnz     short loc_804840C
        mov     eax, [ebp+input]
        mov     eax, [eax]
        mov     [ebp+var_9], al
        cmp     [ebp+var_9], '+'
        jz      short loc_8048444
        cmp     [ebp+var_9], '-'
        jnz     short loc_8048448

loc_8048444:
        add     [ebp+input], 4

loc_8048448:
        mov     [ebp+var_10], 0
        jmp     short loc_8048471

loc_8048451:
        mov     edx, [ebp+var_10]
        mov     eax, edx
        shl     eax, 2
        add     eax, edx
        add     eax, eax
        mov     edx, eax
        mov     eax, [ebp+input]
        mov     eax, [eax]
        lea     eax, [edx+eax]
        sub     eax, 30h
        mov     [ebp+var_10], eax
        add     [ebp+input], 4

loc_8048471:
        call    ___ctype_b_loc
        mov     edx, [eax]
        mov     eax, [ebp+input]
        mov     eax, [eax]
        add     eax, eax
        lea     eax, [edx+eax]
        movzx   eax, word ptr [eax]
        movzx   eax, ax
        and     eax, 800h
        test    eax, eax
        jnz     short loc_8048451
        cmp     [ebp+var_9], 2Dh
        jnz     short loc_804849A
        neg     [ebp+var_10]

loc_804849A:
        mov     eax, [ebp+var_10]

```

```

        leave
        retn
_f      endp

```

72.2.3 Keil (ARM) + -03

```

        PUSH    {r4,lr}
        MOV     r4,r0
        BL      __rt_ctype_table
        LDR     r2,[r0,#0]
|L0.16|
        LDR     r0,[r4,#0]
        LDRB    r0,[r2,r0]
        TST     r0,#1
        ADDNE   r4,r4,#4
        BNE     |L0.16|
        LDRB    r1,[r4,#0]
        MOV     r0,#0
        CMP     r1,#0x2b
        CMPNE   r1,#0x2d
        ADDEQ   r4,r4,#4
        B       |L0.76|
|L0.60|
        ADD     r0,r0,r0,LSL #2
        ADD     r0,r3,r0,LSL #1
        SUB     r0,r0,#0x30
        ADD     r4,r4,#4
|L0.76|
        LDR     r3,[r4,#0]
        LDRB    r12,[r2,r3]
        CMP     r12,#0x20
        BEQ     |L0.60|
        CMP     r1,#0x2d
        RSBEQ   r0,r0,#0
        POP     {r4,pc}

```

72.2.4 Keil (thumb) + -03

```

        PUSH    {r4-r6,lr}
        MOVS    r4,r0
        BL      __rt_ctype_table
        LDR     r2,[r0,#0]
        B       |L0.14|
|L0.12|
        ADDS    r4,r4,#4
|L0.14|
        LDR     r0,[r4,#0]
        LDRB    r0,[r2,r0]
        LSLS    r0,r0,#31
        BNE     |L0.12|
        LDRB    r1,[r4,#0]
        CMP     r1,#0x2b
        BEQ     |L0.32|
        CMP     r1,#0x2d
        BNE     |L0.34|
|L0.32|
        ADDS    r4,r4,#4
|L0.34|

```

```

        MOVS    r0,#0
        B       |L0.48|
|L0.38|
        MOVS    r5,#0xa
        MULS    r0,r5,r0
        ADDS    r4,r4,#4
        SUBS    r0,r0,#0x30
        ADDS    r0,r3,r0
|L0.48|
        LDR     r3,[r4,#0]
        LDRB    r5,[r2,r3]
        CMP     r5,#0x20
        BEQ     |L0.38|
        CMP     r1,#0x2d
        BNE     |L0.62|
        RSBS    r0,r0,#0
|L0.62|
        POP     {r4-r6,pc}

```

72.3 Exercise 2.3

This is standard C function too, actually, two functions working in pair. Source code taken from MSVC 2010 and modified slightly.

The matter of modification is that this function can work properly in multi-threaded environment, and I removed its support for simplification (or for confusion).

72.3.1 MSVC 2010 + /Ox

```

_BSS    SEGMENT
_v      DD      01H DUP (?)
_BSS    ENDS

_TEXT   SEGMENT
_s$ = 8                                     ; size = 4
f1      PROC
        push    ebp
        mov     ebp, esp
        mov     eax, DWORD PTR _s$[ebp]
        mov     DWORD PTR _v, eax
        pop     ebp
        ret     0
f1      ENDP
_TEXT   ENDS
PUBLIC  f2

_TEXT   SEGMENT
f2      PROC
        push    ebp
        mov     ebp, esp
        mov     eax, DWORD PTR _v
        imul    eax, 214013                ; 000343fdH
        add     eax, 2531011                ; 00269ec3H
        mov     DWORD PTR _v, eax
        mov     eax, DWORD PTR _v
        shr     eax, 16                    ; 00000010H
        and     eax, 32767                  ; 00007fffH
        pop     ebp
        ret     0
f2      ENDP

```

```
_TEXT    ENDS
END
```

72.3.2 GCC 4.4.1

```

f1                public f1
                  proc near
arg_0              = dword ptr  8

                  push    ebp
                  mov     ebp, esp
                  mov     eax, [ebp+arg_0]
                  mov     ds:v, eax
                  pop     ebp
                  retn
f1                endp

f2                public f2
                  proc near
                  push    ebp
                  mov     ebp, esp
                  mov     eax, ds:v
                  imul    eax, 343FDh
                  add     eax, 269EC3h
                  mov     ds:v, eax
                  mov     eax, ds:v
                  shr     eax, 10h
                  and     eax, 7FFFh
                  pop     ebp
                  retn
f2                endp

bss               segment dword public 'BSS' use32
                  assume cs:_bss
                  dd ?
bss               ends

```

72.3.3 Keil (ARM) + -03

```

f1 PROC
    LDR    r1,|L0.52|
    STR    r0,[r1,#0] ; v
    BX     lr
    ENDP

f2 PROC
    LDR    r0,|L0.52|
    LDR    r2,|L0.56|
    LDR    r1,[r0,#0] ; v
    MUL    r1,r2,r1
    LDR    r2,|L0.60|
    ADD    r1,r1,r2
    STR    r1,[r0,#0] ; v
    MVN    r0,#0x8000
    AND    r0,r0,r1,LSR #16
    BX     lr
    ENDP

```

```

|L0.52|
      DCD      ||.data||
|L0.56|
      DCD      0x000343fd
|L0.60|
      DCD      0x00269ec3

```

72.3.4 Keil (thumb) + -03

```

f1 PROC
      LDR      r1,|L0.28|
      STR      r0,[r1,#0] ; v
      BX      lr
      ENDP

f2 PROC
      LDR      r0,|L0.28|
      LDR      r2,|L0.32|
      LDR      r1,[r0,#0] ; v
      MULS     r1,r2,r1
      LDR      r2,|L0.36|
      ADDS     r1,r1,r2
      STR      r1,[r0,#0] ; v
      LSLS     r0,r1,#1
      LSRS     r0,r0,#17
      BX      lr
      ENDP

|L0.28|
      DCD      ||.data||
|L0.32|
      DCD      0x000343fd
|L0.36|
      DCD      0x00269ec3

```

72.4 Exercise 2.4

This is standard C library function. Source code taken from MSVC 2010.

72.4.1 MSVC 2010 + /Ox

```

PUBLIC      _f
_TEXT      SEGMENT
_arg1$ = 8          ; size = 4
_arg2$ = 12         ; size = 4
_f         PROC
      push    esi
      mov     esi, DWORD PTR _arg1$[esp]
      push    edi
      mov     edi, DWORD PTR _arg2$[esp+4]
      cmp     BYTE PTR [edi], 0
      mov     eax, esi
      je      SHORT $LN7@f
      mov     dl, BYTE PTR [esi]
      push    ebx
      test    dl, dl

```

```

    je     SHORT $LN40f
    sub    esi, edi
    npad   6
$LL50f:
    mov    ecx, edi
    test   dl, dl
    je     SHORT $LN20f
$LL30f:
    mov    dl, BYTE PTR [ecx]
    test   dl, dl
    je     SHORT $LN140f
    movsx  ebx, BYTE PTR [esi+ecx]
    movsx  edx, dl
    sub    ebx, edx
    jne    SHORT $LN20f
    inc    ecx
    cmp    BYTE PTR [esi+ecx], bl
    jne    SHORT $LL30f
$LN20f:
    cmp    BYTE PTR [ecx], 0
    je     SHORT $LN140f
    mov    dl, BYTE PTR [eax+1]
    inc    eax
    inc    esi
    test   dl, dl
    jne    SHORT $LL50f
    xor    eax, eax
    pop    ebx
    pop    edi
    pop    esi
    ret    0
_f       ENDP
_TEXT    ENDS
END

```

72.4.2 GCC 4.4.1

```

f                public f
                 proc near

var_C            = dword ptr -0Ch
var_8            = dword ptr -8
var_4            = dword ptr -4
arg_0            = dword ptr 8
arg_4            = dword ptr 0Ch

                 push    ebp
                 mov     ebp, esp
                 sub     esp, 10h
                 mov     eax, [ebp+arg_0]
                 mov     [ebp+var_4], eax
                 mov     eax, [ebp+arg_4]
                 movzx   eax, byte ptr [eax]
                 test    al, al
                 jnz     short loc_8048443
                 mov     eax, [ebp+arg_0]
                 jmp     short locret_8048453

loc_80483F4:
                 mov     eax, [ebp+var_4]

```

```

    mov     [ebp+var_8], eax
    mov     eax, [ebp+arg_4]
    mov     [ebp+var_C], eax
    jmp     short loc_804840A

loc_8048402:
    add     [ebp+var_8], 1
    add     [ebp+var_C], 1

loc_804840A:
    mov     eax, [ebp+var_8]
    movzx   eax, byte ptr [eax]
    test    al, al
    jz      short loc_804842E
    mov     eax, [ebp+var_C]
    movzx   eax, byte ptr [eax]
    test    al, al
    jz      short loc_804842E
    mov     eax, [ebp+var_8]
    movzx   edx, byte ptr [eax]
    mov     eax, [ebp+var_C]
    movzx   eax, byte ptr [eax]
    cmp     dl, al
    jz      short loc_8048402

loc_804842E:
    mov     eax, [ebp+var_C]
    movzx   eax, byte ptr [eax]
    test    al, al
    jnz     short loc_804843D
    mov     eax, [ebp+var_4]
    jmp     short locret_8048453

loc_804843D:
    add     [ebp+var_4], 1
    jmp     short loc_8048444

loc_8048443:
    nop

loc_8048444:
    mov     eax, [ebp+var_4]
    movzx   eax, byte ptr [eax]
    test    al, al
    jnz     short loc_80483F4
    mov     eax, 0

locret_8048453:
    leave
    retn
f      endp

```

72.4.3 Keil (ARM) + -03

```

PUSH     {r4,lr}
LDRB     r2,[r1,#0]
CMP      r2,#0
POPEQ    {r4,pc}
B        |L0.80|

```

```

|L0.20|
    LDRB    r12,[r3,#0]
    CMP     r12,#0
    BEQ     |L0.64|
    LDRB    r4,[r2,#0]
    CMP     r4,#0
    POPEQ   {r4,pc}
    CMP     r12,r4
    ADDEQ   r3,r3,#1
    ADDEQ   r2,r2,#1
    BEQ     |L0.20|
    B       |L0.76|
|L0.64|
    LDRB    r2,[r2,#0]
    CMP     r2,#0
    POPEQ   {r4,pc}
|L0.76|
    ADD     r0,r0,#1
|L0.80|
    LDRB    r2,[r0,#0]
    CMP     r2,#0
    MOVNE   r3,r0
    MOVNE   r2,r1
    MOVEQ   r0,#0
    BNE     |L0.20|
    POP     {r4,pc}

```

72.4.4 Keil (thumb) + -03

```

    PUSH    {r4,r5,lr}
    LDRB    r2,[r1,#0]
    CMP     r2,#0
    BEQ     |L0.54|
    B       |L0.46|
|L0.10|
    MOVS    r3,r0
    MOVS    r2,r1
    B       |L0.20|
|L0.16|
    ADDS    r3,r3,#1
    ADDS    r2,r2,#1
|L0.20|
    LDRB    r4,[r3,#0]
    CMP     r4,#0
    BEQ     |L0.38|
    LDRB    r5,[r2,#0]
    CMP     r5,#0
    BEQ     |L0.54|
    CMP     r4,r5
    BEQ     |L0.16|
    B       |L0.44|
|L0.38|
    LDRB    r2,[r2,#0]
    CMP     r2,#0
    BEQ     |L0.54|
|L0.44|
    ADDS    r0,r0,#1
|L0.46|
    LDRB    r2,[r0,#0]
    CMP     r2,#0

```

```

        BNE      |L0.10|
        MOVS     r0,#0
|L0.54|
        POP      {r4,r5,pc}

```

72.5 Exercise 2.5

This exercise is rather on knowledge than on reading code.
 . The function is taken from OpenWatcom.

72.5.1 MSVC 2010 + /Ox

```

_DATA      SEGMENT
COMM       __v:DWORD
_DATA      ENDS
PUBLIC     __real@3e45798ee2308c3a
PUBLIC     __real@4147ffff80000000
PUBLIC     __real@4150017ec0000000
PUBLIC     _f
EXTRN      __fltused:DWORD
CONST      SEGMENT
__real@3e45798ee2308c3a DQ 03e45798ee2308c3ar      ; 1e-008
__real@4147ffff80000000 DQ 04147ffff80000000r      ; 3.14573e+006
__real@4150017ec0000000 DQ 04150017ec0000000r      ; 4.19584e+006
CONST      ENDS
_TEXT      SEGMENT
_v1$ = -16          ; size = 8
_v2$ = -8           ; size = 8
_f        PROC
    sub     esp, 16          ; 00000010H
    fld     QWORD PTR __real@4150017ec0000000
    fstp    QWORD PTR _v1$[esp+16]
    fld     QWORD PTR __real@4147ffff80000000
    fstp    QWORD PTR _v2$[esp+16]
    fld     QWORD PTR _v1$[esp+16]
    fld     QWORD PTR _v1$[esp+16]
    fdiv    QWORD PTR _v2$[esp+16]
    fmul    QWORD PTR _v2$[esp+16]
    fsubp   ST(1), ST(0)
    fcomp   QWORD PTR __real@3e45798ee2308c3a
    fnstsw  ax
    test    ah, 65          ; 00000041H
    jne     SHORT $LN1@f
    or      DWORD PTR __v, 1
$LN1@f:
    add     esp, 16          ; 00000010H
    ret     0
_f        ENDP
_TEXT     ENDS

```

72.6 Exercise 2.6

72.6.1 MSVC 2010 + /Ox

```

PUBLIC     _f
; Function compile flags: /Ogtpy
_TEXT     SEGMENT

```

```

_k0$ = -12          ; size = 4
_k3$ = -8           ; size = 4
_k2$ = -4           ; size = 4
_v$ = 8             ; size = 4
_k1$ = 12           ; size = 4
_k$ = 12            ; size = 4
_f    PROC
    sub    esp, 12    ; 0000000cH
    mov    ecx, DWORD PTR _v$[esp+8]
    mov    eax, DWORD PTR [ecx]
    mov    ecx, DWORD PTR [ecx+4]
    push   ebx
    push   esi
    mov    esi, DWORD PTR _k$[esp+16]
    push   edi
    mov    edi, DWORD PTR [esi]
    mov    DWORD PTR _k0$[esp+24], edi
    mov    edi, DWORD PTR [esi+4]
    mov    DWORD PTR _k1$[esp+20], edi
    mov    edi, DWORD PTR [esi+8]
    mov    esi, DWORD PTR [esi+12]
    xor    edx, edx
    mov    DWORD PTR _k2$[esp+24], edi
    mov    DWORD PTR _k3$[esp+24], esi
    lea    edi, DWORD PTR [edx+32]
$LL80f:
    mov    esi, ecx
    shr    esi, 5
    add    esi, DWORD PTR _k1$[esp+20]
    mov    ebx, ecx
    shl    ebx, 4
    add    ebx, DWORD PTR _k0$[esp+24]
    sub    edx, 1640531527 ; 61c88647H
    xor    esi, ebx
    lea    ebx, DWORD PTR [edx+ecx]
    xor    esi, ebx
    add    eax, esi
    mov    esi, eax
    shr    esi, 5
    add    esi, DWORD PTR _k3$[esp+24]
    mov    ebx, eax
    shl    ebx, 4
    add    ebx, DWORD PTR _k2$[esp+24]
    xor    esi, ebx
    lea    ebx, DWORD PTR [edx+eax]
    xor    esi, ebx
    add    ecx, esi
    dec    edi
    jne    SHORT $LL80f
    mov    edx, DWORD PTR _v$[esp+20]
    pop    edi
    pop    esi
    mov    DWORD PTR [edx], eax
    mov    DWORD PTR [edx+4], ecx
    pop    ebx
    add    esp, 12          ; 0000000cH
    ret    0
_f    ENDP

```

72.6.2 Keil (ARM) + -03

```

PUSH    {r4-r10,lr}
ADD     r5,r1,#8
LDM     r5,{r5,r7}
LDR     r2,[r0,#4]
LDR     r3,[r0,#0]
LDR     r4,|L0.116|
LDR     r6,[r1,#4]
LDR     r8,[r1,#0]
MOV     r12,#0
MOV     r1,r12
|L0.40|
ADD     r12,r12,r4
ADD     r9,r8,r2,LSL #4
ADD     r10,r2,r12
EOR     r9,r9,r10
ADD     r10,r6,r2,LSR #5
EOR     r9,r9,r10
ADD     r3,r3,r9
ADD     r9,r5,r3,LSL #4
ADD     r10,r3,r12
EOR     r9,r9,r10
ADD     r10,r7,r3,LSR #5
EOR     r9,r9,r10
ADD     r1,r1,#1
CMP     r1,#0x20
ADD     r2,r2,r9
STRCS   r2,[r0,#4]
STRCS   r3,[r0,#0]
BCC     |L0.40|
POP     {r4-r10,pc}

|L0.116|
DCD     0x9e3779b9

```

72.6.3 Keil (thumb) + -03

```

PUSH    {r1-r7,lr}
LDR     r5,|L0.84|
LDR     r3,[r0,#0]
LDR     r2,[r0,#4]
STR     r5,[sp,#8]
MOVS    r6,r1
LDM     r6,{r6,r7}
LDR     r5,[r1,#8]
STR     r6,[sp,#4]
LDR     r6,[r1,#0xc]
MOVS    r4,#0
MOVS    r1,r4
MOV     lr,r5
MOV     r12,r6
STR     r7,[sp,#0]
|L0.30|
LDR     r5,[sp,#8]
LSLS    r6,r2,#4
ADDS    r4,r4,r5
LDR     r5,[sp,#4]
LSRS    r7,r2,#5
ADDS    r5,r6,r5

```

```

    ADDS    r6,r2,r4
    EORS    r5,r5,r6
    LDR     r6,[sp,#0]
    ADDS    r1,r1,#1
    ADDS    r6,r7,r6
    EORS    r5,r5,r6
    ADDS    r3,r5,r3
    LSLS    r5,r3,#4
    ADDS    r6,r3,r4
    ADD     r5,r5,lr
    EORS    r5,r5,r6
    LSRS    r6,r3,#5
    ADD     r6,r6,r12
    EORS    r5,r5,r6
    ADDS    r2,r5,r2
    CMP     r1,#0x20
    BCC     |L0.30|
    STR     r3,[r0,#0]
    STR     r2,[r0,#4]
    POP     {r1-r7,pc}

```

```
|L0.84|
```

```
    DCD     0x9e3779b9
```

72.7 Exercise 2.7

This function is taken from Linux 2.6 kernel.

72.7.1 MSVC 2010 + /Ox

```

_table    db 000h, 080h, 040h, 0c0h, 020h, 0a0h, 060h, 0e0h
          db 010h, 090h, 050h, 0d0h, 030h, 0b0h, 070h, 0f0h
          db 008h, 088h, 048h, 0c8h, 028h, 0a8h, 068h, 0e8h
          db 018h, 098h, 058h, 0d8h, 038h, 0b8h, 078h, 0f8h
          db 004h, 084h, 044h, 0c4h, 024h, 0a4h, 064h, 0e4h
          db 014h, 094h, 054h, 0d4h, 034h, 0b4h, 074h, 0f4h
          db 00ch, 08ch, 04ch, 0cch, 02ch, 0ach, 06ch, 0ech
          db 01ch, 09ch, 05ch, 0dch, 03ch, 0bch, 07ch, 0fch
          db 002h, 082h, 042h, 0c2h, 022h, 0a2h, 062h, 0e2h
          db 012h, 092h, 052h, 0d2h, 032h, 0b2h, 072h, 0f2h
          db 00ah, 08ah, 04ah, 0cah, 02ah, 0aah, 06ah, 0eah
          db 01ah, 09ah, 05ah, 0dah, 03ah, 0bah, 07ah, 0fah
          db 006h, 086h, 046h, 0c6h, 026h, 0a6h, 066h, 0e6h
          db 016h, 096h, 056h, 0d6h, 036h, 0b6h, 076h, 0f6h
          db 00eh, 08eh, 04eh, 0ceh, 02eh, 0aeh, 06eh, 0eeh
          db 01eh, 09eh, 05eh, 0deh, 03eh, 0beh, 07eh, 0feh
          db 001h, 081h, 041h, 0c1h, 021h, 0a1h, 061h, 0e1h
          db 011h, 091h, 051h, 0d1h, 031h, 0b1h, 071h, 0f1h
          db 009h, 089h, 049h, 0c9h, 029h, 0a9h, 069h, 0e9h
          db 019h, 099h, 059h, 0d9h, 039h, 0b9h, 079h, 0f9h
          db 005h, 085h, 045h, 0c5h, 025h, 0a5h, 065h, 0e5h
          db 015h, 095h, 055h, 0d5h, 035h, 0b5h, 075h, 0f5h
          db 00dh, 08dh, 04dh, 0cdh, 02dh, 0adh, 06dh, 0edh
          db 01dh, 09dh, 05dh, 0ddh, 03dh, 0bdh, 07dh, 0fdh
          db 003h, 083h, 043h, 0c3h, 023h, 0a3h, 063h, 0e3h
          db 013h, 093h, 053h, 0d3h, 033h, 0b3h, 073h, 0f3h
          db 00bh, 08bh, 04bh, 0cbh, 02bh, 0abh, 06bh, 0ebh
          db 01bh, 09bh, 05bh, 0dbh, 03bh, 0bbh, 07bh, 0fbh
          db 007h, 087h, 047h, 0c7h, 027h, 0a7h, 067h, 0e7h

```

```

db 017h, 097h, 057h, 0d7h, 037h, 0b7h, 077h, 0f7h
db 00fh, 08fh, 04fh, 0cfh, 02fh, 0afh, 06fh, 0efh
db 01fh, 09fh, 05fh, 0dfh, 03fh, 0bfh, 07fh, 0ffh

f                proc near
arg_0            = dword ptr 4

                mov     edx, [esp+arg_0]
                movzx   eax, dl
                movzx   eax, _table[eax]
                mov     ecx, edx
                shr     edx, 8
                movzx   edx, dl
                movzx   edx, _table[edx]
                shl     ax, 8
                movzx   eax, ax
                or      eax, edx
                shr     ecx, 10h
                movzx   edx, cl
                movzx   edx, _table[edx]
                shr     ecx, 8
                movzx   ecx, cl
                movzx   ecx, _table[ecx]
                shl     dx, 8
                movzx   edx, dx
                shl     eax, 10h
                or      edx, ecx
                or      eax, edx
                ret     4
f                endp

```

72.7.2 Keil (ARM) + -O3

```

f2 PROC
    LDR     r1, |L0.76|
    LDRB    r2, [r1, r0, LSR #8]
    AND     r0, r0, #0xff
    LDRB    r0, [r1, r0]
    ORR     r0, r2, r0, LSL #8
    BX     lr
ENDP

f3 PROC
    MOV     r3, r0
    LSR     r0, r0, #16
    PUSH    {lr}
    BL     f2
    MOV     r12, r0
    LSL     r0, r3, #16
    LSR     r0, r0, #16
    BL     f2
    ORR     r0, r12, r0, LSL #16
    POP     {pc}
ENDP

|L0.76|
    DCB     0x00, 0x80, 0x40, 0xc0
    DCB     0x20, 0xa0, 0x60, 0xe0
    DCB     0x10, 0x90, 0x50, 0xd0

```

DCB	0x30,0xb0,0x70,0xf0
DCB	0x08,0x88,0x48,0xc8
DCB	0x28,0xa8,0x68,0xe8
DCB	0x18,0x98,0x58,0xd8
DCB	0x38,0xb8,0x78,0xf8
DCB	0x04,0x84,0x44,0xc4
DCB	0x24,0xa4,0x64,0xe4
DCB	0x14,0x94,0x54,0xd4
DCB	0x34,0xb4,0x74,0xf4
DCB	0x0c,0x8c,0x4c,0xcc
DCB	0x2c,0xac,0x6c,0xec
DCB	0x1c,0x9c,0x5c,0xdc
DCB	0x3c,0xbc,0x7c,0xfc
DCB	0x02,0x82,0x42,0xc2
DCB	0x22,0xa2,0x62,0xe2
DCB	0x12,0x92,0x52,0xd2
DCB	0x32,0xb2,0x72,0xf2
DCB	0x0a,0x8a,0x4a,0xca
DCB	0x2a,0xaa,0x6a,0xea
DCB	0x1a,0x9a,0x5a,0xda
DCB	0x3a,0xba,0x7a,0xfa
DCB	0x06,0x86,0x46,0xc6
DCB	0x26,0xa6,0x66,0xe6
DCB	0x16,0x96,0x56,0xd6
DCB	0x36,0xb6,0x76,0xf6
DCB	0x0e,0x8e,0x4e,0xce
DCB	0x2e,0xae,0x6e,0xee
DCB	0x1e,0x9e,0x5e,0xde
DCB	0x3e,0xbe,0x7e,0xfe
DCB	0x01,0x81,0x41,0xc1
DCB	0x21,0xa1,0x61,0xe1
DCB	0x11,0x91,0x51,0xd1
DCB	0x31,0xb1,0x71,0xf1
DCB	0x09,0x89,0x49,0xc9
DCB	0x29,0xa9,0x69,0xe9
DCB	0x19,0x99,0x59,0xd9
DCB	0x39,0xb9,0x79,0xf9
DCB	0x05,0x85,0x45,0xc5
DCB	0x25,0xa5,0x65,0xe5
DCB	0x15,0x95,0x55,0xd5
DCB	0x35,0xb5,0x75,0xf5
DCB	0x0d,0x8d,0x4d,0xcd
DCB	0x2d,0xad,0x6d,0xed
DCB	0x1d,0x9d,0x5d,0xdd
DCB	0x3d,0xbd,0x7d,0xfd
DCB	0x03,0x83,0x43,0xc3
DCB	0x23,0xa3,0x63,0xe3
DCB	0x13,0x93,0x53,0xd3
DCB	0x33,0xb3,0x73,0xf3
DCB	0x0b,0x8b,0x4b,0xcb
DCB	0x2b,0xab,0x6b,0xeb
DCB	0x1b,0x9b,0x5b,0xdb
DCB	0x3b,0xbb,0x7b,0xfb
DCB	0x07,0x87,0x47,0xc7
DCB	0x27,0xa7,0x67,0xe7
DCB	0x17,0x97,0x57,0xd7
DCB	0x37,0xb7,0x77,0xf7
DCB	0x0f,0x8f,0x4f,0xcf
DCB	0x2f,0xaf,0x6f,0xef
DCB	0x1f,0x9f,0x5f,0xdf
DCB	0x3f,0xbf,0x7f,0xff

72.7.3 Keil (thumb) + -03

f2 PROC

```

LDR    r1,|L0.48|
LSLS   r2,r0,#24
LSRS   r2,r2,#24
LDRB   r2,[r1,r2]
LSLS   r2,r2,#8
LSRS   r0,r0,#8
LDRB   r0,[r1,r0]
ORRS   r0,r0,r2
BX      lr
ENDP

```

f3 PROC

```

MOVS   r3,r0
LSLS   r0,r0,#16
PUSH   {r4,lr}
LSRS   r0,r0,#16
BL      f2
LSLS   r4,r0,#16
LSRS   r0,r3,#16
BL      f2
ORRS   r0,r0,r4
POP     {r4,pc}
ENDP

```

|L0.48|

```

DCB    0x00,0x80,0x40,0xc0
DCB    0x20,0xa0,0x60,0xe0
DCB    0x10,0x90,0x50,0xd0
DCB    0x30,0xb0,0x70,0xf0
DCB    0x08,0x88,0x48,0xc8
DCB    0x28,0xa8,0x68,0xe8
DCB    0x18,0x98,0x58,0xd8
DCB    0x38,0xb8,0x78,0xf8
DCB    0x04,0x84,0x44,0xc4
DCB    0x24,0xa4,0x64,0xe4
DCB    0x14,0x94,0x54,0xd4
DCB    0x34,0xb4,0x74,0xf4
DCB    0x0c,0x8c,0x4c,0xcc
DCB    0x2c,0xac,0x6c,0xec
DCB    0x1c,0x9c,0x5c,0xdc
DCB    0x3c,0xbc,0x7c,0xfc
DCB    0x02,0x82,0x42,0xc2
DCB    0x22,0xa2,0x62,0xe2
DCB    0x12,0x92,0x52,0xd2
DCB    0x32,0xb2,0x72,0xf2
DCB    0x0a,0x8a,0x4a,0xca
DCB    0x2a,0xaa,0x6a,0xea
DCB    0x1a,0x9a,0x5a,0xda
DCB    0x3a,0xba,0x7a,0xfa
DCB    0x06,0x86,0x46,0xc6
DCB    0x26,0xa6,0x66,0xe6
DCB    0x16,0x96,0x56,0xd6
DCB    0x36,0xb6,0x76,0xf6
DCB    0x0e,0x8e,0x4e,0xce
DCB    0x2e,0xae,0x6e,0xee
DCB    0x1e,0x9e,0x5e,0xde
DCB    0x3e,0xbe,0x7e,0xfe
DCB    0x01,0x81,0x41,0xc1

```

```

DCB    0x21,0xa1,0x61,0xe1
DCB    0x11,0x91,0x51,0xd1
DCB    0x31,0xb1,0x71,0xf1
DCB    0x09,0x89,0x49,0xc9
DCB    0x29,0xa9,0x69,0xe9
DCB    0x19,0x99,0x59,0xd9
DCB    0x39,0xb9,0x79,0xf9
DCB    0x05,0x85,0x45,0xc5
DCB    0x25,0xa5,0x65,0xe5
DCB    0x15,0x95,0x55,0xd5
DCB    0x35,0xb5,0x75,0xf5
DCB    0x0d,0x8d,0x4d,0xcd
DCB    0x2d,0xad,0x6d,0xed
DCB    0x1d,0x9d,0x5d,0xdd
DCB    0x3d,0xbd,0x7d,0xfd
DCB    0x03,0x83,0x43,0xc3
DCB    0x23,0xa3,0x63,0xe3
DCB    0x13,0x93,0x53,0xd3
DCB    0x33,0xb3,0x73,0xf3
DCB    0x0b,0x8b,0x4b,0xcb
DCB    0x2b,0xab,0x6b,0xeb
DCB    0x1b,0x9b,0x5b,0xdb
DCB    0x3b,0xbb,0x7b,0xfb
DCB    0x07,0x87,0x47,0xc7
DCB    0x27,0xa7,0x67,0xe7
DCB    0x17,0x97,0x57,0xd7
DCB    0x37,0xb7,0x77,0xf7
DCB    0x0f,0x8f,0x4f,0xcf
DCB    0x2f,0xaf,0x6f,0xef
DCB    0x1f,0x9f,0x5f,0xdf
DCB    0x3f,0xbf,0x7f,0xff

```

72.8 Exercise 2.8

72.8.1 MSVC 2010 + /O1

(/O1: minimize space).

```

_a$ = 8      ; size = 4
_b$ = 12     ; size = 4
_c$ = 16     ; size = 4
?s@@YAXPAN00@Z PROC      ; s, COMDAT
    mov     eax, DWORD PTR _b$[esp-4]
    mov     ecx, DWORD PTR _a$[esp-4]
    mov     edx, DWORD PTR _c$[esp-4]
    push    esi
    push    edi
    sub     ecx, eax
    sub     edx, eax
    mov     edi, 200      ; 000000c8H
$LL6@s:
    push    100          ; 00000064H
    pop     esi
$LL3@s:
    fld     QWORD PTR [ecx+eax]
    fadd    QWORD PTR [eax]
    fstp    QWORD PTR [edx+eax]
    add     eax, 8
    dec     esi
    jne     SHORT $LL3@s

```

```

dec    edi
jne    SHORT $LL60s
pop    edi
pop    esi
ret    0
?s@@YAXPAN00@Z ENDP      ; s

```

72.8.2 Keil (ARM) + -03

```

PUSH    {r4-r12,lr}
MOV     r9,r2
MOV     r10,r1
MOV     r11,r0
MOV     r5,#0
|L0.20|
ADD     r0,r5,r5,LSL #3
ADD     r0,r0,r5,LSL #4
MOV     r4,#0
ADD     r8,r10,r0,LSL #5
ADD     r7,r11,r0,LSL #5
ADD     r6,r9,r0,LSL #5
|L0.44|
ADD     r0,r8,r4,LSL #3
LDM     r0,{r2,r3}
ADD     r1,r7,r4,LSL #3
LDM     r1,{r0,r1}
BL      __aeabi_dadd
ADD     r2,r6,r4,LSL #3
ADD     r4,r4,#1
STM     r2,{r0,r1}
CMP     r4,#0x64
BLT     |L0.44|
ADD     r5,r5,#1
CMP     r5,#0xc8
BLT     |L0.20|
POP     {r4-r12,pc}

```

72.8.3 Keil (thumb) + -03

```

PUSH    {r0-r2,r4-r7,lr}
MOVS    r4,#0
SUB     sp,sp,#8
|L0.6|
MOVS    r1,#0x19
MOVS    r0,r4
LSLS    r1,r1,#5
MULS    r0,r1,r0
LDR     r2,[sp,#8]
LDR     r1,[sp,#0xc]
ADDS    r2,r0,r2
STR     r2,[sp,#0]
LDR     r2,[sp,#0x10]
MOVS    r5,#0
ADDS    r7,r0,r2
ADDS    r0,r0,r1
STR     r0,[sp,#4]
|L0.32|
LSLS    r6,r5,#3

```

```

        ADDS    r0,r0,r6
        LDM     r0!,{r2,r3}
        LDR     r0,[sp,#0]
        ADDS    r1,r0,r6
        LDM     r1,{r0,r1}
        BL      __aeabi_dadd
        ADDS    r2,r7,r6
        ADDS    r5,r5,#1
        STM     r2!,{r0,r1}
        CMP     r5,#0x64
        BGE     |L0.62|
        LDR     r0,[sp,#4]
        B       |L0.32|
|L0.62|
        ADDS    r4,r4,#1
        CMP     r4,#0xc8
        BLT     |L0.6|
        ADD     sp,sp,#0x14
        POP     {r4-r7,pc}

```

72.9 Exercise 2.9

72.9.1 MSVC 2010 + /O1

(/O1: minimize space).

```

tv315 = -8           ; size = 4
tv291 = -4           ; size = 4
_a$ = 8              ; size = 4
_b$ = 12             ; size = 4
_c$ = 16             ; size = 4
?m@@YAXPAN00@Z PROC ; m, COMDAT
    push    ebp
    mov     ebp, esp
    push    ecx
    push    ecx
    mov     edx, DWORD PTR _a$[ebp]
    push    ebx
    mov     ebx, DWORD PTR _c$[ebp]
    push    esi
    mov     esi, DWORD PTR _b$[ebp]
    sub     edx, esi
    push    edi
    sub     esi, ebx
    mov     DWORD PTR tv315[ebp], 100 ; 00000064H
$LL9@m:
    mov     eax, ebx
    mov     DWORD PTR tv291[ebp], 300 ; 0000012cH
$LL6@m:
    fldz
    lea     ecx, DWORD PTR [esi+eax]
    fstp    QWORD PTR [eax]
    mov     edi, 200 ; 000000c8H
$LL3@m:
    dec     edi
    fld     QWORD PTR [ecx+edx]
    fmul    QWORD PTR [ecx]
    fadd    QWORD PTR [eax]
    fstp    QWORD PTR [eax]
    jne     HORT $LL3@m

```

```

add    eax, 8
dec    DWORD PTR tv291[ebp]
jne    SHORT $LL6@m
add    ebx, 800                ; 00000320H
dec    DWORD PTR tv315[ebp]
jne    SHORT $LL9@m
pop    edi
pop    esi
pop    ebx
leave
ret    0
?m@@YAXPAN00@Z ENDP        ; m

```

72.9.2 Keil (ARM) + -03

```

PUSH    {r0-r2,r4-r11,lr}
SUB     sp,sp,#8
MOV     r5,#0
|L0.12|
LDR     r1,[sp,#0xc]
ADD     r0,r5,r5,LSL #3
ADD     r0,r0,r5,LSL #4
ADD     r1,r1,r0,LSL #5
STR     r1,[sp,#0]
LDR     r1,[sp,#8]
MOV     r4,#0
ADD     r11,r1,r0,LSL #5
LDR     r1,[sp,#0x10]
ADD     r10,r1,r0,LSL #5
|L0.52|
MOV     r0,#0
MOV     r1,r0
ADD     r7,r10,r4,LSL #3
STM     r7,{r0,r1}
MOV     r6,r0
LDR     r0,[sp,#0]
ADD     r8,r11,r4,LSL #3
ADD     r9,r0,r4,LSL #3
|L0.84|
LDM     r9,{r2,r3}
LDM     r8,{r0,r1}
BL      __aeabi_dmul
LDM     r7,{r2,r3}
BL      __aeabi_dadd
ADD     r6,r6,#1
STM     r7,{r0,r1}
CMP     r6,#0xc8
BLT     |L0.84|
ADD     r4,r4,#1
CMP     r4,#0x12c
BLT     |L0.52|
ADD     r5,r5,#1
CMP     r5,#0x64
BLT     |L0.12|
ADD     sp,sp,#0x14
POP     {r4-r11,pc}

```

72.9.3 Keil (thumb) + -03

```

        PUSH    {r0-r2,r4-r7,lr}
        MOVS    r0,#0
        SUB     sp,sp,#0x10
        STR     r0,[sp,#0]
|L0.8|
        MOVS    r1,#0x19
        LSLS    r1,r1,#5
        MULS    r0,r1,r0
        LDR     r2,[sp,#0x10]
        LDR     r1,[sp,#0x14]
        ADDS    r2,r0,r2
        STR     r2,[sp,#4]
        LDR     r2,[sp,#0x18]
        MOVS    r5,#0
        ADDS    r7,r0,r2
        ADDS    r0,r0,r1
        STR     r0,[sp,#8]
|L0.32|
        LSLS    r4,r5,#3
        MOVS    r0,#0
        ADDS    r2,r7,r4
        STR     r0,[r2,#0]
        MOVS    r6,r0
        STR     r0,[r2,#4]
|L0.44|
        LDR     r0,[sp,#8]
        ADDS    r0,r0,r4
        LDM     r0!,{r2,r3}
        LDR     r0,[sp,#4]
        ADDS    r1,r0,r4
        LDM     r1,{r0,r1}
        BL      __aeabi_dmul
        ADDS    r3,r7,r4
        LDM     r3,{r2,r3}
        BL      __aeabi_dadd
        ADDS    r2,r7,r4
        ADDS    r6,r6,#1
        STM     r2!,{r0,r1}
        CMP     r6,#0xc8
        BLT     |L0.44|
        MOVS    r0,#0xff
        ADDS    r5,r5,#1
        ADDS    r0,r0,#0x2d
        CMP     r5,r0
        BLT     |L0.32|
        LDR     r0,[sp,#0]
        ADDS    r0,r0,#1
        CMP     r0,#0x64
        STR     r0,[sp,#0]
        BLT     |L0.8|
        ADD     sp,sp,#0x1c
        POP     {r4-r7,pc}

```

72.10 Exercise 2.10

If to compile this piece of code and run, a number will be printed. Where it came from? Where it came from if to compile it in MSVC with optimization (/Ox)?

```
#include <stdio.h>
```

```

int main()
{
    printf ("%d\n");

    return 0;
};

```

72.11 Exercise 2.11

As a practical joke, “fool” your Windows Task Manager to show much more CPUs/CPU cores than your machine actually has:

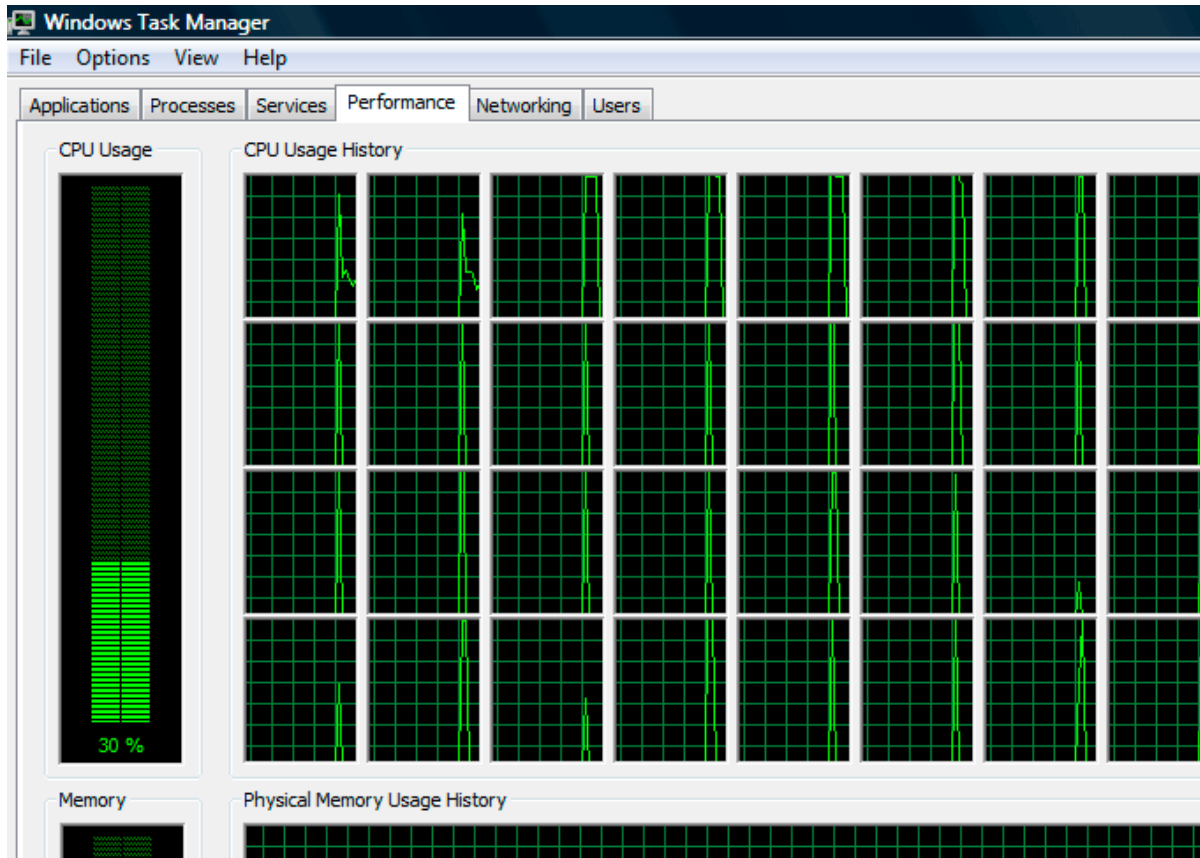


Figure 72.1: Fooled Windows Task Manager

72.12 Exercise 2.12

This is a well-known algorithm. How it’s called?

72.12.1 MSVC 2012 x64 + /Ox

```

s$ = 8
f PROC
    cmp     BYTE PTR [rcx], 0
    mov     r9, rcx
    je      SHORT $LN13@f
    npad    8
$LL50f:
    movzx   edx, BYTE PTR [rcx]
    lea     eax, DWORD PTR [rdx-97]
    cmp     al, 25

```

```

    ja      SHORT $LN3@f
    movsx   r8d, dl
    mov     eax, 1321528399          ; 4ec4ec4fH
    sub     r8d, 84                  ; 00000054H
    imul    r8d
    sar     edx, 3
    mov     eax, edx
    shr     eax, 31
    add     edx, eax
    imul    edx, 26
    sub     r8d, edx
    add     r8b, 97                  ; 00000061H
    jmp     SHORT $LN14@f
$LN3@f:
    lea     eax, DWORD PTR [rdx-65]
    cmp     al, 25
    ja      SHORT $LN1@f
    movsx   r8d, dl
    mov     eax, 1321528399          ; 4ec4ec4fH
    sub     r8d, 52                  ; 00000034H
    imul    r8d
    sar     edx, 3
    mov     eax, edx
    shr     eax, 31
    add     edx, eax
    imul    edx, 26
    sub     r8d, edx
    add     r8b, 65                  ; 00000041H
$LN14@f:
$LN1@f:
    inc     rcx
    cmp     BYTE PTR [rcx], 0
    jne     SHORT $LL5@f
$LN13@f:
    mov     rax, r9
    ret     0
f         ENDP

```

72.12.2 Keil (ARM)

```

f PROC
    PUSH    {r4-r6,lr}
    MOV     r4,r0
    MOV     r5,r0
    B       |L0.84|
|L0.16|
    SUB     r1,r0,#0x61
    CMP     r1,#0x19
    BHI     |L0.48|
    SUB     r0,r0,#0x54
    MOV     r1,#0x1a
    BL      __aeabi_idivmod
    ADD     r0,r1,#0x61
    B       |L0.76|
|L0.48|
    SUB     r1,r0,#0x41
    CMP     r1,#0x19
    BHI     |L0.80|
    SUB     r0,r0,#0x34

```

```

        MOV     r1,#0x1a
        BL      __aeabi_idivmod
        ADD     r0,r1,#0x41
|L0.76|
        STRB    r0,[r4,#0]
|L0.80|
        ADD     r4,r4,#1
|L0.84|
        LDRB    r0,[r4,#0]
        CMP     r0,#0
        MOVEQ   r0,r5
        BNE     |L0.16|
        POP     {r4-r6,pc}
        ENDP

```

72.12.3 Keil (thumb)

```

f PROC
        PUSH    {r4-r6,lr}
        MOVS    r4,r0
        MOVS    r5,r0
        B       |L0.50|
|L0.8|
        MOVS    r1,r0
        SUBS    r1,r1,#0x61
        CMP     r1,#0x19
        BHI     |L0.28|
        SUBS    r0,r0,#0x54
        MOVS    r1,#0x1a
        BL      __aeabi_idivmod
        ADDS    r1,r1,#0x61
        B       |L0.46|
|L0.28|
        MOVS    r1,r0
        SUBS    r1,r1,#0x41
        CMP     r1,#0x19
        BHI     |L0.48|
        SUBS    r0,r0,#0x34
        MOVS    r1,#0x1a
        BL      __aeabi_idivmod
        ADDS    r1,r1,#0x41
|L0.46|
        STRB    r1,[r4,#0]
|L0.48|
        ADDS    r4,r4,#1
|L0.50|
        LDRB    r0,[r4,#0]
        CMP     r0,#0
        BNE     |L0.8|
        MOVS    r0,r5
        POP     {r4-r6,pc}
        ENDP

```

72.13 Exercise 2.13

This is a well-known cryptoalgorithm of the past. How it's called?

72.13.1 MSVC 2012 + /Ox

```

_in$ = 8                                ; size = 2
_f PROC
    movzx    ecx, WORD PTR _in$[esp-4]
    lea      eax, DWORD PTR [ecx*4]
    xor      eax, ecx
    add      eax, eax
    xor      eax, ecx
    shl      eax, 2
    xor      eax, ecx
    and      eax, 32                    ; 00000020H
    shl      eax, 10                    ; 0000000aH
    shr      ecx, 1
    or       eax, ecx
    ret      0
_f ENDP

```

72.13.2 Keil (ARM)

```

f PROC
    EOR      r1,r0,r0,LSR #2
    EOR      r1,r1,r0,LSR #3
    EOR      r1,r1,r0,LSR #5
    AND      r1,r1,#1
    LSR      r0,r0,#1
    ORR      r0,r0,r1,LSL #15
    BX      lr
    ENDP

```

72.13.3 Keil (thumb)

```

f PROC
    LSRS     r1,r0,#2
    EORS     r1,r1,r0
    LSRS     r2,r0,#3
    EORS     r1,r1,r2
    LSRS     r2,r0,#5
    EORS     r1,r1,r2
    LSLs     r1,r1,#31
    LSRS     r0,r0,#1
    LSRS     r1,r1,#16
    ORRS     r0,r0,r1
    BX      lr
    ENDP

```

72.14 Exercise 2.14

Another well-known algorithm. The function takes two variables and returning one.

72.14.1 MSVC 2012

```

_rt$1 = -4                                ; size = 4
_rt$2 = 8                                ; size = 4
_x$ = 8                                  ; size = 4
_y$ = 12                                  ; size = 4

```

```

?f@@YAIIOZ PROC                                     ; f
    push    ecx
    push    esi
    mov     esi, DWORD PTR _x$[esp+4]
    test    esi, esi
    jne     SHORT $LN7@f
    mov     eax, DWORD PTR _y$[esp+4]
    pop     esi
    pop     ecx
    ret     0
$LN7@f:
    mov     edx, DWORD PTR _y$[esp+4]
    mov     eax, esi
    test    edx, edx
    je      SHORT $LN8@f
    or      eax, edx
    push    edi
    bsf     edi, eax
    bsf     eax, esi
    mov     ecx, eax
    mov     DWORD PTR _rt$1[esp+12], eax
    bsf     eax, edx
    shr     esi, cl
    mov     ecx, eax
    shr     edx, cl
    mov     DWORD PTR _rt$2[esp+8], eax
    cmp     esi, edx
    je      SHORT $LN22@f
$LN23@f:
    jbe     SHORT $LN2@f
    xor     esi, edx
    xor     edx, esi
    xor     esi, edx
$LN2@f:
    cmp     esi, 1
    je      SHORT $LN22@f
    sub     edx, esi
    bsf     eax, edx
    mov     ecx, eax
    shr     edx, cl
    mov     DWORD PTR _rt$2[esp+8], eax
    cmp     esi, edx
    jne     SHORT $LN23@f
$LN22@f:
    mov     ecx, edi
    shl     esi, cl
    pop     edi
    mov     eax, esi
$LN8@f:
    pop     esi
    pop     ecx
    ret     0
?f@@YAIIOZ ENDP

```

72.14.2 Keil (ARM mode)

```

||f1|| PROC
    CMP     r0,#0
    RSB     r1,r0,#0
    AND     r0,r0,r1

```

```

        CLZ      r0,r0
        RSBNE    r0,r0,#0x1f
        BX      lr
        ENDP

f PROC
        MOVS     r2,r0
        MOV      r3,r1
        MOVEQ    r0,r1
        CMPNE    r3,#0
        PUSH     {lr}
        POPEQ    {pc}
        ORR      r0,r2,r3
        BL       ||f1||
        MOV      r12,r0
        MOV      r0,r2
        BL       ||f1||
        LSR      r2,r2,r0
|L0.196|
        MOV      r0,r3
        BL       ||f1||
        LSR      r0,r3,r0
        CMP      r2,r0
        EORHI    r1,r2,r0
        EORHI    r0,r0,r1
        EORHI    r2,r1,r0
        BEQ      |L0.240|
        CMP      r2,#1
        SUBNE    r3,r0,r2
        BNE      |L0.196|
|L0.240|
        LSL      r0,r2,r12
        POP      {pc}
        ENDP

```

72.14.3 GCC 4.6.3 for Raspberry Pi (ARM mode)

```

f:
        subs     r3, r0, #0
        beq      .L162
        cmp      r1, #0
        moveq    r1, r3
        beq      .L162
        orr      r2, r1, r3
        rsb      ip, r2, #0
        and      ip, ip, r2
        cmp      r2, #0
        rsb      r2, r3, #0
        and      r2, r2, r3
        clz      r2, r2
        rsb      r2, r2, #31
        clz      ip, ip
        rsbne    ip, ip, #31
        mov      r3, r3, lsr r2
        b        .L169
.L171:
        eorhi    r1, r1, r2
        eorhi    r3, r1, r2
        cmp      r3, #1
        rsb      r1, r3, r1

```

```

        beq      .L167
.L169:
        rsb      r0, r1, #0
        and      r0, r0, r1
        cmp      r1, #0
        clz      r0, r0
        mov      r2, r0
        rsbne    r2, r0, #31
        mov      r1, r1, lsr r2
        cmp      r3, r1
        eor      r2, r1, r3
        bne      .L171
.L167:
        mov      r1, r3, asl ip
.L162:
        mov      r0, r1
        bx       lr

```

72.15 Exercise 2.15

Well-known algorithm again. What it does?

Take also notice that the code for x86 uses FPU, but SIMD-instructions are used instead in x64 code. That's OK: [24](#).

72.15.1 MSVC 2012 x64 /Ox

```

__real@412e848000000000 DQ 0412e848000000000r    ; 1e+006
__real@4010000000000000 DQ 04010000000000000r    ; 4
__real@4008000000000000 DQ 04008000000000000r    ; 3
__real@3f800000 DD 03f800000r                     ; 1

tmp$1 = 8
tmp$2 = 8
f      PROC
        movsdx   xmm3, QWORD PTR __real@4008000000000000
        movss    xmm4, DWORD PTR __real@3f800000
        mov      edx, DWORD PTR ?RNG_state@?1??get_rand@@@9@9
        xor      ecx, ecx
        mov      r8d, 200000                      ; 00030d40H
        npad     2
$LL40f:
        imul     edx, 1664525                      ; 0019660dH
        add      edx, 1013904223                    ; 3c6ef35fH
        mov      eax, edx
        and      eax, 8388607                      ; 007fffffH
        imul     edx, 1664525                      ; 0019660dH
        bts      eax, 30
        add      edx, 1013904223                    ; 3c6ef35fH
        mov      DWORD PTR tmp$2[rsp], eax
        mov      eax, edx
        and      eax, 8388607                      ; 007fffffH
        bts      eax, 30
        movss    xmm0, DWORD PTR tmp$2[rsp]
        mov      DWORD PTR tmp$1[rsp], eax
        cvtps2pd xmm0, xmm0
        subss    xmm0, xmm3
        cvtpd2ps xmm2, xmm0
        movss    xmm0, DWORD PTR tmp$1[rsp]
        cvtps2pd xmm0, xmm0
        mulss    xmm2, xmm2

```

```

    subsd    xmm0, xmm3
    cvtpd2ps xmm1, xmm0
    mulss    xmm1, xmm1
    addss    xmm1, xmm2
    comiss   xmm4, xmm1
    jbe      SHORT $LN3@f
    inc      ecx
$LN3@f:
    imul     edx, 1664525          ; 0019660dH
    add      edx, 1013904223       ; 3c6ef35fH
    mov      eax, edx
    and      eax, 8388607          ; 007fffffH
    imul     edx, 1664525          ; 0019660dH
    bts      eax, 30
    add      edx, 1013904223       ; 3c6ef35fH
    mov      DWORD PTR tmp$2[rsi], eax
    mov      eax, edx
    and      eax, 8388607          ; 007fffffH
    bts      eax, 30
    movss    xmm0, DWORD PTR tmp$2[rsi]
    mov      DWORD PTR tmp$1[rsi], eax
    cvtps2pd xmm0, xmm0
    subsd    xmm0, xmm3
    cvtpd2ps xmm2, xmm0
    movss    xmm0, DWORD PTR tmp$1[rsi]
    cvtps2pd xmm0, xmm0
    mulss    xmm2, xmm2
    subsd    xmm0, xmm3
    cvtpd2ps xmm1, xmm0
    mulss    xmm1, xmm1
    addss    xmm1, xmm2
    comiss   xmm4, xmm1
    jbe      SHORT $LN15@f
    inc      ecx
$LN15@f:
    imul     edx, 1664525          ; 0019660dH
    add      edx, 1013904223       ; 3c6ef35fH
    mov      eax, edx
    and      eax, 8388607          ; 007fffffH
    imul     edx, 1664525          ; 0019660dH
    bts      eax, 30
    add      edx, 1013904223       ; 3c6ef35fH
    mov      DWORD PTR tmp$2[rsi], eax
    mov      eax, edx
    and      eax, 8388607          ; 007fffffH
    bts      eax, 30
    movss    xmm0, DWORD PTR tmp$2[rsi]
    mov      DWORD PTR tmp$1[rsi], eax
    cvtps2pd xmm0, xmm0
    subsd    xmm0, xmm3
    cvtpd2ps xmm2, xmm0
    movss    xmm0, DWORD PTR tmp$1[rsi]
    cvtps2pd xmm0, xmm0
    mulss    xmm2, xmm2
    subsd    xmm0, xmm3
    cvtpd2ps xmm1, xmm0
    mulss    xmm1, xmm1
    addss    xmm1, xmm2
    comiss   xmm4, xmm1
    jbe      SHORT $LN16@f
    inc      ecx

```

```

$LN16@f:
    imul    edx, 1664525                ; 0019660dH
    add     edx, 1013904223             ; 3c6ef35fH
    mov     eax, edx
    and     eax, 8388607                ; 007fffffH
    imul    edx, 1664525                ; 0019660dH
    bts     eax, 30
    add     edx, 1013904223             ; 3c6ef35fH
    mov     DWORD PTR tmp$2[rsp], eax
    mov     eax, edx
    and     eax, 8388607                ; 007fffffH
    bts     eax, 30
    movss   xmm0, DWORD PTR tmp$2[rsp]
    mov     DWORD PTR tmp$1[rsp], eax
    cvtps2pd xmm0, xmm0
    subss   xmm0, xmm3
    cvtpd2ps xmm2, xmm0
    movss   xmm0, DWORD PTR tmp$1[rsp]
    cvtps2pd xmm0, xmm0
    mulss   xmm2, xmm2
    subss   xmm0, xmm3
    cvtpd2ps xmm1, xmm0
    mulss   xmm1, xmm1
    addss   xmm1, xmm2
    comiss   xmm4, xmm1
    jbe     SHORT $LN17@f
    inc     ecx

$LN17@f:
    imul    edx, 1664525                ; 0019660dH
    add     edx, 1013904223             ; 3c6ef35fH
    mov     eax, edx
    and     eax, 8388607                ; 007fffffH
    imul    edx, 1664525                ; 0019660dH
    bts     eax, 30
    add     edx, 1013904223             ; 3c6ef35fH
    mov     DWORD PTR tmp$2[rsp], eax
    mov     eax, edx
    and     eax, 8388607                ; 007fffffH
    bts     eax, 30
    movss   xmm0, DWORD PTR tmp$2[rsp]
    mov     DWORD PTR tmp$1[rsp], eax
    cvtps2pd xmm0, xmm0
    subss   xmm0, xmm3
    cvtpd2ps xmm2, xmm0
    movss   xmm0, DWORD PTR tmp$1[rsp]
    cvtps2pd xmm0, xmm0
    mulss   xmm2, xmm2
    subss   xmm0, xmm3
    cvtpd2ps xmm1, xmm0
    mulss   xmm1, xmm1
    addss   xmm1, xmm2
    comiss   xmm4, xmm1
    jbe     SHORT $LN18@f
    inc     ecx

$LN18@f:
    dec     r8
    jne     $LL4@f
    movd    xmm0, ecx
    mov     DWORD PTR ?RNG_state@?1??get_rand@@@9@9, edx
    cvtdq2ps xmm0, xmm0
    cvtps2pd xmm1, xmm0

```

```

mulsd    xmm1, QWORD PTR __real@4010000000000000
divsd    xmm1, QWORD PTR __real@412e848000000000
cvtpd2ps xmm0, xmm1
ret      0
f        ENDP

```

72.15.2 GCC 4.4.6 -O3 x64

```

f1:
    mov     eax, DWORD PTR v1.2084[rip]
    imul    eax, eax, 1664525
    add     eax, 1013904223
    mov     DWORD PTR v1.2084[rip], eax
    and     eax, 8388607
    or      eax, 1073741824
    mov     DWORD PTR [rsp-4], eax
    movss   xmm0, DWORD PTR [rsp-4]
    subss   xmm0, DWORD PTR .LC0[rip]
    ret

f:
    push    rbp
    xor     ebp, ebp
    push    rbx
    xor     ebx, ebx
    sub     rsp, 16

.L6:
    xor     eax, eax
    call    f1
    xor     eax, eax
    movss   DWORD PTR [rsp], xmm0
    call    f1
    movss   xmm1, DWORD PTR [rsp]
    mulss   xmm0, xmm0
    mulss   xmm1, xmm1
    lea     eax, [rbx+1]
    addss   xmm1, xmm0
    movss   xmm0, DWORD PTR .LC1[rip]
    ucomiss xmm0, xmm1
    cmova   ebx, eax
    add     ebp, 1
    cmp     ebp, 1000000
    jne     .L6
    cvtsi2ss    xmm0, ebx
    unpcklps    xmm0, xmm0
    cvtps2pd    xmm0, xmm0
    mulsd    xmm0, QWORD PTR .LC2[rip]
    divsd    xmm0, QWORD PTR .LC3[rip]
    add     rsp, 16
    pop     rbx
    pop     rbp
    unpcklpd    xmm0, xmm0
    cvtpd2ps    xmm0, xmm0
    ret

v1.2084:
    .long    305419896

.LC0:
    .long    1077936128

.LC1:
    .long    1065353216

.LC2:

```

```

        .long    0
        .long    1074790400
.LC3:
        .long    0
        .long    1093567616

```

72.15.3 GCC 4.8.1 -O3 x86

```

f1:
    sub    esp, 4
    imul   eax, DWORD PTR v1.2023, 1664525
    add    eax, 1013904223
    mov    DWORD PTR v1.2023, eax
    and    eax, 8388607
    or     eax, 1073741824
    mov    DWORD PTR [esp], eax
    fld    DWORD PTR [esp]
    fsub   DWORD PTR .LC0
    add    esp, 4
    ret

f:
    push   esi
    mov    esi, 1000000
    push   ebx
    xor    ebx, ebx
    sub    esp, 16

.L7:
    call   f1
    fstp   DWORD PTR [esp]
    call   f1
    lea    eax, [ebx+1]
    fld    DWORD PTR [esp]
    fmul   st, st(0)
    fxch   st(1)
    fmul   st, st(0)
    faddp   st(1), st
    fld1
    fucomip st, st(1)
    fstp   st(0)
    cmova  ebx, eax
    sub    esi, 1
    jne    .L7
    mov    DWORD PTR [esp+4], ebx
    fild   DWORD PTR [esp+4]
    fmul   DWORD PTR .LC3
    fdiv   DWORD PTR .LC4
    fstp   DWORD PTR [esp+8]
    fld    DWORD PTR [esp+8]
    add    esp, 16
    pop    ebx
    pop    esi
    ret

v1.2023:
    .long   305419896

.LC0:
    .long   1077936128

.LC3:
    .long   1082130432

.LC4:

```

```
.long 1232348160
```

72.15.4 Keil (ARM mode): Cortex-R4F CPU as target

```
f1    PROC
      LDR    r1,|L0.184|
      LDR    r0,[r1,#0] ; v1
      LDR    r2,|L0.188|
      VMOV.F32 s1,#3.00000000
      MUL    r0,r0,r2
      LDR    r2,|L0.192|
      ADD    r0,r0,r2
      STR    r0,[r1,#0] ; v1
      BFC    r0,#23,#9
      ORR    r0,r0,#0x40000000
      VMOV    s0,r0
      VSUB.F32 s0,s0,s1
      BX     lr
      ENDP

f      PROC
      PUSH    {r4,r5,lr}
      MOV     r4,#0
      LDR     r5,|L0.196|
      MOV     r3,r4
|L0.68|
      BL      f1
      VMOV.F32 s2,s0
      BL      f1
      VMOV.F32 s1,s2
      ADD     r3,r3,#1
      VMUL.F32 s1,s1,s1
      VMLA.F32 s1,s0,s0
      VMOV     r0,s1
      CMP     r0,#0x3f800000
      ADDLT   r4,r4,#1
      CMP     r3,r5
      BLT     |L0.68|
      VMOV     s0,r4
      VMOV.F64 d1,#4.00000000
      VCVT.F32.S32 s0,s0
      VCVT.F64.F32 d0,s0
      VMUL.F64 d0,d0,d1
      VLDR     d1,|L0.200|
      VDIV.F64 d2,d0,d1
      VCVT.F32.F64 s0,d2
      POP     {r4,r5,pc}
      ENDP

|L0.184|
      DCD     ||.data||
|L0.188|
      DCD     0x0019660d
|L0.192|
      DCD     0x3c6ef35f
|L0.196|
      DCD     0x000f4240
|L0.200|
      DCFD     0x412e848000000000 ; 1000000
```

```

        DCD      0x00000000
        AREA    ||.data||, DATA, ALIGN=2
v1
        DCD      0x12345678

```

72.16 Exercise 2.16

Well-known function. What it computes? Why stack overflows if 4 and 2 are supplied at input? Are there any error?

72.16.1 MSVC 2012 x64 /Ox

```

m$ = 48
n$ = 56
f    PROC
$LN14:
        push     rbx
        sub      rsp, 32
        mov      eax, edx
        mov      ebx, ecx
        test     ecx, ecx
        je       SHORT $LN11@f
$LL50f:
        test     eax, eax
        jne      SHORT $LN10f
        mov      eax, 1
        jmp      SHORT $LN120f
$LN10f:
        lea      edx, DWORD PTR [rax-1]
        mov      ecx, ebx
        call     f
$LN120f:
        dec      ebx
        test     ebx, ebx
        jne      SHORT $LL50f
$LN110f:
        inc      eax
        add      rsp, 32
        pop      rbx
        ret      0
f    ENDP

```

72.16.2 Keil (ARM) -O3

```

f PROC
        PUSH     {r4,lr}
        MOVS     r4,r0
        ADDEQ    r0,r1,#1
        POPEQ    {r4,pc}
        CMP      r1,#0
        MOVEQ    r1,#1
        SUBEQ    r0,r0,#1
        BEQ      |L0.48|
        SUB      r1,r1,#1
        BL       f
        MOV      r1,r0
        SUB      r0,r4,#1
        |L0.48|

```

```

POP    {r4,lr}
B      f
ENDP

```

72.16.3 Keil (thumb) -O3

```

f PROC
    PUSH    {r4,lr}
    MOVS    r4,r0
    BEQ     |L0.26|
    CMP     r1,#0
    BEQ     |L0.30|
    SUBS    r1,r1,#1
    BL      f
    MOVS    r1,r0
|L0.18|
    SUBS    r0,r4,#1
    BL      f
    POP     {r4,pc}
|L0.26|
    ADDS    r0,r1,#1
    POP     {r4,pc}
|L0.30|
    MOVS    r1,#1
    B      |L0.18|
    ENDP

```

72.17 Exercise 2.17

This program prints some information to *stdout*, each time different. What is it?

Compiled binaries:

- [Linux x64](#)
- [MacOSX x64](#)
- [Win32](#)
- [Win64](#)

As of Windows versions, you may need to install [MSVC 2012 redist](#).

Chapter 73

Level 3

For solving level 3 tasks, you'll probably need considerable ammount of time, maybe up to one day.

73.1 Exercise 3.1

Well-known algorithm, also included in standard C library. Source code was taken from glibc 2.11.1. Compiled in GCC 4.4.1 with `-Os` option (code size optimization). Listing was done by IDA 4.9 disassembler from ELF-file generated by GCC and linker.

For those who wants use IDA while learning, here you may find `.elf` and `.idb` files, `.idb` can be opened with freeware IDA 4.9:

<http://yurichev.com/RE-exercises/3/1/>

```
f
    proc near

var_150    = dword ptr -150h
var_14C    = dword ptr -14Ch
var_13C    = dword ptr -13Ch
var_138    = dword ptr -138h
var_134    = dword ptr -134h
var_130    = dword ptr -130h
var_128    = dword ptr -128h
var_124    = dword ptr -124h
var_120    = dword ptr -120h
var_11C    = dword ptr -11Ch
var_118    = dword ptr -118h
var_114    = dword ptr -114h
var_110    = dword ptr -110h
var_C      = dword ptr -0Ch
arg_0      = dword ptr 8
arg_4      = dword ptr 0Ch
arg_8      = dword ptr 10h
arg_C      = dword ptr 14h
arg_10     = dword ptr 18h

    push    ebp
    mov     ebp, esp
    push    edi
    push    esi
    push    ebx
    sub     esp, 14Ch
    mov     ebx, [ebp+arg_8]
    cmp     [ebp+arg_4], 0
    jz      loc_804877D
    cmp     [ebp+arg_4], 4
    lea     eax, ds:0[ebx*4]
    mov     [ebp+var_130], eax
    jbe     loc_804864C
    mov     eax, [ebp+arg_4]
```

```

mov     ecx, ebx
mov     esi, [ebp+arg_0]
lea     edx, [ebp+var_110]
neg     ecx
mov     [ebp+var_118], 0
mov     [ebp+var_114], 0
dec     eax
imul    eax, ebx
add     eax, [ebp+arg_0]
mov     [ebp+var_11C], edx
mov     [ebp+var_134], ecx
mov     [ebp+var_124], eax
lea     eax, [ebp+var_118]
mov     [ebp+var_14C], eax
mov     [ebp+var_120], ebx

loc_8048433:                                ; CODE XREF: f+28C
mov     eax, [ebp+var_124]
xor     edx, edx
push    edi
push    [ebp+arg_10]
sub     eax, esi
div     [ebp+var_120]
push    esi
shr     eax, 1
imul    eax, [ebp+var_120]
lea     edx, [esi+eax]
push    edx
mov     [ebp+var_138], edx
call    [ebp+arg_C]
add     esp, 10h
mov     edx, [ebp+var_138]
test    eax, eax
jns     short loc_8048482
xor     eax, eax

loc_804846D:                                ; CODE XREF: f+CC
mov     cl, [edx+eax]
mov     bl, [esi+eax]
mov     [edx+eax], bl
mov     [esi+eax], cl
inc     eax
cmp     [ebp+var_120], eax
jnz     short loc_804846D

loc_8048482:                                ; CODE XREF: f+B5
push    ebx
push    [ebp+arg_10]
mov     [ebp+var_138], edx
push    edx
push    [ebp+var_124]
call    [ebp+arg_C]
mov     edx, [ebp+var_138]
add     esp, 10h
test    eax, eax
jns     short loc_80484F6
mov     ecx, [ebp+var_124]
xor     eax, eax

loc_80484AB:                                ; CODE XREF: f+10D
movzx   edi, byte ptr [edx+eax]

```

```

    mov     bl, [ecx+eax]
    mov     [edx+eax], bl
    mov     ebx, edi
    mov     [ecx+eax], bl
    inc     eax
    cmp     [ebp+var_120], eax
    jnz     short loc_80484AB
    push    ecx
    push    [ebp+arg_10]
    mov     [ebp+var_138], edx
    push    esi
    push    edx
    call    [ebp+arg_C]
    add     esp, 10h
    mov     edx, [ebp+var_138]
    test    eax, eax
    jns     short loc_80484F6
    xor     eax, eax

loc_80484E1:                                ; CODE XREF: f+140
    mov     cl, [edx+eax]
    mov     bl, [esi+eax]
    mov     [edx+eax], bl
    mov     [esi+eax], cl
    inc     eax
    cmp     [ebp+var_120], eax
    jnz     short loc_80484E1

loc_80484F6:                                ; CODE XREF: f+ED
                                           ; f+129
    mov     eax, [ebp+var_120]
    mov     edi, [ebp+var_124]
    add     edi, [ebp+var_134]
    lea     ebx, [esi+eax]
    jmp     short loc_8048513
; -----

loc_804850D:                                ; CODE XREF: f+17B
    add     ebx, [ebp+var_120]

loc_8048513:                                ; CODE XREF: f+157
                                           ; f+1F9
    push    eax
    push    [ebp+arg_10]
    mov     [ebp+var_138], edx
    push    edx
    push    ebx
    call    [ebp+arg_C]
    add     esp, 10h
    mov     edx, [ebp+var_138]
    test    eax, eax
    jns     short loc_8048537
    jmp     short loc_804850D
; -----

loc_8048531:                                ; CODE XREF: f+19D
    add     edi, [ebp+var_134]

loc_8048537:                                ; CODE XREF: f+179
    push    ecx
    push    [ebp+arg_10]

```

```

    mov     [ebp+var_138], edx
    push    edi
    push    edx
    call    [ebp+arg_C]
    add     esp, 10h
    mov     edx, [ebp+var_138]
    test    eax, eax
    js      short loc_8048531
    cmp     ebx, edi
    jnb     short loc_8048596
    xor     eax, eax
    mov     [ebp+var_128], edx

loc_804855F:                                ; CODE XREF: f+1BE
    mov     cl, [ebx+eax]
    mov     dl, [edi+eax]
    mov     [ebx+eax], dl
    mov     [edi+eax], cl
    inc     eax
    cmp     [ebp+var_120], eax
    jnz     short loc_804855F
    mov     edx, [ebp+var_128]
    cmp     edx, ebx
    jnz     short loc_8048582
    mov     edx, edi
    jmp     short loc_8048588
; -----

loc_8048582:                                ; CODE XREF: f+1C8
    cmp     edx, edi
    jnz     short loc_8048588
    mov     edx, ebx

loc_8048588:                                ; CODE XREF: f+1CC
                                           ; f+1D0
    add     ebx, [ebp+var_120]
    add     edi, [ebp+var_134]
    jmp     short loc_80485AB
; -----

loc_8048596:                                ; CODE XREF: f+1A1
    jnz     short loc_80485AB
    mov     ecx, [ebp+var_134]
    mov     eax, [ebp+var_120]
    lea     edi, [ebx+ecx]
    add     ebx, eax
    jmp     short loc_80485B3
; -----

loc_80485AB:                                ; CODE XREF: f+1E0
                                           ; f:loc_8048596
    cmp     ebx, edi
    jbe     loc_8048513

loc_80485B3:                                ; CODE XREF: f+1F5
    mov     eax, edi
    sub     eax, esi
    cmp     eax, [ebp+var_130]
    ja      short loc_80485EB
    mov     eax, [ebp+var_124]
    mov     esi, ebx

```

```

    sub     eax, ebx
    cmp     eax, [ebp+var_130]
    ja      short loc_8048634
    sub     [ebp+var_11C], 8
    mov     edx, [ebp+var_11C]
    mov     ecx, [edx+4]
    mov     esi, [edx]
    mov     [ebp+var_124], ecx
    jmp     short loc_8048634
; -----
loc_80485EB:                                ; CODE XREF: f+209
    mov     edx, [ebp+var_124]
    sub     edx, ebx
    cmp     edx, [ebp+var_130]
    jbe     short loc_804862E
    cmp     eax, edx
    mov     edx, [ebp+var_11C]
    lea     eax, [edx+8]
    jle     short loc_8048617
    mov     [edx], esi
    mov     esi, ebx
    mov     [edx+4], edi
    mov     [ebp+var_11C], eax
    jmp     short loc_8048634
; -----
loc_8048617:                                ; CODE XREF: f+252
    mov     ecx, [ebp+var_11C]
    mov     [ebp+var_11C], eax
    mov     [ecx], ebx
    mov     ebx, [ebp+var_124]
    mov     [ecx+4], ebx

loc_804862E:                                ; CODE XREF: f+245
    mov     [ebp+var_124], edi

loc_8048634:                                ; CODE XREF: f+21B
                                           ; f+235 ...
    mov     eax, [ebp+var_14C]
    cmp     [ebp+var_11C], eax
    ja      loc_8048433
    mov     ebx, [ebp+var_120]

loc_804864C:                                ; CODE XREF: f+2A
    mov     eax, [ebp+arg_4]
    mov     ecx, [ebp+arg_0]
    add     ecx, [ebp+var_130]
    dec     eax
    imul    eax, ebx
    add     eax, [ebp+arg_0]
    cmp     ecx, eax
    mov     [ebp+var_120], eax
    jbe     short loc_804866B
    mov     ecx, eax

loc_804866B:                                ; CODE XREF: f+2B3
    mov     esi, [ebp+arg_0]
    mov     edi, [ebp+arg_0]
    add     esi, ebx
    mov     edx, esi

```

```

        jmp     short loc_80486A3
; -----
loc_8048677:                ; CODE XREF: f+2F1
        push    eax
        push    [ebp+arg_10]
        mov     [ebp+var_138], edx
        mov     [ebp+var_13C], ecx
        push    edi
        push    edx
        call    [ebp+arg_C]
        add     esp, 10h
        mov     edx, [ebp+var_138]
        mov     ecx, [ebp+var_13C]
        test    eax, eax
        jns     short loc_80486A1
        mov     edi, edx

loc_80486A1:                ; CODE XREF: f+2E9
        add     edx, ebx

loc_80486A3:                ; CODE XREF: f+2C1
        cmp     edx, ecx
        jbe     short loc_8048677
        cmp     edi, [ebp+arg_0]
        jz      loc_8048762
        xor     eax, eax

loc_80486B2:                ; CODE XREF: f+313
        mov     ecx, [ebp+arg_0]
        mov     dl, [edi+eax]
        mov     cl, [ecx+eax]
        mov     [edi+eax], cl
        mov     ecx, [ebp+arg_0]
        mov     [ecx+eax], dl
        inc     eax
        cmp     ebx, eax
        jnz     short loc_80486B2
        jmp     loc_8048762
; -----
loc_80486CE:                ; CODE XREF: f+3C3
        lea     edx, [esi+edi]
        jmp     short loc_80486D5
; -----
loc_80486D3:                ; CODE XREF: f+33B
        add     edx, edi

loc_80486D5:                ; CODE XREF: f+31D
        push    eax
        push    [ebp+arg_10]
        mov     [ebp+var_138], edx
        push    edx
        push    esi
        call    [ebp+arg_C]
        add     esp, 10h
        mov     edx, [ebp+var_138]
        test    eax, eax
        js      short loc_80486D3
        add     edx, ebx

```

```

    cmp     edx, esi
    mov     [ebp+var_124], edx
    jz      short loc_804876F
    mov     edx, [ebp+var_134]
    lea     eax, [esi+ebx]
    add     edx, eax
    mov     [ebp+var_11C], edx
    jmp     short loc_804875B
; -----

loc_8048710:                                ; CODE XREF: f+3AA
    mov     cl, [eax]
    mov     edx, [ebp+var_11C]
    mov     [ebp+var_150], eax
    mov     byte ptr [ebp+var_130], cl
    mov     ecx, eax
    jmp     short loc_8048733
; -----

loc_8048728:                                ; CODE XREF: f+391
    mov     al, [edx+ebx]
    mov     [ecx], al
    mov     ecx, [ebp+var_128]

loc_8048733:                                ; CODE XREF: f+372
    mov     [ebp+var_128], edx
    add     edx, edi
    mov     eax, edx
    sub     eax, edi
    cmp     [ebp+var_124], eax
    jbe     short loc_8048728
    mov     dl, byte ptr [ebp+var_130]
    mov     eax, [ebp+var_150]
    mov     [ecx], dl
    dec     [ebp+var_11C]

loc_804875B:                                ; CODE XREF: f+35A
    dec     eax
    cmp     eax, esi
    jnb     short loc_8048710
    jmp     short loc_804876F
; -----

loc_8048762:                                ; CODE XREF: f+2F6
                                           ; f+315
    mov     edi, ebx
    neg     edi
    lea     ecx, [edi-1]
    mov     [ebp+var_134], ecx

loc_804876F:                                ; CODE XREF: f+347
                                           ; f+3AC
    add     esi, ebx
    cmp     esi, [ebp+var_120]
    jbe     loc_80486CE

loc_804877D:                                ; CODE XREF: f+13
    lea     esp, [ebp-0Ch]
    pop     ebx
    pop     esi
    pop     edi

```

	pop	ebp
	retn	
f	endp	

73.2 Exercise 3.2

There is a small executable file with a well-known cryptosystem inside. Try to identify it.

- [Windows x86](#)
- [Linux x86](#)
- [MacOSX \(x64\)](#)

73.3 Exercise 3.3

There is a small executable file, some utility. It opens another file, reads it, calculate something and prints a float number. Try to understand what it do.

- [Windows x86](#)
- [Linux x86](#)
- [MacOSX \(x64\)](#)

73.4 Exercise 3.4

There is an utility which encrypts/decrypts files, by password. There is an encrypted text file, password is unknown. Encrypted file is a text in English language. The utility uses relatively strong cryptosystem, nevertheless, it was implemented with a serious blunder. Since the mistake present, it is possible to decrypt the file with a little effort..

Try to find the mistake and decrypt the file.

- [Windows x86](#)
- [Text file](#)

73.5 Exercise 3.5

This is software copy protection imitation, which uses key file. The key file contain user (or customer) name and serial number. There are two tasks:

- (Easy) with the help of [tracer](#) or any other debugger, force the program to accept changed key file.
- (Medium) your goal is to modify user name to another, however, it is not allowed to patch the program.
- [Windows x86](#)
- [Linux x86](#)
- [MacOSX \(x64\)](#)
- [Key file](#)

73.6 Exercise 3.6

Here is a very primitive toy web-server, supporting only static files, without [CGI](#)¹, etc. At least 4 vulnerabilities are leaved here intentionally. Try to find them all and exploit them in order for breaking into a remote host.

- [Windows x86](#)
- [Linux x86](#)
- [MacOSX \(x64\)](#)

¹Common Gateway Interface

73.7 Exercise 3.7

With the help of [tracer](#) or any other win32 debugger, reveal hidden mines in the MineSweeper standard Windows game during play.

Hint: [\[34\]](#) have some insights about MineSweeper's internals.

Chapter 74

crackme / keygenme

Couple of my [keygenmes](#):

<http://crackmes.de/users/yonkie/>

Part XI

Exercise solutions

Chapter 75

Level 1

75.1 Exercise 1.1

That was a function returning maximal value from two.

Chapter 76

Level 2

76.1 Exercise 2.1

Solution: toupper().

C source code:

```
char toupper ( char c )
{
    if( c >= 'a' && c <= 'z' ) {
        c = c - 'a' + 'A';
    }
    return( c );
}
```

76.2 Exercise 2.2

Solution: atoi()

C source code:

```
#include <stdio.h>
#include <string.h>
#include <ctype.h>

int atoi ( const *p ) /* convert ASCII string to integer */
{
    int i;
    char s;

    while( isspace ( *p ) )
        ++p;
    s = *p;
    if( s == '+' || s == '-' )
        ++p;
    i = 0;
    while( isdigit(*p) ) {
        i = i * 10 + *p - '0';
        ++p;
    }
    if( s == '-' )
        i = - i;
    return( i );
}
```

76.3 Exercise 2.3

Solution: `srand()` / `rand()`.

C source code:

```
static unsigned int v;

void srand (unsigned int s)
{
    v = s;
}

int rand ()
{
    return( ((v = v * 214013L
              + 2531011L) >> 16) & 0x7fff );
}
```

76.4 Exercise 2.4

Solution: `strstr()`.

C source code:

```
char * strstr (
    const char * str1,
    const char * str2
)
{
    char *cp = (char *) str1;
    char *s1, *s2;

    if ( !*str2 )
        return((char *)str1);

    while (*cp)
    {
        s1 = cp;
        s2 = (char *) str2;

        while ( *s1 && *s2 && !(*s1-*s2) )
            s1++, s2++;

        if (!*s2)
            return(cp);

        cp++;
    }

    return(NULL);
}
```

76.5 Exercise 2.5

Hint #1: Keep in mind that `__v`—global variable.

Hint #2: The function is called in [CRT](#) startup code, before `main()` execution.

Solution: early Pentium CPU FDIV bug checking¹.

C source code:

¹http://en.wikipedia.org/wiki/Pentium_FDIV_bug

```

unsigned _v; // _v

enum e {
    PROB_P5_DIV = 0x0001
};

void f( void ) // __verify_pentium_fdiv_bug
{
    /*
        Verify we have got the Pentium FDIV problem.
        The volatiles are to scare the optimizer away.
    */
    volatile double    v1    = 4195835;
    volatile double    v2    = 3145727;

    if( (v1 - (v1/v2)*v2) > 1.0e-8 ) {
        _v |= PROB_P5_DIV;
    }
}

```

76.6 Exercise 2.6

Hint: it might be helpful to google a constant used here.

Solution: [TEA²](#) encryption algorithm.

C source code (taken from http://en.wikipedia.org/wiki/Tiny_Encryption_Algorithm):

```

void f (unsigned int* v, unsigned int* k) {
    unsigned int v0=v[0], v1=v[1], sum=0, i;           /* set up */
    unsigned int delta=0x9e3779b9;                      /* a key schedule constant */
    unsigned int k0=k[0], k1=k[1], k2=k[2], k3=k[3];   /* cache key */
    for (i=0; i < 32; i++) {                            /* basic cycle start */
        sum += delta;
        v0 += ((v1<<4) + k0) ^ (v1 + sum) ^ ((v1>>5) + k1);
        v1 += ((v0<<4) + k2) ^ (v0 + sum) ^ ((v0>>5) + k3);
    }                                                    /* end cycle */
    v[0]=v0; v[1]=v1;
}

```

76.7 Exercise 2.7

Hint: the table contain pre-calculated values. It is possible to implement the function without it, but it will work slower, though.

Solution: this function reverse all bits in input 32-bit integer. It is `lib/bitrev.c` from Linux kernel.

C source code:

```

const unsigned char byte_rev_table[256] = {
    0x00, 0x80, 0x40, 0xc0, 0x20, 0xa0, 0x60, 0xe0,
    0x10, 0x90, 0x50, 0xd0, 0x30, 0xb0, 0x70, 0xf0,
    0x08, 0x88, 0x48, 0xc8, 0x28, 0xa8, 0x68, 0xe8,
    0x18, 0x98, 0x58, 0xd8, 0x38, 0xb8, 0x78, 0xf8,
    0x04, 0x84, 0x44, 0xc4, 0x24, 0xa4, 0x64, 0xe4,
    0x14, 0x94, 0x54, 0xd4, 0x34, 0xb4, 0x74, 0xf4,
    0x0c, 0x8c, 0x4c, 0xcc, 0x2c, 0xac, 0x6c, 0xec,
    0x1c, 0x9c, 0x5c, 0xdc, 0x3c, 0xbc, 0x7c, 0xfc,
    0x02, 0x82, 0x42, 0xc2, 0x22, 0xa2, 0x62, 0xe2,
    0x12, 0x92, 0x52, 0xd2, 0x32, 0xb2, 0x72, 0xf2,
    0x0a, 0x8a, 0x4a, 0xca, 0x2a, 0xaa, 0x6a, 0xea,

```

²Tiny Encryption Algorithm

```

    0x1a, 0x9a, 0x5a, 0xda, 0x3a, 0xba, 0x7a, 0xfa,
    0x06, 0x86, 0x46, 0xc6, 0x26, 0xa6, 0x66, 0xe6,
    0x16, 0x96, 0x56, 0xd6, 0x36, 0xb6, 0x76, 0xf6,
    0x0e, 0x8e, 0x4e, 0xce, 0x2e, 0xae, 0x6e, 0xee,
    0x1e, 0x9e, 0x5e, 0xde, 0x3e, 0xbe, 0x7e, 0xfe,
    0x01, 0x81, 0x41, 0xc1, 0x21, 0xa1, 0x61, 0xe1,
    0x11, 0x91, 0x51, 0xd1, 0x31, 0xb1, 0x71, 0xf1,
    0x09, 0x89, 0x49, 0xc9, 0x29, 0xa9, 0x69, 0xe9,
    0x19, 0x99, 0x59, 0xd9, 0x39, 0xb9, 0x79, 0xf9,
    0x05, 0x85, 0x45, 0xc5, 0x25, 0xa5, 0x65, 0xe5,
    0x15, 0x95, 0x55, 0xd5, 0x35, 0xb5, 0x75, 0xf5,
    0x0d, 0x8d, 0x4d, 0xcd, 0x2d, 0xad, 0x6d, 0xed,
    0x1d, 0x9d, 0x5d, 0xdd, 0x3d, 0xbd, 0x7d, 0xfd,
    0x03, 0x83, 0x43, 0xc3, 0x23, 0xa3, 0x63, 0xe3,
    0x13, 0x93, 0x53, 0xd3, 0x33, 0xb3, 0x73, 0xf3,
    0x0b, 0x8b, 0x4b, 0xcb, 0x2b, 0xab, 0x6b, 0xeb,
    0x1b, 0x9b, 0x5b, 0xdb, 0x3b, 0xbb, 0x7b, 0xfb,
    0x07, 0x87, 0x47, 0xc7, 0x27, 0xa7, 0x67, 0xe7,
    0x17, 0x97, 0x57, 0xd7, 0x37, 0xb7, 0x77, 0xf7,
    0x0f, 0x8f, 0x4f, 0xcf, 0x2f, 0xaf, 0x6f, 0xef,
    0x1f, 0x9f, 0x5f, 0xdf, 0x3f, 0xbf, 0x7f, 0xff,
};

unsigned char bitrev8(unsigned char byte)
{
    return byte_rev_table[byte];
}

unsigned short bitrev16(unsigned short x)
{
    return (bitrev8(x & 0xff) << 8) | bitrev8(x >> 8);
}

/**
 * bitrev32 - reverse the order of bits in a unsigned int value
 * @x: value to be bit-reversed
 */
unsigned int bitrev32(unsigned int x)
{
    return (bitrev16(x & 0xffff) << 16) | bitrev16(x >> 16);
}

```

76.8 Exercise 2.8

Solution: two 100*200 matrices of *double* type addition.

C/C++ source code:

```

#define M    100
#define N    200

void s(double *a, double *b, double *c)
{
    for(int i=0;i<N;i++)
        for(int j=0;j<M;j++)
            *(c+i*M+j)=*(a+i*M+j) + *(b+i*M+j);
};

```

76.9 Exercise 2.9

Solution: two matrices (one is 100*200, second is 100*300) of *double* type multiplication, result: 100*300 matrix.

C/C++ source code:

```
#define M      100
#define N      200
#define P      300

void m(double *a, double *b, double *c)
{
    for(int i=0;i<M;i++)
        for(int j=0;j<P;j++)
        {
            *(c+i*M+j)=0;
            for (int k=0;k<N;k++) *(c+i*M+j)+=(a+i*M+j) * *(b+i*M+j);
        }
};
```

76.10 Exercise 2.11

Hint: Task Manager get CPU/CPU cores count using function call

`NtQuerySystemInformation(SystemBasicInformation, ..., ..., ...)`, it is possible to find that call and to substitute resulting number.

And of course, the Task Manager will show incorrect results in CPU usage history.

76.11 Exercise 2.12

This is a primitive cryptographic algorithm named ROT13, once popular in UseNet and mailing lists ³.

[Source code.](#)

76.12 Exercise 2.13

The cryptoalgorithm is linear feedback shift register ⁴.

[Source code.](#)

76.13 Exercise 2.14

This is algorithm of finding greater common divisor (GCD).

[Source code.](#)

76.14 Exercise 2.15

Pi value calculation using Monte-Carlo method.

[Source code.](#)

76.15 Exercise 2.16

It is Ackermann function ⁵.

³<https://en.wikipedia.org/wiki/ROT13>

⁴https://en.wikipedia.org/wiki/Linear_feedback_shift_register

⁵https://en.wikipedia.org/wiki/Ackermann_function

```
int ack (int m, int n)
{
    if (m==0)
        return n+1;
    if (n==0)
        return ack (m-1, 1);
    return ack(m-1, ack (m, n-1));
};
```

76.16 Exercise 2.17

This is 1D cellular automation working by *Rule 110*:

https://en.wikipedia.org/wiki/Rule_110.

[Source code](#).

Chapter 77

Level 3

77.1 Exercise 3.1

Hint #1: The code has one characteristic thing, if considering it, it may help narrowing search of right function among glibc functions.

Solution: characteristic —is callback-function calling (20), pointer to which is passed in 4th argument. It is `quicksort()`.
[C source code](#).

77.2 Exercise 3.2

Hint: easiest way is to find by values in the tables.

[Commented C source code](#).

77.3 Exercise 3.3

[Commented C source code](#).

77.4 Exercise 3.4

[Commented C source code, and also decrypted file](#).

77.5 Exercise 3.5

Hint: as we can see, the string with user name occupies not the whole file.

Bytes after terminated zero till offset 0x7F are ignored by program.

[Commented C source code](#).

77.6 Exercise 3.6

[Commented C source code](#).

As another exercise, now you may try to fix all vulnerabilities you found in this web-server.

Afterword

Chapter 78

Questions?

Do not hesitate to mail any questions to the author: <dennis@yurichev.com>

Please, also do not hesitate to send me any corrections (including grammar ones (you see how horrible my English is?)), etc.

Part XII

Appendix

Chapter 79

Common terminology

word usually is a variable fitting into [GPR](#) of [CPU](#). In the computers older than personal, memory size was often measured in words rather than bytes.

Chapter 80

x86

80.1 Terminology

Common for 16-bit (8086/80286), 32-bit (80386, etc), 64-bit.

byte 8-bit. DB assembly directive is used for defining array of bytes.

word 16-bit. DW assembly directive —”—.

double word (“dword”) 32-bit. DD assembly directive —”—.

quad word (“qword”) 64-bit. DQ assembly directive —”—.

tbyte (10 bytes) 80-bit or 10 bytes (used for IEEE 754 FPU registers).

paragraph (16 bytes)—term was popular in MS-DOS environment.

Data types of the same width (BYTE, WORD, DWORD) are also the same in Windows [API](#).

80.2 General purpose registers

It is possible to access many registers by byte or 16-bit word parts. It is all inheritance from older Intel CPUs (up to 8-bit 8080) still supported for backward compatibility. For example, this feature is usually not present in [RISC](#) CPUs.

Registers prefixed with R- appeared in x86-84, and those prefixed with E- —in 80386. Thus, R-registers are 64-bit, and E-registers —32-bit.

8 more [GPR](#)’s were added in x86-86: R8-R15.

N.B.: In the Intel manuals byte parts of these registers are prefixed by *L*, e.g.: *R8L*, but [IDA](#) names these registers by adding *B* suffix, e.g.: *R8B*.

80.2.1 RAX/EAX/AX/AL

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RAX ^{x64}							
				EAX			
						AX	
						AH	AL

[AKA](#) accumulator. The result of function if usually returned via this register.

80.2.2 RBX/EBX/BX/BL

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RBX ^{x64}							
				EBX			
						BX	
						BH	BL

80.2.3 RCX/ECX/CX/CL

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RCX ^{x64}							
				ECX			
						CX	
						CH	CL

AKA counter: in this role it is used in REP prefixed instructions and also in shift instructions (SHL/SHR/RxL/RxR).

80.2.4 RDX/EDX/DX/DL

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RDX ^{x64}							
				EDX			
						DX	
						DH	DL

80.2.5 RSI/ESI/SI/SIL

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RSI ^{x64}							
				ESI			
						SI	
						SIL ^{x64}	

AKA “source”. Used as source in the instructions REP MOV_Sx, REP CMPS_x.

80.2.6 RDI/EDI/DI/DIL

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RDI ^{x64}							
				EDI			
						DI	
						DIL ^{x64}	

AKA “destination”. Used as a pointer to destination place in the instructions REP MOV_Sx, REP STOS_x.

80.2.7 R8/R8D/R8W/R8L

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
R8							
				R8D			
						R8W	
						R8L	

80.2.8 R9/R9D/R9W/R9L

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
R9							
				R9D			
						R9W	
						R9L	

80.2.9 R10/R10D/R10W/R10L

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
R10							
				R10D			
						R10W	
						R10L	

80.2.10 R11/R11D/R11W/R11L

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
R11							
				R11D			
						R11W	
						R11L	

80.2.11 R12/R12D/R12W/R12L

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
R12							
				R12D			
						R12W	
						R12L	

80.2.12 R13/R13D/R13W/R13L

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
R13							
				R13D			
						R13W	
						R13L	

80.2.13 R14/R14D/R14W/R14L

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
R14							
				R14D			
						R14W	
						R14L	

80.2.14 R15/R15D/R15W/R15L

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
R15							
				R15D			
						R15W	
						R15L	

80.2.15 RSP/ESP/SP/SPL

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RSP ^{x64}							
				ESP			
						SP	
						SPL ^{x64}	

[AKA stack pointer](#). Usually points to the current stack except those cases when it is not yet initialized.

80.2.16 RBP/EBP/BP/BPL

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RBP ^{x64}							
				EBP			
						BP	
						BPL ^{x64}	

[AKA frame pointer](#). Usually used for local variables and arguments of function accessing. More about it: ([6.2.1](#)).

80.2.17 RIP/EIP/IP

7th (byte number)	6th	5th	4th	3rd	2nd	1st	0th
RIP ^{x64}							
				EIP			
						IP	

AKA “instruction pointer”¹. Usually always points to the current instruction. Cannot be modified, however, it is possible to do (which is equivalent to):

```
mov eax...
jmp eax
```

Or:

```
push val
ret
```

80.2.18 CS/DS/ES/SS/FS/GS

16-bit registers containing code selector (CS), data selector (DS), stack selector (SS).

FS in win32 points to [TLS](#), GS took this role in Linux. It is done for faster access to the [TLS](#) and other structures like [TIB](#). In the past, these registers were used as segment registers ([66](#)).

80.2.19 Flags register

AKA EFLAGS.


Bit (mask)	Abbreviation (meaning)	Description
0 (1)	CF (Carry)	The CLC/STC/CMC instructions are used for setting/resetting/toggling this flag
2 (4)	PF (Parity)	(15.3.1) .
4 (0x10)	AF (Adjust)	
6 (0x40)	ZF (Zero)	Setting to 0 if the last operation's result was 0.
7 (0x80)	SF (Sign)	
8 (0x100)	TF (Trap)	Used for debugging. If turned on, an exception will be generated after each instruction execution.
9 (0x200)	IF (Interrupt enable)	Are interrupts enabled. The CLI/STI instructions are used for the flag setting/resetting
10 (0x400)	DF (Direction)	A directions is set for the REP MOVsX, REP CMPSX, REP LODSx, REP SCASx instructions. The CLD/STD instructions are used for the flag setting/resetting
11 (0x800)	OF (Overflow)	
12, 13 (0x3000)	IOPL (I/O privilege level) ⁸⁰²⁸⁶	
14 (0x4000)	NT (Nested task) ⁸⁰²⁸⁶	
16 (0x10000)	RF (Resume) ⁸⁰³⁸⁶	Used for debugging. CPU will ignore hardware breakpoint in DRx if the flag is set.
17 (0x20000)	VM (Virtual 8086 mode) ⁸⁰³⁸⁶	
18 (0x40000)	AC (Alignment check) ⁸⁰⁴⁸⁶	
19 (0x80000)	VIF (Virtual interrupt) ^{Pentium}	
20 (0x100000)	VIP (Virtual interrupt pending) ^{Pentium}	
21 (0x200000)	ID (Identification) ^{Pentium}	

All the rest flags are reserved.

¹Sometimes also called “program counter”

80.3 FPU-registers

8 80-bit registers working as a stack: ST(0)-ST(7). N.B.: [IDA](#) calls ST(0) as just ST. Numbers are stored in the IEEE 754 format. *long double* value format:



(S—sign, I—integer part)

80.3.1 Control Word

Register controlling behaviour of the [FPU](#).

Bit	Abbreviation (meaning)	Description
0	IM (Invalid operation Mask)	
1	DM (Denormalized operand Mask)	
2	ZM (Zero divide Mask)	
3	OM (Overflow Mask)	
4	UM (Underflow Mask)	
5	PM (Precision Mask)	
7	IEM (Interrupt Enable Mask)	Exceptions enabling, 1 by default (disabled)
8, 9	PC (Precision Control)	00 — 24 bits (REAL4) 10 — 53 bits (REAL8) 11 — 64 bits (REAL10)
10, 11	RC (Rounding Control)	00 — (by default) round to nearest 01 — round toward $-\infty$ 10 — round toward $+\infty$ 11 — round toward 0
12	IC (Infinity Control)	0 — (by default) treat $+\infty$ and $-\infty$ as unsigned 1 — respect both $+\infty$ and $-\infty$

The PM, UM, OM, ZM, DM, IM flags are defining if to generate exception in case of corresponding errors.

80.3.2 Status Word

Read-only register.

Bit	Abbreviation (meaning)	Description
15	B (Busy)	Is FPU do something (1) or results are ready (0)
14	C3	
13, 12, 11	TOP	points to the currently zeroth register
10	C2	
9	C1	
8	C0	
7	IR (Interrupt Request)	
6	SF (Stack Fault)	
5	P (Precision)	
4	U (Underflow)	
3	O (Overflow)	
2	Z (Zero)	
1	D (Denormalized)	
0	I (Invalid operation)	

The SF, P, U, O, Z, D, I bits are signaling about exceptions.

About the C3, C2, C1, C0 read more: [\(15.3.1\)](#).

N.B.: When ST(*x*) is used, FPU adds *x* to TOP (by modulo 8) and that is how it gets internal register's number.

80.3.3 Tag Word

The register has current information about number's registers usage.

Bit	Abbreviation (meaning)
15, 14	Tag(7)
13, 12	Tag(6)
11, 10	Tag(5)
9, 8	Tag(4)
7, 6	Tag(3)
5, 4	Tag(2)
3, 2	Tag(1)
1, 0	Tag(0)

For each tag:

- 00 — The register contains a non-zero value
- 01 — The register contains 0
- 10 — The register contains a special value ([NaN²](#), ∞ , or denormal)
- 11 — The register is empty

80.4 SIMD-registers

80.4.1 MMX-registers

8 64-bit registers: MM0..MM7.

80.4.2 SSE and AVX-registers

SSE: 8 128-bit registers: XMM0..XMM7. In the x86-64 8 more registers were added: XMM8..XMM15.

AVX is the extension of all these registers to 256 bits.

80.5 Debugging registers

Used for hardware breakpoints control.

- DR0 — address of breakpoint #1
- DR1 — address of breakpoint #2
- DR2 — address of breakpoint #3
- DR3 — address of breakpoint #4
- DR6 — a cause of break is reflected here
- DR7 — breakpoint types are set here

80.5.1 DR6

Bit (mask)	Description
0 (1)	B0 — breakpoint #1 was triggered
1 (2)	B1 — breakpoint #2 was triggered
2 (4)	B2 — breakpoint #3 was triggered
3 (8)	B3 — breakpoint #4 was triggered
13 (0x2000)	BD — modification attempt of one of DRx registers. may be raised if GD is enabled
14 (0x4000)	BS — single step breakpoint (TF flag was set in EFLAGS). Highest priority. Other bits may also be set.
15 (0x8000)	BT (task switch flag)

²Not a Number

N.B. Single step breakpoint is a breakpoint occurring after each instruction. It can be enabled by setting TF in EFLAGS (80.2.19).

80.5.2 DR7

Breakpoint types are set here.

Bit (mask)	Description
0 (1)	L0 — enable breakpoint #1 for the current task
1 (2)	G0 — enable breakpoint #1 for all tasks
2 (4)	L1 — enable breakpoint #2 for the current task
3 (8)	G1 — enable breakpoint #2 for all tasks
4 (0x10)	L2 — enable breakpoint #3 for the current task
5 (0x20)	G2 — enable breakpoint #3 for all tasks
6 (0x40)	L3 — enable breakpoint #4 for the current task
7 (0x80)	G3 — enable breakpoint #4 for all tasks
8 (0x100)	LE — not supported since P6
9 (0x200)	GE — not supported since P6
13 (0x2000)	GD — exception will be raised if any MOV instruction tries to modify one of DRx registers
16,17 (0x30000)	breakpoint #1: R/W — type
18,19 (0xC0000)	breakpoint #1: LEN — length
20,21 (0x300000)	breakpoint #2: R/W — type
22,23 (0xC00000)	breakpoint #2: LEN — length
24,25 (0x3000000)	breakpoint #3: R/W — type
26,27 (0xC000000)	breakpoint #3: LEN — length
28,29 (0x30000000)	breakpoint #4: R/W — type
30,31 (0xC0000000)	breakpoint #4: LEN — length

Breakpoint type is to be set as follows (R/W):

- 00 — instruction execution
- 01 — data writes
- 10 — I/O reads or writes (not available in user-mode)
- 11 — on data reads or writes

N.B.: breakpoint type for data reads is absent, indeed.

Breakpoint length is to be set as follows (LEN):

- 00 — one-byte
- 01 — two-byte
- 10 — undefined for 32-bit mode, eight-byte in 64-bit mode
- 11 — four-byte

80.6 Instructions

Instructions marked as (M) are not usually generated by compiler: if you see it, it is probably hand-written piece of assembly code, or this is compiler intrinsic (62).

Only most frequently used instructions are listed here. Read [14] or [1] for a full documentation.

80.6.1 Prefixes

LOCK force CPU to make exclusive access to the RAM in multiprocessor environment. For the sake of simplification, it can be said that when instruction with this prefix is executed, all other CPUs in multiprocessor system is stopped. Most often it is used for critical sections, semaphores, mutexes. Commonly used with ADD, AND, BTR, BTS, CMPXCHG, OR, XADD, XOR. Read more about critical sections ([50.4](#)).

REP used with MOVsX and STOSx: execute the instruction in loop, counter is located in the CX/ECX/RCX register. For detailed description, read more about MOVsX ([80.6.2](#)) and STOSx ([80.6.2](#)) instructions.

Instructions prefixed by REP are sensitive to DF flag, which is used to set direction.

REPE/REPNE (AKA REPZ/REPNZ) used with CMPSx and SCASx: execute the last instruction in loop, count is set in the CX/ECX/RCX register. It will terminate prematurely if ZF is 0 (REPE) or if ZF is 1 (REPNE).

For detailed description, read more about CMPSx ([80.6.3](#)) and SCASx ([80.6.2](#)) instructions.

Instructions prefixed by REPE/REPNE are sensitive to DF flag, which is used to set direction.

80.6.2 Most frequently used instructions

These can be memorized in the first place.

ADC (*add with carry*) add values, [increment](#) result if CF flag is set. often used for addition of large values, for example, to add two 64-bit values in 32-bit environment using two ADD and ADC instructions, for example:

```
; work with 64-bit values: add val1 to val2.
; .lo mean lowest 32 bits, .hi means highest.
ADD val1.lo, val2.lo
ADC val1.hi, val2.hi ; use CF set or cleared at the previous instruction
```

One more example: [21](#).

ADD add two values

AND logical “and”

CALL call another function: PUSH address_after_CALL_instruction; JMP label

CMP compare values and set flags, the same as SUB but no results writing

DEC [decrement](#). CF flag is not touched.

IMUL signed multiply

INC [increment](#). CF flag is not touched.

JCXZ, JECXZ, JRCXZ (M) jump if CX/ECX/RCX=0

JMP jump to another address. Opcode has [jump offset](#).

Jcc (where cc—condition code)

A lot of instructions has synonyms (denoted with AKA), this was done for convenience. Synonymous instructions are translating into the same opcode. Opcode has [jump offset](#).

JAE AKA JNC: jump if above or equal (unsigned): CF=0

JA AKA JNBE: jump if greater (unsigned): CF=0 and ZF=0

JBE jump if lesser or equal (unsigned): CF=1 or ZF=1

JB AKA JC: jump if below (unsigned): CF=1

JC AKA JB: jump if CF=1

JE AKA JZ: jump if equal or zero: ZF=1

JGE jump if greater or equal (signed): SF=OF

JG jump if greater (signed): ZF=0 and SF=OF

JLE jump if lesser or equal (signed): ZF=1 or SF≠OF

JL jump if lesser (signed): SF≠OF

JNAE *AKA* JC: jump if not above or equal (unsigned) CF=1
JNA jump if not above (unsigned) CF=1 and ZF=1
JNBE jump if not below or equal (unsigned): CF=0 and ZF=0
JNB *AKA* JNC: jump if not below (unsigned): CF=0
JNC *AKA* JAE: jump CF=0 synonymous to JNB.
JNE *AKA* JNZ: jump if not equal or not zero: ZF=0
JNGE jump if not greater or equal (signed): SF $\neq$ OF
JNG jump if not greater (signed): ZF=1 or SF $\neq$ OF
JNLE jump if not lesser (signed): ZF=0 and SF=OF
JNL jump if not lesser (signed): SF=OF
JNO jump if not overflow: OF=0
JNS jump if SF flag is cleared
JNZ *AKA* JNE: jump if not equal or not zero: ZF=0
JO jump if overflow: OF=1
JPO jump if PF flag is cleared
JP *AKA* JPE: jump if PF flag is set
JS jump if SF flag is set
JZ *AKA* JE: jump if equal or zero: ZF=1

LAHF copy some flag bits to AH

LEAVE equivalent of the MOV ESP, EBP and POP EBP instruction pair—in other words, this instruction sets the [stack pointer](#) (ESP) back and restores the EBP register to its initial state.

LEA (*Load Effective Address*) form address

This instruction was intended not for values summing and multiplication but for address forming, e.g., for forming address of array element by adding array address, element index, with multiplication of element size³.

So, the difference between MOV and LEA is that MOV forms memory address and loads value from memory or stores it there, but LEA just forms an address.

But nevertheless, it can be used for any other calculations.

LEA is convenient because the computations performing by it is not alter CPU flags.

```
int f(int a, int b)
{
    return a*8+b;
};
```

Listing 80.1: MSVC 2010 /Ox

```
_a$ = 8                                ; size = 4
_b$ = 12                              ; size = 4
_f    PROC
    mov     eax, DWORD PTR _b$[esp-4]
    mov     ecx, DWORD PTR _a$[esp-4]
    lea     eax, DWORD PTR [eax+ecx*8]
    ret     0
_f    ENDP
```

Intel C++ uses LEA even more:

```
int f1(int a)
{
    return a*13;
};
```

³See also: http://en.wikipedia.org/wiki/Addressing_mode

Listing 80.2: Intel C++ 2011

```

_f1    PROC NEAR
        mov     ecx, DWORD PTR [4+esp]      ; ecx = a
        lea     edx, DWORD PTR [ecx+ecx*8]  ; edx = a*9
        lea     eax, DWORD PTR [edx+ecx*4]  ; eax = a*9 + a*4 = a*13
        ret

```

These two instructions instead of one IMUL will perform faster.

MOVSX/MOVSW/MOVSX/MOVSQ copy byte/ 16-bit word/ 32-bit word/ 64-bit word address of which is in the SI/ESI/RSI into the place address of which is in the DI/EDI/RDI.

Together with REP prefix, it will repeated in loop, count is stored in the CX/ECX/RCX register: it works like memcpy() in C. If block size is known to compiler on compile stage, memcpy() is often inlined into short code fragment using REP MOVSB, sometimes even as several instructions.

memcpy(EDI, ESI, 15) equivalent is:

```

; copy 15 bytes from ESI to EDI
CLD          ; set direction to "forward"
MOV ECX, 3
REP MOVSD    ; copy 12 bytes
MOVSW        ; copy 2 more bytes
MOVSB        ; copy remaining byte

```

(Supposedly, it will work faster then copying 15 bytes using just one REP MOVSB).

MOVSX load with sign extension see also: (13.1)

MOVZX load and clear all the rest bits see also: (13.1)

MOV load value. this instruction was named awry resulting confusion (data are not moved), in other architectures the same instructions is usually named “LOAD” or something like that.

One important thing: if to set low 16-bit part of 32-bit register in 32-bit mode, high 16 bits will remain as they were. But if to modify low 32-bit of register in 64-bit mode, high 32 bits of registers will be cleared.

Supposedly, it was done for x86-64 code porting simplification.

MUL unsigned multiply

NEG negation: $op = -op$

NOP **NOP**. Opcode is 0x90, so it is in fact mean XCHG EAX, EAX idle instruction. This means, x86 do not have dedicated **NOP** instruction (as in many **RISC**). More examples of such operations: (61).

NOP may be generated by compiler for aligning labels on 16-byte boundary. Another very popular usage of **NOP** is to replace manually (patch) some instruction like conditional jump to **NOP** in order to disable its execution.

NOT $op1: op1 = \neg op1$. logical inversion

OR logical “or”

POP get value from the stack: $value = SS: [ESP]$; $ESP = ESP + 4$ (or 8)

PUSH push value to stack: $ESP = ESP - 4$ (or 8); $SS: [ESP] = value$

RET : return from subroutine: POP tmp; JMP tmp.

In fact, RET is a assembly language macro, in Windows and *NIX environment is translating into RETN (“return near”) or, in MS-DOS times, where memory was addressed differently (66), into RETF (“return far”).

RET may have operand. Its algorithm then will be: POP tmp; ADD ESP op1; JMP tmp. RET with operand usually end functions with *stdcall* calling convention, see also: ??.

SAHF copy bits from AH to flags, see also: 15.3.3

SBB (*subtraction with borrow*) subtract values, **decrement** result if CF flag is set. often used for subtraction of large values, for example, to subtract two 64-bit values in 32-bit environment using two SUB and SBB instructions, for example:

```
; work with 64-bit values: subtract val2 from val1.
; .lo mean lowest 32 bits, .hi means highest.
SUB val1.lo, val2.lo
SBB val1.hi, val2.hi ; use CF set or cleared at the previous instruction
```

One more example: [21](#).

SCASB/SCASW/SCASD/SCASQ (M) compare byte/ 16-bit word/ 32-bit word/ 64-bit word stored in the AX/EAX/RAX with a variable address of which is in the DI/EDI/RDI. Set flags as CMP does.

This instruction is often used with REPNE prefix: continue to scan a buffer until a special value stored in AX/EAX/RAX is found. Hence “NE” in REPNE: continue to scan if compared values are not equal and stop when equal.

It is often used as strlen() C standard function, to determine [ASCIIZ](#) string length:

Example:

```
lea    edi, string
mov     ecx, 0FFFFFFFFh ; scan 2^32-1 bytes, i.e., almost "infinitely"
xor     eax, eax        ; 0 is the terminator
repne scasb
add     edi, 0FFFFFFFFh ; correct it

; now EDI points to the last character of the ASCIIZ string.

; let's determine string length
; current ECX = -1-strlen


not     ecx
dec     ecx

; now ECX contain string length
```

If to use different AX/EAX/RAX value, the function will act as memchr() standard C function, i.e., it will find specific byte.

SHL shift value left

SHR shift value right:

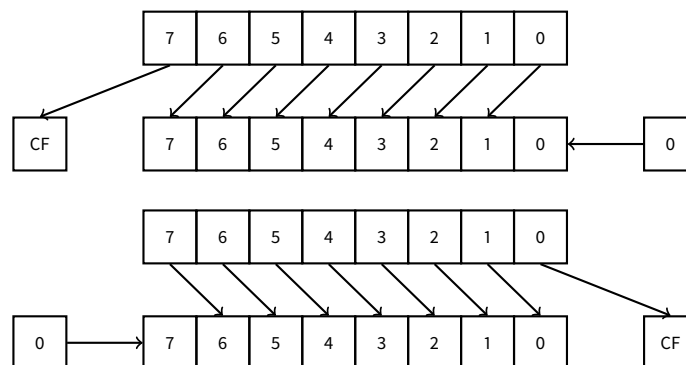

This instruction is frequently used for multiplication and division by 2^n . Another very frequent application is bit fields processing: [17](#).

SHRD op1, op2, op3: shift value in op2 right by op3 bits, taking bits from op1.

Example: [21](#).

STOSB/STOSW/STOSD/STOSQ store byte/ 16-bit word/ 32-bit word/ 64-bit word from AX/EAX/RAX into the place address of which is in the DI/EDI/RDI.

Together with REP prefix, it will repeated in loop, count is stored in the CX/ECX/RCX register: it works like memset() in C. If block size is known to compiler on compile stage, memset() is often inlined into short code fragment using REP MOVsx, sometimes even as several instructions.

memset(EDI, 0xAA, 15) equivalent is:

```

; store 15 0xAA bytes to EDI
CLD                ; set direction to "forward"
MOV EAX, 0AAAAAAAh
MOV ECX, 3
REP STOSD          ; write 12 bytes
STOSW              ; write 2 more bytes
STOSB              ; write remaining byte

```

(Supposedly, it will work faster then storing 15 bytes using just one REP STOSB).

SUB subtract values. frequently occurred pattern `SUB reg, reg` meaning write 0 to reg.

TEST same as AND but without results saving, see also: [17](#)

XCHG exchange values in operands

XOR `op1, op2`: [XOR](#)⁴ values. $op1 = op1 \oplus op2$. frequently occurred pattern `XOR reg, reg` meaning write 0 to reg.

80.6.3 Less frequently used instructions

BSF *bit scan forward*, see also: [22.2](#)

BSR *bit scan reverse*

BSWAP (*byte swap*), change value [endianness](#).

BTC bit test and complement

BTR bit test and reset

BTS bit test and set

BT bit test

CBW/CWD/CWDE/CDQ/CDQE Sign-extend value:

CBW : convert byte in AL to word in AX

CWD : convert word in AX to doubleword in DX:AX

CWDE : convert word in AX to doubleword in EAX

CDQ : convert doubleword in EAX to quadword in EDX:EAX

CDQE (x64): convert doubleword in EAX to quadword in RAX

These instructions consider value's sign, extending it to high part of newly constructed value. See also: [21.4](#).

CLD clear DF flag.

CLI (M) clear IF flag

CMC (M) toggle CF flag

CMOVcc conditional MOV: load if condition is true The condition codes are the same as in Jcc instructions ([80.6.2](#)).

CMPSB/CMPSW/CMPSD/CMPSQ (M) compare byte/ 16-bit word/ 32-bit word/ 64-bit word from the place address of which is in the SI/ESI/RSI with a variable address of which is in the DI/EDI/RDI. Set flags as CMP does.

Together with REP prefix, it will repeated in loop, count is stored in the CX/ECX/RCX register, the process will be running until ZF flag is zero (e.g., until compared values are equal to each other, hence "E" in REPE).

It works like `memcmp()` in C.

Example from Windows NT kernel ([WRK v1.2](#)):

⁴eXclusive OR

Listing 80.3: base\ntos\rtl\i386\movemem.asm

```

; ULONG
; RtlCompareMemory (
;     IN PVOID Source1,
;     IN PVOID Source2,
;     IN ULONG Length
; )
;
; Routine Description:
;
;     This function compares two blocks of memory and returns the number
;     of bytes that compared equal.
;
; Arguments:
;
;     Source1 (esp+4) - Supplies a pointer to the first block of memory to
;     compare.
;
;     Source2 (esp+8) - Supplies a pointer to the second block of memory to
;     compare.
;
;     Length (esp+12) - Supplies the Length, in bytes, of the memory to be
;     compared.
;
; Return Value:
;
;     The number of bytes that compared equal is returned as the function
;     value. If all bytes compared equal, then the length of the original
;     block of memory is returned.
;
;--

RcmSource1     equ     [esp+12]
RcmSource2     equ     [esp+16]
RcmLength      equ     [esp+20]

CODE_ALIGNMENT
cPublicProc _RtlCompareMemory,3
cPublicFpo 3,0

        push     esi                ; save registers
        push     edi                ;
        cld                        ; clear direction
        mov      esi,RcmSource1     ; (esi) -> first block to compare
        mov      edi,RcmSource2     ; (edi) -> second block to compare

;
;     Compare dwords, if any.
;

rcm10:  mov      ecx,RcmLength       ; (ecx) = length in bytes
        shr      ecx,2              ; (ecx) = length in dwords
        jz       rcm20              ; no dwords, try bytes
        repe     cmpsd              ; compare dwords
        jnz      rcm40              ; mismatch, go find byte

;
;     Compare residual bytes, if any.
;

rcm20:  mov      ecx,RcmLength       ; (ecx) = length in bytes

```

```

        and     ecx,3                ; (ecx) = length mod 4
        jz      rcm30                ; 0 odd bytes, go do dwords
        repe    cmpsb                ; compare odd bytes
        jnz     rcm50                ; mismatch, go report how far we got

;
;   All bytes in the block match.
;

rcm30:  mov     eax,RcmLength        ; set number of matching bytes
        pop     edi                ; restore registers
        pop     esi                ;
        stdRET  _RtlCompareMemory

;
;   When we come to rcm40, esi (and edi) points to the dword after the
;   one which caused the mismatch. Back up 1 dword and find the byte.
;   Since we know the dword didn't match, we can assume one byte won't.
;

rcm40:  sub     esi,4                ; back up
        sub     edi,4                ; back up
        mov     ecx,5                ; ensure that ecx doesn't count out
        repe    cmpsb                ; find mismatch byte

;
;   When we come to rcm50, esi points to the byte after the one that
;   did not match, which is TWO after the last byte that did match.
;

rcm50:  dec     esi                ; back up
        sub     esi,RcmSource1      ; compute bytes that matched
        mov     eax,esi             ;
        pop     edi                ; restore registers
        pop     esi                ;
        stdRET  _RtlCompareMemory

stdENDP _RtlCompareMemory

```

N.B.: this function uses 32-bit words comparison (CMPSD) if block size is multiple of 4, or per-byte comparison (CMPSB) otherwise.

CPUID get information about [CPU](#) features. see also: (18.6.1).

DIV unsigned division

IDIV signed division

INT (M): **INT x** is analogous to **PUSHF**; **CALL dword ptr [x*4]** in 16-bit environment. It was widely used in MS-DOS, functioning as syscalls. Registers **AX/BX/CX/DX/SI/DI** were filled by arguments and jump to the address in the Interrupt Vector Table (located at the address space beginning) will be occurred. It was popular because **INT** has short opcode (2 bytes) and the program which needs some MS-DOS services is not bothering by determining service's entry point address. Interrupt handler return control flow to called using **IRET** instruction.

Most busy MS-DOS interrupt number was 0x21, serving a huge amount of its [API](#). See also: [4] for the most comprehensive interrupt lists and other MS-DOS information.

In post-MS-DOS era, this instruction was still used as syscall both in Linux and Windows (48), but later replaced by **SYSENTER** or **SYSCALL** instruction.

INT 3 (M): this instruction is somewhat standing aside of **INT**, it has its own 1-byte opcode (0xCC), and actively used while debugging. Often, debuggers just write 0xCC byte at the address of breakpoint to be set, and when exception is raised, original byte will be restored and original instruction at this address will be re-executed. As of [Windows NT](#), an **EXCEPTION_BREAKP** exception will be raised when [CPU](#) executes this instruction. This debugging event may be intercepted and handled

by a host debugger, if loaded. If it is not loaded, Windows will offer to run one of the registered in the system debuggers. If [MSVS⁵](#) is installed, its debugger may be loaded and connected to the process. In order to protect from [reverse engineering](#), a lot of anti-debugging methods are checking integrity of the code loaded.

MSVC has [compiler intrinsic](#) for the instruction: `__debugbreak()`⁶.

There are also a win32 function in kernel32.dll named `DebugBreak()`⁷, which also executes `INT 3`.

IN (M) input data from port. The instruction is usually can be seen in OS drivers or in old MS-DOS code, for example (55.3).

IRET : was used in MS-DOS environment for returning from interrupt handler after it was called by `INT` instruction. Equivalent to `POP tmp; POPF; JMP tmp`.

LOOP (M) [decrement](#) CX/ECX/RCX, jump if it is still not zero.

OUT (M) output data to port. The instruction is usually can be seen in OS drivers or in old MS-DOS code, for example (55.3).

POPA (M) restores values of (R|E)DI, (R|E)SI, (R|E)BP, (R|E)BX, (R|E)DX, (R|E)CX, (R|E)AX registers from stack.

POPCNT population count. counts number of 1 bits in value. [AKA](#) “hamming weight”. [AKA](#) “NSA instruction” because of rumors:

This branch of cryptography is fast-paced and very politically charged. Most designs are secret; a majority of military encryptions systems in use today are based on LFSRs. In fact, most Cray computers (Cray 1, Cray X-MP, Cray Y-MP) have a rather curious instruction generally known as “population count.” It counts the 1 bits in a register and can be used both to efficiently calculate the Hamming distance between two binary words and to implement a vectorized version of a LFSR. I’ve heard this called the canonical NSA instruction, demanded by almost all computer contracts.


[31]

POPF restore flags from stack ([AKA](#) EFLAGS register)


PUSHA (M) pushes values of (R|E)AX, (R|E)CX, (R|E)DX, (R|E)BX, (R|E)BP, (R|E)SI, (R|E)DI registers to the stack.

PUSHF push flags ([AKA](#) EFLAGS register)

RCL (M) rotate left via CF flag:

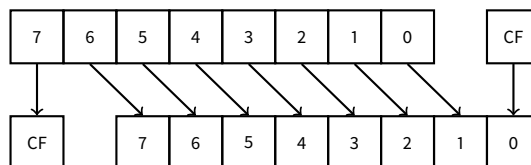


RCR (M) rotate right via CF flag:

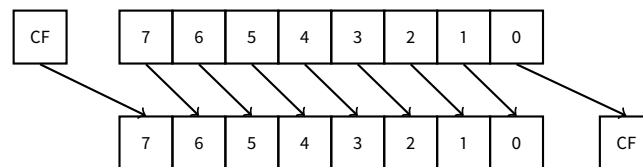

ROL/ROR (M) cyclic shift

ROL: rotate left:

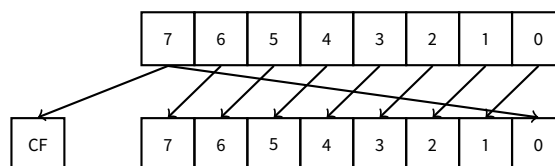


⁵Microsoft Visual Studio

⁶<http://msdn.microsoft.com/en-us/library/f408b4et.aspx>

⁷[http://msdn.microsoft.com/en-us/library/windows/desktop/ms679297\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/ms679297(v=vs.85).aspx)

ROR: rotate right:

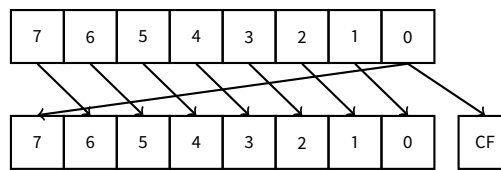


Despite the fact that almost all CPUs has these instructions, there are no corresponding operations in the C/C++, so the compilers of these PLs are usually not generating these instructions.

For programmer's convenience, at least MSVC has pseudofunctions (compiler intrinsics) `_rotl()` and `_rotr()`⁸, which are translated by compiler directly to these instructions.

SAL Arithmetic shift left, synonymous to SHL

SAR Arithmetic shift right

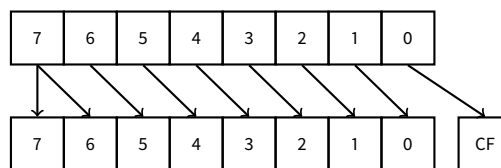

Hence, sign bit is always stayed at the place of MSB⁹.

SETcc op: load 1 to op (byte only) if condition is true or zero otherwise. The condition codes are the same as in Jcc instructions (80.6.2).

STC (M) set CF flag

STD (M) set DF flag

STI (M) set IF flag

SYSCALL (AMD) call syscall (48)

SYSENTER (Intel) call syscall (48)

UD2 (M) undefined instruction, raises exception. used for testing.

80.6.4 FPU instructions

-R in mnemonic usually means that operands are reversed, -P means that one element is popped from the stack after instruction execution, -PP means that two elements are popped.

-P instructions are often useful when we do not need a value in the FPU stack to be present anymore.

FABS replace value in ST(0) by absolute value in ST(0)

FADD op: ST(0)=op+ST(0)

FADD ST(0), ST(i): ST(0)=ST(0)+ST(i)

FADDP ST(1)=ST(0)+ST(1); pop one element from the stack, i.e., summed values in the stack are replaced by sum

FCHS : ST(0)=-ST(0)

FCOM compare ST(0) with ST(1)

FCOM op: compare ST(0) with op

FCOMP compare ST(0) with ST(1); pop one element from the stack

FCOMPP compare ST(0) with ST(1); pop two elements from the stack

⁸<http://msdn.microsoft.com/en-us/library/5cc576c4.aspx>

⁹Most significant bit/byte

FDIVR op: $ST(0) = op / ST(0)$

FDIVR ST(i), ST(j): $ST(i) = ST(j) / ST(i)$

FDIVRP op: $ST(0) = op / ST(0)$; pop one element from the stack

FDIVRP ST(i), ST(j): $ST(i) = ST(j) / ST(i)$; pop one element from the stack

FDIV op: $ST(0) = ST(0) / op$

FDIV ST(i), ST(j): $ST(i) = ST(i) / ST(j)$

FDIVP ST(1)= $ST(0) / ST(1)$; pop one element from the stack, i.e., dividend and divisor values in the stack are replaced by quotient

FILD op: convert integer and push it to the stack.

FIST op: convert ST(0) to integer op

FISTP op: convert ST(0) to integer op; pop one element from the stack

FLD1 push 1 to stack

FLDCW op: load FPU control word (80.3) from 16-bit op.

FLDZ push zero to stack

FLD op: push op to the stack.

FMUL op: $ST(0) = ST(0) * op$

FMUL ST(i), ST(j): $ST(i) = ST(i) * ST(j)$

FMULP op: $ST(0) = ST(0) * op$; pop one element from the stack

FMULP ST(i), ST(j): $ST(i) = ST(i) * ST(j)$; pop one element from the stack

FSINCOS : tmp=ST(0); ST(1)=sin(tmp); ST(0)=cos(tmp)

FSQRT : $ST(0) = \sqrt{ST(0)}$

FSTCW op: store FPU control word (80.3) into 16-bit op after checking for pending exceptions.

FNSTCW op: store FPU control word (80.3) into 16-bit op.

FSTSW op: store FPU status word (80.3.2) into 16-bit op after checking for pending exceptions.

FNSTSW op: store FPU status word (80.3.2) into 16-bit op.

FST op: copy ST(0) to op

FSTP op: copy ST(0) to op; pop one element from the stack

FSUBR op: $ST(0) = op - ST(0)$

FSUBR ST(0), ST(i): $ST(0) = ST(i) - ST(0)$

FSUBRP ST(1)= $ST(0) - ST(1)$; pop one element from the stack, i.e., summed values in the stack are replaced by difference

FSUB op: $ST(0) = ST(0) - op$

FSUB ST(0), ST(i): $ST(0) = ST(0) - ST(i)$

FSUBP ST(1)= $ST(1) - ST(0)$; pop one element from the stack, i.e., summed values in the stack are replaced by difference

FUCOM ST(i): compare ST(0) and ST(i)

FUCOM : compare ST(0) and ST(1)

FUCOMP : compare ST(0) and ST(1); pop one element from stack.

FUCOMPP : compare ST(0) and ST(1); pop two elements from stack.

The instructions performs just like FCOM, but exception is raised only if one of operands is SNaN, while QNaN numbers are processed smoothly.

FXCH ST(i) exchange values in ST(0) and ST(i)

FXCH exchange values in ST(0) and ST(1)

80.6.5 SIMD instructions**80.6.6 Instructions having printable ASCII opcode**

(In 32-bit mode).

It can be suitable for shellcode constructing. See also: [59.1](#).

ASCII character	hexadecimal code	x86 instruction
0	30	XOR
1	31	XOR
2	32	XOR
3	33	XOR
4	34	XOR
5	35	XOR
7	37	AAA
8	38	CMP
9	39	CMP
:	3a	CMP
;	3b	CMP
<	3c	CMP
=	3d	CMP
?	3f	AAS
@	40	INC
A	41	INC
B	42	INC
C	43	INC
D	44	INC
E	45	INC
F	46	INC
G	47	INC
H	48	DEC
I	49	DEC
J	4a	DEC
K	4b	DEC
L	4c	DEC
M	4d	DEC
N	4e	DEC
O	4f	DEC
P	50	PUSH
Q	51	PUSH
R	52	PUSH
S	53	PUSH
T	54	PUSH
U	55	PUSH
V	56	PUSH
W	57	PUSH
X	58	POP
Y	59	POP
Z	5a	POP
[	5b	POP
\	5c	POP
]	5d	POP
^	5e	POP
_	5f	POP
`	60	PUSHA
a	61	POPA
f	66	(in 32-bit mode) switch to 16-bit operand size
g	67	(in 32-bit mode) switch to 16-bit address size
h	68	PUSH

i	69	IMUL
j	6a	PUSH
k	6b	IMUL
p	70	JO
q	71	JNO
r	72	JB
s	73	JAE
t	74	JE
u	75	JNE
v	76	JBE
w	77	JA
x	78	JS
y	79	JNS
z	7a	JP

Summarizing: AAA, AAS, CMP, DEC, IMUL, INC, JA, JAE, JB, JBE, JE, JNE, JNO, JNS, JO, JP, JS, POP, POPA, PUSH, PUSHA, XOR.

Chapter 81

ARM

81.1 General purpose registers

- R0 — function result is usually returned using R0
- R1
- R2
- R3
- R4
- R5
- R6
- R7
- R8
- R9
- R10
- R11
- R12
- R13 — [AKA SP \(stack pointer\)](#)
- R14 — [AKA LR \(link register\)](#)
- R15 — [AKA PC \(program counter\)](#)

R0-R3 are also called “scratch registers”: function arguments are usually passed in them, and values in them are not necessary to restore upon function exit.

81.2 Current Program Status Register (CPSR)

Bit	Description
0..4	M — processor mode
5	T — Thumb state
6	F — FIQ disable
7	I — IRQ disable
8	A — imprecise data abort disable
9	E — data endianness
10..15, 25, 26	IT — if-then state
16..19	GE — greater-than-or-equal-to
20..23	DNM — do not modify
24	J — Java state
27	Q — sticky overflow
28	V — overflow
29	C — carry/borrow/extend
30	Z — zero bit
31	N — negative/less than

81.3 VFP (floating point) and NEON registers

0..31 ^{bits}	32..64	65..96	97..127
Q0 ^{128 bits}			
D0 ^{64 bits}		D1	
S0 ^{32 bits}	S1	S2	S3

S-registers are 32-bit ones, used for single precision numbers storage.

D-registers are 64-bit ones, used for double precision numbers storage.

D- and S-registers share the same physical space in CPU—it is possible to access D-register via S-registers (it is senseless though).

Likewise, **NEON** Q-registers are 128-bit ones and share the same physical space in CPU with other floating point registers.

In VFP 32 S-registers are present: S0..S31.

In VFPv2 there are 16 D-registers added, which are, in fact, occupy the same space as S0..S31.

In VFPv3 (**NEON** or “Advanced SIMD”) there are 16 more D-registers added, resulting D0..D31, but D16..D31 registers are not sharing a space with other S-registers.

In **NEON** or “Advanced SIMD” there are also 16 128-bit Q-registers added, which share the same space as D0..D31.

Chapter 82

Some GCC library functions

name	meaning
__divdi3	signed division
__moddi3	getting remainder (modulo) of signed division
__udivdi3	unsigned division
__umoddi3	getting remainder (modulo) of unsigned division

Chapter 83

Some MSVC library functions

11 in function name mean “long long”, e.g., 64-bit data type.

name	meaning
<code>__alldiv</code>	signed division
<code>__allmul</code>	multiplication
<code>__allrem</code>	remainder of signed division
<code>__allshl</code>	shift left
<code>__allshr</code>	signed shift right
<code>__aulldiv</code>	unsigned division
<code>__aullrem</code>	remainder of unsigned division
<code>__aullshr</code>	unsigned shift right

Multiplication and shift left procedures are the same for both signed and unsigned numbers, hence only one function for each operation here.

The source code of these function can be founded in the installed [MSVS](#), in `VC/crt/src/intel/*.asm`.

Acronyms used

OS Operating System	xiv
FAQ Frequently Asked Questions	xiv
OOP Object-Oriented Programming	252
PL Programming language	3
PRNG Pseudorandom number generator	170
RA Return Address	12
PE Portable Executable: 50.2	345
SP Stack Pointer	9
DLL Dynamic-link library	345
PC Program Counter	9
LR Link Register	9
IDA Interactive Disassembler	5
IAT Import Address Table	346
INT Import Name Table	346
RVA Relative Virtual Address	346
VA Virtual Address	346
OEP Original Entry Point	342
MSVC Microsoft Visual C++	
MSVS Microsoft Visual Studio	572
ASLR Address Space Layout Randomization	346
MFC Microsoft Foundation Classes	348
TLS Thread Local Storage	xiv
AKA Also Known As	

CRT C runtime library; sec:CRT	5
CPU Central processing unit	xiv
FPU Floating-point unit	108
CISC Complex instruction set computing	10
RISC Reduced instruction set computing	10
GUI Graphical user interface	342
RTTI Run-time type information	267
BSS Block Started by Symbol	64
SIMD Single instruction, multiple data	183
BSOD Black Screen of Death	334
DBMS Database management systems	xiv
ISA Instruction Set Architecture	xiv
CGI Common Gateway Interface	542
HPC High-Performance Computing	212
SOC System on Chip	9
SEH Structured Exception Handling: 50.3	19
ELF Executable file format widely used in *NIX system including Linux	xiv
TIB Thread Information Block	131
TEA Tiny Encryption Algorithm	549
PIC Position Independent Code: 49.1	xiv
NAN Not a Number	563
NOP No Operation	49
BEQ (PowerPC, ARM) Branch if Equal	52

BNE (PowerPC, ARM) Branch if Not Equal	101
BLR (PowerPC) Branch to Link Register	384
XOR eXclusive OR	569
MCU Microcontroller unit	407
RAM Random-access memory	43
ROM Read-only memory	488
EGA Enhanced Graphics Adapter	488
VGA Video Graphics Array	488
API Application programming interface	316
ASCII American Standard Code for Information Interchange	473
ASCIIZ ASCII Zero (null-terminated ASCII string)	49
IA64 Intel Architecture 64 (Itanium): 65	310
EPIC Explicitly parallel instruction computing	485
OOE Out-of-order execution	485
MSDN Microsoft Developer Network	xv
MSB Most significant bit/byte	573
STL (C++) Standard Template Library: 34	277
PODT (C++) Plain Old Data Type	289
HDD Hard disk drive	301
VM Virtual Memory	
WRK Windows Research Kernel	328
GPR General Purpose Registers	3
SSDT System Service Dispatch Table	334

RE Reverse Engineering	494
SSE Streaming SIMD Extensions	201
BCD Binary-coded decimal	472
BOM Byte order mark	319
GDB GNU debugger	24

Bibliography

- [1] AMD. AMD64 Architecture Programmer's Manual. 2013. Also available as <http://developer.amd.com/resources/documentation-articles/developer-guides-manuals/>.
- [2] Apple. iOS ABI Function Call Guide. 2010. Also available as <http://developer.apple.com/library/ios/documentation/Xcode/Conceptual/iPhoneOSABIReference/iPhoneOSABIReference.pdf>.
- [3] blexim. Basic integer overflows. Phrack, 2002. Also available as <http://yurichev.com/mirrors/phrack/p60-0x0a.txt>.
- [4] Ralf Brown. The x86 interrupt list. Also available as <http://www.cs.cmu.edu/~ralf/files.html>.
- [5] Mike Burrell. Writing efficient itanium 2 assembly code. Also available as <http://yurichev.com/mirrors/RE/itanium.pdf>.
- [6] Marshall Cline. C++ faq. Also available as <http://www.parashift.com/c++-faq-lite/index.html>.
- [7] Thomas H. Cormen, Charles E. Leiserson, Ronald L. Rivest, and Clifford Stein. Introduction to Algorithms, Third Edition. The MIT Press, 3rd edition, 2009.
- [8] Stephen Dolan. mov is turing-complete. 2013. Also available as <http://www.cl.cam.ac.uk/~sd601/papers/mov.pdf>.
- [9] Nick Montfort et al. 10 PRINT CHR\$(205.5+RND(1)); : GOTO 10. The MIT Press, 2012. Also available as http://trope-tank.mit.edu/10_PRINT_121114.pdf.
- [10] Agner Fog. The microarchitecture of Intel, AMD and VIA CPUs / An optimization guide for assembly programmers and compiler makers. 2013. <http://agner.org/optimize/microarchitecture.pdf>.
- [11] Agner Fog. Optimizing software in C++: An optimization guide for Windows, Linux and Mac platforms. 2013. http://agner.org/optimize/optimizing_cpp.pdf.
- [12] Agner Fog. Calling conventions. 2014. http://www.agner.org/optimize/calling_conventions.pdf.
- [13] IBM. PowerPC(tm) Microprocessor Family: The Programming Environments for 32-Bit Microprocessors. 2000. Also available as http://yurichev.com/mirrors/PowerPC/6xx_pem.pdf.
- [14] Intel. Intel® 64 and IA-32 Architectures Software Developer's Manual Combined Volumes:1, 2A, 2B, 2C, 3A, 3B, and 3C. 2013. Also available as <http://www.intel.com/content/dam/www/public/us/en/documents/manuals/64-ia-32-architectures-software-developer-manual-325462.pdf>.
- [15] ISO. ISO/IEC 9899:TC3 (C C99 standard). 2007. Also available as <http://www.open-std.org/jtc1/sc22/WG14/www/docs/n1256.pdf>.
- [16] ISO. ISO/IEC 14882:2011 (C++ 11 standard). 2013. Also available as <http://www.open-std.org/jtc1/sc22/wg21/docs/papers/2013/n3690.pdf>.
- [17] Brian W. Kernighan. The C Programming Language. Prentice Hall Professional Technical Reference, 2nd edition, 1988.
- [18] Donald E. Knuth. The Art of Computer Programming Volumes 1-3 Boxed Set. Addison-Wesley Longman Publishing Co., Inc., Boston, MA, USA, 2nd edition, 1998.
- [19] Eugene Loh. The ideal hpc programming language. Queue, 8(6):30:30–30:38, June 2010.
- [20] Advanced RISC Machines Ltd. The ARM Cookbook. 1994. Also available as [http://yurichev.com/ref/ARM%20Cookbook%20\(1994\)](http://yurichev.com/ref/ARM%20Cookbook%20(1994)).

- [21] Michael Matz / Jan Hubicka / Andreas Jaeger / Mark Mitchell. System v application binary interface. amd64 architecture processor supplement, 2013. Also available as <http://x86-64.org/documentation/abi.pdf>.
- [22] Aleph One. Smashing the stack for fun and profit. Phrack, 1996. Also available as <http://yurichev.com/mirrors/phrack/p49-0x0e.txt>.
- [23] Matt Pietrek. A crash course on the depths of win32™ structured exception handling. MSDN magazine.
- [24] Matt Pietrek. An in-depth look into the win32 portable executable file format. MSDN magazine, 2002.
- [25] Eric S. Raymond. The Art of UNIX Programming. Pearson Education, 2003. Also available as <http://catb.org/esr/writings/taoup/html/>.
- [26] D. M. Ritchie and K. Thompson. The unix time sharing system. 1974. Also available as <http://dl.acm.org/citation.cfm?id=361061>.
- [27] Dennis M. Ritchie. The evolution of the unix time-sharing system. 1979.
- [28] Dennis M. Ritchie. Where did ++ come from? (net.lang.c). http://yurichev.com/mirrors/C/c_dmr_postincrement.txt, 1986. [Online; accessed 2013].
- [29] Dennis M. Ritchie. The development of the c language. SIGPLAN Not., 28(3):201–208, March 1993. Also available as <http://yurichev.com/mirrors/C/dmr-The%20Development%20of%20the%20C%20Language-1993.pdf>.
- [30] Mark E. Russinovich and David A. Solomon with Alex Ionescu. Windows® Internals: Including Windows Server 2008 and Windows Vista, Fifth Edition. 2009.
- [31] Bruce Schneier. Applied Cryptography: Protocols, Algorithms, and Source Code in C. 1994.
- [32] Igor Skochinsky. Compiler internals: Exceptions and rtti, 2012. Also available as <http://yurichev.com/mirrors/RE/Recon-2012-Skochinsky-Compiler-Internals.pdf>.
- [33] SunSoft Steve Zucker and IBM Kari Karhi. SYSTEM V APPLICATION BINARY INTERFACE: PowerPC Processor Supplement. 1995. Also available as http://yurichev.com/mirrors/PowerPC/elfspec_ppc.pdf.
- [34] trew. Introduction to reverse engineering win32 applications. uninformed. Also available as http://yurichev.com/mirrors/RE/uninformed_v1a7.pdf.
- [35] Henry S. Warren. Hacker's Delight. Addison-Wesley Longman Publishing Co., Inc., Boston, MA, USA, 2002.
- [36] Dennis Yurichev. Finding unknown algorithm using only input/output pairs and z3 smt solver. 2012. Also available as http://yurichev.com/writings/z3_rocket.pdf.
- [37] Dennis Yurichev. C/C++ programming language notes. 2013. Also available as <http://yurichev.com/writings/C-notes-en.pdf>.

Glossary

decrement Decrease by 1. [9](#), [89](#), [99](#), [101](#), [331](#), [432](#), [565](#), [567](#), [572](#)

increment Increase by 1. [10](#), [89](#), [92](#), [99–101](#), [408](#), [428](#), [565](#)

product Multiplication result. [184](#)

stack pointer A register pointing to the place in the stack. SP/ESP/RSP in x86. [5](#), [6](#), [10](#), [14](#), [17](#), [20](#), [30](#), [31](#), [39](#), [55](#), [239](#), [254](#), [560](#), [566](#), [577](#)

tail call It is when compiler (or interpreter) transforms recursion (with which it is possible: *tail recursion*) into iteration for efficiency: http://en.wikipedia.org/wiki/Tail_call. [13](#)

quotient Division result. [146](#)

anti-pattern Generally considered as bad practice. [16](#), [39](#)

atomic operation “ατομος” mean “indivisible” in Greek, so atomic operation is what guaranteed not to be broke up during operation by other threads. [376](#), [482](#)

basic block a group of instructions not having jump/branch instructions, and also not having jumps inside block from the outside. In IDA it looks just like as a list of instructions without breaking empty lines. [489](#), [490](#)

callee A function being called by another. [13](#), [16](#), [45](#), [53](#), [55](#), [58](#), [81](#), [193](#), [239](#), [254](#)

caller A function calling another. [5](#), [45](#), [53](#), [54](#), [57](#), [61](#), [81](#), [193](#), [200](#), [205](#), [254](#)

compiler intrinsic A function specific to a compiler which is not usual library function. Compiler generate a specific machine code instead of call to it. It is often a pseudofunction for specific CPU instruction. Read more: [\(62\)](#). [572](#)

CP/M Control Program for Microcomputers: a very basic disk OS used before MS-DOS. [470](#)

debuggee A program being debugged. [127](#)

dongle Dongle is a small piece of hardware connected to LPT printer port (in past) or to USB. Its function was akin to security token, it has some memory and, sometimes, secret (crypto-)hashing algorithm.. [383](#)

endianness Byte order: [36](#). [12](#), [41](#), [569](#)

GiB Gibibyte: 2^{30} or 1024 mebibytes or 1073741824 bytes. [8](#)

heap usually, a big chunk of memory provided by OS so that applications can divide it by themselves as they wish. malloc()/free() works with heap.. [14](#), [16](#), [152](#), [273](#), [275](#), [289](#), [290](#), [345](#), [346](#)

jump offset a part of JMP or Jcc instruction opcode, it just to be added to the address of the next instruction, and thus is how new PC is calculated. May be negative as well.. [49](#), [50](#), [73](#), [565](#)

kernel mode A restrictions-free CPU mode in which it executes OS kernel and drivers. cf. [user mode](#).. [589](#)

keygenme A program which imitates fictional software protection, for which one needs to make a keys/licenses generator. [544](#)

leaf function A function which is not calling any other function. [16](#)

- link register** (RISC) A register where return address is usually stored. This makes calling leaf functions without stack usage, i.e., faster.. [16](#), [384](#), [577](#)
- loop unwinding** It is when a compiler instead of generation loop code of n iteration, generates just n copies of the loop body, in order to get rid of loop maintenance instructions. [91](#)
- name mangling** used at least in C++, where compiler need to encode name of class, method and argument types in the one string, which will become internal name of the function. read more here: [31.1.1](#). [252](#), [313](#), [314](#)
- NaN** not a number: special cases of floating point numbers, usually signaling about errors . [117](#), [487](#)
- NEON** *AKA* “Advanced SIMD”—[SIMD](#) from ARM. [578](#)
- NOP** “no operation”, idle instruction. [331](#)
- POKE** BASIC language instruction writing byte on specific address. [331](#)
- register allocator** Compiler’s function assigning local variables to CPU registers. [98](#), [139](#), [193](#)
- reverse engineering** act of understanding, how the thing works, sometimes, in order to clone it. [xiv](#), [572](#)
- security cookie** A random value, different at each execution. Read more about it: [16.3](#). [365](#)
- stack frame** Part of stack containing information specific to the current functions: local variables, function arguments, [RA](#), etc. [35](#), [54](#), [365](#)
- thunk function** Tiny function with a single role: call another function.. [12](#), [176](#), [384](#), [394](#)
- tracer** My own simple debugging tool. Read more about it: [52](#). [93](#), [94](#), [127](#), [317](#), [325](#), [329](#), [361](#), [371](#), [453](#), [459](#), [464](#), [467](#), [542](#), [543](#)
- user mode** A restricted CPU mode in which it executes all applied software code. cf. [kernel mode](#).. [402](#), [588](#)
- Windows NT** Windows NT, 2000, XP, Vista, 7, 8. [191](#), [238](#), [320](#), [334](#), [346](#), [375](#), [473](#), [571](#)
- xoring** often used in English language, meaning applying [XOR](#) operation. [365](#), [397](#), [400](#)

Index

- .NET, 350
- AT&T syntax, 7, 18
- Buffer Overflow, 126, 365
- C language elements
 - Pointers, 34, 39, 63, 173, 193
 - Post-decrement, 101
 - Post-increment, 101
 - Pre-decrement, 101
 - Pre-increment, 101
 - C99, 61
 - bool, 137
 - restrict, 210
 - variable length arrays, 133
 - const, 4, 44
 - for, 89, 148
 - if, 69, 80
 - restrict, 210
 - return, 5, 45, 61
 - switch, 79–81
 - while, 97
- C standard library
 - alloca(), 17, 133
 - assert(), 322
 - atexit(), 278
 - atoi(), 547
 - calloc(), 421
 - close(), 339
 - localtime(), 248
 - longjmp(), 81
 - malloc(), 153
 - memchr(), 568
 - memcmp(), 323, 569
 - memcpy(), 7, 34, 567
 - memset(), 464, 568
 - open(), 339
 - qsort(), 173, 553
 - rand(), 316, 407, 548
 - read(), 339
 - scanf(), 34
 - srand(), 548
 - strcmp(), 339
 - strcpy(), 7, 407
 - strlen(), 97, 189, 568
 - strstr(), 548
 - time(), 248
 - tolower(), 427
 - toupper(), 547
- Compiler's anomalies, 143, 478
- C++, 454
 - C++11, 289, 333
 - ostream, 269
 - References, 271
 - STL
 - std::forward_list, 289
 - std::list, 279
 - std::map, 297
 - std::set, 297
 - std::string, 272
 - std::vector, 289
 - grep usage, 94, 119, 312, 325, 329, 452
 - Intel syntax, 7, 9
 - position-independent code, 9, 336
 - RAM, 43
 - ROM, 43, 44
 - Recursion, 13, 15
 - Tail recursion, 13
 - Stack, 14, 53, 81
 - Syntactic Sugar, 80, 157
 - iPod/iPhone/iPad, 9
 - OllyDbg, 21, 36, 41, 64, 71, 92
 - Oracle RDBMS, 5, 183, 321, 353, 455, 463, 465, 478, 489
- 8080, 100
- 8086, 402
- 8253, 472
- 80286, 402, 488
- 80386, 488
- Angry Birds, 119
- ARM, 100, 229, 233, 383
 - ARM mode, 9
 - Instructions
 - ADD, 11, 77, 81, 95, 105, 146
 - ADDAL, 77
 - ADDCC, 86
 - ADDS, 59, 81
 - ADR, 9, 77
 - ADREQ, 77, 81
 - ADRGT, 77
 - ADRHl, 77
 - ADRNE, 81
 - ASRS, 105, 143
 - B, 30, 77, 78
 - BCS, 78, 121
 - BEQ, 52, 81
 - BGE, 78
 - BIC, 143
 - BL, 10, 12, 77
 - BLE, 78
 - BLEQ, 77
 - BLGT, 77

- BLHI, [77](#)
- BLS, [78](#)
- BLT, [95](#)
- BLX, [12](#)
- BNE, [78](#)
- BX, [59](#), [87](#)
- CLZ, [524](#), [525](#)
- CMP, [52](#), [77](#), [81](#), [86](#), [95](#), [146](#)
- IDIV, [103](#)
- IT, [119](#), [132](#)
- LDMCSFD, [77](#)
- LDMEA, [14](#)
- LDMED, [14](#)
- LDMFA, [14](#)
- LDMFD, [10](#), [14](#), [77](#)
- LDMGEFD, [77](#)
- LDR, [32](#), [39](#), [125](#)
- LDR.W, [136](#)
- LDRB, [161](#)
- LDRB.W, [101](#)
- LDRSB, [100](#)
- LSL, [146](#)
- LSL.W, [146](#)
- LSLS, [125](#)
- MLA, [59](#)
- MOV, [10](#), [105](#), [146](#)
- MOVT, [11](#), [105](#)
- MOVT.W, [12](#)
- MOVW, [12](#)
- MULS, [59](#)
- MVNS, [101](#)
- ORR, [143](#)
- POP, [9](#), [10](#), [14](#), [16](#)
- PUSH, [14](#), [16](#)
- RSB, [136](#), [146](#)
- SMMUL, [105](#)
- STMEA, [14](#)
- STMED, [14](#)
- STMFA, [14](#), [33](#)
- STMFD, [9](#), [14](#)
- STMIA, [31](#)
- STMIB, [33](#)
- STR, [31](#), [125](#)
- SUB, [31](#), [136](#), [146](#)
- SUBEQ, [102](#)
- SXTB, [162](#)
- TEST, [98](#)
- TST, [140](#), [146](#)
- VADD, [111](#)
- VDIV, [111](#)
- VLDR, [111](#)
- VMOV, [111](#), [118](#)
- VMOVGT, [118](#)
- VMRS, [118](#)
- VMUL, [111](#)
- Registers
 - APSR, [118](#)
 - FPSCR, [118](#)
 - Link Register, [10](#), [16](#), [30](#), [87](#), [577](#)
 - R0, [60](#), [577](#)
 - scratch registers, [100](#), [577](#)
 - Z, [52](#), [578](#)
- thumb mode, [9](#), [78](#), [87](#)
- thumb-2 mode, [9](#), [87](#), [119](#)
- armel, [111](#)
- armhf, [111](#)
- Condition codes, [77](#)
- Data processing instructions, [105](#)
- DCB, [10](#)
- hard float, [111](#)
- if-then block, [119](#)
- Leaf function, [16](#)
- Optional operators
 - ASR, [105](#), [146](#)
 - LSL, [125](#), [136](#), [146](#)
 - LSR, [105](#), [146](#)
 - ROR, [146](#)
 - RRX, [146](#)
 - soft float, [111](#)
- ASLR, [346](#)
- AWK, [327](#)
- bash, [61](#)
- BASIC
 - POKE, [331](#)
- binary grep, [324](#), [381](#)
- BIND.EXE, [350](#)
- Bitcoin, [479](#)
- Borland C++Builder, [314](#)
- Borland Delphi, [314](#)
- BSoD, [334](#)
- BSS, [347](#)
- C11, [333](#)
- Callbacks, [173](#)
- Canary, [129](#)
- cdecl, [20](#)
- COFF, [392](#)
- column-major order, [133](#)
- Compiler intrinsic, [17](#), [477](#)
- CRC32, [146](#), [396](#)
- CRT, [342](#), [361](#)
- Cygwin, [313](#)
- cygwin, [317](#), [351](#), [380](#)
- Delphi, [318](#)
- DES, [183](#), [193](#)
- dlopen(), [339](#)
- dlsym(), [339](#)
- DOSBox, [473](#)
- DosBox, [329](#)
- double, [108](#)
- dtruss, [380](#)
- EICAR, [469](#)
- ELF, [42](#)
- Error messages, [321](#)
- fastcall, [8](#), [33](#), [138](#)
- float, [108](#)
- FORTTRAN, [133](#), [210](#), [313](#)
- Function epilogue, [13](#), [30](#), [31](#), [77](#), [161](#), [327](#)
- Function prologue, [6](#), [13](#), [16](#), [31](#), [129](#), [327](#)

- Fused multiply-add, 59
- GCC, 313, 579
- GDB, 24, 27, 128
- Hiew, 49, 73, 318, 347, 348, 351
- IAT, 346
- IDA, 45, 320
 - var_?, 31, 39
- IEEE 754, 108, 170, 201, 558
- Inline code, 96, 143, 213, 258
- INT, 346
- int 0x2e, 335
- int 0x80, 334
- Intel C++, 5, 184, 478, 489, 566
- Itanium, 485
- jumptable, 83, 87
- Keil, 9
- kernel panic, 334
- kernel space, 334
- LD_PRELOAD, 338
- Linux, 455
 - libc.so.6, 138, 176
- LLVM, 9
- long double, 108
- Loop unwinding, 91
- Mac OS Classic, 383
- MacOSX, 380
- MD5, 323, 396
- MFC, 348
- MIDI, 323
- MinGW, 313
- MIPS, 231, 234, 347, 383
- MS-DOS, 130, 323, 329, 331, 345, 402, 469, 471, 558, 571
 - DOS extenders, 488
- MSVC, 580
- Name mangling, 252
- NEC V20, 473
- objdump, 338, 351
- OEP, 345, 350
- opaque predicate, 236
- OpenMP, 315, 479
- OpenWatcom, 314, 498, 499, 509
- Ordinal, 348
- Page (memory), 191
- Pascal, 318
- PDB, 312, 347, 451
- PDP-11, 101
- PowerPC, 383
- Raspberry Pi, 9, 112
- ReactOS, 359
- Register allocation, 193
- Relocation, 12
- row-major order, 133
- RTTI, 267
- RVA, 346
- SAP, 312, 451
- SCO OpenServer, 391
- Security cookie, 129, 365
- SHA1, 396
- SHA512, 479
- Shadow space, 56, 58, 202
- Shellcode, 470, 575
- shellcode, 235, 334, 346
- Signed numbers, 71, 309
- SIMD, 201
- SSE, 201
- SSE2, 201
- strace, 338, 380
- syscall, 334
- syscalls, 138, 380
- TCP/IP, 310
- thiscall, 252, 254
- ThumbTwoMode, 11
- TLS, 130, 333, 347, 350, 561
 - Callbacks, 351
- Unicode, 319
- Unrolled loop, 96, 132
- uptime, 338
- user space, 334
- UTF-16LE, 319
- UTF-8, 319
- VA, 346
- Watcom, 314
- Win32, 319, 488
 - RaiseException(), 351
 - SetUnhandledExceptionFilter(), 353
- Windows
 - GetProcAddress, 350
 - KERNEL32.DLL, 137
 - LoadLibrary, 350
 - MSVC80.DLL, 174
 - ntoskrnl.exe, 455
 - Structured Exception Handling, 19, 351
 - TIB, 130, 351, 561
 - Windows 2000, 346
 - Windows NT4, 346
 - Windows Vista, 345
 - Windows XP, 346, 350
- Windows 3.x, 238, 488
- Windows API, 558
- Wine, 359
- Wolfram Mathematica, 106, 107
- x86
 - Instructions
 - AAA, 576
 - AAS, 576
 - ADC, 178, 243, 565
 - ADD, 5, 20, 54, 243, 565
 - ADDSD, 201

ADDSS, 204
AND, 6, 138, 141, 144, 165, 565
BSF, 192, 526, 569
BSR, 569
BSWAP, 310, 569
BT, 569
BTC, 569
BTR, 376, 569
BTS, 569
CALL, 5, 15, 349, 565
CBW, 569
CDQ, 182, 569
CDQE, 569
CLD, 569
CLI, 569
CMC, 569
CMOVcc, 77, 497, 569
CMP, 45, 565, 576
CMPSB, 323, 569
CMPSD, 569
CMPSQ, 569
CMPSW, 569
COMISD, 203
COMISS, 204
CPUID, 163, 571
CWD, 243, 569
CWDE, 569
DEC, 99, 565, 576
DIV, 571
DIVSD, 201, 326
FABS, 573
FADD, 573
FADDP, 109, 110, 573
FCHS, 573
FCOM, 115, 117, 573
FCOMP, 114, 573
FCOMPP, 573
FDIV, 109, 325, 548, 574
FDIVP, 109, 574
FDIVR, 110, 573
FDIVRP, 573
FILD, 574
FIST, 574
FISTP, 574
FLD, 112, 114, 574
FLD1, 574
FLDCW, 574
FLDZ, 574
FMUL, 109, 574
FMULP, 574
FNSTCW, 574
FNSTSW, 114, 117, 574
FSINCOS, 574
FSQRT, 574
FST, 574
FSTCW, 574
FSTP, 112, 574
FSTSW, 574
FSUB, 574
FSUBP, 574
FSUBR, 574
FSUBRP, 574
FUCOM, 117, 574
FUCOMP, 574
FUCOMPP, 117, 574
FWAIT, 108
FXCH, 574
IDIV, 571
IMUL, 54, 565, 576
IN, 402, 472, 572
INC, 99, 565, 576
INT, 470, 571
IRET, 571, 572
JA, 71, 309, 565, 576
JAE, 71, 565, 576
JB, 71, 309, 565, 576
JBE, 71, 565, 576
JC, 565
JCXZ, 565
JE, 80, 565, 576
JECXZ, 565
JG, 71, 309, 565
JGE, 70, 565
JL, 71, 309, 565
JLE, 70, 565
JMP, 15, 30, 349, 565
JNA, 565
JNAE, 565
JNB, 565
JNBE, 117, 565
JNC, 565
JNE, 45, 70, 565, 576
JNG, 565
JNGE, 565
JNL, 565
JNLE, 565
JNO, 565, 576
JNS, 565, 576
JNZ, 565
JO, 565, 576
JP, 115, 473, 565, 576
JPO, 565
JRCXZ, 565
JS, 565, 576
JZ, 52, 80, 478, 565
LAHF, 566
LEA, 35, 56, 149, 155, 566
LEAVE, 6, 566
LES, 408
LOCK, 375
LODSB, 472
LOOP, 89, 327, 497, 572
MAXSD, 204
MOV, 5, 7, 348, 567
MOVDQA, 187
MOVDQU, 187
MOVSB, 567
MOVSD, 202, 426, 567
MOVSDX, 202
MOVSQ, 567
MOVSS, 204
MOVSW, 567

-
- MOVSX, [98](#), [100](#), [161](#), [162](#), [567](#)
 - MOVZX, [98](#), [153](#), [383](#), [567](#)
 - MUL, [567](#)
 - MULSD, [201](#)
 - NEG, [567](#)
 - NOP, [149](#), [475](#), [567](#)
 - NOT, [99](#), [101](#), [430](#), [567](#)
 - OR, [141](#), [567](#)
 - OUT, [402](#), [572](#)
 - PADDD, [187](#)
 - PCMPEQB, [192](#)
 - PLMULHW, [183](#)
 - PLMULLD, [183](#)
 - PMOVMKB, [192](#)
 - POP, [5](#), [14](#), [15](#), [567](#), [576](#)
 - POPA, [572](#), [576](#)
 - POPCNT, [572](#)
 - POPF, [472](#), [572](#)
 - PUSH, [5](#), [6](#), [14](#), [15](#), [35](#), [567](#), [576](#)
 - PUSHA, [572](#), [576](#)
 - PUSHF, [572](#)
 - PXOR, [192](#)
 - RCL, [327](#), [572](#)
 - RCR, [572](#)
 - RET, [5](#), [15](#), [129](#), [254](#), [567](#)
 - ROL, [477](#), [572](#)
 - ROR, [477](#), [572](#)
 - SAHF, [117](#), [567](#)
 - SAL, [573](#)
 - SALC, [473](#)
 - SAR, [573](#)
 - SBB, [178](#), [567](#)
 - SCASB, [472](#), [473](#), [568](#)
 - SCASD, [568](#)
 - SCASQ, [568](#)
 - SCASW, [568](#)
 - SETALC, [473](#)
 - SETcc, [117](#), [573](#)
 - SETNBE, [117](#)
 - SETNZ, [98](#)
 - SHL, [123](#), [144](#), [568](#)
 - SHR, [145](#), [165](#), [568](#)
 - SHRD, [181](#), [568](#)
 - STC, [573](#)
 - STD, [573](#)
 - STI, [573](#)
 - STOSB, [568](#)
 - STOSD, [568](#)
 - STOSQ, [568](#)
 - STOSW, [568](#)
 - SUB, [5](#), [6](#), [45](#), [80](#), [569](#)
 - SYSCALL, [571](#), [573](#)
 - SYSENTER, [335](#), [571](#), [573](#)
 - TEST, [98](#), [138](#), [140](#), [569](#)
 - UD2, [573](#)
 - XADD, [376](#)
 - XCHG, [569](#)
 - XOR, [5](#), [45](#), [99](#), [327](#), [397](#), [569](#), [576](#)
 - EBP, [35](#), [54](#)
 - ECX, [252](#)
 - ESP, [20](#), [35](#)
 - JMP, [84](#)
 - RIP, [338](#)
 - ZF, [45](#), [138](#)
 - 8086, [100](#), [142](#)
 - 80386, [142](#)
 - 80486, [108](#)
 - AVX, [183](#)
 - FPU, [108](#), [562](#)
 - MMX, [183](#)
 - SSE, [183](#)
 - SSE2, [183](#)
 - x86-64, [7](#), [8](#), [26](#), [34](#), [38](#), [51](#), [55](#), [193](#), [201](#), [222](#), [338](#), [558](#), [563](#)
 - Xcode, [9](#)
 - Registers
 - Flags, [45](#)
 - EAX, [45](#), [60](#)